



US 20030066193A1

(19) **United States**(12) **Patent Application Publication****Hsu**(10) **Pub. No.: US 2003/0066193 A1**(43) **Pub. Date: Apr. 10, 2003**

(54) **GEL COMPOSITION THAT DISPLAYS
CHANGES IN TEMPERATURE THROUGH
COLOR CHANGE AND THE
MANUFACTURING METHOD THEREOF**

(76) **Inventor: Chin Cheng Hsu, Taipei City (TW)**

Correspondence Address:

HSU Chin Cheng

PO Box 82-144

TAIPEI (TW)

(21) **Appl. No.: 09/970,698**

(22) **Filed: Oct. 5, 2001**


Publication Classification


(51) **Int. Cl.⁷ B29B 7/00**

(52) **U.S. Cl. 29/896.92; 252/586**

(57) **ABSTRACT**

A gel composition that displays changes in temperature through color changes, characterized in that the gel composition can show changes in temperature by changing its color and the entire color of the composition will change when there is a 2 degree centigrade change in its immediate environment. The method of manufacturing the gel composition includes the steps of: mixing 75% of water by weight with 25% of vinyl alcohol by weight and stirring well the mixture of water and vinyl alcohol, heating the mixture to 70 degrees centigrade to form a gel material, adding temperature sensitive colorant into the gel material and completely dissolving the colorant into the gel material, and filing the gel material into a transparent pocket made of TPU/PVC/EVA film and sealing the pocket.

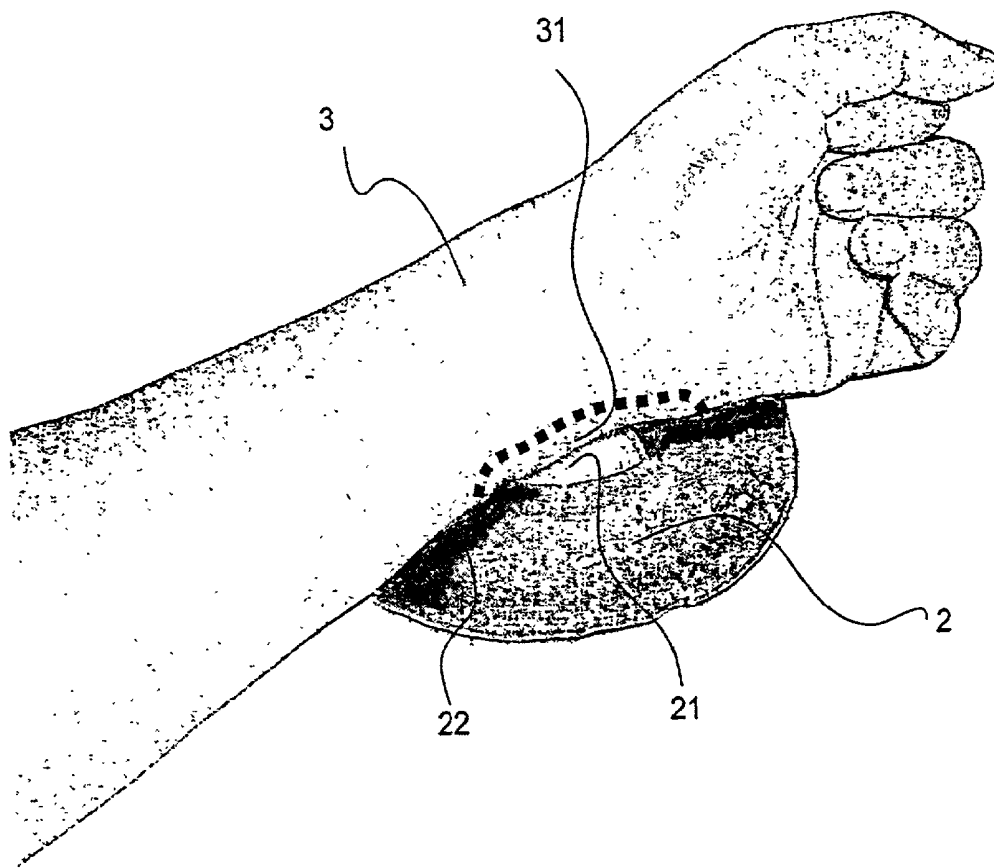

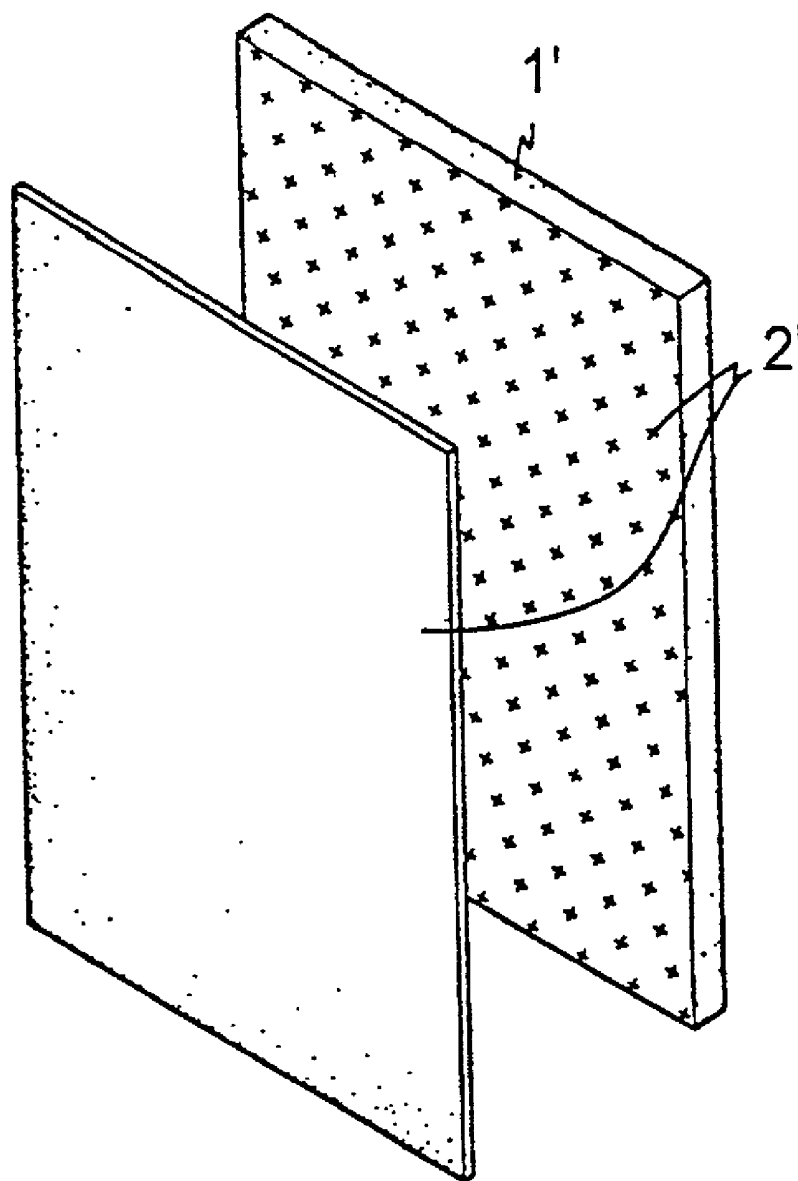

PRIOR ART
FIG. 1

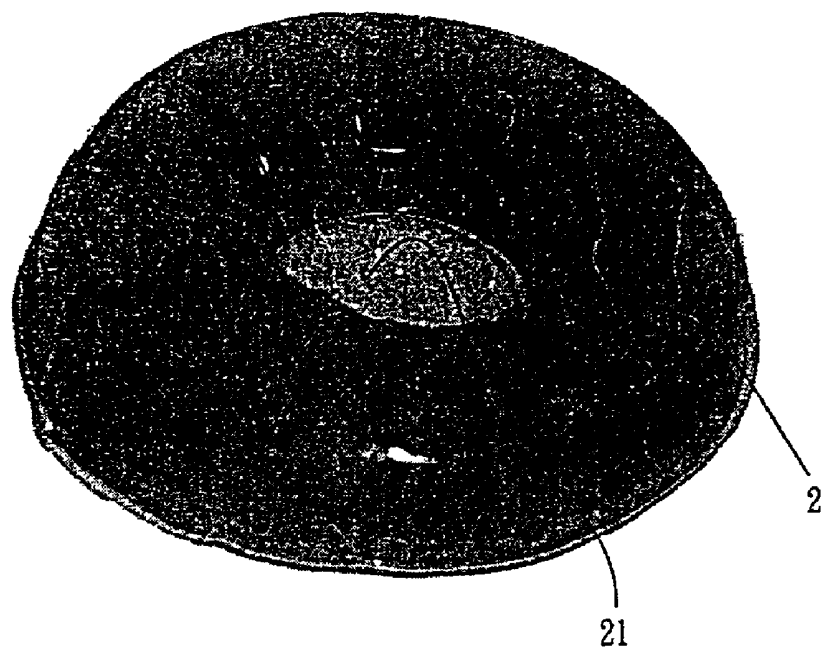


FIG. 2

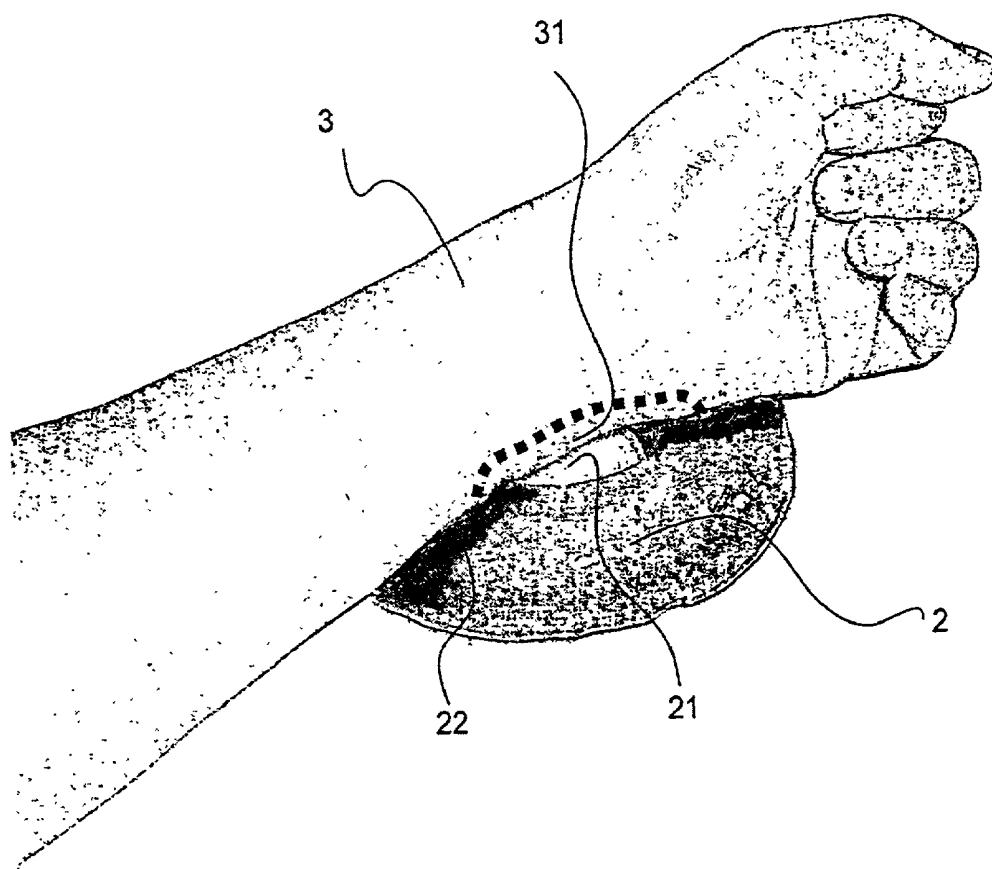


FIG. 3

**GEL COMPOSITION THAT DISPLAYS CHANGES
IN TEMPERATURE THROUGH COLOR CHANGE
AND THE MANUFACTURING METHOD
THEREOF**

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] This invention is related to a gel composition which displays changes in temperature through color change and the manufacturing method thereof. The gel composition can be used as a protection pad for reducing pressure and illustrating whether the body temperature of a person is normal or not.

[0003] 2. Description of the Prior Art

[0004] As shown in **FIG. 1**, the conventional protection pad for rehabilitation is simply a rectangular pad **2'** made of foam rubber **1'**. However, such a conventional protection pad cannot provide satisfactory resiliency and flexibility so that it will easily deform subject to pressure thereby often causing the user feel uncomfortable and therefore making it unfit for practical use.

[0005] Further, the patient who needs rehabilitation must use the protection pad for a long time, so that the wound will be easily infected and inflamed. Hence, the nurse has to check the wound regularly in order to prevent infection and inflammation of the wound, and in case of negligence, the wound will be found infected and inflamed

[0006] Therefore, it is an object of the present invention to provide a gel composition which can obviate and mitigate the above-mentioned drawbacks.

SUMMARY OF THE INVENTION

[0007] This invention is related to a gel composition which displays changes in temperature through color change.

[0008] It is the primary object of the present invention to provide a gel composition which can show changes in temperature by changing its color, characterized in that the entire color of the composition will change when there is a 2 degree centigrade change in its immediate environment.

[0009] It is another object of the present invention to provide a method of manufacturing the composition which comprises the steps of mixing 75% of water by weight with 25% of vinyl alcohol by weight and stirring well the mixture of water and vinyl alcohol, heating said mixture to 70 degrees centigrade to form a gel material, adding temperature sensitive colorant into the gel material and completely dissolving the colorant into the gel material, and filling the gel material into a transparent pocket made of TPU/PVC/EVA film and sealing the pocket.

[0010] It is a further object of the present invention to provide a composition which can be used to make a pillow so that the pillow not only can reduce the pressure applied to the head of a user but also can illustrate whether the body temperature of the user is normal or not.

[0011] The foregoing object and summary provide only a brief introduction to the present invention. To fully appreciate these and other objects of the present invention as well as the invention itself, all of which will become apparent to

those skilled in the art, the following detailed description of the invention and the claims should be read in conjunction with the accompanying drawings. Throughout the specification and drawings identical reference numerals refer to identical or similar parts.

[0012] Many other advantages and features of the present invention will become manifest to those versed in the art upon making reference to the detailed description and the accompanying sheets of drawings in which a preferred structural embodiment incorporating the principles of the present invention is shown by way of illustrative example.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] **FIG. 1** illustrates the structure of a conventional protection pad;

[0014] **FIG. 2** is a perspective view of a protection pad according to the present invention; and

[0015] **FIG. 3** is a working view of the present invention.

**DETAILED DESCRIPTION OF THE PRESENT
INVENTION**

[0016] For the purpose of promoting an understanding of the principles of the invention, reference will now be made to the embodiment illustrated in the drawings. Specific language will be used to describe same. It will, nevertheless, be understood that no limitation of the scope of the invention is thereby intended, alterations and further modifications in the illustrated device, and further applications of the principles of the invention as illustrated herein being contemplated as would normally occur to one skilled in the art to which the invention relates.

[0017] With reference to the drawings and in particular to **FIGS. 2 and 3** thereof, the gel composition according to the present invention can show changes in temperature by changing its color. The entire color of the composition of the device will change when there is a 2 degree centigrade change in its immediate environment. The temperature range within this two degree centigrade change is displayed by a combination of the two colors at the lower temperature and the higher temperature. Thus, the device will show the change from one temperature to another by displaying a mixture of two colors.

[0018] The method of manufacturing the composition comprises the steps of mixing 75% of water by weight with 25% of vinyl alcohol by weight, stirring well the mixture of water and vinyl alcohol, heating the mixture to 70 degrees centigrade to form a gel-like material, adding temperature sensing colorant into the gel-like material and completely dissolving the colorant in the gel-like material, filling the gel-like material into a transparent pocket made of TPU/PVC/EVA film, and sealing the pocket.

[0019] It will be understood that each of the elements described above, or two or more together may also find a useful application in other types of methods differing from the type described above.

[0020] While certain novel features of this invention have been shown and described and are pointed out in the annexed claim, it is not intended to be limited to the details above, since it will be understood that various omissions, modifications, substitutions and changes in the forms and

details of the device illustrated and in its operation can be made by those skilled in the art without departing in any way from the spirit of the present invention.

I claim:

1. A gel composition that displays changes in temperature through color changes, characterized in that said gel composition shows changes in temperature by changing its color and entire color of said composition will change when there is a 2 degree centigrade change in its immediate environment.

2. A method of manufacturing a gel composition capable of changing color with environmental temperature comprising the steps of:

- a. mixing 75% of water by weight with 25% of vinyl alcohol by weight and stirring well mixture of water and vinyl alcohol;
- b. heating said mixture to 70 degrees centigrade to form a gel material;
- c. adding temperature sensitive colorant into said gel material and completely dissolving said colorant into said gel material; and
- d. filling said gel material into a transparent pocket made of TPU/PVC/EVA film and sealing said pocket.

* * * * *

专利名称(译)	通过颜色变化显示温度变化的凝胶组合物及其制造方法		
公开(公告)号	US20030066193A1	公开(公告)日	2003-04-10
申请号	US09/970698	申请日	2001-10-05
[标]申请(专利权)人(译)	许金成		
申请(专利权)人(译)	许金成		
当前申请(专利权)人(译)	许金成		
[标]发明人	HSU CHIN CHENG		
发明人	HSU, CHIN CHENG		
IPC分类号	A61B5/00 G01K11/16 G01K13/00 G02F1/01 B29B7/00		
CPC分类号	A61B5/01 A61B5/445 Y10T29/49613 G01K13/002 G02F1/0147 G01K11/16		
外部链接	Espacenet USPTO		

摘要(译)

一种凝胶组合物，其通过颜色变化显示温度变化，其特征在于凝胶组合物可通过改变其颜色显示温度变化，并且当其直接环境中存在2摄氏度的变化时，组合物的整个颜色将改变。制备凝胶组合物的方法包括以下步骤：将75%重量的水与25%重量的乙烯醇混合并充分搅拌水和乙烯醇的混合物，将混合物加热至70摄氏度以形成凝胶材料，将温度敏感的着色剂加入到凝胶材料中，并将着色剂完全溶解到凝胶材料中，并将凝胶材料填充到由TPU / PVC / EVA薄膜制成的透明袋中并密封袋。

