



(19) **United States**

(12) **Patent Application Publication**
Solenberger

(10) **Pub. No.: US 2003/0139657 A1**

(43) **Pub. Date: Jul. 24, 2003**

(54) **METHOD AND APPARATUS FOR IMPROVING THE DURABILITY OF A SENSOR**

(75) **Inventor: Stephen D. Solenberger, Glen Moore, PA (US)**

Correspondence Address:
TOWNSEND AND TOWNSEND AND CREW, LLP
TWO EMBARCADERO CENTER
EIGHTH FLOOR
SAN FRANCISCO, CA 94111-3834 (US)

tion of application No. 09/241,328, filed on Feb. 1, 1999, now Pat. No. 6,119,027, which is a continuation of application No. 08/914,457, filed on Aug. 19, 1997, now Pat. No. 5,910,108, which is a continuation of application No. 08/505,975, filed on Jul. 24, 1995, now Pat. No. 5,673,693, which is a division of application No. 08/172,477, filed on Dec. 23, 1993, now Pat. No. 5,507,286.

Publication Classification

(51) **Int. Cl.⁷ A61B 5/00**
(52) **U.S. Cl. 600/323**

(73) **Assignee: Nellcor Puritan Bennett Incorporated, Pleasanton, CA (US)**

(21) **Appl. No.: 10/310,130**


(22) **Filed: Dec. 3, 2002**

Related U.S. Application Data

(60) **Continuation of application No. 09/626,733, filed on Jul. 27, 2000, now abandoned, which is a continua-**

(57) **ABSTRACT**

The present invention relates to a method and apparatus for improving the durability of a sensor, specifically one attached by an adhesive material to a subject. Specifically, the present invention discloses a method and apparatus for laminating a sensor and inserting the sensor into a protective shield for use. The shield includes some adhesive material to affix the sensor to the subject. A dirty, damaged, or worn out shield may be discarded and the sensor inserted into a new shield for continued use of the sensor.

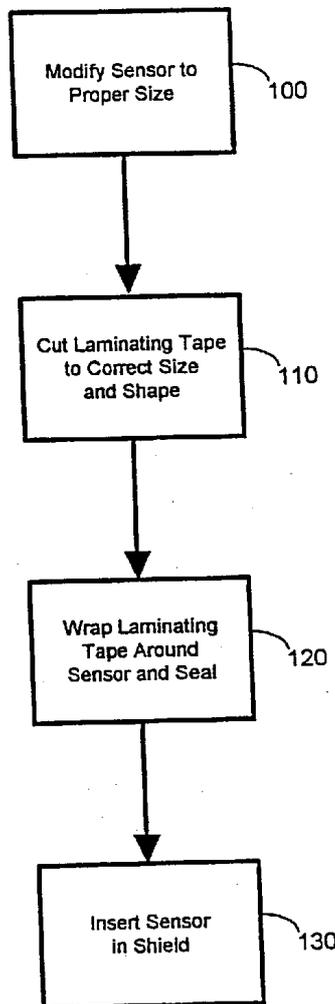

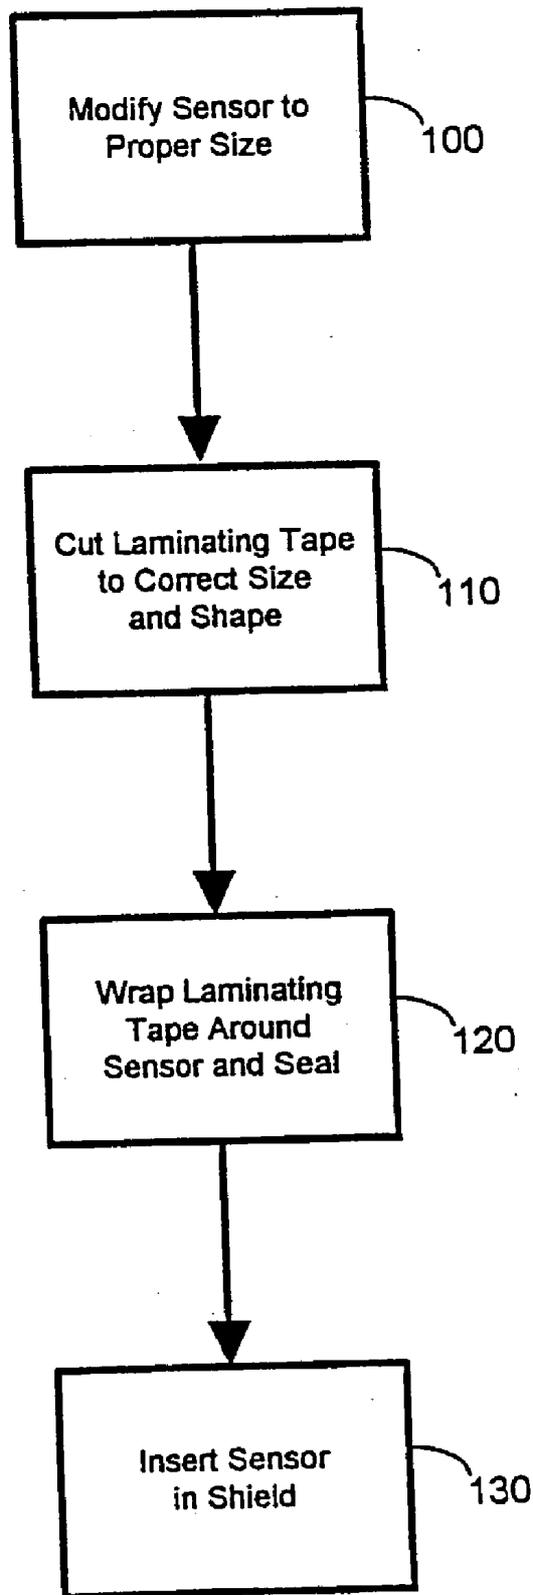


Fig. 1

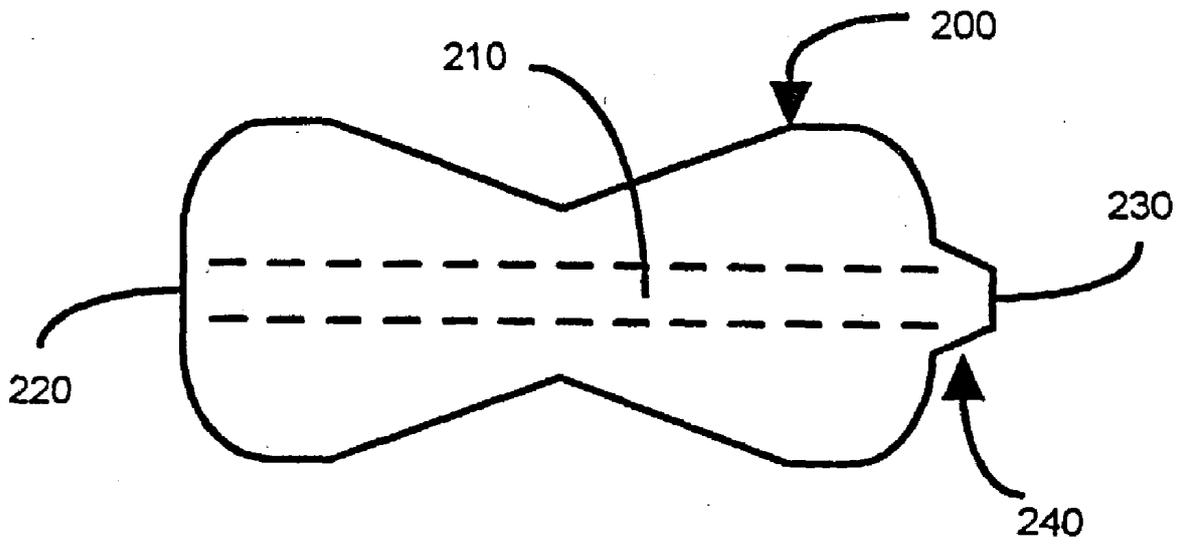


Fig. 2

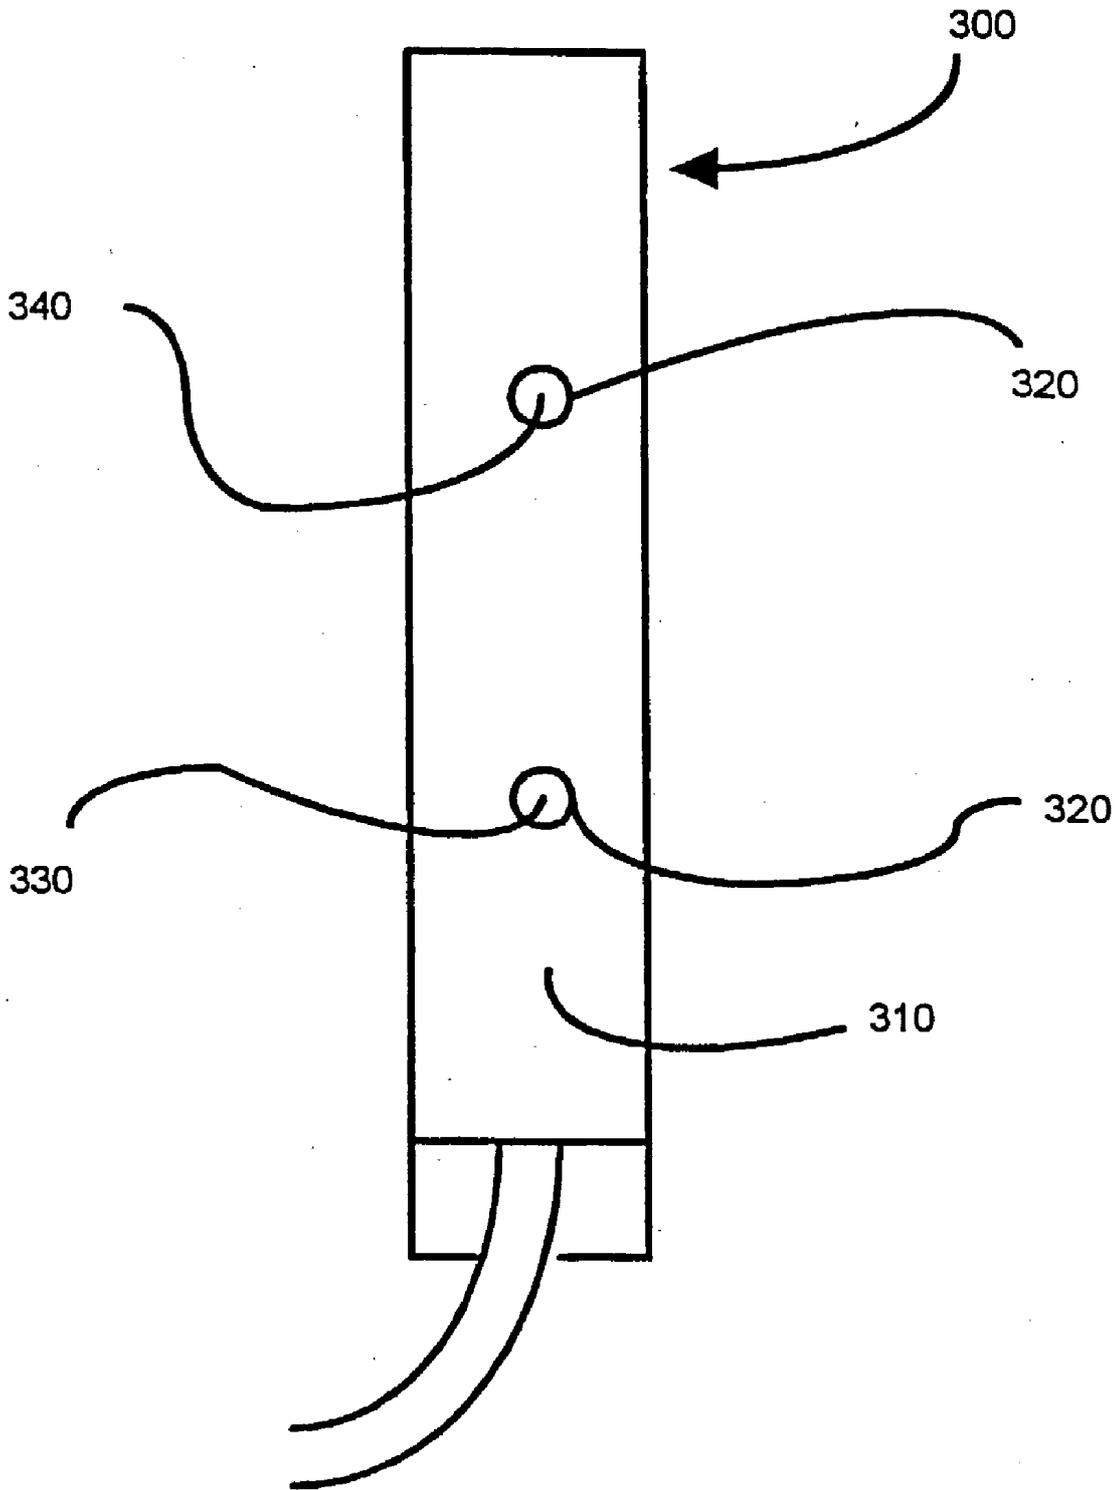


Fig. 3

METHOD AND APPARATUS FOR IMPROVING THE DURABILITY OF A SENSOR

FIELD OF THE INVENTION

[0001] The present invention relates to the field of sensors which are attached to a subject to be monitored, particularly a sensor which is attached with adhesive to the subject. The preferred embodiment of the present invention is directed to the field of sensors for use with pulse oximeters.

BACKGROUND OF THE INVENTION

[0002] The present invention provides a means of improving the durability of a sensor, particularly a sensor which is attached with adhesive to the subject which is to be monitored. The preferred embodiment of the present invention is directed to improving the durability of sensors which are connected to pulse oximeters.

[0003] A pulse oximeter is a device which monitors the oxygen content of the blood of a subject by measuring the blood's absorption of light. The sensor includes a pair of light emitting diodes (L.E.D.) and a photocell detector which are coupled to wires connected to the pulse oximeter. The diodes, the detector, and a portion of the wires are covered with a flexible plastic casing. An adhesive material is typically coupled to the casing.

[0004] When in use, the plastic casing is wrapped around a part of the subject, typically a finger. When properly applied, the diodes are aligned on the subject so that they are facing the photocell detector with the subject's finger in between. The sensor is held in this position by affixing it to the skin with the adhesive material.

[0005] A known problem with the sensors described above is the limited lifespan of the adhesive and the lack of durability of the casing.

[0006] In addition, maintaining the cleanliness of the sensor is desirable since the casing touches the skin of the subject directly. However, the ability to clean the sensor is limited in that the adhesive portion of the sensor is permanently coupled to the casing. The adhesive portion cannot be conveniently cleaned without adversely affecting the strength of the remaining adhesive.

[0007] Another motivation for making such cleaning possible is to maintain the accuracy of the sensor. A study has shown that a build up of adhesive on the diodes may cause inaccurate readings by the pulse oximeter. Inaccurate readings on a medical instrument are clearly undesirable and potentially dangerous. The ability to clean the diodes and detector would provide a means to avoid this potential source of inaccuracy, potentially increasing patient safety.

SUMMARY AND OBJECT OF THE INVENTION

[0008] It is an object of the present invention to increase the durability of a sensor.

[0009] It is a further object of the present invention to make convenient cleaning of a sensor possible without adversely affecting the function of the sensor.

[0010] It is another object of the present invention to improve the cleanliness of a sensor by providing a dedicated means of attaching the sensor to the subject.

[0011] It is yet a further object of the present invention to provide a uniform size shield to protect and affix a variety of sensors of potentially different sizes.

[0012] It also an object of the present invention to provide all of the above objects without adversely affecting the performance of the sensor during use.

[0013] The method of the present invention involves laminating the casing of the sensor to increase its durability. The lamination material includes two apertures; one to accommodate the diodes and one to accommodate the detector.

[0014] The laminated casing may then be inserted into a disposable shield which includes an adhesive strip. The shield protects the casing of the sensor from direct contact with the subject's skin. In the preferred embodiment, the shape of the shield is well suited to the proper mounting of the sensor on the subject's finger. However, the shield may be of other shapes and configurations to facilitate mounting on a toe or some other extremity, as appropriate.

[0015] The use of the present invention permits the laminated casing to be easily removed from the shield and the shield to be discarded. The laminated casing may be cleaned and inserted into a new clean shield for use. In this way, conditions that may have previously been cause for discarding the sensor are now only cause for discarding the shield. Examples of such occurrences are contamination of the shield, loss of adhesion of the adhesive, tearing or other damage to the adhesive material portion.

[0016] The foregoing and other objects features and advantages of the present invention will be apparent from the following, more particular description of the preferred embodiment of the invention and as illustrated in the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] **FIG. 1** illustrates the steps involved in improving a sensor with the present invention.

[0018] **FIG. 2** illustrates in the adhesive shield employed in the preferred embodiment of the present invention.

[0019] **FIG. 3** illustrates the surface of a sensor employed in the preferred embodiment of the present invention.

DETAILED DESCRIPTION

[0020] The present invention permits a sensor to be improved for durability and cleanliness. The steps employed to modify a sensor for use in the preferred embodiment are described with reference to **FIG. 1**.

[0021] First, the sensor is prepared for lamination **100**, which often involves physical modification to the sensor. This modification may involve making the profile of the casing larger or smaller, as appropriate. In a preferred embodiment, this involves removing some or all of the adhesive material from the casing by trimming or tearing it away. An alternative embodiment may include modifying the sensor make it the appropriate shape for later insertion into the shield.

[0022] Next, the laminating tape is cut to the appropriate size and shape for the shape of sensor **110** and for the size of the shield in which the sensor shall be inserted. In the preferred embodiment, the commercially available laminat-

ing tape employed is a mylar wrap with a tape seal at each end. Employing a clear laminating tape facilitates use of the sensor by leaving identifying marks or other information printed on the casing visible to the user. The thickness of the laminating tape may be varied to improve durability of the sensor or to facilitate the proper fit of the laminated sensor in the shield.

[0023] In the preferred embodiment for use with pulse oximeter sensors, two apertures are made at the appropriate locations on the laminating tape for alignment with the diodes and the detector of the sensor. For example, if the commercially available D-25 sensor sold by Nellcor is employed, these apertures are made 25 mm apart to properly align with the diodes and detector on the sensor when the sensor is laminated.

[0024] The laminating tape is wrapped around the sensor, folded over and sealed securely **120**. In the preferred embodiment, the laminating tape is wrapped such that each aperture lines up properly with a respective diode or detector, as appropriate.

[0025] The laminated sensor may now be inserted into the shield **130**. In the preferred embodiment, the shield is comprised of a polyethylene plastic sleeve which is coupled to a segment of adhesive material which has been properly cut to shape for its intended use. The sleeve is of a sufficient diameter to accommodate the sensor to be employed. Preferably, the sleeve will be of a size to accommodate a number of different type sensors for use with a single type of shield.

[0026] In the preferred embodiment, the adhesive tape employed is a commercially available moisture vapor transmission tape. As with the laminating material, the use of a clear material facilitates use of the sensor by leaving identifying marks or alignment marks or other information printed on the casing of the sensor visible to the user. It also leaves visible the portion of the subject's skin to which the sensor is attached.

[0027] In the preferred embodiment, the adhesive tape is cut to a shape as detailed in **FIG. 2** for attachment to a subject's finger. Other shapes may be appropriate for another use, such as attachment to a toe.

[0028] Upon completion of the above steps, the sensor is ready to be attached to the subject, as appropriate. If the shield becomes damaged or dirty, or the adhesive loses its strength, the old shield may be discarded and replaced with a new clean shield. When performing such replacement, it may also be desirable to clean the sensor before inserting the sensor in the shield. This may be done with an antiseptic, such as by an alcohol wipe.

[0029] With reference now to **FIG. 2**, the adhesive shield employed with the present invention will now be described. Adhesive tape **200** is cut to facilitate attachment to the subject. **FIG. 2** shows a possible set of dimensions for the adhesive tape **200** for use in the preferred embodiment, which is for attachment to a subject's finger.

[0030] The location of the plastic sleeve **210**, although not its actual dimension, is shown with a dotted line down the lengthwise portion of the adhesive material **200**. The sleeve may be sealed at one end **220**, although in a preferred embodiment, it is not. The opposite end **230** of the shield is used to insert the casing of the sensor into the sleeve **210** for

use. The adhesive material is cut to include a tab **240** to facilitate the opening of the sleeve **210** and insertion of the sensor.

[0031] With reference now to **FIG. 3**, the appearance of the surface of the laminated sensor will now be described. The laminating tape **300** is wrapped around the length of the sensor casing **310** and folded over to seal both ends. Apertures **320** are cut into the laminating tape **300** of the appropriate width and at the appropriate location such that they will align with the diodes **330** and the photocell detector **340** when the laminating tape is applied to the sensor casing **310**.

[0032] Some of the many advantages of the present invention should now be readily apparent. For example, the sensor thus laminated and employed with a series of shields may continue to be used as long as reliable readings are obtained by the sensor.

[0033] Obviously, many modifications and variations of the present invention are possible in light of the above teachings. For instance, sensors for devices other than pulse oximeters which employ adhesive to attach to a subject may advantageously employ this invention. In addition, pulse oximeters which employ sensors that attach to other parts of a subject, such as a toe, may also employ this invention. It is therefore to be understood that the foregoing embodiments are presented by way of example only and that within the scope of the claims attached hereto the invention may be practiced other than as specifically described.

[0034] Some of the many advantages of the present invention should now be readily apparent. For example, the sensor thus laminated and employed with a series of shields may continue to be used as long as reliable readings are obtained by the sensor.

[0035] Obviously, many modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that the foregoing embodiments are presented by way of example only and that within the scope of the claims attached hereto the invention may be practiced other than as specifically described.

What is claimed:

1. A method for improving the durability of a sensor, wherein said sensor includes at least one light emitting diode and at least one photocell detector, comprising the steps of:

- a) modifying the sensor to conform to a uniform size;
- b) cutting a laminating material to the appropriate shape for its intended use;
- c) creating a first aperture in said laminating material which is at least as large as the size of said diode;
- d) creating a second aperture in said laminating material which is at least as large as the size of said detector;
- e) laminating said sensor with said laminating material such that said first aperture is positioned homologously with said diode and wherein said second aperture is positioned homologously with said detector;
- f) inserting said sensor into a sleeve
- g) cutting an adhesive material to the appropriate shape for attachment to a subject's finger; and

- h) coupling said adhesive material to said sleeve and to said subject's finger.
- 2. The method of claim 1 wherein said laminating material comprises a clear mylar wrap.
- 3. The method of claim 1 wherein said laminating material includes a tape seal at each end.
- 4. The method of claim 1 wherein said adhesive material comprises a clear moisture vapor transmission tape.
- 5. The method of claim 1 wherein said sleeve is comprised of polyethylene plastic.
- 6. The method of claim 1 wherein said adhesive material includes a tab to facilitate said insertion of said sensor in said sleeve.
- 7. An improvement to a sensor for use with a pulse oximeter, wherein said sensor includes at least one light emitting diode and at least one photocell detector, comprising:
 - a) laminating material, including a first aperture at least as large as said diode and a second aperture at least as

- large as said detector, wherein said laminating material enwraps said sensor and said first aperture is homologously aligned with said diode and said second aperture is homologously aligned with said detector;
- b) sleeve, into which said laminated sensor is inserted;
- c) adhesive means, coupled to the exterior of said sleeve.
- 8. The apparatus of claim 7 wherein said laminating material comprises a clear mylar wrap.
- 9. The apparatus of claim 7 wherein said laminating material includes a tape seal at each, end.
- 10. The apparatus of claim 7 wherein said adhesive material comprises a clear moisture vapor transmission tape.
- 11. The apparatus of claim 7 wherein said adhesive material includes a tab to facilitate said insertion of said sensor in said sleeve.

* * * * *

专利名称(译)	用于改善传感器耐久性的方法和设备		
公开(公告)号	US20030139657A1	公开(公告)日	2003-07-24
申请号	US10/310130	申请日	2002-12-03
[标]申请(专利权)人(译)	内尔科尔普里坦贝内特公司		
申请(专利权)人(译)	NELLCOR PURITAN BENNETT INCORPORATED		
当前申请(专利权)人(译)	NELLCOR PURITAN BENNETT INCORPORATED		
[标]发明人	SOLENBERGER STEPHEN D		
发明人	SOLENBERGER, STEPHEN D.		
IPC分类号	A61B5/00 A61B19/08		
CPC分类号	A61B5/14552 Y10T29/49002 A61B2019/085 A61B19/081 A61B46/10 A61B2046/205		
其他公开文献	US6681126		
外部链接	Espacenet USPTO		

摘要(译)

本发明涉及一种用于改善传感器耐久性的方法和设备，特别是通过粘合材料附着到受试者的传感器。具体地，本发明公开了一种用于层压传感器并将传感器插入保护罩以供使用的方法和设备。护罩包括一些粘合材料以将传感器固定到受试者。可以丢弃脏的，损坏的或磨损的防护罩，并将传感器插入新的防护罩中以继续使用传感器。

