



US 20100198187A1

(19) **United States**

(12) **Patent Application Publication**  
**Yodfat et al.**

(10) **Pub. No.: US 2010/0198187 A1**

(43) **Pub. Date: Aug. 5, 2010**

(54) **VENTED DISPENSING DEVICE AND METHOD**

filed on Jul. 20, 2007, provisional application No. 60/961,382, filed on Jul. 20, 2007.

(76) Inventors: **Ofer Yodfat, Maccabim-Reut (IL); Avraham Neta, Misgav (IL)**

**Publication Classification**

Correspondence Address:  
**MINTZ LEVIN COHN FERRIS GLOVSKY & POPEO**  
**ONE FINANCIAL CENTER**  
**BOSTON, MA 02111 (US)**

(51) **Int. Cl.**  
*A61M 31/00* (2006.01)  
*A61B 5/00* (2006.01)  
*G08B 21/00* (2006.01)  
(52) **U.S. Cl. .... 604/500; 604/131; 600/309; 340/540**

(57) **ABSTRACT**

Disclosed is a fluid dispensing device that includes at least one reservoir to hold the therapeutic fluid, at least one other unit requiring communication with ambient air, at least partly, to operate, and at least one housing defining an interior to retain the at least one reservoir and the at least one other unit. The at least one housing has at least one vent port formed on one or more of its walls. The at least one vent port is adapted to direct or communicate air to maintain pressure equilibrium between the air pressure in the interior of the at least one housing and the ambient air pressure outside the at least one housing, and provide communication with the ambient air to the at least one other unit requiring air to enable operation of the at least one other unit.

(21) Appl. No.: **12/452,764**


(22) PCT Filed: **Jul. 20, 2008**


(86) PCT No.: **PCT/IL2008/001000**

§ 371 (c)(1),  
(2), (4) Date: **Apr. 7, 2010**


**Related U.S. Application Data**

(60) Provisional application No. 60/961,528, filed on Jul. 20, 2007, provisional application No. 60/961,484,

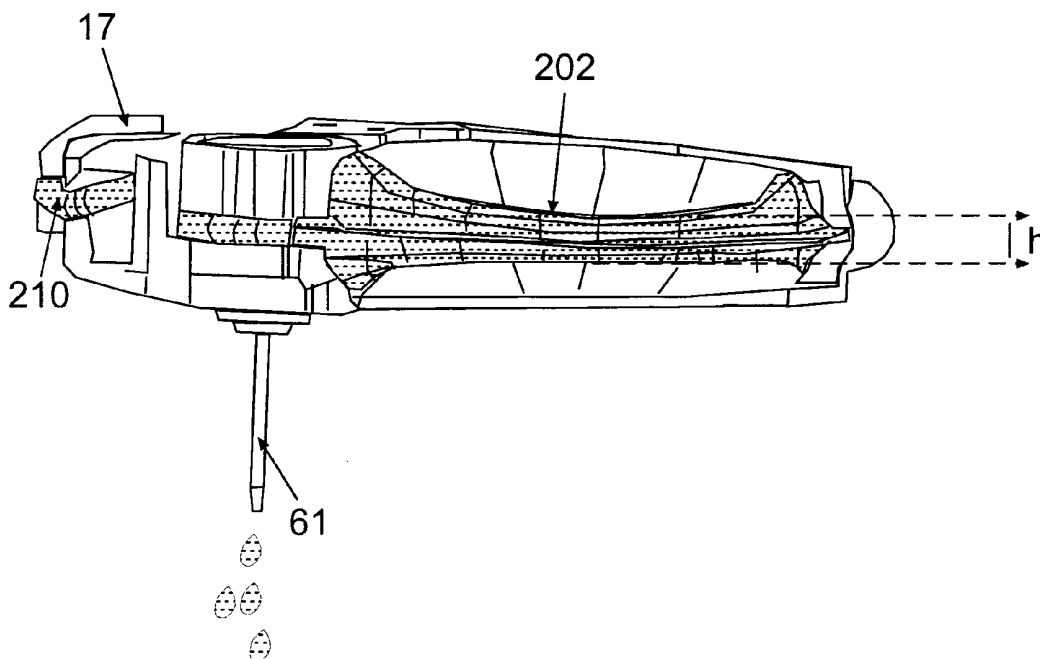


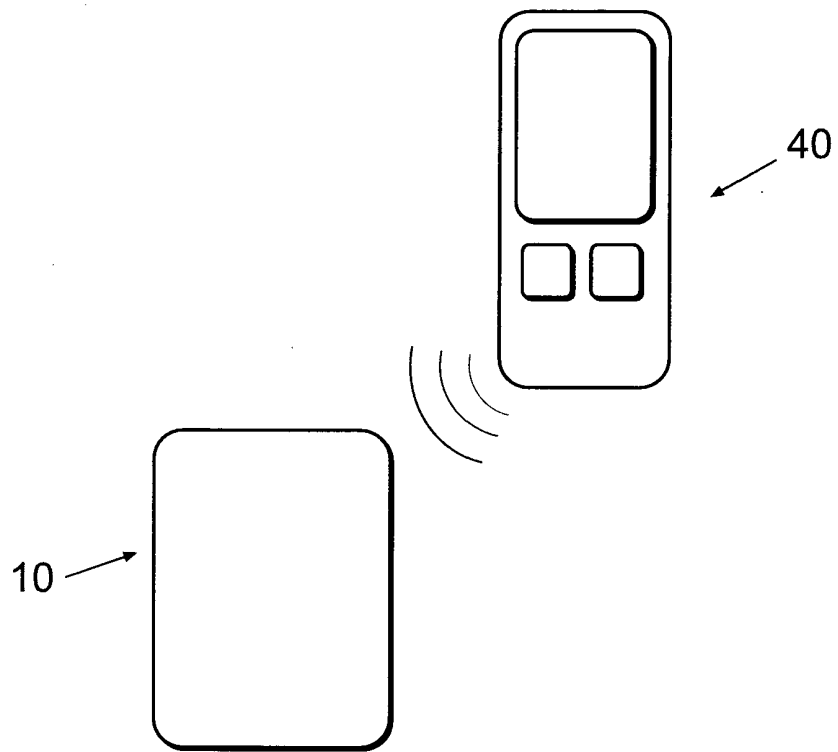


**Fig. 1a**

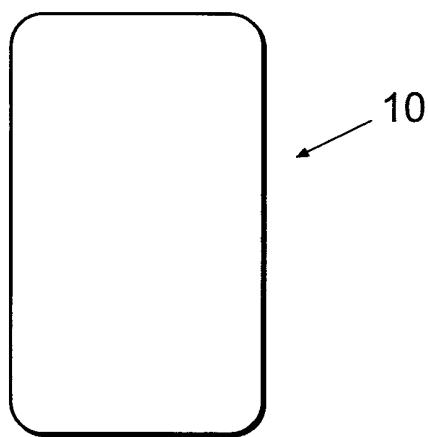


**Fig. 1b**

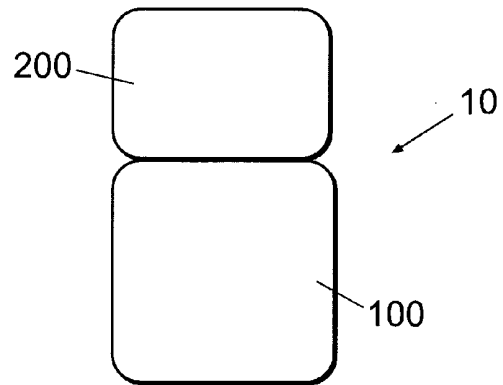


**Fig. 1c**

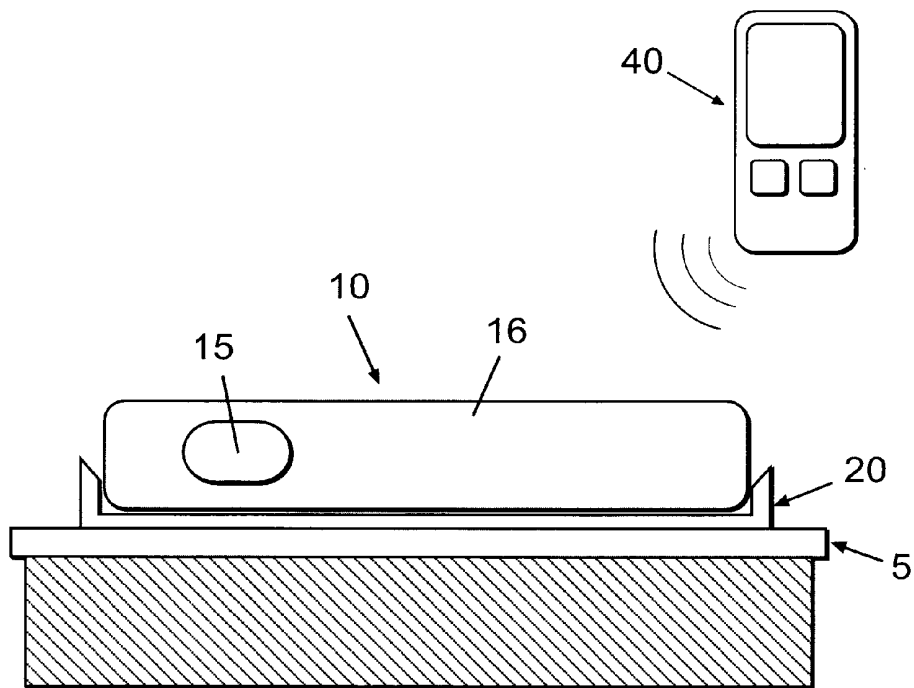


**Fig. 2a**

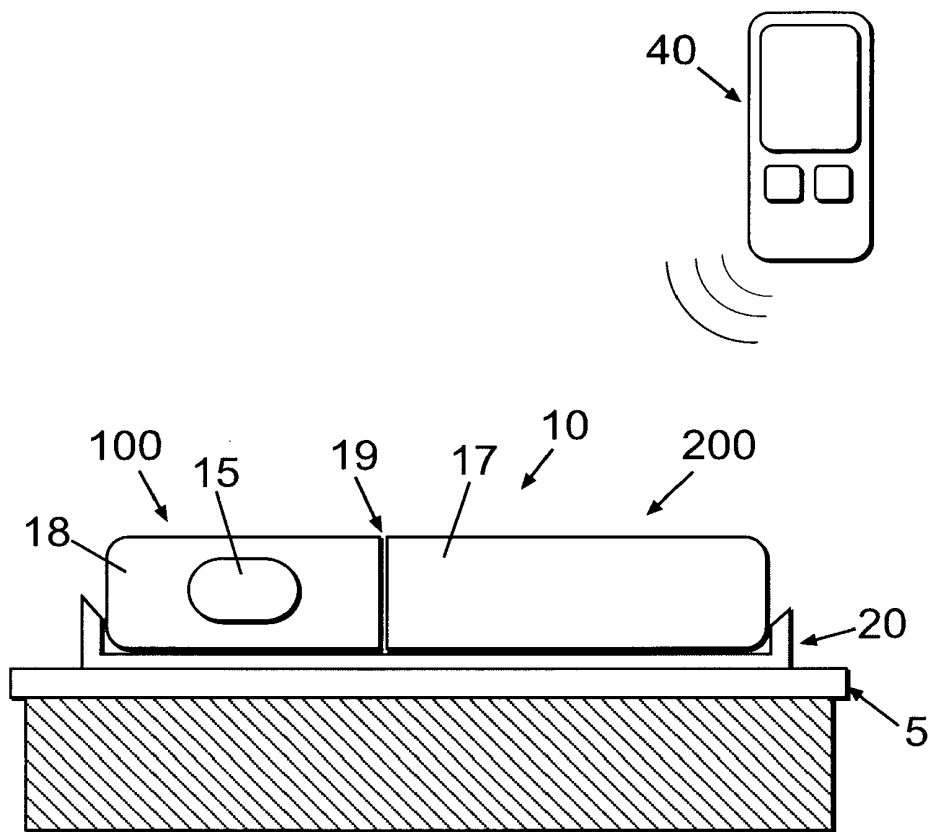

**Fig. 2b**

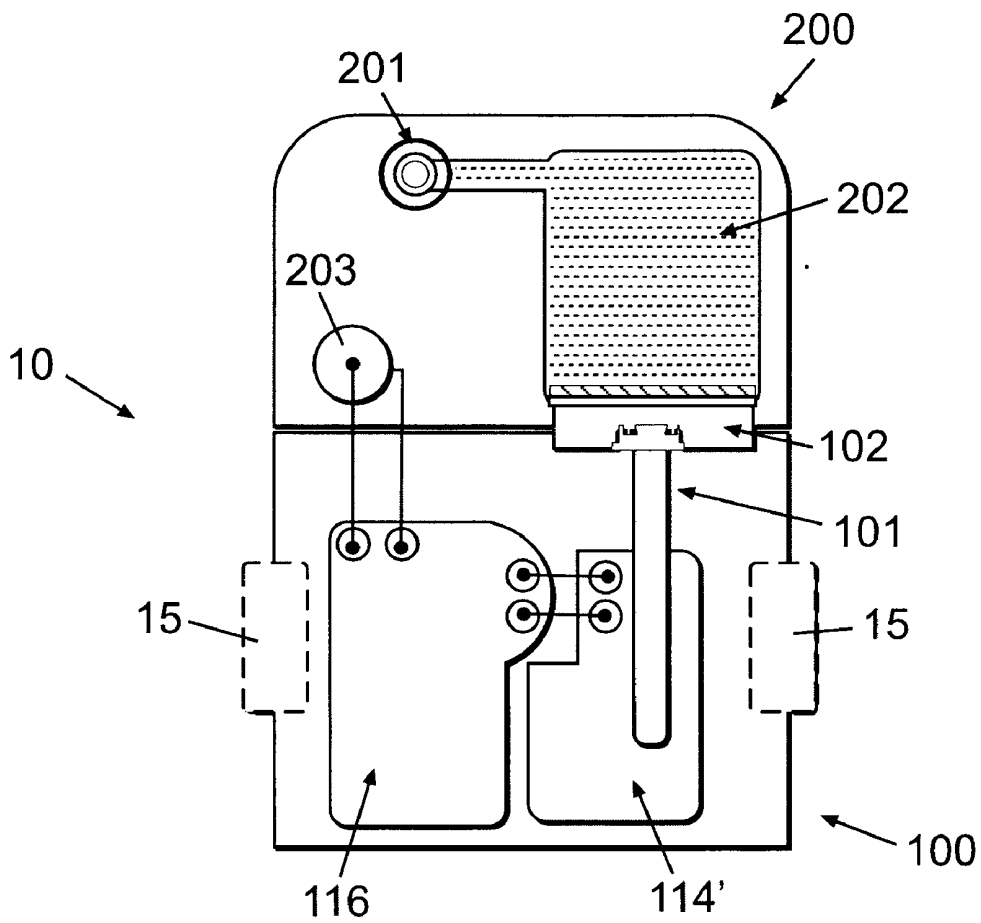

**Fig. 3a**

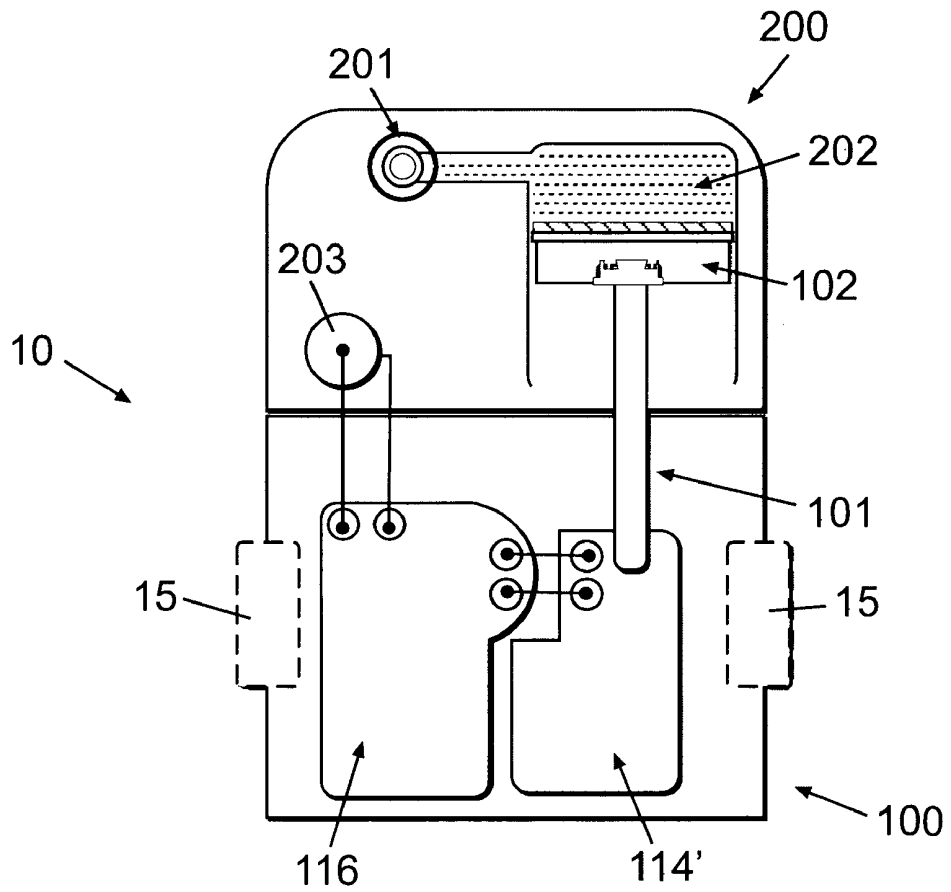

**Fig. 3b**

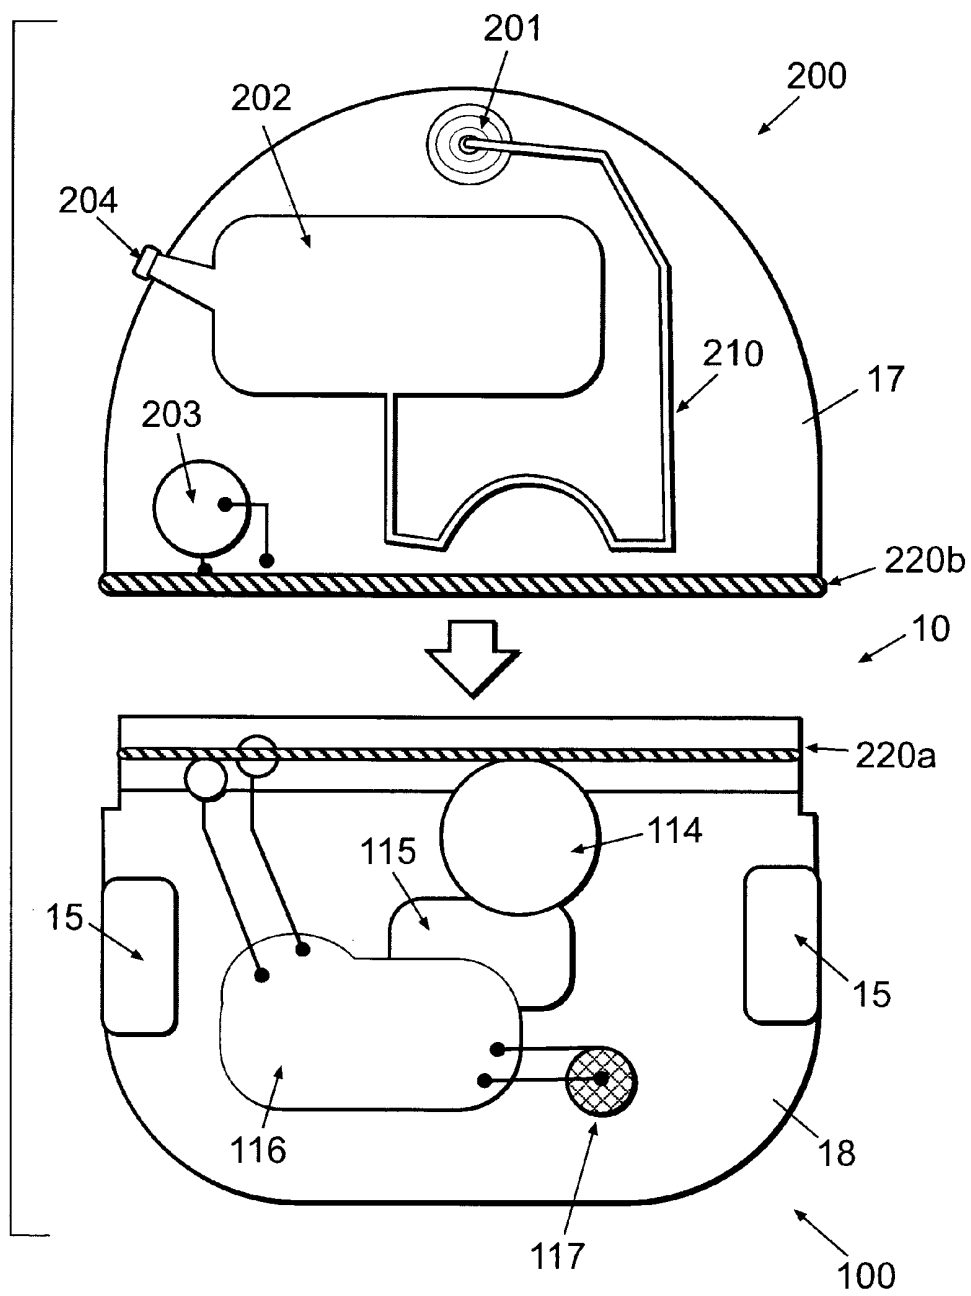


Fig. 4a



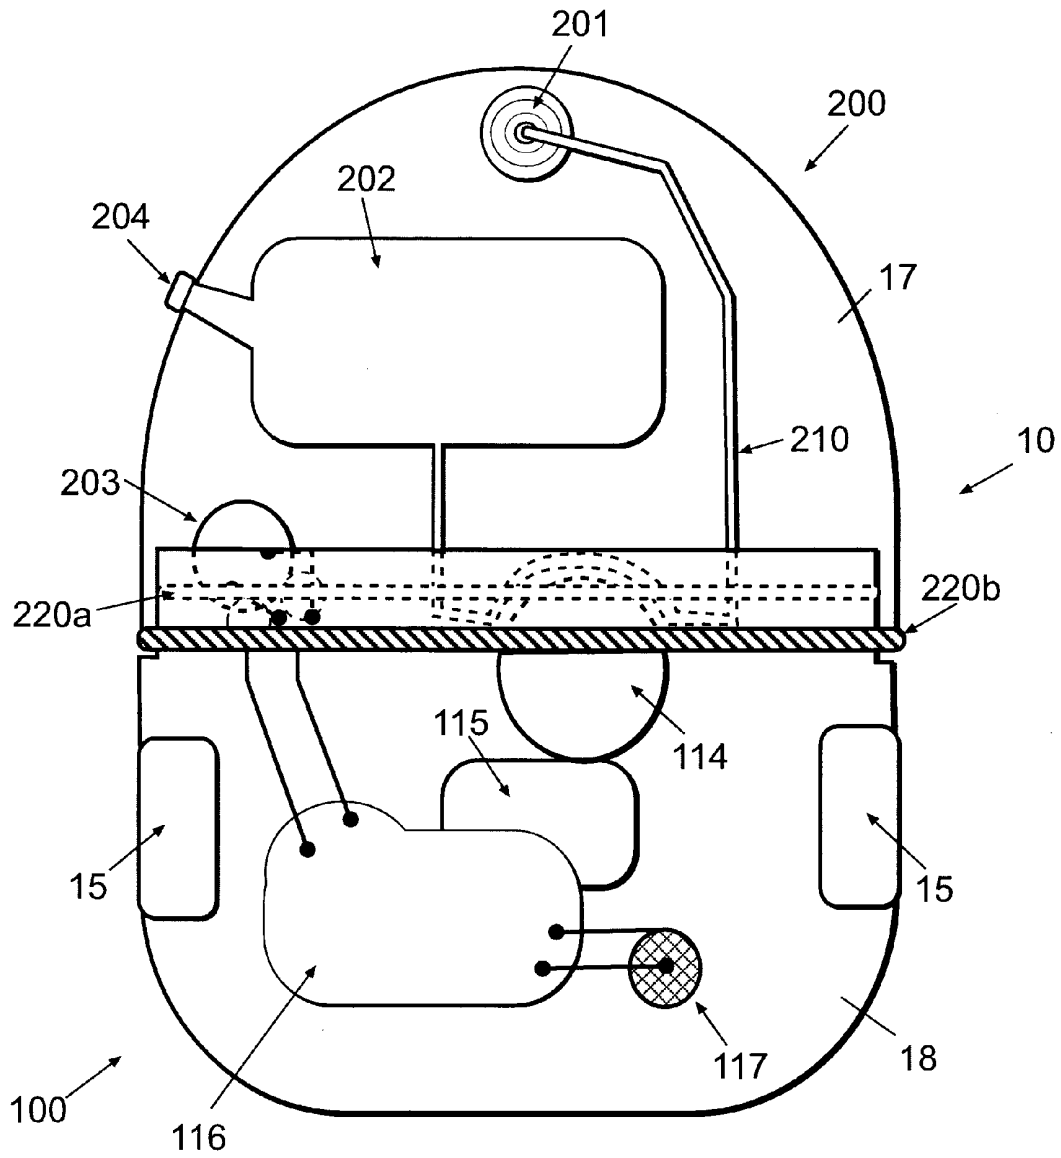



Fig. 4b

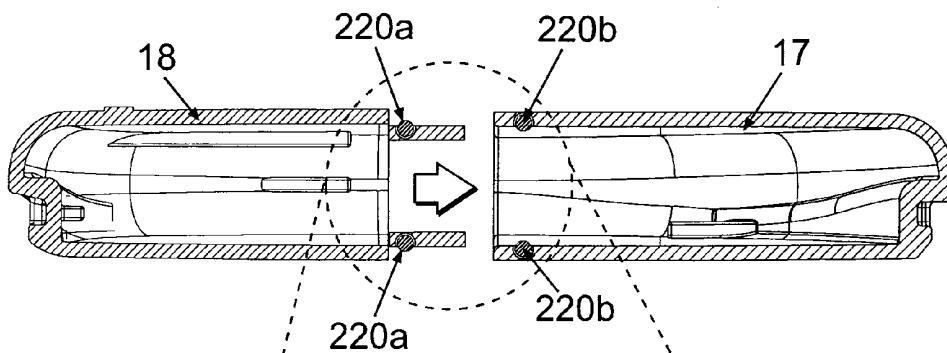


**Fig. 5a**

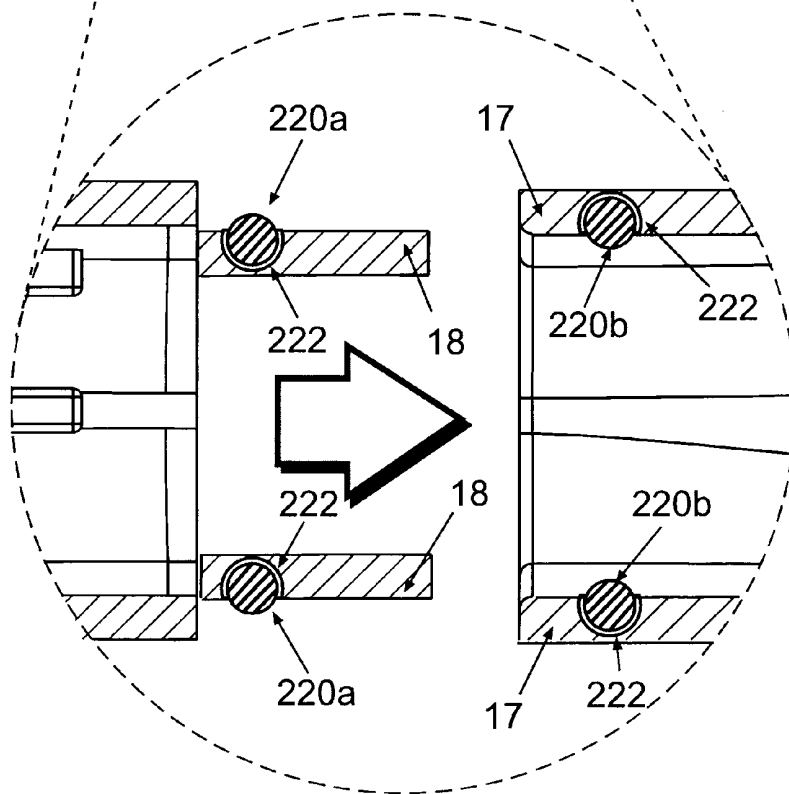


**Fig. 5b**

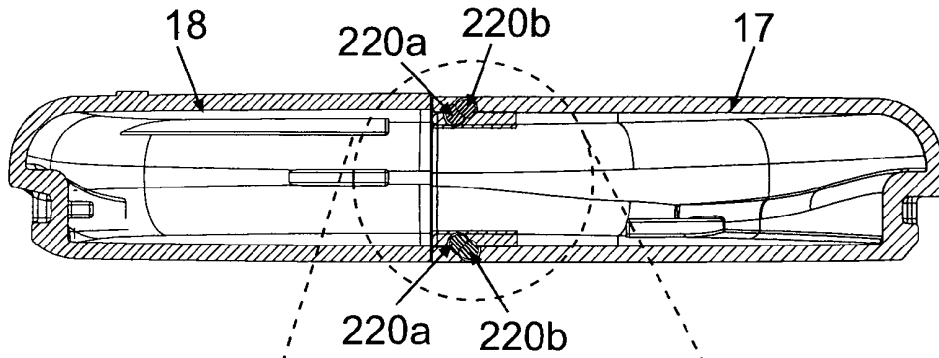


**Fig. 5c**

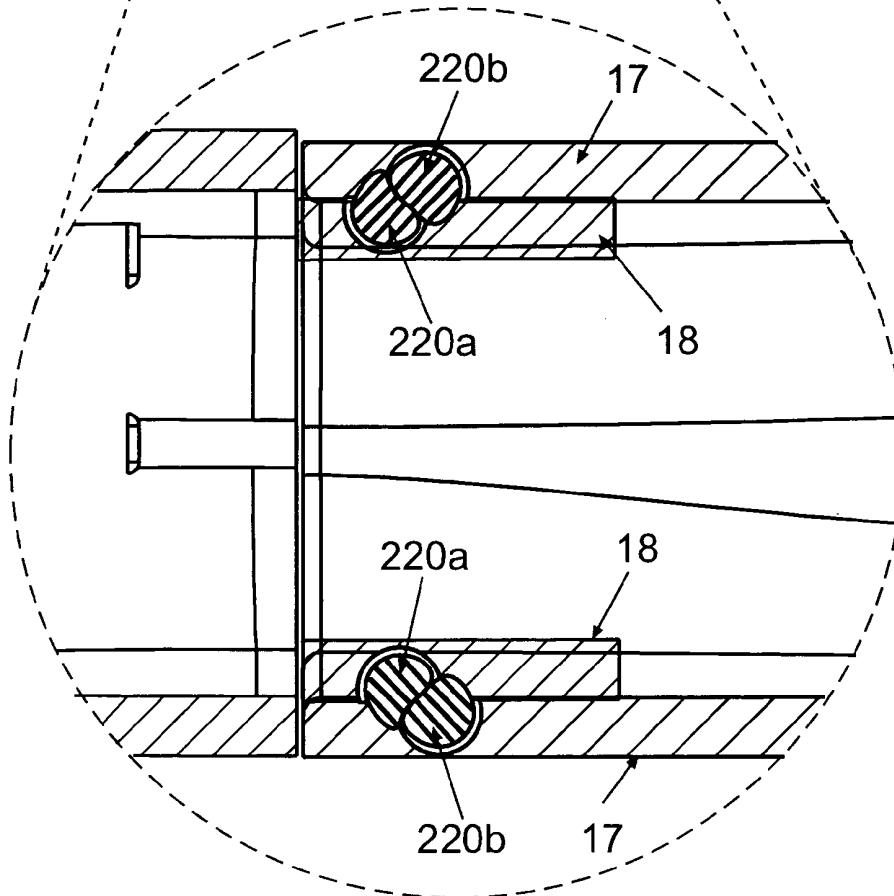

**Fig. 5d**

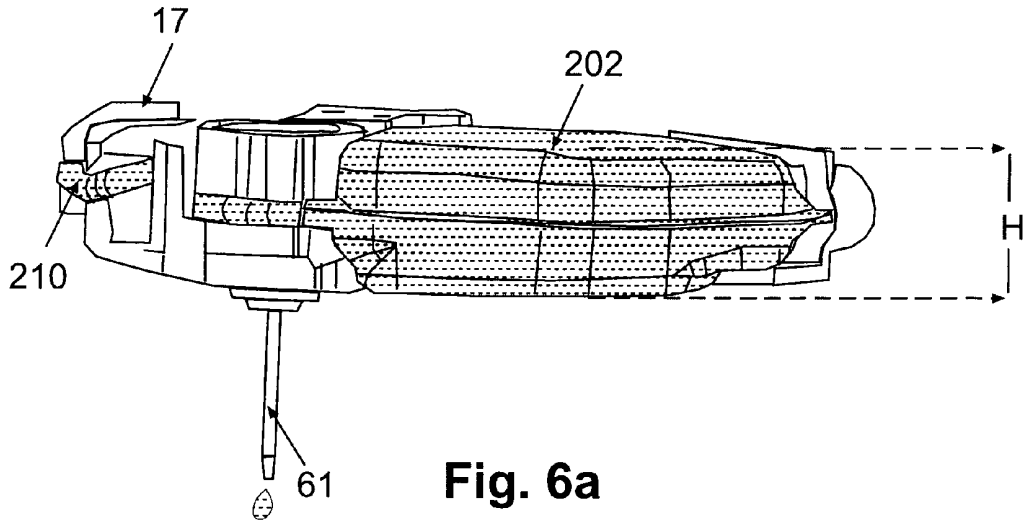

**Fig. 6a**

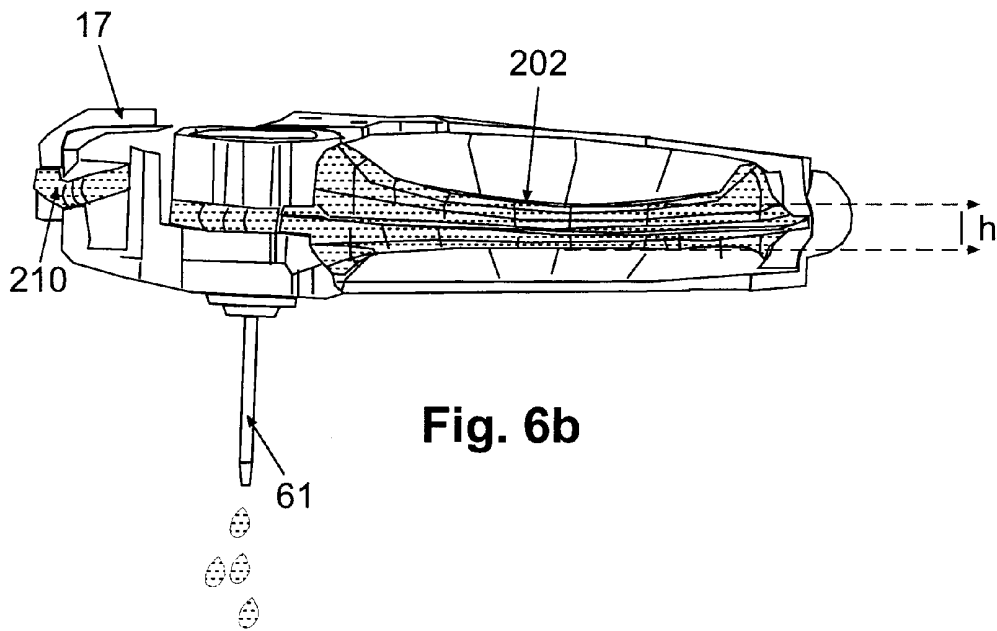

**Fig. 6b**



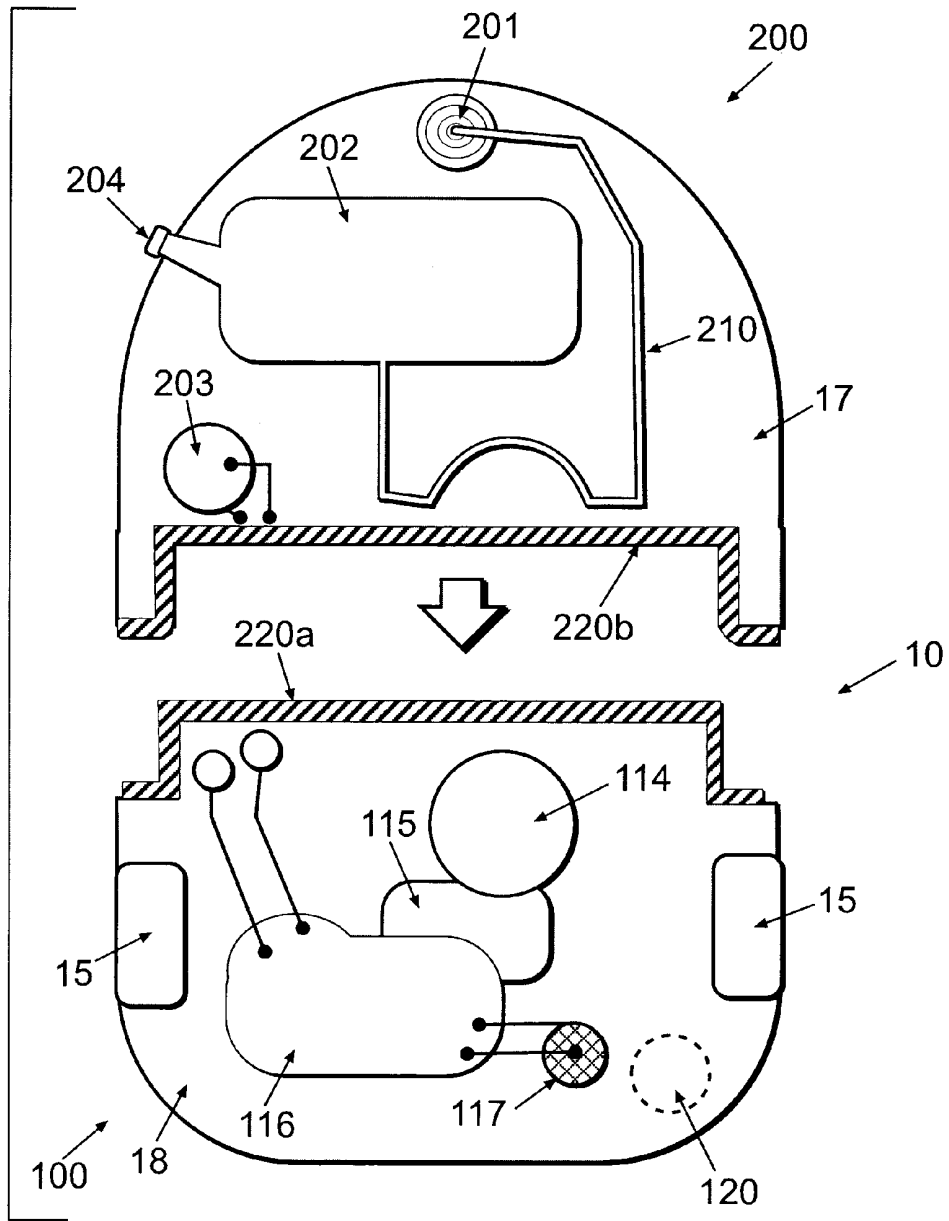



Fig. 7

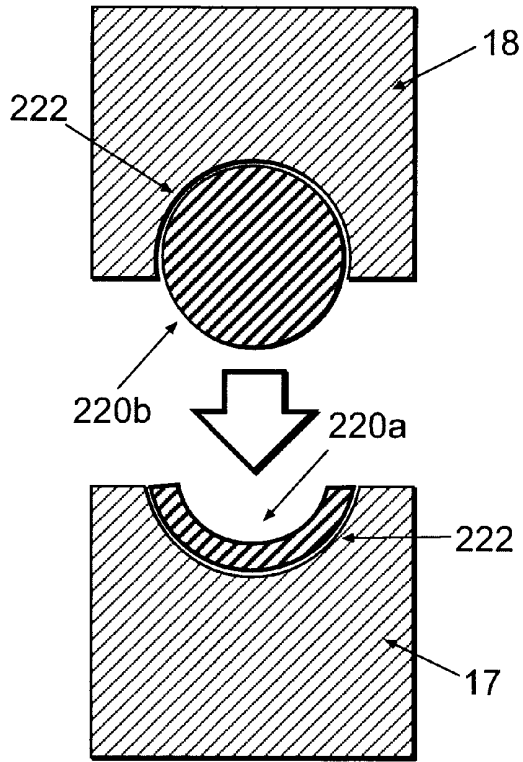


**Fig. 8a**

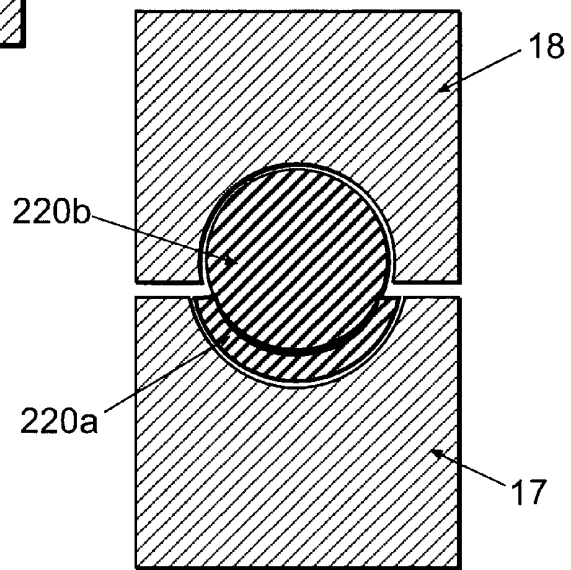


**Fig. 8b**

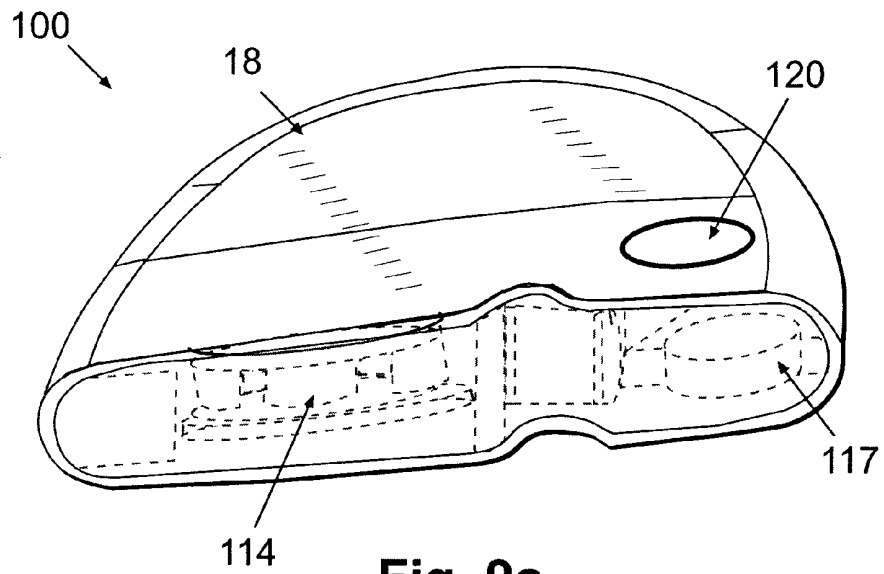

**Fig. 9a**

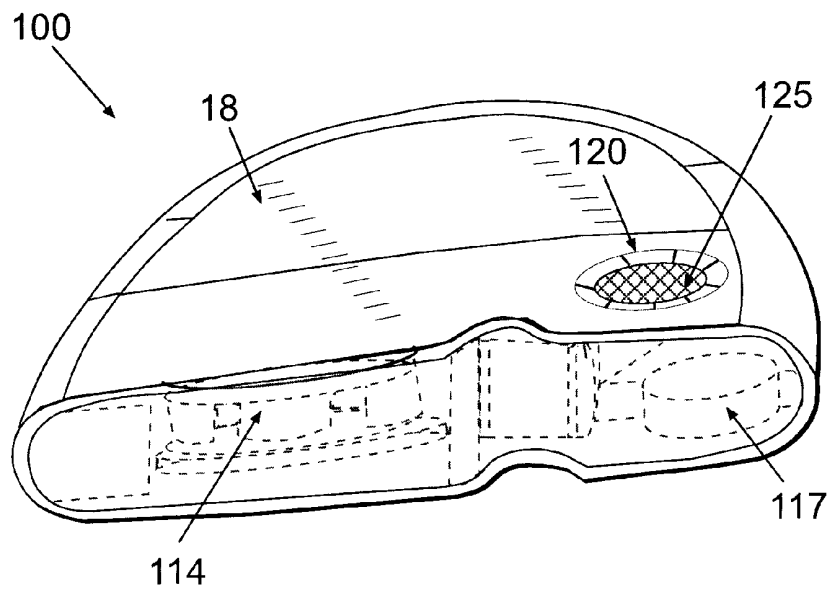

**Fig. 9b**

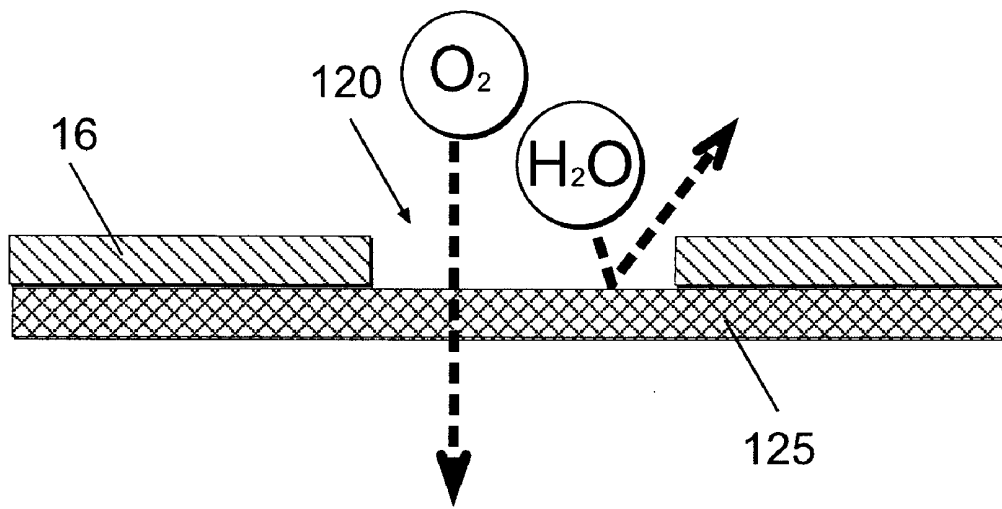

**Fig. 10**

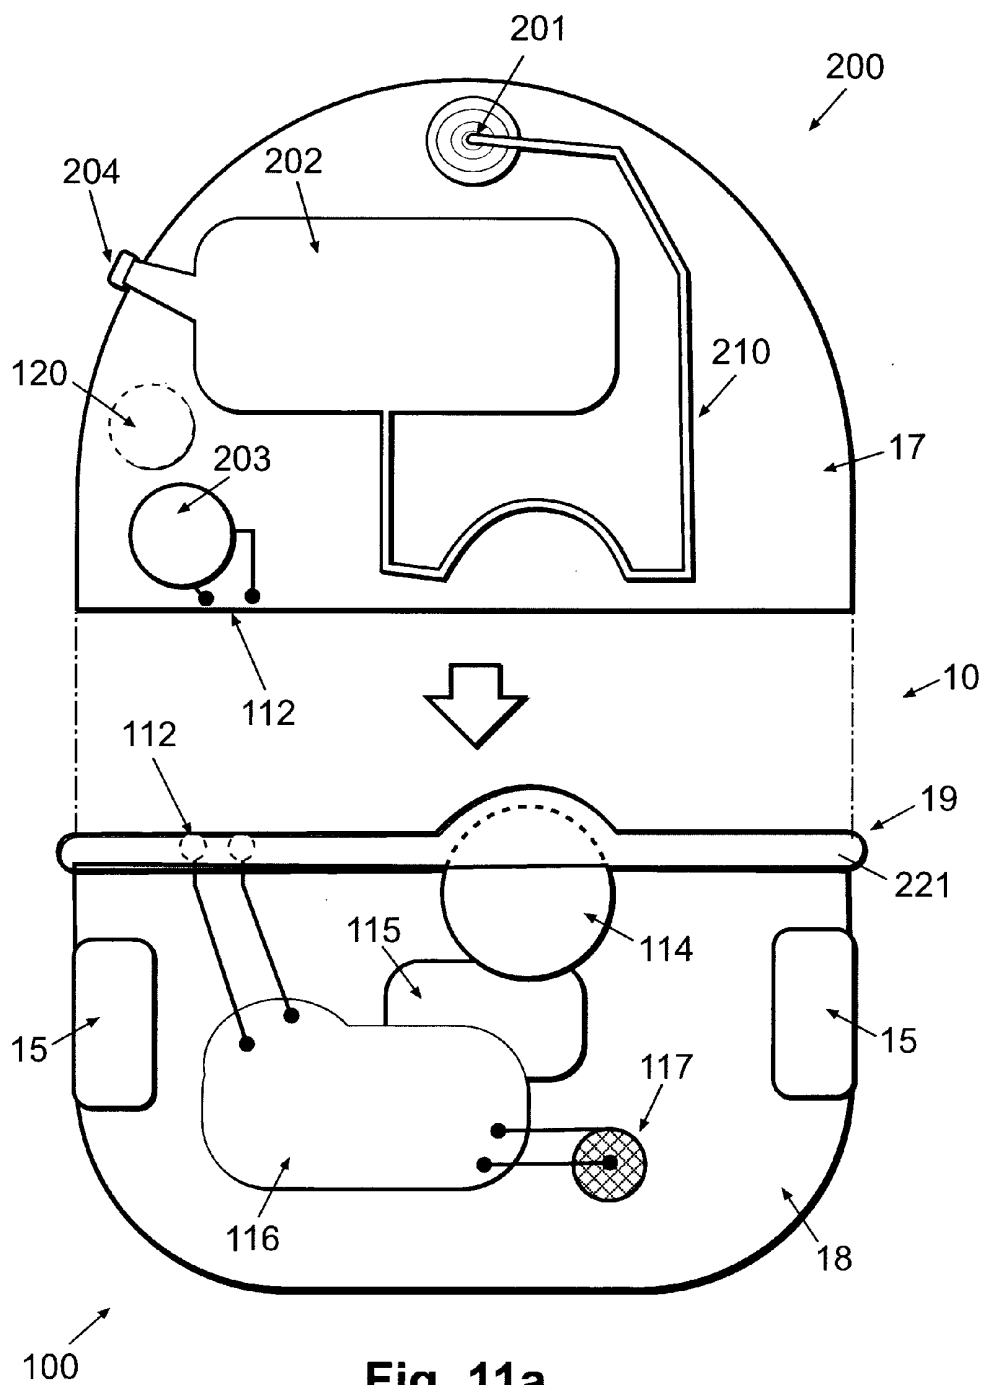


Fig. 11a

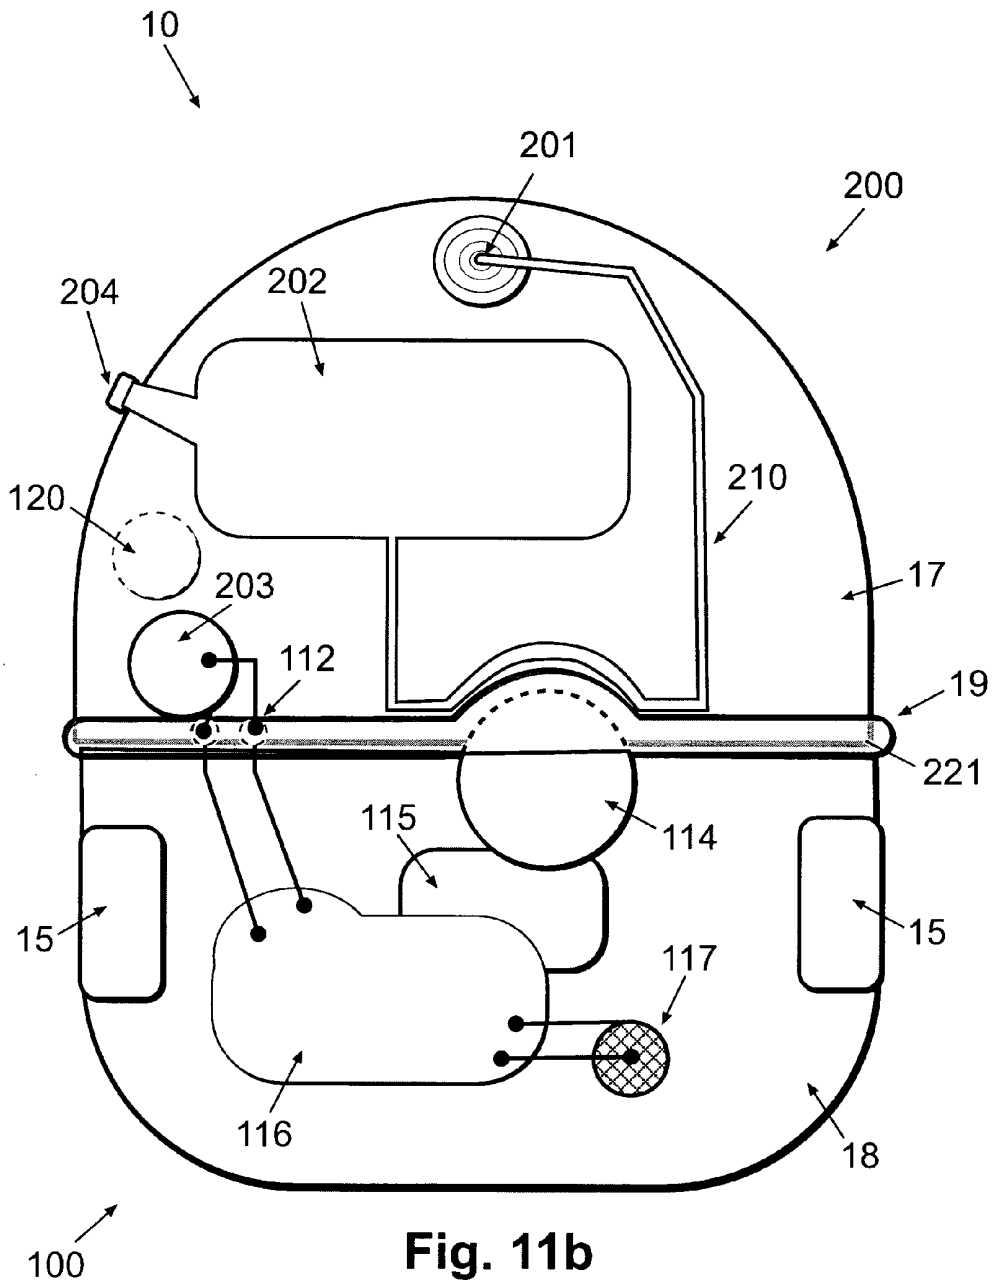


Fig. 11b

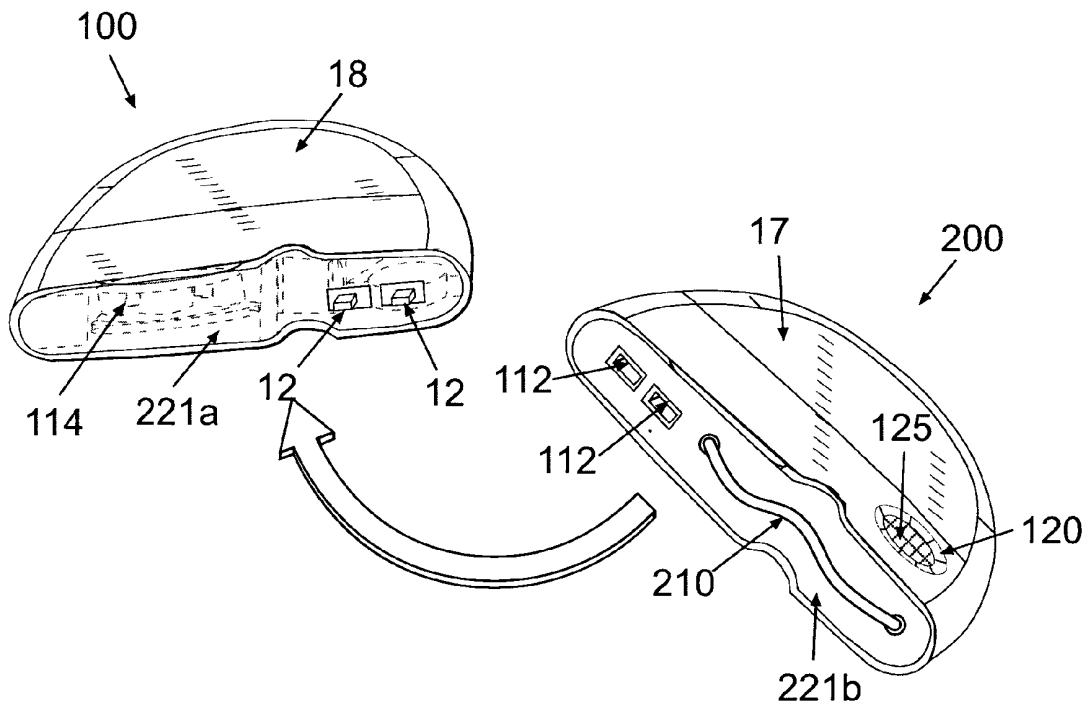


Fig. 12

## VENTED DISPENSING DEVICE AND METHOD

### CROSS-REFERENCE TO RELATED APPLICATIONS

**[0001]** This application claims priority to provisional U.S. application Ser. No. 60/961,382 entitled “Vented Dispensing Device and Method,” filed Jul. 20, 2007, provisional U.S. application Ser. No. 60/961,484 entitled “Energy Supply Means for Fluid Dispensing Device,” filed Jul. 20, 2007, and provisional U.S. application Ser. No. 60/961,528, entitled “Collapsible Pump Reservoir”, filed Jul. 20, 2007, the contents of all of which are hereby incorporated by reference in their entireties.

### BACKGROUND OF THE INVENTION

**[0002]** 1. Field of the Invention

**[0003]** Embodiments of the present disclosure relate generally to a system, a device and a method for sustained medical infusion of fluids and/or continuous monitoring of body analyte. In some embodiments, a portable infusion patch-like device is provided that is securable (e.g., adherable) to the skin and that optionally may also continuously and/or periodically monitor body analytes. In some embodiments, a multi-component fluid dispensing and/or bodily analytes monitoring device is described that includes one or more vents configured to, for example, direct air to, among other things, balance pressure differences between the pressure within and outside its interior by enabling air transfer through the device while preventing entrance of water and other liquids which could affect functioning of the device.

**[0004]** 2. Background of Invention

**[0005]** Medical treatment of several illnesses requires, under some circumstances, continuous or periodical drug infusion into various body compartments, such as subcutaneous and intra-venous injections. For example, diabetes mellitus patients require the administration of varying amounts of insulin throughout the day to control their blood glucose levels. In recent years, ambulatory portable insulin infusion pumps have emerged as a superior alternative to multiple daily injections of insulin by syringe. These pumps, which deliver insulin at continuous basal rates as well as in bolus volumes, were developed to liberate patients from repeated self-administered injections, and to allow them to maintain a near-normal daily routine. In another example, ambulatory pumps may be used to treat post surgery pain where the treatment regiment requires relief by continuous or periodic administration of medication (e.g., administration of opium derivatives). These drugs can be locally delivered to the subcutaneous tissue surrounding the incision scar while avoiding systemic side effects of oral or intravenous administered analgesics. Another application of ambulatory pumps includes use of the pumps in the treatment of cancer patients that require continuous/periodical delivery of chemotherapy medications via an open vein access port.

**[0006]** Several ambulatory insulin infusion devices are available on the market. The first generation of such devices included disposable syringe-type reservoir, piston and tubes, as described, for example, in U.S. Pat. Nos. 3,631,847, 3,771,694, 4,657,486 and 4,544,369, the contents of all of which are hereby incorporated by reference in their entireties.

**[0007]** A drawback of these devices is their relatively large sizes and weights, resulting by their physical configuration

and the relatively large driving mechanisms, e.g., syringes and pistons. These relatively bulky devices have to be carried in patients' pockets or be attached to the patients' belts. Consequently, the fluid delivery tubes of those devices are relatively long, usually longer than 60 cm, to enable needle insertion in remote sites of the body. Such uncomfortable bulky fluid delivery devices each having a relatively long tube are disfavored by the majority of diabetic insulin users because these devices interfere with the patients' regular activities, such as sleeping, exercising, etc.

**[0008]** To avoid tubing limitations, a second generation of pumps has been developed. Second generation pumps include a housing having a bottom surface adapted for attachment to the user's skin, a reservoir disposed within the housing, and an injection needle adapted for fluid communication with the reservoir. These skin securable (e.g., adhereable) devices are generally discarded every 2-3 days, much like the infusion sets employed in first generation pumps. Second generation devices are described, for example, in U.S. Pat. Nos. 5,957,895, 6,589,229 and 6,740,059, the contents of all of which are hereby incorporated by reference in their entireties. Other configurations of skin securable pumps are disclosed, for example, in U.S. Pat. Nos. 6,723,072 and 6,485,461, the contents of all of which are hereby incorporated by reference in their entireties. These patents describe, for example, a pump implemented as a single piece and remains secured to a user's skin for the entire usage duration. The needle emerges from the bottom surface of the device and is secured to the device housing. A drawback of these 2<sup>nd</sup> generation devices is their relative bulkiness and their high cost of manufacture. Particularly, the reservoirs used in conjunctions with these devices are typically tubular and syringe-like, thus requiring a relatively large occupying space and relatively large physical dimensions (e.g., large thickness). Another drawback of second generation devices is that users have to discard the entire device, including expensive electronics and the driving mechanisms of the devices, every 2-3 days.

**[0009]** To avoid, for example, volume and cost constraints, 3<sup>rd</sup> generation skin-secured devices have been proposed, as described, for example, in commonly-owned patent applications PCT/IL06/001276 and U.S. Ser. No. 11/397,115, filed Apr. 3, 2006, the contents of which are hereby incorporated by reference in their entireties. The device disclosed in these applications includes, in some embodiments, one or more of the following units:

**[0010]** 1. A dispensing patch unit (hereinafter “dispensing patch”, “patch” or “dispensing device”)—the dispensing patch unit generally includes two parts, a disposable part and a reusable part. The reusable part comprises, for example, electronic components, including a motor, a buzzer and a controller. The electronic components are configured to control and monitor, for example, the activity of the dispensing patch. The buzzer is configured, for example, to alarm the user under certain circumstances (e.g., when the reservoir has been emptied). The disposable part comprises, for example, a reservoir for therapeutic fluid, a short delivery tube, an outlet port and an energy source (e.g., battery). In some embodiments, switches/buttons may be provided on the dispensing patch to allow for delivery of doses in response to manual commands. After connection of the reusable and disposable parts, the assembled device may

form a sealed item that has a relatively thin dimension, thus rendering the whole device inexpensive, light and discrete.

**[0011]** 2. A remote control unit, which can be used for data acquisition, programming, and communication of user inputs.

**[0012]** 3. A cradle unit—a skin securable (e.g., adherable) structure that is attached to the skin and enables connection and disconnection of the dispensing patch unit.

**[0013]** 4. A cannula cartridge—a unit that includes a cannula for delivering a therapeutic fluid into the patient body.

**[0014]** The dispensing patch unit may be attached to the body of a diabetic patient during the entire usage duration to achieve improved glycemic control. The two-part patch unit may be water tight to enable showering, swimming, and exposure to rain, food (e.g., soup) and beverages (e.g., beer, soda or coffee) that may unintentionally contaminate the device. Such two-part devices are described, for example, in co-owned U.S. Ser. No. 11/397,115 and in U.S. Provisional Application U.S. Ser. No. 60/922,794, entitled “Apparatus and method for pumping fluid into a mammal’s body”, filed Apr. 10, 2007, the contents of all which are hereby incorporated by reference in their entireties.

**[0015]** In some embodiments, a dispensing patch unit that includes a continuous analyte monitor (to enable insulin dispensing and glucose monitoring) may be used. Such a patch unit is described in commonly-owned pending U.S. patent application Ser. Nos. 11/706,606, filed Feb. 14, 2007, U.S. Provisional Application Nos. 60/842,869, filed Sep. 6, 2006 and 60/848,511, filed Sep. 29, 2006, the contents of all which are hereby incorporated by reference in their entireties. Such a dual-function patch unit may also be composed of two parts and may be controlled remotely or manually. Such a patch unit may be water tight as well.

#### SUMMARY OF THE INVENTION

**[0016]** Disclosed are vented fluid delivery devices and associated methods, in which one or more vents formed in the device cause the device to be impervious to fluids but pervious to one or more gases (e.g., oxygen). Such devices and methods may further be configured for example, to enable air (including) oxygen transfer to at least one unit of a fluid dispensing device that requires communication with ambient air, at least in part, to operate (e.g., a zinc-air battery). A vented fluid delivery device may also enable regulating pressure changes within the device as necessary to form an equilibrium with the pressure outside of the device, and/or enable increased transmission of sound waves created by components (e.g., alarms) within the device.

**[0017]** Some embodiments of the present disclosure are directed to a vented device that includes a water-tight and gas pervious, miniature, portable fluid dispensing unit. The vented device may include one or more vents disposed within at least one wall of at least one housing of the device. The fluid dispensing unit may be a patch type dispensing unit that is securable (e.g., adherable) to a patient’s body and enables continuous and/or discrete controllable fluid delivery. In some embodiments, the delivered fluid is insulin. The dispensing patch unit may also include a fluid reservoir, a driving mechanism (e.g., a peristaltic pump or a piston), electronics (e.g., electronics included as part of a printed circuit board, or “PCB”), a power source and/or a delivery tube. In some

embodiments, an audible notification unit (e.g., a buzzer) is provided to notify the patient under certain circumstances, e.g., when the reservoir is empty or is nearly empty. The power source may include one or more zinc-air batteries to supply the energy requirements of the dispensing patch including, for example, energy requirements of the pump’s motor.

**[0018]** In some embodiments, the dispensing patch may comprise two parts: a reusable part and a disposable. The reusable part may include the relatively expensive components such as, for example, electronics (e.g., the electronics implementing the controller of the device) and a motor, while the disposable part may include the relatively less expensive components, including, for example, a fluid reservoir and a power source. In some embodiments, the dispensing patch may be sealed by at least one gasket or o-ring placed on the interface between the two parts (e.g., the reusable and disposable parts). Thus, a sealed compartment may be formed by attaching one part to the other. In some embodiments, an opening, also referred to as a vent or a vent port, may be provided in the housing of the dispensing patch so as to direct air to enable, for example, establishing pressure equilibrium within the interior of the device. The opening, or vent, may further enable air (including oxygen) transfer to one or more units of the device that require communication with ambient air, at least in part, to operate. Such one or more units may include zinc-air battery(ies). The opening (vent) may also be configured to direct air to enable air flow regulation (e.g., according to pressure changes) to perform pressure equilibration. The opening (vent) may also be configured to enable transmission of sound waves.

**[0019]** In some embodiments, a selective membrane covers the vent to prevent water from entering into the dispensing patch unit.

**[0020]** In some embodiments, the membrane allows a minimal rate of gas transfer that is at least 1  $\mu$ l per hour.

**[0021]** In some embodiments, at least one vent is provided in a dispensing patch unit. In some embodiments, at least one vent is provided in a reusable part of the dispensing patch in the proximity of an audible notification module (e.g., a buzzer).

**[0022]** In some embodiments, at least one vent is provided in a disposable part of the dispensing patch in proximity of the reservoir.

**[0023]** In some embodiments, at least one vent is provided in the disposable part of the dispensing patch in proximity of a power source.

**[0024]** In some embodiments, a skin-securable (e.g., adherable) two-part dispensing patch unit is provided. After connection of the parts, the assembled patch unit is waterproof and at the same time pervious to oxygen.

**[0025]** In some embodiments, a water tight gas pervious housing for a dispensing patch unit is provided. In this type of a unit, the gas (e.g., oxygen) is consumed by at least one of the dispensing patch components. In some embodiments, a water tight, oxygen pervious housing for the dispensing patch unit is provided, in which the oxygen is consumed by at least one zinc air battery. In some embodiments, a water tight, oxygen pervious housing for dispensing patch unit is provided, in which the oxygen is consumed in the course of the occurrence of chemical reactions with glucose oxidase.

**[0026]** In some embodiments, a skin-securable (e.g., skin-adherable) infusion patch unit is provided that includes two

sealed parts, reusable and disposable (i.e., each part is contained within its own sealed housing).

**[0027]** In some embodiments, a skin-securable (e.g., adherable) infusion patch unit is provided that includes two water tight parts, reusable and disposable, where one or both of the parts are pervious to at least one gas.

**[0028]** In some embodiments, a water tight, gas pervious housing for a dispensing patch unit is provided.

**[0029]** In some embodiments of the present disclosure, a fluid delivery device that includes a remote control unit and a dispensing patch unit configured for water tight sealing and at the same time gas permeability of one or more device housings is described. In some embodiments, an external, miniature, portable, programmable fluid dispensing patch unit that includes a vent that can be covered with a selectively permeable membrane is provided.

**[0030]** In some embodiments, a small, low cost, portable dispensing patch unit including disposable and reusable parts having a vent covered with a selectively permeable membrane is provided. The membrane is provided in one or more parts of the dispensing patch unit. The membrane may be protected by a perforated cover.

**[0031]** In some embodiments, a dispensing patch unit is provided that includes a sensor for measuring an analyte level (e.g., glucose level). The patch unit may be fitted with one or more housings that are water tight and gas pervious.

**[0032]** Some embodiments of the present disclosure include one or more housings for a fluid dispensing device, where the one or more housings include an aperture covered by a selectively permeable membrane made from a suitable material such as, for example, GORE-TEX™ and/or CELGARD™, configured to enable one or more gases to pass therethrough.

**[0033]** In some embodiments, in addition to being water proof, a skin-securable dispensing patch unit may be provided that enables air entry (venting) to enable performance of one or more of the following functions (applications):

**[0034]** To maintain pressure equilibrium between the interior of the patch unit and ambient atmosphere. Pressure differences between the patch unit interior and the ambient atmosphere can hamper pump flow accuracy and accordingly affect drug delivery. If a reservoir is enclosed in a sealed housing, reduction in reservoir volume during emptying can induce a relative negative pressure. Increasing of negative pressure (building of vacuum) may require higher torque and may thus hamper pumping accuracy. Pressure disequilibrium can also happen during altitude changes during flying or mountaineering. Under such circumstances, the relative high pressure within a sealed housing can cause undesirable (i.e., uncontrolled) drug delivery. These effects are likely to occur when the patch unit is fitted with a resilient (collapsible) thin walled reservoir that continuously (or periodically) shrinks during emptying and that may be sensitive to pressure changes.

**[0035]** To improve loudness of an audible notification module (e.g., buzzer) provided within the patch unit. An opening in the patch housing can improve sound delivery from the buzzer contained within a sealed patch unit.

**[0036]** Air may be needed for chemical and electrochemical reactions of one or more of the units/components, such as a battery, located within the patch, that require communication with ambient air, at least partly, to operate. In some embodiments, one or more Zinc-Air

batteries may be provided, which may require ingress of air in order to operate properly. A description of such a patch unit is also provided in pending commonly-owned U.S. provisional patent application No. 60/961,484, entitled "Energy Supply Means for Fluid Dispensing Device", and in the non-provisional U.S. non-provisional patent application entitled "Energy Supply for Fluid Dispensing Device", which is being filed on the same date herewith, the contents of both of which are hereby incorporated by reference in their entireties. The Zinc-air batteries are small, lightweight, have high energy capacity, and are relatively inexpensive, thus making them suitable candidates for thin, skin-securable pumps. Zinc-Air batteries typically require ventilation because they chemically react with oxygen from the ambient air to produce electrical energy. Other examples of reactions that may require ingress of air include oxidation of glucose, to measure the amount of glucose in a sample and for in the user body. Oxidization of glucose may be conducted by glucose oxidase as described, for example, in U.S. Pat. Nos. 3,770,607 and 4,679,562, the contents of which are hereby incorporated by reference in their entireties.

**[0037]** In some embodiments of the present disclosure, membranes may be used to provide water tight seal for the housing of a skin-securable (e.g., adherable) patch unit and at the same time to render it permeable to air. The materials from which such membranes may include water repelling fabrics and polymers. Water repelling fabrics may comprise various porous materials (e.g., fabrics), coated with hydrophobic layers that are pervious to air (such materials are also referred to as durable water repellent finishes, water repelling fabrics). Examples of such fabrics are described, for example, in U.S. Pat. Nos. 3,953,566, 4,194,041, 4,560,611 and 4,429,000, the contents of all of which are hereby incorporated by reference in their entireties. Durable water repellent finishes (DWR) are hydrophobic coatings such as polytetrafluoroethylene, perfluoroalkoxy polymer resin and many other types of polymers applied to fabrics to render them water-resistant by causing water to bead up and roll off. Examples of such finishes are described, for example, in U.S. Pat. Nos. 5,688,864, 6,811,884, 6,743,516 and 5,973,055, the contents of all of which are hereby incorporated by reference in their entireties. Polymeric membranes may enable selective passing of certain chemicals (e.g., oxygen) while preventing others chemical or materials (e.g., water) to pass. Generally, nonporous polymeric membranes are used to separate fluids, such as during purification processes in drug and food industries. There, gases and fluids are separated due to their different solubility and diffusivity in polymers. Porous membranes may also be utilized to perform fluid separation. The diameter of the pores of such membranes may be smaller than the mean free path of water molecules. Under standard conditions (e.g., STP conditions of about 1 atm, 300°K), the mean free path of water molecules is approximately 40 nm. Examples of such membranes are described, for example, in U.S. Pat. Nos. 5,352,513, 5,985,475, 7,083,849, 6,676,993, 6,854,603 and 6,638,610, the contents of all of which are hereby incorporated by reference in their entireties.

**[0038]** In some embodiments, a portable programmable fluid dispensing device is provided that is fitted with a water-tight housing that enables not only sealing but also gas transfer.

**[0039]** In some embodiments, one or more water tight housings are provided for a portable programmable fluid dispensing device that enable gas transfer required to cause a chemical reaction.

**[0040]** In some embodiments, a device may be provided that includes a skin-securable dispensing patch unit that is water tight and at the same time pervious to gases. In some embodiments, the device dispenses insulin.

**[0041]** In some embodiments, a miniature portable device for monitoring of glucose is provided that is both water tight and pervious to gases. The continuous monitoring device can be incorporated within an insulin dispensing device, thus endowing it with both sensing and dispensing capabilities. In some embodiments, the device may dispense insulin according to monitored glucose levels within a closed loop system.

**[0042]** In some embodiments of the present disclosure, a simple and inexpensive dispensing patch that is composed of two parts, a disposable part and a reusable part, is provided. After connecting the reusable and disposable parts, the whole device may be water tight and at the same time pervious to gases.

**[0043]** In some embodiments, a dispensing patch unit is provided that delivers fluid into the body. The housing of the device may maintain pressure equilibrium between the device and the ambient atmosphere.

**[0044]** In some embodiments, a device may be provided that delivers fluid into the body. The housing of the device may include at least one opening that enables ingress of air while preventing penetration by water and/or other fluids.

**[0045]** In some embodiments, a device is provided that delivers fluid into the body. At least one housing of the device may include one or more openings that enable ingress of some gases while liquid penetration is prevented.

**[0046]** In one aspect, a fluid dispensing device for delivery of a therapeutic fluid to a user's body is disclosed. The fluid dispensing device includes at least one reservoir to hold the therapeutic fluid, at least one other unit requiring communication with ambient air, at least partly, to operate, and at least one housing defining an interior to retain the at least one reservoir and the at least one other unit, the at least one housing having at least one vent port formed on one or more walls of the at least one housing. The at least one vent port is adapted to direct air into the interior and out of the interior of the at least one housing to maintain pressure equilibrium in the interior of the at least one housing between the air pressure in the interior of the at least one housing and the ambient air pressure outside the at least one housing, and provide communication with ambient air to the at least one other unit requiring air to enable operation of the at least one other unit.

**[0047]** Embodiments of the device may include one or more of the following features.

**[0048]** The at least one other unit requiring communication with the ambient air may include at least one energy source including at least one electrochemical cell to produce electrical energy upon exposure to air. The at least one vent port adapted to direct air may be adapted to direct air into the interior of the at least one housing to provide air to the energy source to enable operation of the at least one energy source.

**[0049]** The at least one energy source may include at least one zinc-air battery.

**[0050]** The at least one vent port adapted to direct air into the interior of the at least one housing to maintain pressure equilibrium in the interior of the at least one housing may be adapted to direct air into the interior of the at least one housing

to maintain the pressure equilibrium in the interior of the at least one housing to facilitate controlled delivery of therapeutic fluid from the at least one reservoir retained inside the at least one housing.

**[0051]** The device may further include a semi-permeable membrane covering the at least one vent port, the membrane being impervious to at least one liquid but pervious to at least one gas. The semi-permeable membrane may be impervious to substantially all liquid and may be substantially pervious to air.

**[0052]** The semi-permeable membrane may include a water repelling fabric. The semi-permeable membrane may include a polymer. The semi-permeable membrane may include GORE-TEX™. The semi-permeable membrane may include CELGARD™.

**[0053]** The semi-permeable membrane may provide a rate of gas transfer greater than or equal to about 0.1 micro-liter per hour at a temperature of 300°K and pressure conditions of 1 atm.

**[0054]** The device may further include at least one zinc-air battery and the semi-permeable membrane may provide a rate of gas transfer greater than or equal to about 2.5 micro liter per second at a temperature of 300°K and pressure conditions of 1 atm.

**[0055]** The device may further include an audible notification module disposed in the at least one housing, and the at least one vent port may be further adapted to direct there-through sound and/or vibration generated by the audible notification module from the interior of the at least one housing to an exterior of the at least one housing to notify the user regarding a condition of the fluid dispensing device.

**[0056]** The at least one housing may include a reusable part including at least a portion of a driving mechanism and electronic components having a processor, and a disposable part having the reservoir, the disposable part being connectable to the reusable part. The at least one vent port may be formed on the disposable part and/or reusable part. The disposable part may be configured to retain at least one energy source comprising at least one electrochemical cell to produce electrical energy, and the reusable part may include the at least one vent port. The disposable part and the reusable part may be substantially sealed.

**[0057]** The disposable part and the reusable part may be substantially sealed when operatively coupled to each other, at least one of the disposable and the reusable part being permeable to ingress of liquids when not operatively coupled to the other part.

**[0058]** The device may further include at least one seal to substantially cover the at least one vent port to prevent entry of air into the at least one housing through the at least one vent port when the device is not in operation.

**[0059]** The at least one other unit may include a sensing element to determine bodily analyte level, the sensing element disposed in the at least one housing. The at least one vent port adapted to direct air may be adapted to provide air to the sensing element to enable operation of the sensing element.

**[0060]** In another aspect, a method is disclosed. The method includes maintaining communication of ambient air with the interior of at least one housing of a fluid dispensing device through a vent port formed on one or more walls of the at least one housing, maintaining pressure equilibrium in the interior of the at least one housing between the air pressure in the interior of the at least one housing and the ambient air pressure outside the at least one housing, and delivering some

of the air communicated through the vent port to at least one other unit of the fluid dispensing device that requires communication with the ambient air, at least partly, to operate.

**[0061]** Embodiments of the method may include any of the features described in relation to the device, as well as any one of the following features.

**[0062]** Delivering some of the air to the at least one other unit of the fluid dispensing device may include delivering some of the air to at least one energy source comprising at least one electrochemical cell to produce electrical energy upon exposure of the cell to the delivered air.

**[0063]** Delivering some of the air to the at least one energy source may include delivering the some of the air to at least one zinc-air battery.

**[0064]** Maintaining the pressure equilibrium in the interior of the at least one housing may include maintaining the pressure equilibrium in the interior of the at least one housing to facilitate controlled delivery of therapeutic fluid from at least one reservoir disposed inside the at least one housing, the reservoir adapted to hold therapeutic fluid to be dispensed by the fluid dispensing device.

**[0065]** The method may further include covering the at least one vent port with a semi-permeable membrane, the membrane being impervious to at least one liquid but pervious to at least one gas.

**[0066]** Delivering some of the air to at least one other unit of the fluid dispensing device may include delivering the some of the air to at least one zinc-air battery, and the semi-permeable membrane may provide a rate of gas transfer greater than or equal to about 2.5 micro liter per second at a temperature of 300°K and pressure conditions of 1 atm.

**[0067]** The method may further include directing sound and/or vibrations produced by an audible notification module disposed in the at least one housing from the interior of the at least one housing to an exterior of the at least one housing to notify a user regarding a condition of the fluid dispensing device.

**[0068]** Delivering some of the air to at least one other unit of the fluid dispensing device may include delivering air to a sensor to enable operation of the sensor, the sensor configured to determine bodily analyte level. Delivering air to the sensor to enable operation of the sensor may include delivering air to the sensor to perform glucose oxidization.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0069]** For a better understanding of the devices, systems and methods described herein, including the various objects and advantages thereof, reference is made to the following description, which is to be taken in conjunction with the accompanying illustrative drawings.

**[0070]** FIGS. 1a-c are schematic diagrams of exemplary single-part and two-part infusion pumps with and without a remote control unit.

**[0071]** FIGS. 2a-b are schematic diagrams of exemplary single part and two-part dispensing patch units, respectively, secured to a patient's skin using a cradle.

**[0072]** FIGS. 3a-b are schematic diagrams illustrating operation of an exemplary two part dispensing patch unit which includes a piston-type displacement pumping mechanism that comprises a propelling plunger.

**[0073]** FIGS. 4a-b are schematic diagrams of an exemplary sealable two part dispensing patch unit.

**[0074]** FIGS. 5a-d are schematic diagrams of exemplary embodiment of a sealed fluid dispensing device.

**[0075]** FIGS. 6a-b are schematic diagrams illustrating operation of an exemplary fluid dispensing device that includes a collapsible reservoir.

**[0076]** FIG. 7 is a schematic diagram of an exemplary sealable two part dispensing patch unit provided with a vent.

**[0077]** FIGS. 8a-b are cross-sectional diagrams of an exemplary sealed fluid dispensing device.

**[0078]** FIGS. 9a-b are perspective views of an exemplary reusable part of the dispensing patch having a vent with and without, respectively, a selectively permeable membrane.

**[0079]** FIG. 10 is a partial schematic diagram of an exemplary dispensing patch's housing closed by a selectively permeable membrane.

**[0080]** FIGS. 11a-b are schematic diagrams of an exemplary two-part dispensing patch unit comprising a sealed reusable part and a sealed disposable part.

**[0081]** FIG. 12 is a perspective view of an exemplary a fluid dispensing device depicting the electrical and mechanical connections between a sealed reusable part and a sealed disposable part with a vent.

#### DETAILED DESCRIPTION OF THE INVENTION

**[0082]** Disclosed are devices, systems and methods for dispensing fluids, including therapeutic fluids such as, for example, insulin. A fluid dispensing device for delivery of a therapeutic fluid to a user's body includes at least one reservoir to hold the therapeutic fluid, at least one other unit requiring communication with ambient air, at least partly, to operate. Such a device further includes at least one housing defining an interior to retain the at least one reservoir and the at least one other unit. The at least one housing has at least one vent port formed on one or more walls of the at least one housing, that is adapted to direct air into the interior of the at least one housing to maintain pressure equilibrium in the interior of the at least one housing between the air pressure in the interior of the at least one housing and the ambient air pressure outside the at least one housing, and to provide air to the at least one other unit requiring communication with ambient air to enable operation of the at least one other unit. In some embodiments, the at least one other unit includes at least one zinc-air battery that includes at least one electrochemical cell to produce electrical energy upon exposure of the cell to air. Under such circumstances, the vent port adapted to direct air is adapted to direct air to, among other things, provide air to the at least one zinc-air battery to enable operation of the battery.

**[0083]** Referring to FIG. 1a, a schematic diagram of a fluid delivery device, also referred to herein as an infusion pump, is shown. The device comprises a dispensing patch unit 10, which can be secured (e.g., adhered to a patient's body), and a remote control unit 40, which communicates with the patch unit 10. The patch unit 10 may be composed of a single part, as shown, for example, in FIG. 1b, or two parts (as shown, for example, in FIG. 1c), namely, a reusable part 100 and a disposable part 200. The patch unit 10 may employ different dispensing mechanisms, such as, for example, a reservoir with a piston, or a peristaltic positive displacement mechanism, e.g., a peristaltic pump with rollers and a stator plate. The dispensing patch unit may include a user interface that includes buttons (not shown) to enable manual fluid delivery programming.

**[0084]** Referring to FIG. 2a, a fluid delivery device comprising a single-part dispensing patch unit 10 having a housing 16, a cradle unit 20 and a remote control unit 40 is shown.

The patch unit **10** is connectable to cradle unit **20** securable (e.g., through adhesion) to the patient's skin **5**. The patch unit **10** may be disconnected from or reconnected to the cradle unit **20** at the patient's discretion. A needle unit that may include a cannula and a penetrating member (not shown) may be inserted through the cradle unit into the patient's body. Fluid delivery can be controlled through programmed profiles and instructions, programmed, for example, by the remote control unit **40**, or provided manually through at least one button **15** provided on the patch unit **10** (e.g., disposed on the housing **16** of the patch unit).

[0085] Referring to FIG. **2b**, a fluid delivery device comprising a two-part dispensing unit **10** that includes a reusable part **100** and its housing **18**, a disposable part **200** and its housing **17**, a cradle unit **20** and a remote control unit **40** is shown. One or more manual buttons **15**, constituting a user-interface, may be located on the reusable part **100** of the patch unit **10**. The reusable part **100** and the disposable part **200** are connectable at the interface **19**.

[0086] The depicted configurations of fluid delivery devices, such as those shown in FIGS. **2a-b**, which comprise a patch unit, a cradle unit and a needle unit as detailed herein are also described in commonly-owned patent applications Israeli Patent Application No. IL 171813, U.S. Publication No. 2007/0106218 (corresponding to U.S. patent application Ser. No. 11/397,115, entitled "Systems and methods for sustained medical infusion and devices related thereto"), U.S. application Ser. No. 11/706,606, filed Feb. 14, 2007, and U.S. provisional application Nos. 60/833,110, filed Jul. 24, 2006, 60/842,869, filed Sep. 6, 2006, and 60/848,511, filed Sep. 29, 2006, the contents of all of which are hereby incorporated by reference in their entireties. One of the advantages of the two-part configuration, shown, for example, in FIG. **2b**, is that the relatively expensive units/components of the fluid delivery device may be deployed within the reusable part, while the less expensive unit components of the device may be accommodated within the disposable part.

[0087] Referring to FIGS. **3a** and **3b**, schematic diagrams of an exemplary dispensing patch unit **10** in operation are shown. The depicted dispensing patch unit **10** is implemented using an infusion pump which includes a piston-type displacement pumping mechanism that comprises a propelling plunger and is configured to deliver fluid through interaction of a piston with the fluid reservoir retained in the housing of the disposable part **200**. Such a configuration is also disclosed in commonly-owned U.S. provisional application No. 60/928,815, entitled "A positive displacement pump", filed May 11, 2007, the content of which is hereby incorporated by reference in its entirety. As noted, in some embodiments, the patch unit may include two parts, namely, the reusable part **100** and the disposable part **200**.

[0088] The disposable part **200** may comprise:

[0089] An outlet port **201** for delivering the therapeutic fluid to a patient's body.

[0090] A reservoir **202** that stores the therapeutic fluid (e.g., insulin).

[0091] A power source **203** that includes one or more energy sources, such as batteries, to energize the electrical units/components of the infusion pump.

[0092] A threaded rod **101** and plunger **102** that are components of the dispensing mechanism.

[0093] The reusable part **100** may comprise:

[0094] One or more manual buttons **15**, forming at least part of a user-interface disposed on the patch unit, to

adjust the amount of therapeutic fluid to be delivered, particularly for a bolus dosage.

[0095] A displacement driving mechanism **114'**, including a motor and a gear. This part of the driving mechanism moves a piston, which, in some embodiments comprises the threaded rod **101** and the plunger **102** that, as noted, may be included in the disposable part **200**.

[0096] Electronic components **116** such as controller, processor and transceiver.

[0097] As shown in FIG. **3a**, the piston infusion pump **10** includes a full fluid reservoir **202**. The threaded rod **101** and the plunger **102** are pulled back so that the plunger **102** is positioned proximate to the interface where the disposable part **200** and the reusable part **100** connect to thus provide maximal volume for the therapeutic fluid in the reservoir **202**. FIG. **3b** shows the piston infusion pump after delivery of therapeutic fluid, as a result of which the fluid reservoir is emptied. Particularly, to deliver the therapeutic fluid, the threaded rod **101** and the plunger **102** are moved to cause the therapeutic fluid to be pushed out of the reservoir **202** to the patient's body through the outlet port **201**. The change in position of the plunger **102** thus reduces the volume of the reservoir **202**.

[0098] Referring to FIGS. **4a** and **4b**, schematic diagrams of another exemplary dispensing patch are shown. Particularly, a sealable dispensing patch unit **10** comprises two parts, namely, a reusable part **100** and a disposable part **200** that are similar to those described, for example, in commonly-owned U.S. provisional application No. 60/922,794, entitled "Apparatus and method for pumping fluid into a mammal's body", filed Apr. 10, 2007, the content of which is hereby incorporated by reference in its entirety. The disposable part **200** includes a gasket **220b**. Another gasket **220a** is coupled to the reusable part **100**. These gaskets are, in some embodiments, flat gasket, o-ring types, or other types of seals that may be applied. The gasket **220a** may be coupled to the housing **18** of the reusable part **100** by welding, gluing, or other coupling mechanism or procedure, and/or may be positioned in a trench in the housing **18**. The gasket **220b** may be coupled to the housing **17** of the disposable part **200**. Thus, the gaskets remain in their places even when the parts **100** and **200** of the dispensing patch unit are separated, as shown in FIG. **4a**. The gasket configurations may include at least one o-ring, and/or other gasket(s) that may be provided with the reusable part or the disposable part.

[0099] FIG. **4b** shows the disposable part **200** connected to the reusable **100** part. The gaskets **220a** and **220b** maintain sealing (as also shown in FIGS. **5a-d**) of the dispensing patch unit **10** after attaching the reusable part **100** to the disposable part **200**. The sealing may be achieved by the application of pressure on the gaskets as shown, for example in FIGS. **5a-d**.

[0100] The disposable part **200** depicted in FIGS. **4a** and **4b** may include:

[0101] An outlet port **201**.

[0102] A reservoir **202**.

[0103] At least one energy source such as a battery **203**.

[0104] A filling port **204**.

[0105] A delivery tube **210**.

[0106] The reusable part **100** of FIGS. **4a** and **4b** may include:

[0107] A user interface that may include one or more buttons **15** for manual fluid delivery programming.

[0108] A driving mechanism **115** to actuate the pumping mechanism.

- [0109] A peristaltic-based pumping mechanism rotary wheel **114**.
- [0110] A controller implemented, for example, using an electronic control system arranged on a printed circuit board (PCB) **116**.
- [0111] An audible notification module that may include a buzzer **117** to provide alarms to alert a user (e.g., the patient) regarding certain conditions of the dispensing device.
- [0112] When the disposable part **200** is coupled to the reusable part **100**, the rotary wheel **114** actuates the delivery tube to compress a section of the delivery tube to thus cause displacement of the therapeutic fluid towards the outlet port **201** of the disposable part **200**.
- [0113] Referring to FIGS. **5a-d**, cross-sectional diagrams of a dispensing patch unit with sealing are shown. Particularly, in these figures, the interface between the housing **18** of the reusable part **100** and the housing **17** of the disposable part **100** are shown. FIG. **5a** shows the separated disposable and reusable parts, aligned and facing each other ready for attachment (FIG. **5b** is an enlarged view of part of the view shown in FIG. **5a**). FIG. **5c** depicts the disposable part attached to the reusable part (FIG. **5d** is an enlarged view of part of the view shown in FIG. **5c**). As shown, the gaskets **220a** and **220b** are received in trenches **222** defined in the housings of the disposable and/or the reusable parts to facilitate maintaining the gaskets in place.
- [0114] Referring to FIGS. **6a** and **6b**, schematic diagrams of an exemplary dispensing device having a collapsible reservoir **202** is shown. Further descriptions of similar collapsible reservoirs are provided, for example, in co-pending and co-owned U.S. provisional application No. 60/961,528, entitled "Collapsible Pump Reservoir", filed Jul. 20, 2007, and co-owned U.S. non-provisional patent application entitled "Collapsible Reservoir for Use with a Delivery Device" which is being filed on the same date as the instant application, the contents of both of which are hereby incorporated by reference in their entireties. A collapsible reservoir is suitable for use with peristaltic pumps. The fluid within the reservoir **202** is displaced by the forcibly induced peristaltic movement along the delivery tube **210**. The reservoir **202** is configured to collapse while emptying, to compensate for the displaced fluid and to avoid entry of air. In some embodiments, the collapsible reservoir is positioned in the housing **17** of the disposable part. FIG. **6a** shows a full collapsible reservoir **202** while FIG. **6b** shows the reservoir after some of the fluid that was held in it had been removed (e.g., delivered to the patient). As shown, the volume of the collapsible reservoir **202** is decreased when the reservoir is being emptied, e.g., the dimensions, such as the height of the full reservoir "H" (as indicated in FIG. **6a**), are larger than the dimensions, such as the height "h" of the depleted reservoir (as indicated in FIG. **6b**). The depicted dispensing system also includes a cannula **61** for the delivery of the therapeutic fluid from the dispensing patch to the patient's body. The cannula is inserted into the patient body and is in fluid communication with the delivery tube **210** (as shown in FIGS. **6a** and **6b**).
- [0115] Referring to FIG. **7**, a schematic diagram of an exemplary sealable dispensing patch unit **10** is shown. The dispensing patch comprises two parts, namely, a reusable part **100** and a disposable part **200**. A face seal is employed to seal the dispensing patch **10** unit. Particularly, sealing may be achieved by using a first gasket (or o-ring, or any other sealing device) **220a** coupled to the reusable part **100**, and a second gasket **220b** coupled to the disposable part **200**. The gaskets may be prepared using pre-made molds corresponding to the shapes of the contours of the respective houses to which the gaskets (or other sealing devices) are to be coupled to. As described in greater details below, an example of a face seal is provided in FIGS. **8a** and **8b**. Returning to FIG. **7**, the dispensing device includes a vent aperture (also referred to as a vent, or a vent port) **120** formed on one or more of the walls of the housing(s) of the dispensing device to enable gas (e.g., oxygen) to enter and exit the sealed patch unit after the disposable and reusable parts are attached. In the exemplary dispensing patch unit (device) depicted in FIG. **7**, the vent port is formed in one or more of the walls of the housing **18** of the reusable part **100**. Vent(s) similar to the vent **120** may be provided in the housing(s) of any other of the embodiments of the dispensing devices disclosed herein.
- [0116] In some embodiments, air passage to direct air into the interior defined by at least one housing of the dispensing device may be required to, among other things, balance the pressure between the interior of the at least one housing (which may be watertight or sealed) and the ambient air. Pressure differences between the interior defined by the at least one housing of the dispensing patch unit may result due to altitude changes and/or to changes in the volume of the therapeutic fluid or the reservoir containing the fluid. Air communication with the interior defined by the at least one housing of the dispensing patch unit (dispensing device) may also be required to enable operation of at least one unit/component of the dispensing device that requires communication with ambient air, at least partly, to operate (an example of such a unit/component includes a zinc-air battery that requires air to operate). In some embodiments, the vent **120** may be covered by a selective membrane to prevent water entrance to the dispensing patch unit, thus making the unit water tight. In some embodiments, the vent may be positioned in the vicinity of the of an audible notification module, such as a buzzer **117**, to provide increased loudness of sounds or vibrations produced by the buzzer **117**. The at least one vent port formed in the wall(s) of the at least one housing is thus further adapted to deliver or transmit the sound waves and/or vibrations produced by the buzzer to the exterior of the at least one housing of the dispensing device. The vent port(s) may be positioned, in some embodiments, in other locations of the at least one housing of the dispensing patch unit.
- [0117] The disposable part **200** of the dispensing patch unit depicted in FIG. **7** may also include:
- [0118] An outlet port **201**.
  - [0119] A reservoir **202**.
  - [0120] At least one energy source such as a battery **203**.
  - [0121] A filling port **204**.
  - [0122] A delivery tube **210**.
- [0123] The reusable part **100** of the dispensing patch unit depicted in FIG. **7** may comprise:
- [0124] A user-interface that includes, for example, one or more buttons **15** to enable, for example, manual fluid delivery programming.
  - [0125] A driving mechanism **115**.
  - [0126] A peristaltic mechanism rotary wheel **114**.
  - [0127] A controller implemented, for example, using an electronic control system arranged on a printed circuit board (PCB) **116**.

[0128] The dispensing patch unit **10** may also include a sensing unit, to measure, for example, a glucose level in the patient's body to thus implement a closed loop fluid delivery system.

[0129] With further reference to FIGS. **8a** and **8b**, cross-sectional diagrams of an exemplary face seal are shown. Two gaskets (or o-rings) **220a** and **220b**, received in trenches **222**, have complementary cross-sectional shapes so that one gasket (or some other type of seal) fits within the other to maintain proper sealing. In some embodiments, the gasket with a "C" shaped cross-section is coupled to the housing **17** of the disposable part while the gasket having the "O"-shaped cross-section is coupled to the housing **18** of the reusable part. FIG. **8b** shows the two gaskets brought in close proximity to each other to reliably seal the dispensing patch unit after attaching the reusable and the disposable part.

[0130] Referring to FIGS. **9a** and **9b**, perspective views of an exemplary reusable part **100** that includes a vent port **120** are shown. The vent port may be covered, in some embodiments, with a selectively permeable membrane **125** (as shown in FIG. **9b**). In some embodiments, the open surface area of the membrane **125** may be large enough to enable minimal flow of 0.1  $\mu\text{l}/\text{hour}$  of gas across it under standard conditions (STP). A flow of 0.1  $\mu\text{l}/\text{hour}$  of gas, which is derived from the minimal basal flow of insulin dosage for a child, is required to enable pressure equilibrium between the interior of the housing and the ambient air. Generally, when the volume occupied by the fluid is reduced, the empty volume in the housing is increased, thus reducing the internal pressure in the housing. Pressure differential (i.e. when pressure equilibrium between the interior of the housing to the ambient air is disrupted) may cause inaccurate fluid delivery, increased power consumption and the like.

[0131] In some embodiments, the vent **120** is positioned proximate to the buzzer **117**, which is one of the components of the reusable part **100**. This physical configuration of the reusable part facilitates transmission of sound/vibrations produced by the buzzer to the outside of the device, thus improving the alarm performance of the device.

[0132] Referring to FIG. **10**, a partial cross-sectional diagram of an exemplary selectively permeable membrane **125** is shown. In some embodiments, the membrane **125** covers the vent **120** formed on one or more of the walls of the at least one housing **16** of a dispensing patch unit. In the illustrated embodiment, the vent **120** may be provided in the housing proximate to an audible notification module (e.g., a buzzer) to improve the alarm performance of the device. In some embodiments, the vent **120** may be provided proximate to an air-operated battery (e.g., a zinc-air battery) and/or a glucose oxidase sensor to provide air (oxygen) to enable operation of one or more of those units. In some embodiments, the vent **120** may be positioned close to the reservoir holding the therapeutic fluid to facilitate the pressure balancing functionality of the dispensing device. In some embodiments, a two-part dispensing patch unit may include a vent **120** that may be provided in the housing of the disposable part, in the housing of the reusable part, or in both of them. There may be more than one vent in the housing of the dispensing patch unit.

[0133] The membrane **125** covering the at least one vent port may be formed from any suitable material such as, for example, a GORE-TEX™ fabric. The selectively permeable membrane is, in some embodiments, water tight and at the same time pervious to at least one gas (e.g., oxygen). In some embodiments, the membrane may enable minimal air flow of

0.1  $\mu\text{l}$  per hour to enable delivery of the minimal dosage of insulin for a child. In some embodiments, materials that enable other air flows rates may be used. For example materials that enable an air flow of about 1 ml per minute may be used in circumstances where the dispensing patch unit is used during flight. In some embodiments, when applying a membrane **125** with air permeability of 5 liter per sec of 1 square meter of the membrane, the available area of the membrane for air flow may be at least 0.03  $\text{mm}^2$  to enable pressure balancing during flight. Other requirements that may affect the attributes of the membrane **125** include the type of the battery used in conjunction with the dispensing patch unit. For example, zinc air button batteries may require about 0.5  $\text{mm}^2$  of membrane surface area to enable oxygen flow rate of 2.5 micro liters per second. It should be noted that the surface area of the membrane available for gas transfer is described herein only as an example, and that many other parameters may affect the size of the membrane, including the membrane's permeability, manufacturing and assembly processes, minimal gas flow capability, etc. The vent **120** may take any suitable form such as, for example, having contour(s) that are polygonal, circular, elliptical, amorphous and the like.

[0134] The membrane may be pervious to other gases, including nitrogen, carbon dioxide ( $\text{CO}_2$ ), etc., and it may be impervious to some other gases such as, for example, hydrogen sulfide, water vapors and NOXs (nitrogen oxides). The selectively permeable membrane should be impervious to aqueous solutions such as sea water, beverages (e.g., soda and juices) and food (e.g., soup and porridge). The selectively permeable membrane may also be impervious to other fluids that may damage the dispensing patch, including alcohol and cooking oil.

[0135] Referring to FIGS. **11a** and **11b**, schematic diagrams of an exemplary two-part dispensing patch unit with a sealed reusable part **100** and a sealed disposable part **200** are shown. Each of the reusable part **100** and the disposable part **200** constituting the dispensing patch unit **10** is by itself water tight. The sides of the parts which face the interface **19** between the parts may thus not require an additional seal (in contrast to the embodiments shown, for example, in FIGS. **4a** and **4b** and FIG. **7**). Therefore, water sealed electrical connections **112** are provided to electrically connect the power source **203**, located in the disposable part **200**, with the other electrical components, such as the electronic circuitry arranged on the printed circuit board (PCB) **116**, the driving mechanism **115** and the buzzer **117** that are located in the reusable part **100**. The rotary wheel **114** and the driving mechanism **115** may be sealed by a flexible seal **221**, which may be adjusted to match the shape of the dispensing patch unit. The flexible seal **221** may be made from material that may transfer the torque and pressure from the rotary wheel **114** to the delivery tube **210**. In some embodiments, the flexible seal may be made of thermoplastic elastomer (TPE), such as fluoropolymer, polytetrafluorethylene, polyethylene, PVC and the like. Other materials may be used. In some embodiments, the seal may be relatively thin to transfer the pressure and moment from the rotary wheel **114** to the tube **210** while still providing proper sealing functionality. In some embodiments, the width of the seal may be less than 1 mm. Alternatively, the rotary wheel **114** and other components may be left out of the sealed compartment of the reusable part **100**, thus providing a direct contact between the rotary wheel **114** and the delivery tube **210**.

[0136] As further shown in FIGS. 11a and 11b, a vent 120 is provided in the housing 17 of the disposable part 200. In some embodiments, the vent is located in vicinity of the reservoir or the battery (or both), thus enabling pressure balancing for the reservoir 202 and provisioning of air flow to the battery 203 to be easily achieved.

[0137] The reusable part 100 may also comprise a user interface that includes one or more buttons 15 to enable manual fluid delivery programming.

[0138] Referring to FIG. 12, a perspective view of an exemplary dispensing patch unit 10 is shown. A sealed reusable part 100 and a sealed disposable part 200 constitute the dispensing patch 10. A portion of the delivery tube 210 may be located outside the sealed disposable part 200 to enable better contact with the rotary wheel 114 upon attachment of the reusable part 100 to the disposable part 200. Water tight electrical connections 112 are provided to enable electrical connection with the electronic components of the dispensing patch unit. Examples of such connectors include commercially available connectors such as those manufactured by DURALINE™. Also shown are the housing 17 of the disposables part and its seal 221b, the housing 18 of the reusable part and its seal 221a, and a vent 120 located in the housing 17 covered by selectively permeable membrane 125.

[0139] Although particular embodiments have been disclosed herein in detail, this has been done by way of example for purposes of illustration only, and is not intended to be limiting with respect to the scope of the appended claims, which follow. In particular, it is contemplated that various substitutions, alterations, and modifications may be made without departing from the spirit and scope of the invention as defined by the claims. Any and all of the foregoing patents, applications, and publications referenced in this specification are hereby incorporated by reference in their entireties. Other aspects, advantages, and modifications are considered to be within the scope of the following claims. The claims presented are representative of the inventions disclosed herein. Other, unclaimed inventions are also contemplated.

#### 1.-38. (canceled)

39. A fluid dispensing device for delivery of a therapeutic fluid to a user's body, the fluid dispensing device comprising:  
 a disposable part housing comprising of at least one reservoir to hold the therapeutic fluid;  
 at least one other unit requiring communication with ambient air, at least partly, to operate;  
 a reusable part housing including at least a portion of a driving mechanism and electronic components having a processor;  
 at least one vent port formed on one or more walls of at least one of the disposable part housing and the reusable part housing; and  
 a semi-permeable membrane covering the at least one vent port, the membrane being impervious to at least one liquid but pervious to at least one gas,  
 wherein the at least one vent port is configured for communicating air into at least one of the disposable part housing and the reusable part housing to at least one of: maintain pressure equilibrium between the air pressure therein and the ambient air pressure there out, and provide communication with the ambient air to the at least one other unit requiring air to enable operation of the at least one other unit.

40. The device of claim 39, wherein the at least one other unit includes at least one energy source comprising at least one electrochemical cell to produce electrical energy upon exposure to air.

41. The fluid dispensing device of claim 40, wherein the at least one electrochemical cell comprises a Zinc-air battery.

42. The fluid dispensing device of claim 39, wherein as a result of the pressure equilibrium, controlled delivery of the therapeutic fluid from the at least one reservoir to the body of the user is enabled.

43. The fluid dispensing device of claim 39, wherein the semi-permeable membrane comprises a water repelling fabric.

44. The fluid dispensing device of claim 39, wherein the semi-permeable membrane comprises a polymer.

45. The fluid dispensing device of claim 39, wherein the semi-permeable membrane comprises GORE-TEX®.

46. The fluid dispensing device of claim 39, wherein the semi-permeable membrane comprises CELGARD®.

47. The fluid dispensing device of claim 39, wherein the semi-permeable membrane is configured to provide a rate of gas transfer greater than or equal to about 0.1 micro-liter per hour at a temperature of about 300° K. and pressure conditions of about 1 atm.

48. The fluid dispensing device of claim 39, wherein the semi-permeable membrane is configured to provide a rate of gas transfer greater than or equal to about 2.5 micro liter per second at a temperature of about 300° K. and pressure conditions of about 1 atm.

49. The fluid dispensing device of claim 39, further comprising an audible notification module disposed in the reusable part housing, wherein the at least one vent port is further configured to direct sound and/or vibration generated by the audible notification module as a notification regarding a condition of the fluid dispensing device.

50. The fluid dispensing device of claim 40, wherein the reusable part housing includes the at least one vent port.

51. The fluid dispensing device of claim 39, wherein the disposable part housing and the reusable part housing are substantially sealed when operatively coupled to each other, and wherein at least one of the disposable part housing and the reusable part housing allow ingress of liquids when not operatively coupled to the other part.

52. The fluid dispensing device of claim 39, further comprising at least one seal to substantially close the at least one vent port to prevent entry of air into the disposable part housing and/or the reusable part housing through the at least one vent port when the device is not in operation.

53. The fluid dispensing device of claim 39, wherein the at least one other unit includes a sensor to determine a body analyte level and wherein the at least one vent port is configured for providing air to the sensor to enable its operation.

54. A fluid dispensing device for delivery of a therapeutic fluid to a user's body, the fluid dispensing device comprising:  
 a disposable part housing comprising of at least one reservoir to hold the therapeutic fluid;  
 at least one energy source comprising at least one Zinc-air battery which provides energy upon exposure to air;  
 a reusable part housing including at least a portion of a driving mechanism and electronic components having a processor, wherein the disposable part housing and the reusable part housing are substantially sealed when operatively coupled to each other, and wherein at least

one of the disposable part housing and the reusable part housing allows ingress of liquids when not operatively coupled to the other part;

at least one vent port formed on one or more walls of at least one of the disposable part housing and the reusable part housing;

a semi-permeable membrane comprising a water-repelling fabric which substantially covers and/or is provided at the at least one vent port, the membrane being impervious to at least one liquid but pervious to at least one gas, wherein the at least one vent port is configured for communicating air into at least one of the disposable part housing and the reusable part housing to at least one of: maintain pressure equilibrium between the air pressure therein and the ambient air pressure there out, and provide communication with the ambient air to the at least one Zinc-air battery to enable operation of the at least one Zinc-air battery,

and wherein as a result of the pressure equilibrium, controlled delivery of the therapeutic fluid from the at least one reservoir to the body of the user is enabled; and

an audible notification module disposed in the reusable part housing, wherein the at least one vent port is further configured to direct sound and/or vibration generated by the audible notification module as a notification regarding a condition of the fluid dispensing device.

**55.** A method for delivery of a therapeutic fluid to a user's body using a fluid dispensing device, comprising:

providing a fluid dispensing device comprising:

a disposable part housing comprising of at least one reservoir to hold the therapeutic fluid;

at least one energy source comprising at least one Zinc-air battery which provides energy upon exposure to air;

a reusable part housing including at least a portion of a driving mechanism and electronic components having a processor;

at least one vent port formed on one or more walls of at least one of the disposable part housing and the reusable part housing;

a semi-permeable membrane which substantially covers and/or is provided at the at least one vent port, the membrane being impervious to at least one liquid but pervious to at least one gas,

wherein the at least one vent port is configured for communicating air into at least one of the disposable part housing and the reusable part housing to at least one of:

maintain pressure equilibrium between the air pressure therein and the ambient air pressure there out, and provide communication with the ambient air to the at least one Zinc air battery requiring air to enable operation of the at least one Zinc air battery,

operatively coupling the disposable part housing and the reusable part housing together, wherein as a result of such coupling:

the disposable part housing and the reusable part housing are substantially sealed, ambient air flow is established to the Zinc-air battery enabling operation of the fluid dispensing device, and therapeutic fluid is provided to the user.

\* \* \* \* \*

专利名称(译)	通风分配装置和方法		
公开(公告)号	<a href="#">US20100198187A1</a>	公开(公告)日	2010-08-05
申请号	US12/452764	申请日	2008-07-20
[标]申请(专利权)人(译)	YODFAT奥弗 NETA亚伯拉罕		
申请(专利权)人(译)	YODFAT奥弗 NETA亚伯拉罕		
当前申请(专利权)人(译)	YODFAT奥弗 NETA亚伯拉罕		
[标]发明人	YODFAT OFER NETA AVRAHAM		
发明人	YODFAT, OFER NETA, AVRAHAM		
IPC分类号	A61M31/00 A61B5/00 G08B21/00		
CPC分类号	A61B5/14532 A61B5/1486 A61M5/14248 A61M5/1723 A61M5/142 A61M2005/14264 A61M2205/50 A61M2205/82 A61M2207/00 A61M2005/14204 A61M5/16822 A61M5/14244 A61M5/155 A61M2005/ /14268 A61M2205/581 A61M2205/582		
优先权	60/961382 2007-07-20 US 60/961528 2007-07-20 US 60/961484 2007-07-20 US		
其他公开文献	US8491529		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

公开了一种流体分配装置，其包括至少一个储存器以保持治疗流体，至少一个其他单元需要与环境空气连通，至少部分地操作，以及至少一个壳体限定内部以保持至少一个储存器和至少一个其他单元。所述至少一个壳体具有形成在其一个或多个壁上的至少一个通气口。所述至少一个通气口适于引导或连通空气，以维持所述至少一个壳体内部的空气压力与所述至少一个壳体外部的环境空气压力之间的压力平衡，并提供与周围空气的通信。所述至少一个其他单元需要空气以使所述至少一个其他单元能够运行。

