




US 20020047828A1

(19) **United States**(12) **Patent Application Publication**
Stern et al.(10) **Pub. No.: US 2002/0047828 A1**(43) **Pub. Date: Apr. 25, 2002**(54) **SYSTEM AND METHOD FOR OPTIMAL
VIEWING OF COMPUTER MONITORS TO
MINIMIZE EYESTRAIN****Related U.S. Application Data**(63) Non-provisional of provisional application No.
60/222,268, filed on Jul. 31, 2000.(76) Inventors: **Roger A. Stern**, Cupertino, CA (US);
Jory E. Moon, Los Altos, CA (US);
Sherwyne Bakar, Palo Alto, CA (US)**Publication Classification**(51) **Int. Cl.⁷ G09G 5/00**(52) **U.S. Cl. 345/156**


Correspondence Address:

**TOWNSEND AND TOWNSEND AND CREW,
LLP****TWO EMBARCADERO CENTER
EIGHTH FLOOR
SAN FRANCISCO, CA 94111-3834 (US)**(21) Appl. No.: **09/920,337**(22) Filed: **Jul. 31, 2001****ABSTRACT**

A system and method for helping ensure that a user of a computer is set up to optimally view the computer monitor under optimal conditions in order to minimize eyestrain. The system includes determining an optimal viewing distance and monitoring the distance of a user from the computer monitor during use of the computer. The system further includes notifying the user when they stray from the optimal viewing distance and further may include testing various aspects of the user's eyesight during use of the computer monitor.

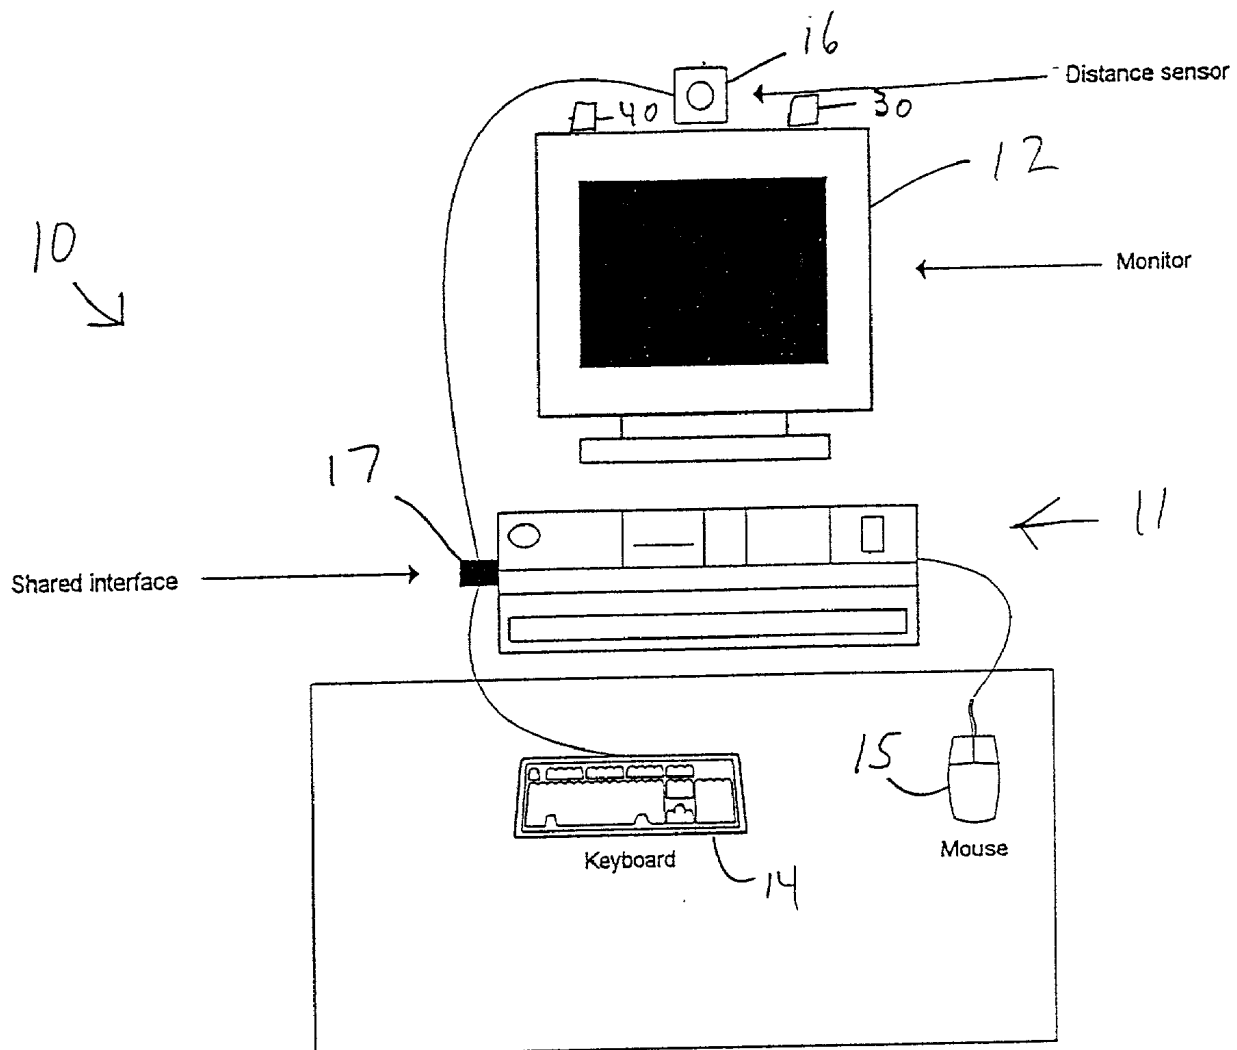


View of system in place on a computer

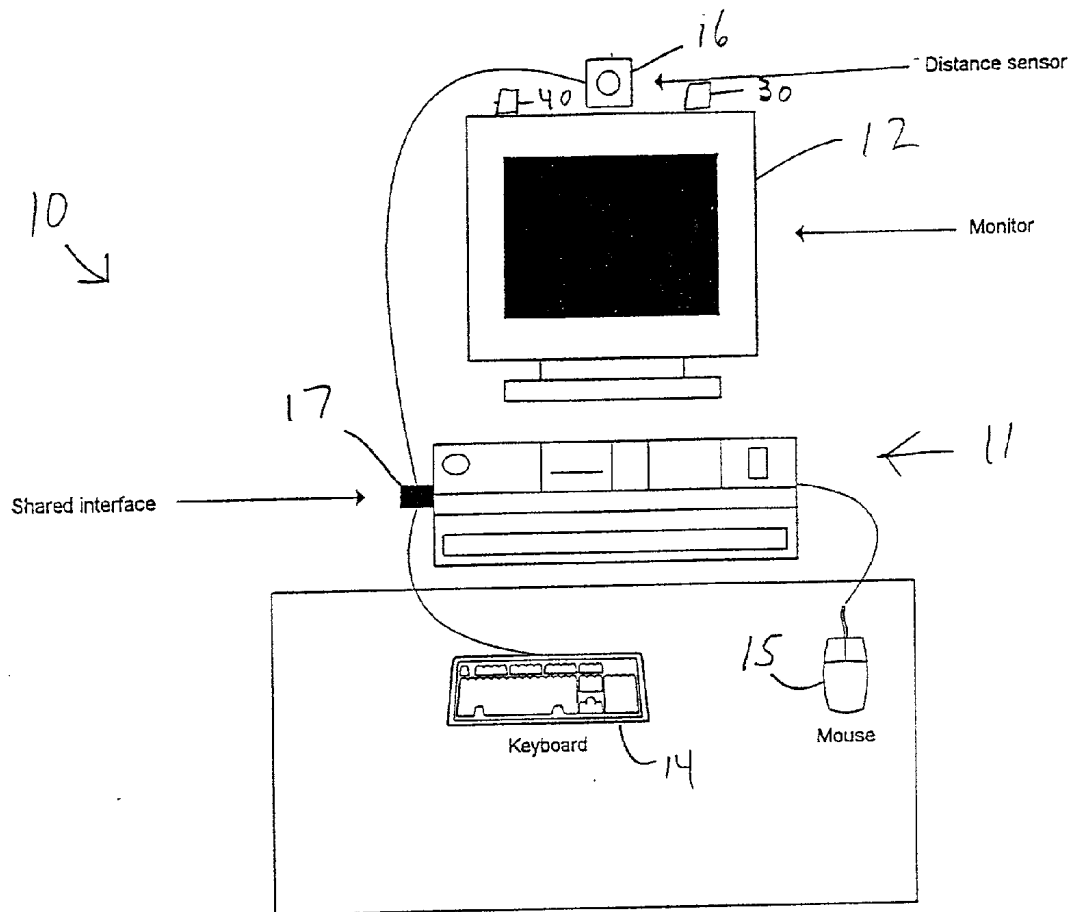

View of system in place on a computer

Figure 1

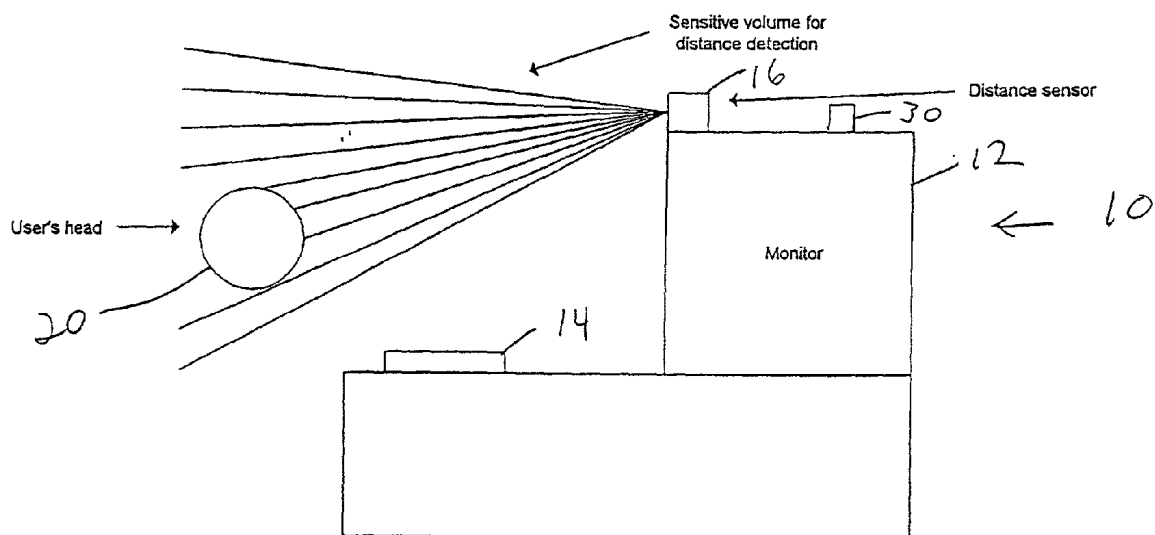

Side view, showing sensing distance to user's head

Figure 2



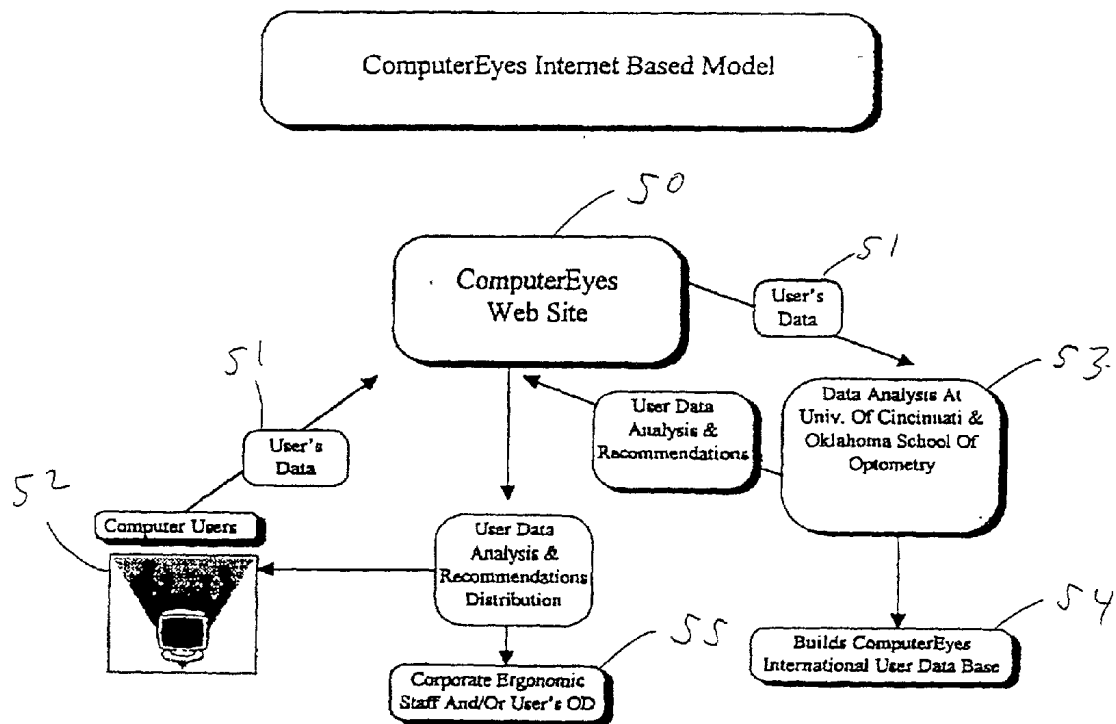


Figure 3

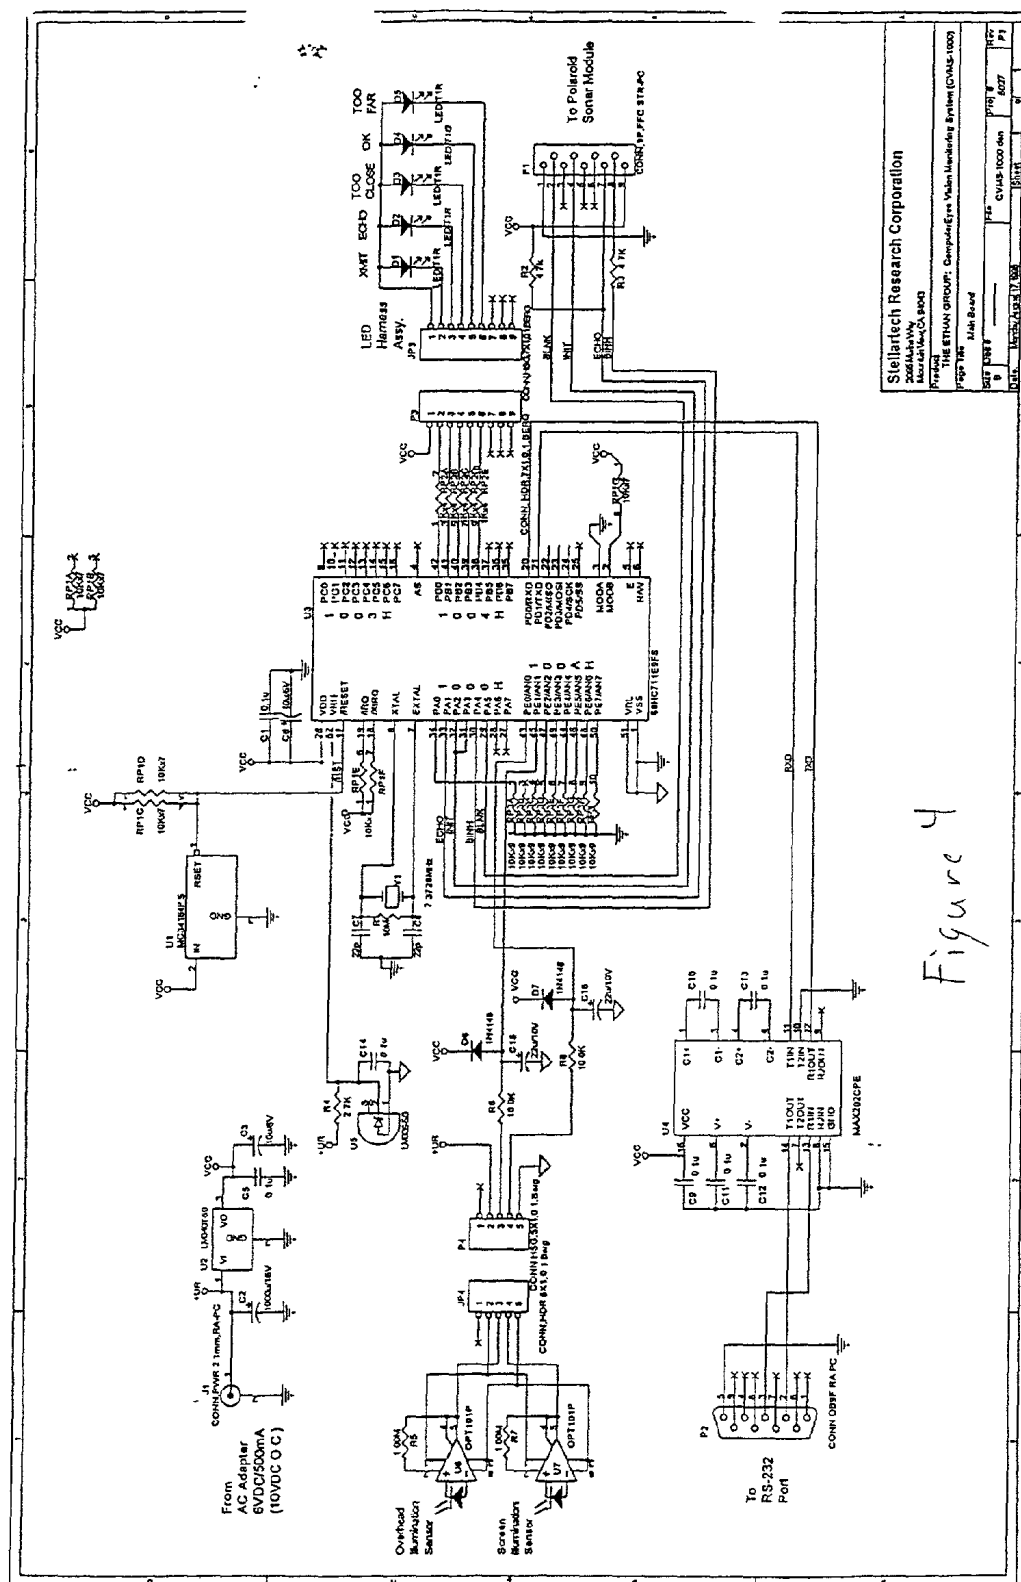

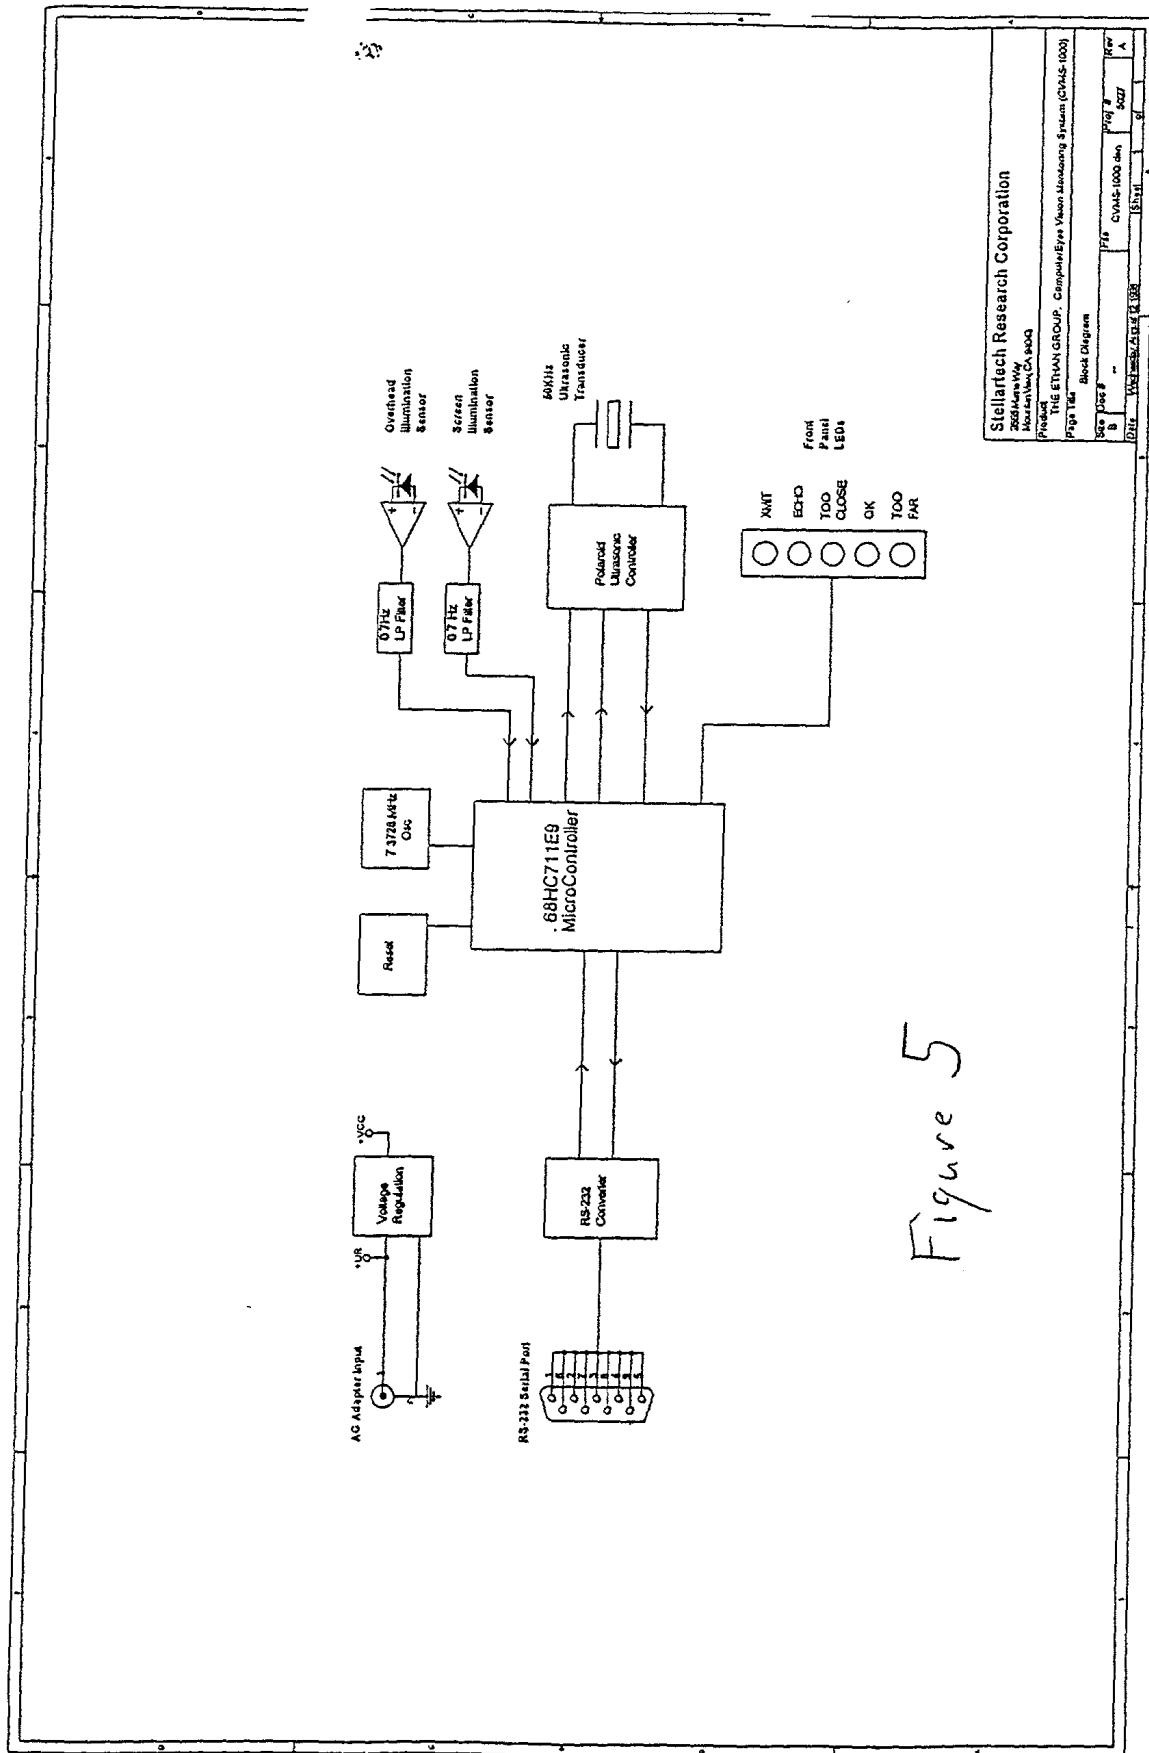

Stellartech Research Corporation									
10000 Wye									
Modular									
Product THE ETHAN GROUP, ComputerEye Vision Tracking System (CVMS-1000)									
Page 154 Block Diagram									
Size	Job #	File	CVMS-1000.dwg	Sheet	5	of	10	Rev	A
Date	Wednesday, 12/18/98	Time	13:11						

SYSTEM AND METHOD FOR OPTIMAL VIEWING OF COMPUTER MONITORS TO MINIMIZE EYESTRAIN

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to systems and methods for helping ensure that a user of a computer is properly positioned to view a monitor, and more particularly, to systems and methods for helping ensure that a user of a computer is set up to optimally view the computer monitor under optimal conditions.

[0003] 2. Description of the Prior Art

[0004] A common problem of many computer users is that they often sit too close to the computer monitor. This is especially true of young children. It is well known that if one sits too close to the computer monitor, the eye will intently focus on what is many times a stationary image. This can lead to eyestrain.

[0005] Additionally, many users sit too long in front of a computer without taking a break. This is true for many workers who must operate a computer for almost the entire work day. It is often difficult to ascertain when one has spent too much time in front of a computer without taking a break. Additionally, many times the lighting in the room where the computer is located may not be optimal. This may lead to glare and other problems that also result in eyestrain.

[0006] Recent medical literature clearly shows an increase in eyestrain-related problems, especially in children. Use of computers is rapidly growing among children and improper use of computers is thought to be a contributing factor to the increase in eyestrain related problems in children.

SUMMARY OF THE INVENTION

[0007] In accordance with one embodiment of the present invention, a user of a computer monitor determines a proper viewing distance. This may be accomplished by an installation program that will ask the user to select a viewing distance by displaying any one of a number of standard test patterns and asking the user to identify them. The optimal viewing distance would then be selected based upon the identification of the test patterns and would preferably be slightly close than the farthest distance at which the user can correctly identify the test pattern.

[0008] In accordance with another embodiment of the present invention, the user will be notified when he is not at the proper viewing distance. This may be accomplished by switching the computer monitor's display to a "screensaver" type program, sounding an alarm, or even turning off the computer monitor. A sensor may be provided for monitoring the actual distance of the user. Preferably, the sensor would be "piggybacked" onto an existing device, such as, for example, a keyboard or mouse, thus not requiring any additional computer resources or requiring any other source of electrical power.

[0009] In accordance with another embodiment of the present invention, statistics about a user's viewing distance are recorded. This may be especially useful in work situations where almost continuous use of the computer is anticipated. For example, there might be trend toward closer

viewing as the length of time the computer is being used increases. In such a situation, this may indicate that a break is in order, and in a preferred embodiment of the present invention, the system would so notify the user.

[0010] In accordance with another embodiment of the present invention, the measured viewing distance may be used for a periodic test of the user's eyesight. For example, test patterns may be displayed and the user may be "scored" at some predetermined fixed distance. If the user scores too low on the tests, use of the computer may be inhibited.

[0011] In accordance with another embodiment of the present invention, the level of ambient light in the user's environment may be measured and suggestions may be provided by the system to either increase or decrease the amount of ambient light. In such an embodiment, a light level sensor may be incorporated into the system that would feed information regarding the ambient light into the computer through the shared interface as previously discussed.

[0012] In accordance with yet another embodiment of the present invention, the system may determine "amplitude of accommodation," which is the minimum distance between the eye and a viewing surface below which the surface is blurry.

[0013] In accordance with yet another embodiment of the present invention, a user may be presented with color tests and asked to respond to them. This may be done over a period of time to determine the user's interpretation of colors as use of the computer over the period of time progresses.

[0014] In yet another embodiment of the present invention, the system monitors the number of times or rate at which an individual blinks their eyes. The individual may be viewing a monitor and with a sensor, the rate of blinking of the eyes is monitored. By monitoring the rate at which the individual blinks their eyes, or by monitoring the rate of changes in a baseline eye blink rate, early detection of visual fatigue is possible.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] FIG. 1 is a schematic illustration of a system in accordance with the present invention with a computer system;

[0016] FIG. 2 is a side view of the system illustrated in FIG. 1;

[0017] FIG. 3 is a schematic illustration of an internet-based model of a system in accordance with the present invention;

[0018] FIG. 4 is a schematic illustration of a circuit for a motherboard in accordance with the present invention; and

[0019] FIG. 5 is a schematic block diagram of a possible arrangement of a control system for a system in accordance with the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EXEMPLARY EMBODIMENTS

[0020] FIGS. 1 and 2 schematically illustrate a possible arrangement of a system 10 in accordance with the present invention. System 10 is depicted as a computer system 11 including a computer monitor 12. Those skilled in the art

will understand that other monitors will also benefit from the methods and system of the present invention. However, for simplicity and clarity, a computer system will be used to describe the present invention.

[0021] System **10** further includes computer inputs, such as, for example keyboard **14** and mouse **15**. System **10** further includes at least one distance sensor **16**. Preferably, distance sensor **16** is piggybacked with, for example, the keyboard or the mouse via a shared interface **17**. Thus, the distance sensor does not take up additional computer resources or require any additional source of electrical power. More distance sensors may be used and may be arranged in various configurations as needed.

[0022] Distance sensor **16** may be one of any of well-known distance sensors in the art. In a preferred embodiment, the use of echolocation with high frequency sound waves is used. As stated previously, preferably, distance sensor **16** is piggybacked with an existing computer peripheral with a shared interface. However, distance sensor **16** may be interfaced to the computer through its own interface port, such as, for example, an RS 232 serial port. Distance sensor **16** may be mounted on the monitor using an adhesive tape attachment and aimed such that the spatial volume where the distance measurements are made extend from a point very close to the monitor, for example, within 6 inches and extend out to what may be considered the farthest practical viewing distance, for example, 36 inches. Generally, optimal viewing distance is believed to be approximately 18 to 21 inches from computer monitor **12**. The distance information from the sensor may be sampled, for example, once per second, and such real-time distance data is then fed directly into the computer through the interface.

[0023] In an initial step, a user **20** determines their proper viewing distance. This may be accomplished with an installation program that will ask the user to select a viewing distance. In a preferred embodiment, the optimal viewing distance would be user specific for computers used by more than one person. Preferably, the method includes displaying any one of a number of standard test patterns that are known in the art and asking the user to identify them. Preferably the optimal viewing distance is then set slightly closer than the farthest distance at which the user is able to correctly identify the test pattern.

[0024] System **10** will preferably then notify user **20** when they are not at the proper viewing distance as measured by distance sensor **16**. One way in which user **20** may be notified is by switching the display to a "screensaver" type of program when the user gets too close to the screen. Preferably, the switching algorithm used to switch to the screensaver would be intelligent and, for example, ignore momentary infrequent violations of distance limits. The type of screensaver may be selected by the user and, for example, may consist of a message indicating that the user is too close or the image may consist of a relaxing image that is pleasant to view. In any event, normal use of the computer is suspended until the user returns to the proper viewing distance or until sometime when it expires. If user **20** is a child, the screensaver may be some type of gentle reminder to move back from the computer, either visual or auditory, or it may be done with animated characters, or by motivation such as a game where the child receives points or a "gold star" if the proper viewing distance is maintained.

[0025] In accordance with another embodiment of the present invention, statistics are recorded about user **20**'s viewing distance, as measured by distance sensor **16**. The statistics may then be monitored or analyzed in order to determine if there is a trend toward closer viewing and the length of time that the computer monitor is being viewed. This information may be used to indicate that a break is in order and, preferably, the system would notify user **20**, for example, either visually or audibly.

[0026] Furthermore, the measured viewing distance may be used for a periodic test of the user's eyesight. This may be used by displaying test patterns already known in the art similar to those used above for determining optimal viewing, and "scoring" the user at some predetermined fixed distance. If user **20** scores too low on such a test, use of the computer may be inhibited. Additionally, in a preferred embodiment of the present invention, a light sensor **30** is provided that measures the level of ambient light in the user's environment and provides suggestions as to either increasing or decreasing the amount of ambient light. Light level sensor **30** may be incorporated into distance sensor **16** or may be a separate sensor all together. If it were a separate sensor, light level sensor **30** once again would preferably be piggybacked with another device in the system or may have a dedicated interface, such as, for example, an RS 232 serial port.

[0027] Additionally, system **10** preferably measures a user's "amplitude of accommodation," which is generally defined as the minimum distance between the eye and a viewing surface below which the surface is blurry. Such a test for amplitude of accommodation preferably is performed by having the user lean forward until the screen becomes fuzzy. While the user is at this distance where the screen has become fuzzy, the user clicks the mouse and the software measures the distance to the user via the distance sensor **16**. Such a test may be performed over a period of time in order to determine the variance of the amplitude of accommodation over a period of time of use of the computer monitor.

[0028] In another embodiment of the present invention, system **10** performs color testing of the user. User **20** is preferably presented with color tests, which are known in the art, and is asked to respond to them. As with the amplitude of accommodation test, this may be performed over a period of time in order to determine the variance of the user's "interpretation" of colors over a period of time of use of the computer monitor.

[0029] System **10** also preferably monitors a user's number of times of blinking, or rate at which the user blinks their eyes. In such an embodiment, system **10** includes a small imaging sensor or camera **40** pointed at the user's face. An image analysis and pattern recognition algorithm is used to identify the user's face from other objects in a room, identify the eyes on the face and make a decision as to whether the eyes are open or not. Small digital image sensors and powerful digital signal processing circuitry is available to perform these functions and is well known in the art. Performance of the system may be improved or made user specific, for example, by having the computer user let the system take reference images of the face with their eyes both open and closed. These reference images then serve as templates in a pattern matching algorithm.

[0030] In a further embodiment of the present invention, system **10** includes testing or determining a user's visual acuity. Such testing, which may commonly be referred to as rapid visual acuity testing (RVAT) would be useful for determining the visual acuity of a user at the user's working distance from the computer monitor. The visual acuity may be monitored periodically in order to determine changes over a period of time. In a preferred embodiment, user **20** would sit at their normal working distance at the computer and the screen would be blank except for arrows on an outer portion of the screen that act as indicators for a band or ring or "C." The "C" appears on the screen as a 20/10 letter (i.e., a size of a letter that at 20 feet would appear to a user as being at 10 feet) and would slowly increase in size, for example, 20/11, 20/12, 20/13, etc., until first discernable by the user. At the point the user detects the "C," the user clicks the mouse or the enter key. The progression of the C pauses and a message appear instructing the user to identify the position of the C. If the answer is correct, the "C" is rotated randomly in two more positions. If the individual again correctly identifies the orientation of the "C," then the test is ended. Preferably, a predetermined amount of time, for example, up to five seconds for each decision, is provided.

[0031] By accurately knowing the distance of the eye from the computer, size of the "C" angular subtends, and the correct response, a software program within the computer will be able to calculate an individual's visual acuity. If improper responses are made, then the progression of size of the "C" slowly increases until the right answers are given.

[0032] By calculating the level of illumination, the testing of visual acuity may be performed at the same level of light.

[0033] FIG. 3 illustrates a schematic illustration of an Internet based model of the system in accordance with the present invention. A central web site **50** is provided for receiving data **51** from a user at a local site **52** that includes computer users. The computer user's data is sent to the central web site over the Internet and then forwarded to an analysis location **53** that analyzes the user's data. The data analysis site also provides a central web site international users' database **54** and sends back analyses and recommendations regarding the user data to the central web site. The central web site then distributes the data analysis and recommendations to a corporate ergonomic staff and/or users' OD **55** and, if desired, to the actual user itself.

[0034] FIG. 4 schematically illustrates a possible circuit for a motherboard that would be included in a computer system that utilizes the present invention. FIG. 5 is an electronic block diagram of a possible control system for a system in accordance with the present invention.

[0035] The present invention may also be used for vision testing in the home for those patients who have recently undergone ocular surgery, require monitoring before surgery, are taking pharmaceuticals that may affect their vision, or have an ongoing medical problem that is vision related.

[0036] Preferably, the system resembles a laptop computer incorporating the appropriate hardware features plus a keyboard for user input and a remote input device for distance vision testing. The system also preferably includes a built-in modem configured to automatically access a web site on the click of the mouse.

[0037] Software features preferably include user medical history, medications, and vision profiling, real time mea-

surement of viewing distance while vision testing, adjusting test pattern size relative to viewing distance, recommendations for optimizing environmental lighting prior to vision testing, recording and tracking real time user vision performance over time, and transmitting patient information and analysis to eyecare and/or medical doctor.

[0038] In the software, preferably an icon in the utility tray will be incorporated to activate onscreen directions, comments and recommendations based upon the system's data analysis. Furthermore, the software will preferably make productivity measurements by evaluating typing speed, mouse clicks, engagement time and errors. Additionally, the view size will preferably increase automatically, over time, based upon collected parameters and analyzed data provided by the software.

[0039] The system preferably allows a patient's professional caregiver to prescribe the type and frequency of vision testing. Upon test completion, the patient plugs the device into a standard phone outlet to transmit the data to the web site where it is stored in the patient's file and transmitted either by e-mail or fax to their doctor(s).

[0040] Preferably, the system includes three or more light meters in order to determine the source of multi-directional light relative to the user. This will allow for the analysis of glare. Preferably, one separate attachable sensor will be used to measure various parameters of the monitor screen.

[0041] Preferably, the system will include sensors to measure ambient noise, temperature and humidity. Such information will allow for proper operation of the equipment and also allow for the analysis to take into account the effects of these conditions.

[0042] While the system has been described throughout with the use of software, in an alternative embodiment, the system will be in communication with a central website. Such communication may be provided, for example, via the Internet. The website would thus control the system and various parameters may be automatically changed within the system as directed from the website, such as, for example, the viewer distance from the monitor.

[0043] The system also preferably includes a leveling device for proper positioning of the individual in front of the computer. LEDs may be incorporated into the system in order to determine the correct viewing angle for the individual.

[0044] Additionally, the system preferably includes a mechanical apparatus situated under a user's monitor or incorporated into a user's desk. The apparatus automatically moves the computer monitor (including flat panel displays) in a forward or backward direction to adjust for accommodative and visual changes of the user throughout the day. The image size or view size on the user's screen will also adjust automatically in accordance with the direction of monitor display movement. The mechanical apparatus also preferably will control the height of the monitor and the viewing angle of the monitor.

[0045] In some embodiments, the position of the monitor in one, two or three dimensions is controlled to reduce eyestrain, improve viewing, relax or exercise head, neck or other muscles or relieve or ameliorate strain on muscles. The position might be changed to an identified optimal position

or might change among several positions to provide variability or exercise of selected muscles or reduction of strain on body parts.

What is claimed is:

1. A system for monitoring the use of a display by a user, the system comprising:

- a display used by the user for performance of a task; and
- a first sensor positioned relative to the display and selected from the group consisting of a distance sensor and a light sensor.

2. The system of claim 1, further comprising a communication link between the system and a computer system accessible using a hypertext protocol.

3. The system of claim 1, wherein the display is selected from the group consisting of a CRT monitor, an LCD monitor and a flat panel.

4. The system of claim 3, wherein the first sensor is incorporated into a bezel of the display or structure supporting the display.

5. The system of claim 1, further comprising at least three light sensors positioned to determine a source of multidirectional light relative to the user.

6. The system of claim 1, wherein the first sensor includes an incorporated camera or an incorporated imaging sensor.

7. The system of claim 6, wherein incorporated camera or an incorporated imaging sensor is capable of monitoring blink rate.

8. The system of claim 1, further comprising a computer for processing inputs from the first sensor.

9. The system of claim 1, further comprising a cable coupling the first sensor to the system.

10. The system of claim 1, wherein the first sensor is positioned to monitor the display.

11. The system of claim 1, wherein the first sensor is positioned on top of the display.

12. The system of claim 1, further comprising a remote input device.

13. The system of claim 1, wherein the first sensor is a distance sensor.

14. The system of claim 1, wherein the first sensor is a light sensor.

15. A method for determining a viewing distance, wherein the viewing distance relates to a distance between a user and a display, using a distance sensor positioned in a known position relative to the display, comprising the steps of:

positioning the user in front of the display in order to perform a task using the display;

allowing the distance sensor to measure a viewing distance between the distance sensor and the user; and

receiving an analysis of the measurement.

16. A method for determining a viewing distance, wherein the viewing distance relates to a distance between a user and a display, using a distance sensor positioned in a known position relative to the display, comprising the steps of:

positioning the user in front of the display in order to perform a task using the display;

allowing the distance sensor to measure a viewing distance between the distance sensor and the user;

receiving an analysis of the measurement; and

using a light sensor to measure ambient light in an environment of the user.

17. A method for determining a viewing distance, wherein the viewing distance relates to a distance between a user and a display, using a distance sensor positioned in a known position relative to the display, comprising the steps of:

providing a distance sensor to measure a viewing distance between the distance sensor and the user while the user performs a task using the display;

providing a software program that accepts input from the distance sensor of a measured distance; and

providing a software program that is capable of notifying the user of the measured distance.

18. A method for determining a light setting for a user using a display using a light sensor positioned in a known position relative to the display, the method comprising:

positioning the user in front of the display in order to perform a task using the display;

allowing the light sensor to measure light in the and environment of the user; and

receiving an analysis of the light measurement.

19. The method of claim 18, wherein the method further comprises suggesting a change in light amount in the environment.

20. A method for determining a recommended viewing distance for a user using a display, the method comprising:

presenting a test pattern on the display;

positioning the user in front of the display;

displaying a query on the display;

accepting a response to the query; and

displaying a suggestion regarding recommended viewing distance.

21. A method for testing a user's vision using a display, the method comprising:

positioning the user in front of the display in order to perform a task using the display;

displaying a test pattern on the display for testing vision according to a test selected from the group consisting of an acuity test, a color test, a test for amplitude of accommodation and a test for visual field defect;

selecting a test result; and

receiving an analysis of the test result.

22. A system for monitoring the use of a display by a user, the system comprising:

a display used by the user for performance of a task; and

a first sensor positioned close to the display and selected from the group consisting of a distance sensor and a light sensor; and

a second sensor distinct from the first sensor.

23. The system of claim 22, wherein the second sensor is selected from the group consisting of a distance sensor, a noise sensor, a temperature sensor, a humidity sensor and a light sensor.

24. The system of claim 22, wherein the second sensor is incorporated into the first sensor.

25. The system of claim 22, wherein the first sensor is a distance sensor and the second sensor is a light sensor.

26. A system for monitoring the use of a display by a user using the display for performance of a task, the system comprising:

- a display;

- a first sensor positioned close to the display and selected from the group consisting of a distance sensor and a light sensor;

- a second sensor distinct from the first sensor; and

- a third sensor distinct from the first sensor and distinct from the second sensor.

27. A system for monitoring the use of a display by a user using the display for performance of a task, the system comprising:

- a display;

- a first sensor positioned close to the display; and

- three light sensors positioned to determine a source of multidirectional light relative to the user.

28. A system for monitoring the use of a display by a user using the display for performance of a task, the system comprising:

- a display;

- a first sensor positioned close to the display and selected from the group consisting of a distance sensor and a light sensor; and

- a software program for processing inputs from the first sensor.

29. The system of claim 28, wherein the first sensor is a distance sensor and the software program includes program instructions for determining a user's viewing distance from an output of the distance sensor.

30. The system of claim 28, wherein the software program includes program instructions for accepting sensor inputs representing distance and light measurements over time.

31. The system of claim 28, wherein the software program includes program instructions for accepting inputs from one input source selected from the group consisting of a sensor, a user, a mouse and a keyboard.

32. A system for monitoring the use of a display by a user using the display for performance of a task, the system comprising:

- a display;

- a first sensor positioned close to the display and selected from the group consisting of a distance sensor and a light sensor; and

- a software program for processing inputs from the first sensor and for displaying a test pattern on the display.

33. The system of claim 32, wherein the test pattern is a test pattern usable for at least one test selected from the group consisting of a visual acuity test, a visual field test, an amplitude of accommodation test, and a color sensitivity test.

34. A system for monitoring the use of a display by a user using the display for performance of a task, the system comprising:

- a display;

- a first sensor positioned close to the display and selected from the group consisting of a distance sensor and a light sensor;

- a second sensor distinct from the first sensor; and

- a software program for processing inputs from the first sensor and for displaying a test pattern on the display.

35. A system for monitoring the use of a display by a user using the display for performance of a task, the system comprising:

- a display;

- a first sensor positioned close to the display and selected from the group consisting of a distance sensor and a light sensor;

- a second sensor distinct from the first sensor;

- a third sensor distinct from the first sensor and distinct from the second sensor; and

- a software program for processing inputs from at least the first sensor and for displaying a test pattern on the display.

* * * * *

专利名称(译)	用于最佳地观看计算机监视器以最小化眼睛疲劳的系统和方法		
公开(公告)号	US20020047828A1	公开(公告)日	2002-04-25
申请号	US09/920337	申请日	2001-07-31
[标]申请(专利权)人(译)	斯特恩罗杰 MOON乔里E 巴卡尔SHERWYNE		
申请(专利权)人(译)	斯特恩ROGER A. MOON乔里E. 巴卡尔SHERWYNE		
当前申请(专利权)人(译)	斯特恩ROGER A. MOON乔里E. 巴卡尔SHERWYNE		
[标]发明人	STERN ROGER A MOON JORY E BAKAR SHERWYNE		
发明人	STERN, ROGER A. MOON, JORY E. BAKAR, SHERWYNE		
IPC分类号	A61B3/024 A61B3/028 A61B3/032 A61B3/06 A61B5/00 G06F1/16 G06F3/00 G06F3/01 G06F3/14 G09G5/00		
CPC分类号	A61B3/024 A61B3/028 A61B3/032 A61B3/06 G06F2200/1611 G06F1/1601 G06F3/011 G06F3/013 G06F3/14 A61B5/0002		
优先权	60/222268 2000-07-31 US		
其他公开文献	US7233312		
外部链接	Espacenet USPTO		

摘要(译)

一种用于帮助确保计算机的用户被设置为在最佳条件下最佳地观看计算机监视器以便最小化眼睛疲劳的系统和方法。该系统包括确定最佳观看距离并在使用计算机期间监视用户与计算机监视器的距离。该系统还包括在用户偏离最佳观看距离时通知用户，并且还可以包括在使用计算机监视器期间测试用户视力的各个方面。

