



(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2004/0106849 A1**

**Cho et al.**

(43) **Pub. Date:**

**Jun. 3, 2004**

(54) **MULTI-FUNCTIONAL, BI-DIRECTIONAL COMMUNICATION TELEMETRY CAPSULE**

(57)

**ABSTRACT**

(76) Inventors: **Jin-Ho Cho**, Daegu-City (KR);  
**Hyun-Chul Choi**, Daegu-City (KR);  
**Jun-Rim Choi**, Daegu-City (KR)

A multi-functional, bi-directional communication telemetry capsule for endoscopy is provided. The multi-functional, bi-directional communication telemetry capsule includes a capsule body insertable into a patient's body, a lens mounted on the capsule body, an imaging sensor installed in the capsule body to image a site of the patient's body viewed through the lens, a pH sensor, a biological potential sensing electrode, a stimulating electrode, a pressure sensor, a light emitter to emit light in front of the capsule body, the light intensity of the light emitter being externally controllable, a transmitter to wirelessly transmit an image signal generated by the imaging sensor, a pH signal generated by the pH sensor, a biological signal generated by the biological potential sensing electrode, and a pressure signal generated by the pressure sensor, a receiver to wirelessly receives an external control signal, and a control unit and a power source for the forgoing constitutional elements.

Correspondence Address:  
**NIXON & VANDERHYE P.C.**  
**8th Floor**  
**1100 North Glebe Rd.**  
**Arlington, VA 22201-4714 (US)**

(21) Appl. No.: **10/308,028**

(22) Filed: **Dec. 3, 2002**

**Publication Classification**

(51) **Int. Cl.<sup>7</sup>** ..... **A61B 1/00**  
(52) **U.S. Cl.** ..... **600/101**

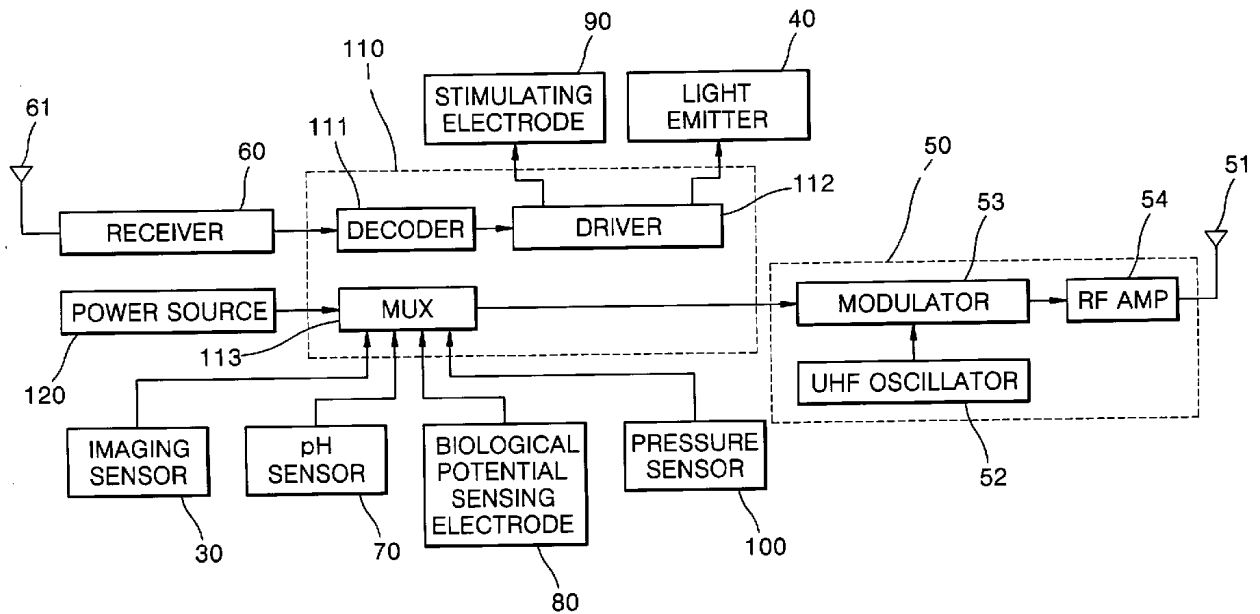


FIG. 1

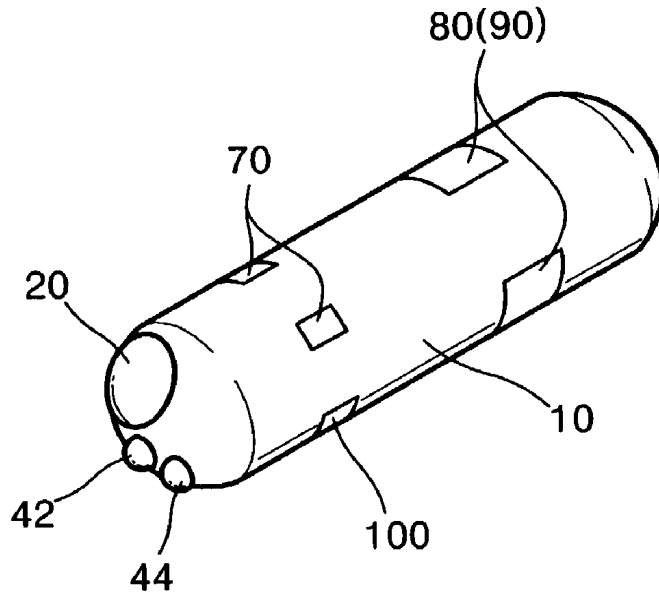


FIG. 2

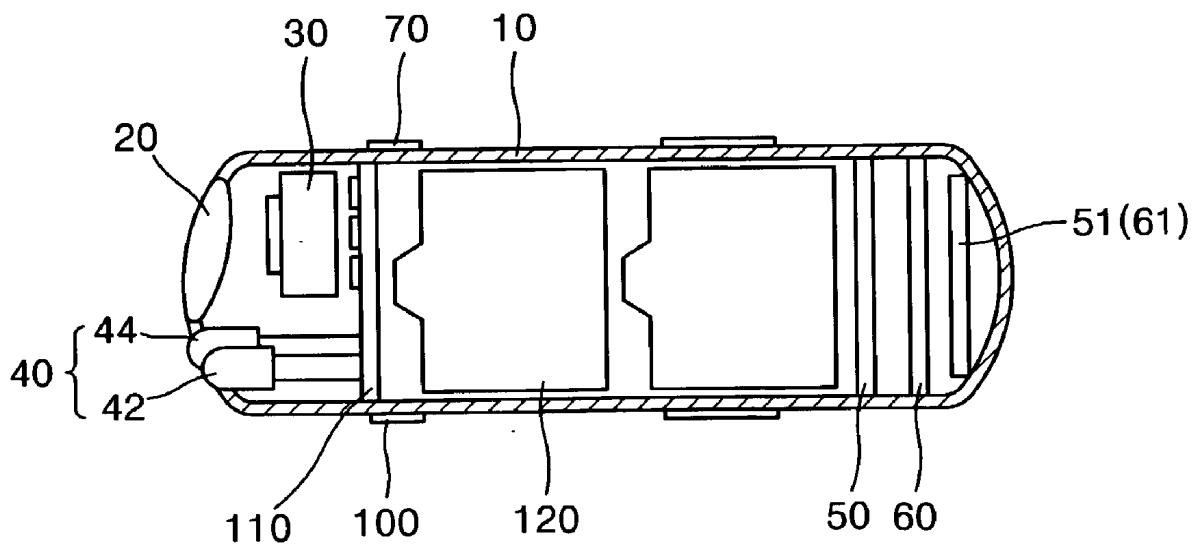


FIG. 3


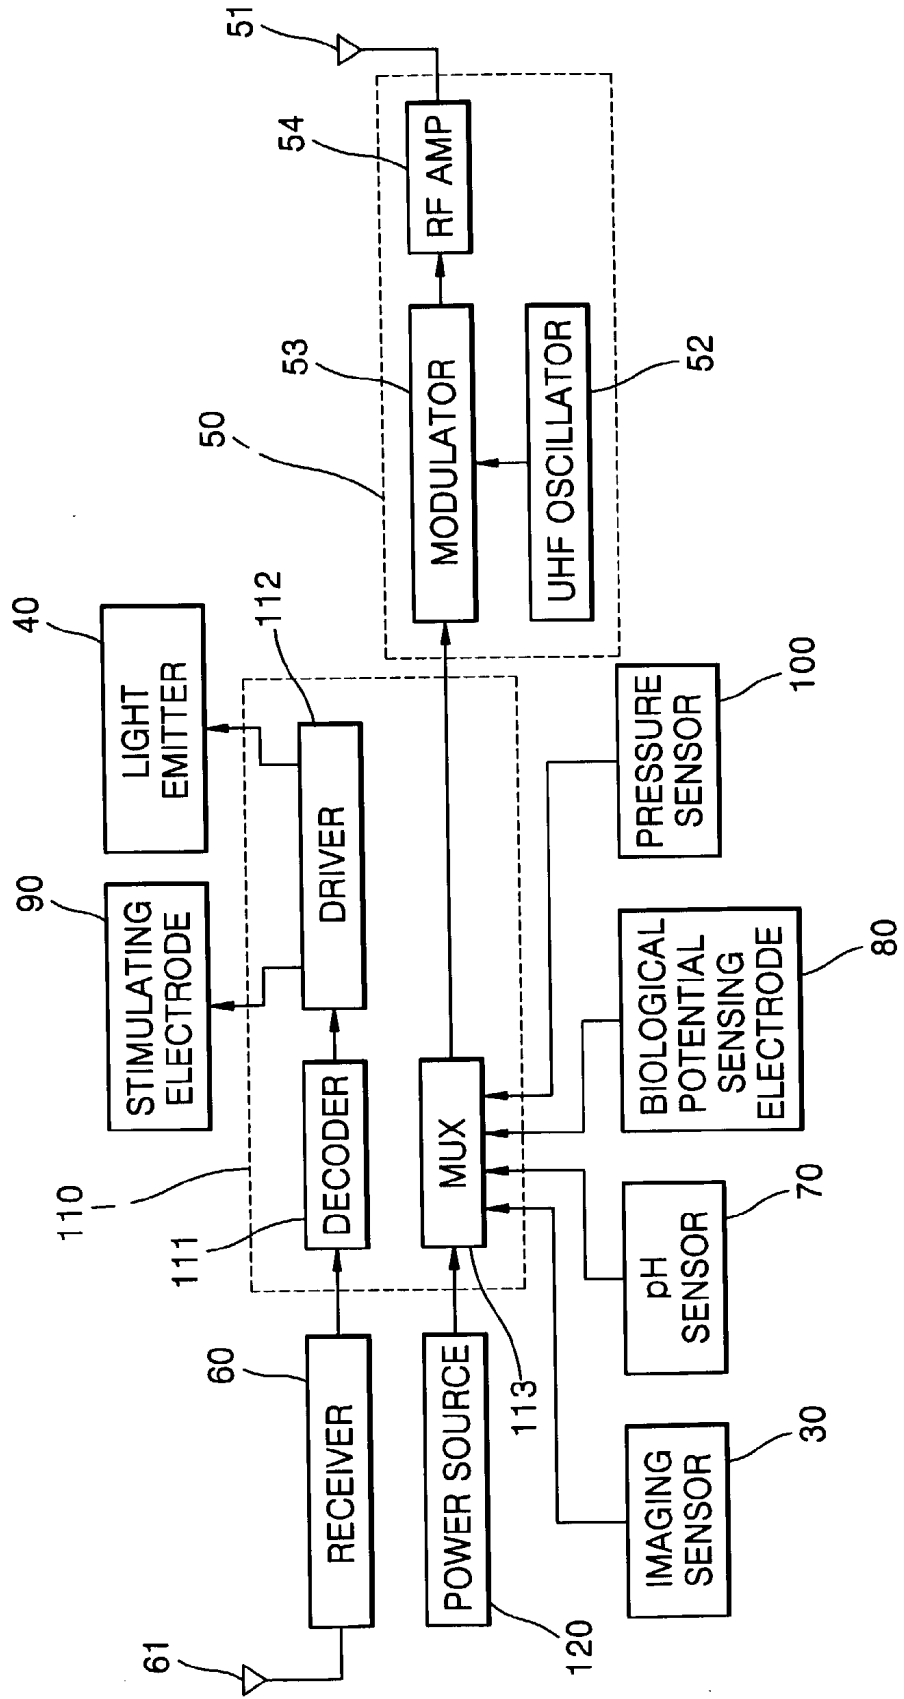


FIG. 4

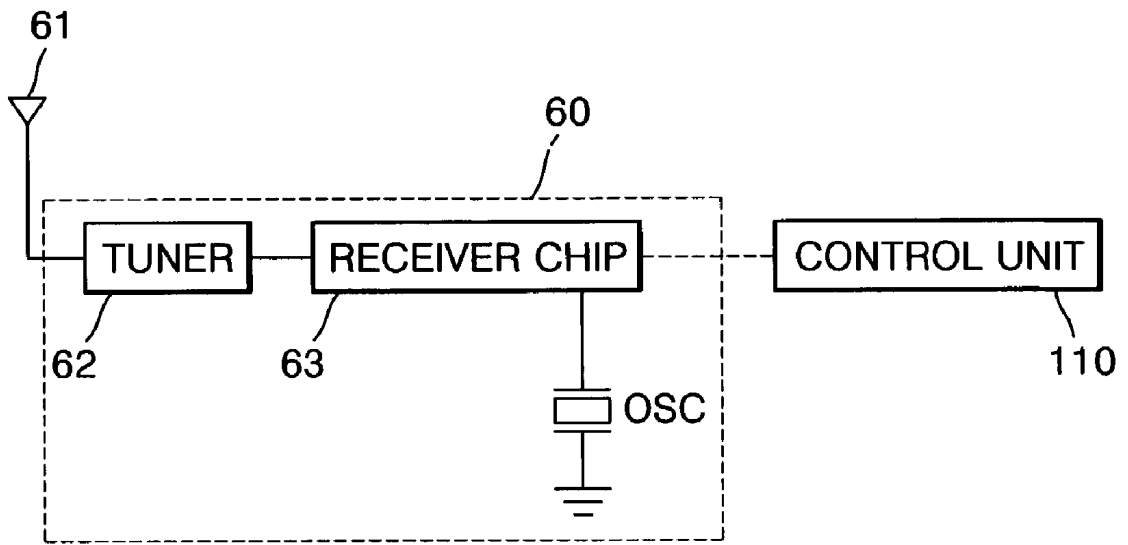

## MULTI-FUNCTIONAL, BI-DIRECTIONAL COMMUNICATION TELEMETRY CAPSULE

### BACKGROUND OF THE INVENTION

#### [0001] 1. Field of the Invention

[0002] The present invention relates to a multi-functional, al, bi-directional telemetry capsule, and more particularly, to a multi-functional, bi-directional telemetry capsule for endoscopy, which is externally controllable and capable of wirelessly transmitting a signal according to an internal state of a patient's body to the outside.

#### [0003] 2. Description of the Related Art

[0004] An endoscope is a medical instrument widely used for examining visually the interior of a patient's bodily canal or organ such as the stomach, bladder, or colon. However, when an endoscope is inserted via a patient's esophagus or anus and advanced into the small or large intestine, the patient feels so much pain that the insertion itself is difficult and the interior of the organ cannot be visualized.

[0005] Furthermore, the intestinal state of a patient cannot be examined with 100% accuracy using conventional endoscopes. For example, an abnormal gastric pH or pressure level cannot be visualized with the conventional endoscope, and the inserted endoscope body is not externally controllable, thereby obstructing an accurate diagnostic examination.

### SUMMARY OF THE INVENTION

[0006] Accordingly, the invention provides a multi-functional, bi-directional communication telemetry capsule for a more accurate and easy endoscopic examination, which is externally controllable after being inserted into a patient's body, capable of wirelessly transmitting an internal state of the patient's body, and allows a user to properly visualize a desired organ.

[0007] The invention also provides a multi-functional, bi-directional communication telemetry capsule for endoscopy which can measure a pH or pressure level in a patient's organ and can be moved in the body by electrical stimulation.

[0008] In an aspect, the invention provides a multi-functional, bi-directional communication telemetry capsule for endoscopy, the capsule comprising; a capsule body insertable into a patient's body; a lens mounted on the capsule body; an imaging sensor installed in the capsule body to image a site of the patient's body viewed through the lens; a light emitter to emit light in front of the capsule body; a transmitter to wirelessly transmit an image signal generated by the imaging sensor; a receiver to wirelessly receive an external control signal; a control unit to control the imaging sensor, the light emitter, the transmitter, and the receiver; and a power source to supply power to the forgoing constitutional elements.

[0009] In the multi-functional, bi-directional communication telemetry capsule according to the present invention, the light emitter may include at least one of a white-light light emitting diode emitting white light and an infrared ray emitting diode emitting infrared rays. The light intensity of the light emitter is externally controllable.

[0010] The multi-functional, bi-directional communication telemetry capsule according to the present invention may further comprise a pH sensor mounted on the external surface of the capsule body and connected to the control unit to measure a pH level of a site of the patient's body. The multi-functional, bi-directional communication telemetry capsule may further comprise a biological potential sensing electrode mounted on the external surface of the capsule body and connected to the control unit to measure an electromyogram and/or an electrocardiogram. In these embodiments, the pH sensor and the biological potential sensing electrodes may be implemented with ion sensitive field effect transistors (ISFETs) that have a small volume and need no electrolyte for measurement.

[0011] The multi-functional, bi-directional communication telemetry capsule according to the present invention may further comprise a stimulating electrode mounted on the external surface of the capsule body and connected to the control unit to apply an electrical stimulus to the intestine. The multi-functional, bi-directional communication telemetry capsule may further comprise a pressure sensor mounted on the external surface of the capsule body and connected to the control unit to measure the inner pressure of a site of the patient's body.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The above features and advantages of the present invention will become more apparent by describing in detail exemplary embodiments thereof with reference to the attached drawings in which:

[0013] **FIG. 1** is a perspective view of a multi-functional, bi-directional communication telemetry capsule for endoscopy according to an embodiment of the present invention;

[0014] **FIG. 2** is a longitudinal sectional view of the multi-functional, bi-directional communication telemetry capsule in **FIG. 1**;

[0015] **FIG. 3** is a block diagram of the multi-functional, bi-directional communication telemetry capsule in **FIGS. 1 and 2**; and

[0016] **FIG. 4** is a block diagram of a receiver in **FIG. 3**.

### DETAILED DESCRIPTION OF THE INVENTION

[0017] Embodiments of a multi-functional, bi-directional communication telemetry capsule for endoscopy according to the present invention will be described with reference to the appended drawings.

[0018] A multi-functional, bi-directional communication telemetry capsule according to an embodiment of the present invention is shown in **FIG. 1**. **FIG. 2** is a longitudinal sectional view of the multi-functional, bi-directional communication telemetry capsule of **FIG. 1**. Referring to **FIGS. 1 and 2**, a multi-functional, bi-directional communication telemetry capsule according to the present invention includes a capsule body **10** insertable into a patient's body, a lens **20** mounted on the capsule body **10**, an imaging sensor **30** installed in the capsule body **10** to form an image of a site of the patient's body through the lens **20**, a light emitter **40** to emit light in front of the capsule body **10**, a transmitter **50** to wirelessly transmit an image signal generated by the

imaging sensor **30**, a receiver **60** to wirelessly receive an external control signal, a pH sensor **70** to measure a pH level of a site of the patient's body, a biological potential sensing electrode **80** to measure an electromyogram (EMG) of the intestine or an electrocardiogram (ECG) of the heart, an stimulating electrode **90** to apply an electrical stimulus to the intestine, and a pressure sensor **100** to measure a pressure level of a site of the patient's body. The multi-functional, bi-directional communication telemetry capsule according to the present invention includes a control unit **110** to control the imaging sensor **30**, the light emitter **40**, the transmitter **50**, the receiver **60**, the pH sensor **70**, the biological potential sensing electrode **80**, the stimulating electrode **90**, and the pressure sensor **100**, and a power source **120** to supply power to the above-listed elements of the capsule. Antennas **51** and **61**, which may be implemented with known loop-coil or spiral antennas, are installed in the capsule body **10** for enhancing wireless transmission and reception efficiency of the transmitter **50** and the receptor **60**, respectively. Alternatively, either one of the antennas **51** and **61** may be shared by the transmitter **50** and the receptor **60**.

[0019] The capsule body **10** has a cylindrical shape of a length of 3 cm or less and a diameter of 0.7-1 cm so as to be insertable into the patient's body and to easily travel through the intestine.

[0020] The lens **20** focuses light to allow the imaging sensor **30** to form an image of the interior of the intestine. The lens **20** may be contaminated with bodily mucus. Accordingly, it is preferable that the lens **20** be equipped with a wiper (not shown) for removing the bodily mucus adhering to the lens **20**.

[0021] The imaging sensor **30** that enables a color image to be captured may be implemented with a known charge coupled device (CCD) or a complementary metal oxide silicon (CMOS) semiconductor device.

[0022] The light emitter **40** includes at least one of a white-light light emitting diode (LED) **42** emitting white light and an infrared LED **44** emitting infrared rays. The white-light LED emits white light to illuminate a dark lumen to allow the imaging sensor **30** to form a color image. At this time, when a tumorous or inflammatory pathology is in progress in the intestinal wall, the pathological tissue cannot be visualized with the imaging sensor **30**. In this case, pathological conditions can be examined by infrared irradiation from the infrared LED **44** based on a temperature difference between normal and pathological tissues. According to the present invention, the on/off state of the imaging sensor **30** and the light emitter **40** is selectively controlled by an external signal so as to reduce unnecessary power consumption. Also, the light intensity of the light emitter can be externally controlled.

[0023] Referring to FIG. 3, which is a block diagram of the multi-functional, bi-directional communication telemetry capsule according to the present invention, the transmitter **50** includes a ultra high frequency (UHF) oscillator **52**, a modulator **53**, and a radio frequency amplifier (RF AMP) **54**. The transmitter **50** modulates the information multiplexed by and transmitted from a multiplexer (MUX) **113** of the control unit **110**, which is acquired by the imaging sensor **30**, the pH sensor **70**, the biological potential sensing electrode **80**, and/or the pressure sensor **100**, in an UHF range and amplifies and transmits the modulated informa-

tion. Since the multi-functional, bi-directional communication telemetry capsule according to the present invention has a small size, only a small antenna is needed for the multi-functional, bi-directional communication telemetry capsule. For a high information transmission efficiency when using the small antenna, the transmitter **50** works in a UHF range. If the frequency range used in the transmitter **50** is too high, the image signal may degrade due to frequency absorption and dispersion in the patient's body. Therefore, a frequency range of 300-2400 MHz is suitable for the transmitter **50**.

[0024] FIG. 4 is a block diagram of the receiver **60** in FIG. 3. Referring to FIG. 4, the receiver **60** includes a tuner **62** and a receiver chip **63**. The tuner **62**, connected to the receiver antenna **61**, is an inductor-capacitor (LC) tank circuit tuned on a UHF frequency transmitted from an external transmitter (not shown). The receiver chip **63** may be implemented with one chip On-Off Keyed (OOK) SMD heterodine receiver chip (MICRF 007, available from MICREL Co.). This 8-pin OOK SMD chip occupies a small area of 4 mm by 6 mm. Since an OOK output signal can be modulated up to 3 kHz, various loads in the telemetry capsule can be controlled using the OOK SMD chip at a frequency of 375 Hz for each channel.

[0025] Any frequency band, for example, VHF or UHF band, may be selectively used for the receiver **60**. This is because the amount of information carried by the external control signal to the receiver **60** is incomparably less than that of the image signal to be transmitted by the transmitter **50**. For example, frequency values of 27.125 MHz, 315 MHz, 433 MHz, etc., available to the public may be used for the receiver **60**. A known OOK scheme is suitable for the communication and modulation scheme in the receiver **60**.

[0026] The pH sensor **70** is mounted on the external surface of the capsule body **10** in order to measure the pH of a site of the patient's body. A smaller pH sensor is more preferred due to the small size of the capsule body **10**. For example, an ion sensitive field effect transistor (ISFET) known for its small volume is suitable for the pH sensor **70**. The use of the ISFET is also convenient because it does not require electrolytes, such as KCl solution, unlike general pH sensors. The pH sensor **70** is very useful to measure the degree of gastric juice secretion or digestion stage.

[0027] The biological potential sensing electrode **80** is mounted on the external surface of the capsule body **10** to measure the intestinal EMG or ECG. The EMG acquired by the biological potential sensing electrode **80** provides information on the contractility of the intestine, and the ECG acquired by the biological potential sensing electrode **80** enables a more precise cardiac diagnosis because the cardiac potential is measured in the patient's body.

[0028] The stimulating electrode **90** is mounted on the external surface of the capsule body **10** to apply an electrical stimulus to the intestine. When the stimulating electrode **90** applies an electrical stimulus to the intestine, the intestine is forced to move so as to facilitate motion of the multi-functional, bi-directional communication telemetry capsule along the intestine to be excreted through the anus if necessary. The duration for which the capsule stays and operates in the intestine can be controlled by the intensity of electrical stimuli applied to the stimulating electrode **90**.

[0029] Although in the above-described embodiment the biological potential sensing electrode **80** and the stimulating

electrode **90** are described as being separately constructed for the convenience of explanation, it will be appreciated that the bipotential sensing electrode **80** and the stimulating electrode **90** can be constructed as a single electrode.

[0030] The pressure sensor **100** is mounted on the external surface of the capsule body **10** to measure the internal pressure of the intestine as an index of a state of an intestinal movement.

[0031] The control unit **110** includes a decoder **111** to select an appropriate channel signal among a plurality of channel signals received from the receiver **60**, a driver **112** to supply power to the stimulating electrode **90** or the light emitter **40** according to the diagnostic purpose, and the MUX **113** to multiplex a plurality of signals input from the imaging sensor **30**, the pH sensor **70**, the biological potential sensing electrode **80**, and the pressure sensor **100**. The control unit **100** is connected to the imaging sensor **30**, the light emitter **40**, the transmitter **50**, the receiver **60**, the pH sensor **70**, the biological potential sensing electrode **80**, the stimulating electrode **90**, and the pressure sensor **100** and systematically control the operations of these elements using an external remote signal.

[0032] The operation of the multi-functional, bi-directional communication telemetry capsule according to the present invention having the structure as described above will be described.

[0033] As a patent swallows the multi-functional, bi-directional communication telemetry capsule through the esophagus, the capsule travels inside the patient's body. When the capsule reaches a predetermined site to be examined in the patient's body, the controller **110** is controlled by an external wireless signal in order to operate the capsule.

[0034] For example, the interior of the stomach can be simply visualized by the imaging sensor **30** in cooperation with the white-light LED **42**. Whether or not the stomach wall has a pathology in progress can be observed using the infrared rays emitted from the infrared LED **44** and imaged by the imaging sensor **30**. For a more precision gastric condition examination, pH and pressure levels in the stomach can be measured by operating the pH sensor **70** and the pressure sensor **100**, respectively, and physiological signals, such as EMG and ECG, can be detected by operating the biological potential sensing electrode **80**. The resulting image signal or measured signals are externally transmitted with a ultra high frequency through the transmitter **50**.

[0035] When there is a need to move the multi-functional, bi-directional telemetry capsule to another site, an electrical pulse is applied to the stimulating electrode **90** located on the external surface of the capsule body **10** in order to facilitate pyloric movement. The multi-functional, bi-directional telemetry capsule according to the present invention can be moved to a target site to be diagnosed by the pyloric movement or can be excreted through the anus if necessary.

[0036] Alternatively, electrical stimulation by the stimulating electrode **90** may be applied for therapeutic purposes, for example, in order to alleviate indigestion, constipation, etc.

[0037] As described above, the multi-functional, bi-directional communication telemetry capsule according to the present invention can visualize the internal state of a patient's body and can measure pH and pressure levels in a site of the patient's body, thereby enabling a more accurate diagnosis and treatment. The motion of the multi-functional, bi-directional communication telemetry capsule in the patient's intestine can be controlled by electrical stimulation, so that the capsule reaches a target site to be examined. The multi-functional, bi-directional communication telemetry capsule can be timely turned on and off by external control, thereby minimizing power consumption.

[0038] While the present invention has been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention as defined by the following claims.

What is claimed is:

1. A multi-functional, bi-directional communication telemetry capsule for endoscopy, the capsule comprising;

a capsule body insertable into a patient's body;

a lens mounted on the capsule body;

an imaging sensor installed in the capsule body to image a site of the patient's body viewed through the lens;

a light emitter to emit light in front of the capsule body;

a transmitter to wirelessly transmit an image signal generated by the imaging sensor;

a receiver to wirelessly receive an external control signal;

a control unit to control the imaging sensor, the light emitter, the transmitter, and the receiver; and

a power source to supply power to the forgoing constitutional elements.

2. The multi-functional, bi-directional communication telemetry capsule of claim 1, wherein the light emitter includes at least one of a white-light light emitting diode emitting white light and an infrared ray emitting diode emitting infrared rays.

3. The multi-functional, bi-directional communication telemetry capsule of claim 1, wherein the light intensity of the light emitter is externally controllable.

4. The multi-functional, bi-directional communication telemetry capsule of claim 1, further comprising a pH sensor mounted on the external surface of the capsule body and connected to the control unit to measure a pH level of a site of the patient's body.

5. The multi-functional, bi-directional communication telemetry capsule of claim 1, further comprising a biological potential sensing electrode mounted on the external surface of the capsule body and connected to the control unit to measure an electromyogram and/or an electrocardiogram.

6. The multi-functional, bi-directional communication telemetry capsule of either one of claims 4 and 5, wherein the pH sensor and the biological potential sensing electrodes are implemented with ion sensitive field effect transistors

(ISFETS) that have a small volume and need no electrolyte for measurement.

7. The multi-functional, bi-directional communication telemetry capsule of claim 1, further comprising a stimulating electrode mounted on the external surface of the capsule body and connected to the control unit to apply an electrical stimulus to the intestine.

8. The multi-functional, bi-directional communication telemetry capsule of claim 1, further comprising a pressure sensor mounted on the external surface of the capsule body and connected to the control unit to measure the inner pressure of a site of the patient's body.

\* \* \* \* \*

专利名称(译)	多功能双向通信遥测舱		
公开(公告)号	<a href="#">US20040106849A1</a>	公开(公告)日	2004-06-03
申请号	US10/308028	申请日	2002-12-03
[标]申请(专利权)人(译)	赵真HO 彩炫CHUL 才俊RIM		
申请(专利权)人(译)	CHO JIN-HO 彩炫哲 CHOI JUN-RIM		
当前申请(专利权)人(译)	CHO JIN-HO 彩炫哲 CHOI JUN-RIM		
[标]发明人	CHO JIN HO CHOI HYUN CHUL CHOI JUN RIM		
发明人	CHO, JIN-HO CHOI, HYUN-CHUL CHOI, JUN-RIM		
IPC分类号	A61B1/04 A61B5/00 A61B5/03 A61B5/042 A61N1/36 A61B1/00		
CPC分类号	A61B1/04 A61B1/041 A61B5/0031 A61N1/36007 A61B5/042 A61B5/14539 A61B5/036		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

提供了一种用于内窥镜检查的多功能双向通信遥测胶囊。该多功能双向通信遥测胶囊包括可插入患者体内的胶囊体，安装在胶囊体上的镜片，安装在胶囊体内的成像传感器，用于通过镜片观察患者身体部位的成像，pH传感器，生物电位传感电极，刺激电极，压力传感器，在胶囊体前面发光的光发射器，可从外部控制的光发射器的光强度，用于无线传输图像信号的发射器由成像传感器产生的pH信号，由生物电位感测电极产生的生物信号，由压力传感器产生的压力信号，用于无线接收外部控制信号的接收器，以及控制单元和前述宪法要素的动力源。

