



US 20160063207A1

(19) **United States**(12) **Patent Application Publication**
Schmidt(10) **Pub. No.: US 2016/0063207 A1**(43) **Pub. Date: Mar. 3, 2016**(54) **DEVICE AND METHOD FOR ASSESSING
MORTALITY RISK OF A CARDIAC PATIENT***5/02055* (2013.01); *A61B 5/0476* (2013.01);
A61B 5/04008 (2013.01); *A61B 5/0488*
(2013.01); *A61B 5/6826* (2013.01)(71) Applicant: **Georg SCHMIDT**, München (DE)(72) Inventor: **Georg Schmidt**, Munchen (DE)

(57)

ABSTRACT(21) Appl. No.: **14/782,036**(22) PCT Filed: **Mar. 28, 2014**(86) PCT No.: **PCT/EP2014/056317**

§ 371 (c)(1),



(2) Date: **Oct. 2, 2015**(30) **Foreign Application Priority Data**


Apr. 2, 2013 (EP) 13001675.1

Publication Classification(51) **Int. Cl.***G06F 19/00* (2006.01)*A61B 5/0205* (2006.01)*A61B 5/00* (2006.01)*A61B 5/04* (2006.01)*A61B 5/0488* (2006.01)*A61B 5/0456* (2006.01)*A61B 5/0476* (2006.01)(52) **U.S. Cl.**CPC *G06F 19/3431* (2013.01); *G06F 19/3406*
(2013.01); *A61B 5/0456* (2013.01); *A61B*


Device and method for assessing a mortality risk of a cardiac patient based on at least one vital sign or biosignal of said patient. The invention relates to a device and method for assessing a mortality risk of a cardiac patient based on at least one vital sign or biosignal of said patient. In order to improve the quality of risk stratification for cardiac patients as compared to conventional mortality risk assessment concepts, the invention provides a device for assessing a mortality risk of a cardiac patient based on at least one vital sign or biosignal of said patient, said device comprising a data provision unit being configured to provide at least one data function of at least one vital sign or biosignal of said patient, a data processing unit being configured to process data of said at least one data function for assessing a mortality risk of said patient by performing the following actions: selecting at least one data sequence from said at least one data function according to a predetermined routine; computing a specific behavior of at least one parameter of said at least one data function based on said at least one selected data sequence; and assessing a mortality risk of said patient based on said computed behavior. A corresponding method and computer readable medium, which, when loaded, performs steps of said method, are also disclosed.

ECG

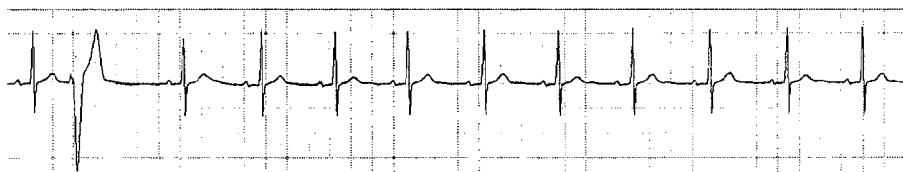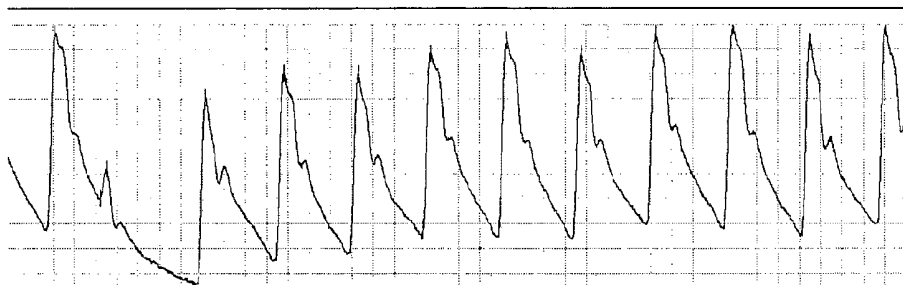Blood
Pressure

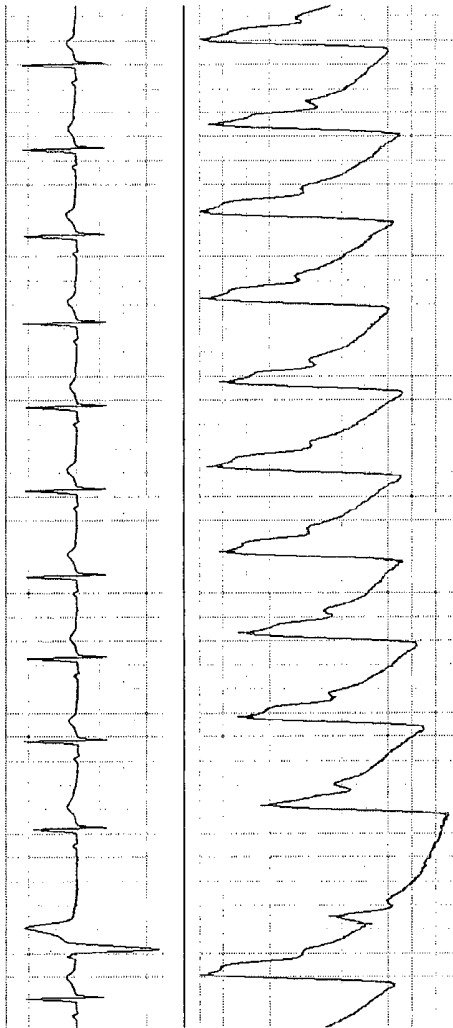

ECG
Fig. 1
Blood Pressure

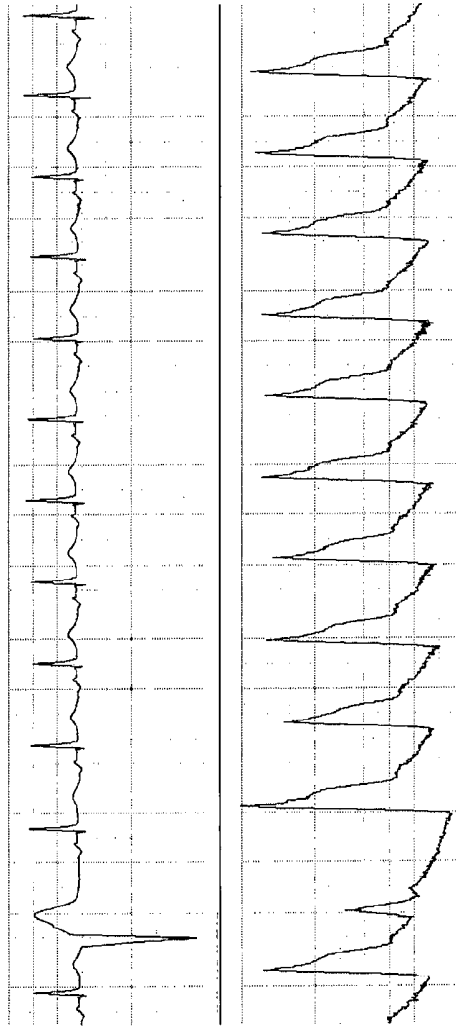

ECG
Fig. 3
Blood Pressure

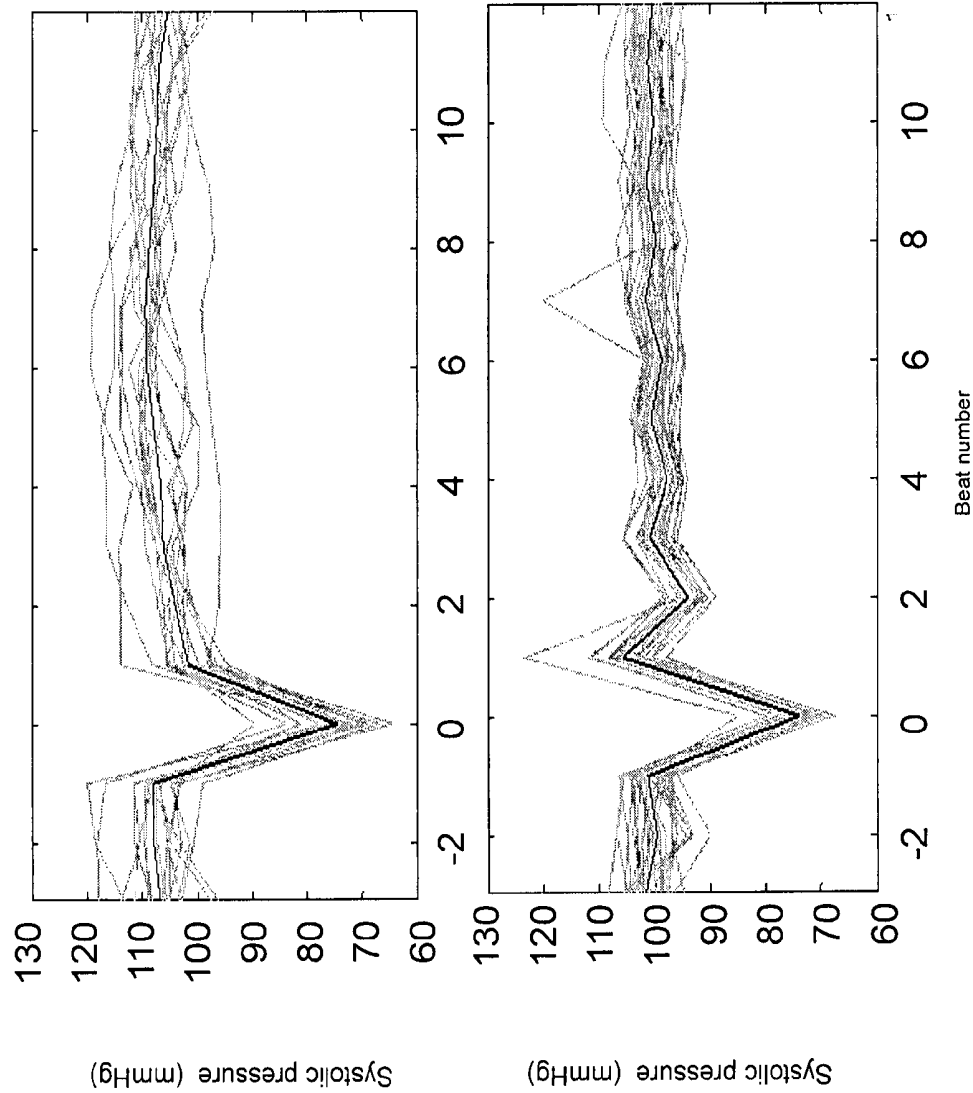


Fig. 2

Fig. 4

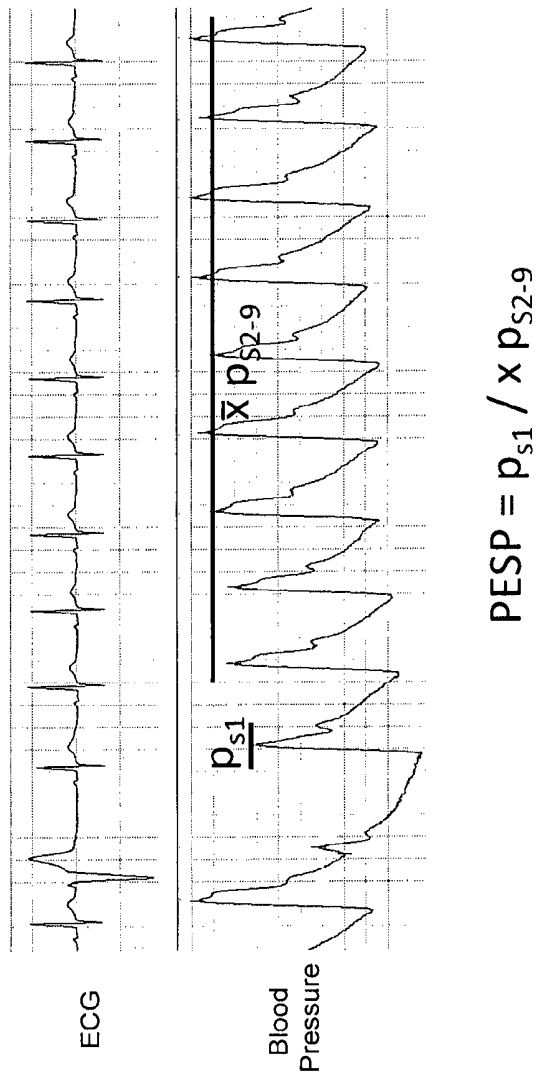


Fig. 5

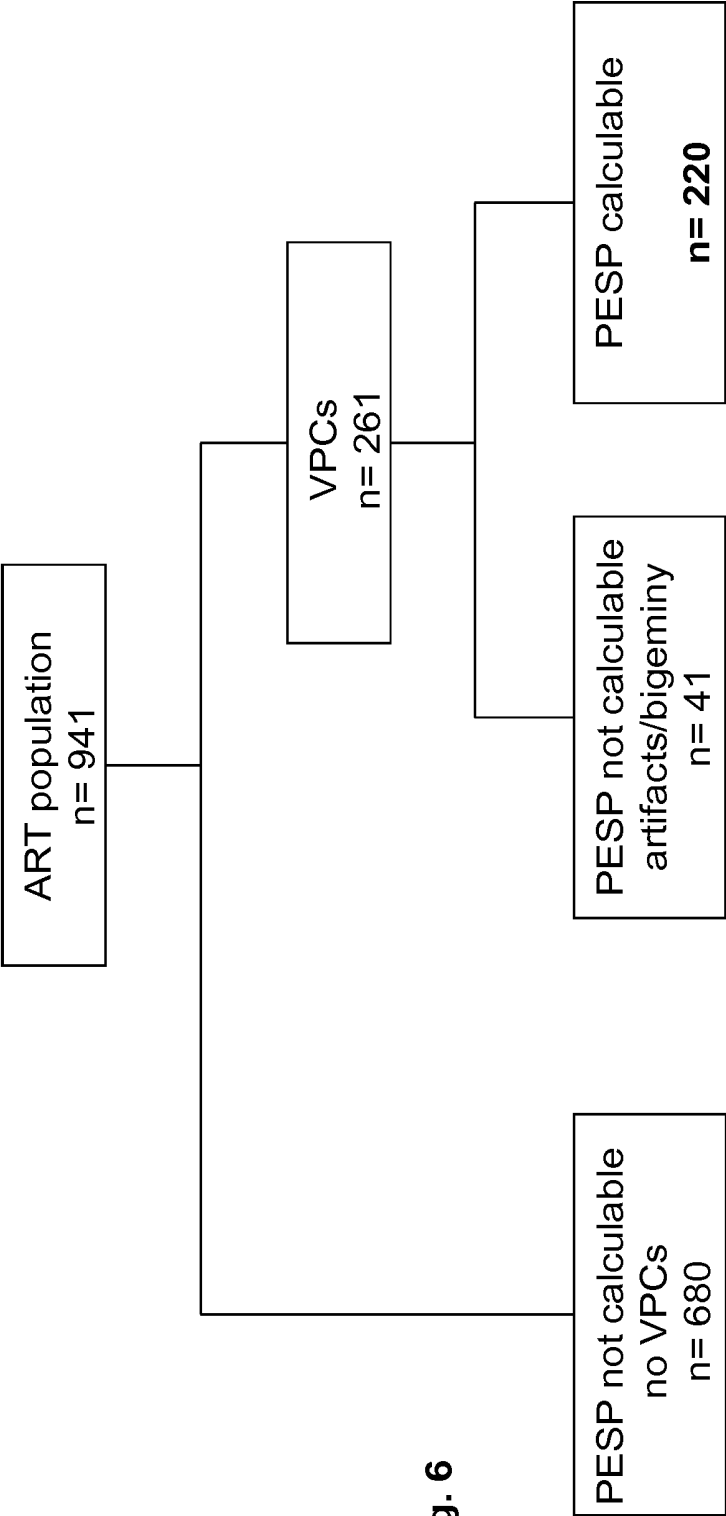


Fig. 6

<i>Clinical data</i>	
Age (years), median (IQR)	65 (58- 72)
Females, n (%)	38 (17.3)
Diabetes mellitus, n (%)	42 (19.1)
History of previous MI, n (%)	42 (19.1)
CK max (U/l), median (IQR)	1,309 (652 -2,594)
GRACE score; median (IQR)	119 (103-135)
LVEF (%), median (IQR)	49 (40-58)
Creatinine (md/dl), median (IQR)	1.1 (1.0-1.3)
COPD, n (%)	13 (5.9)

Fig. 7

Variable	univariat			multivariat		
	HR	χ^2	p	HR	χ^2	p
PESP ≥ 1	4.03 (1.86 – 8.76)	12.4	<0.001	3.43 (1.57 – 7.51)	9.5	0.002
LVEF < 35 %	2.23 (1.00 – 4.98)	3.8	0.050	1.52 (0.67 – 3.45)	1.0	0.321
VPC ≥ 10 per h	2.45 (1.18 – 5.12)	5.7	0.017	1.90 (0.89 – 4.03)	2.8	0.096
GRACE score ≥ 120	3.13 (1.44 – 6.79)	8.3	0.004	2.33 (1.05 – 5.15)	4.3	0.038

Fig. 8

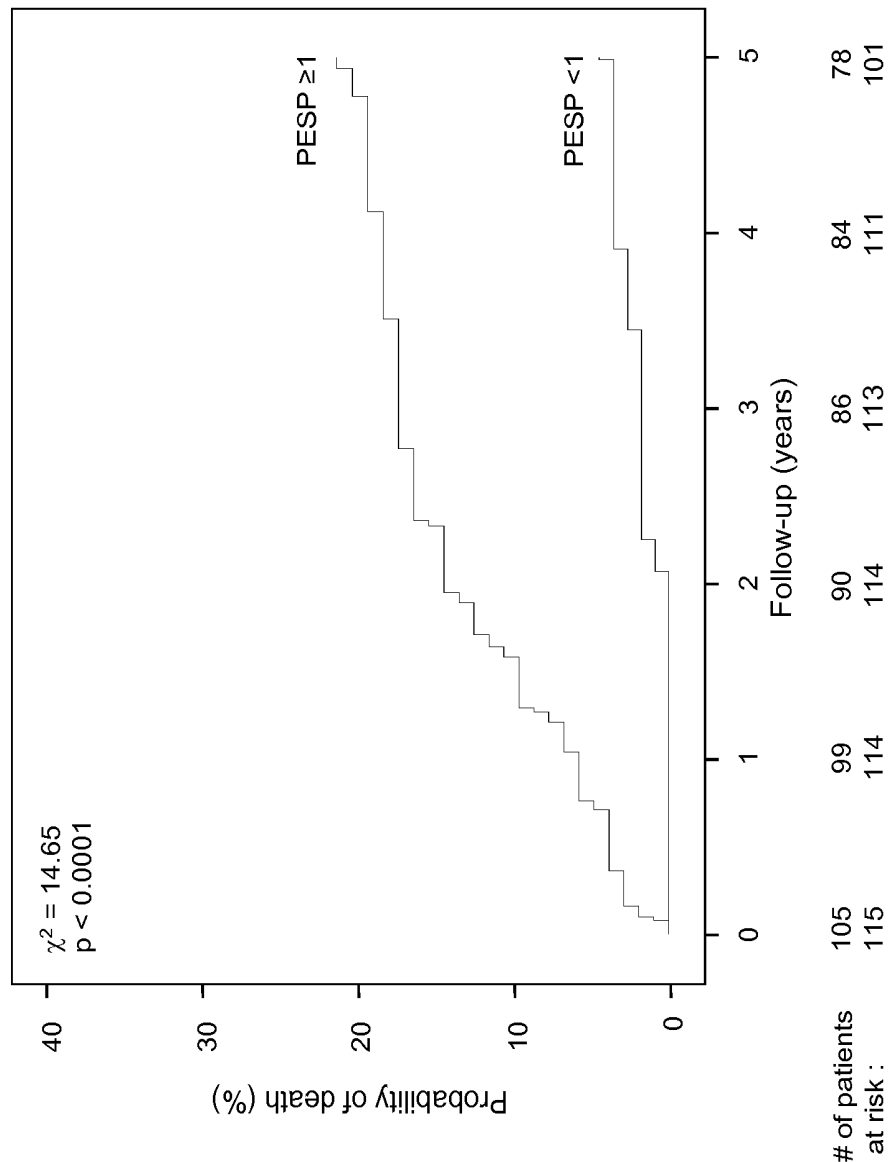


Fig. 9

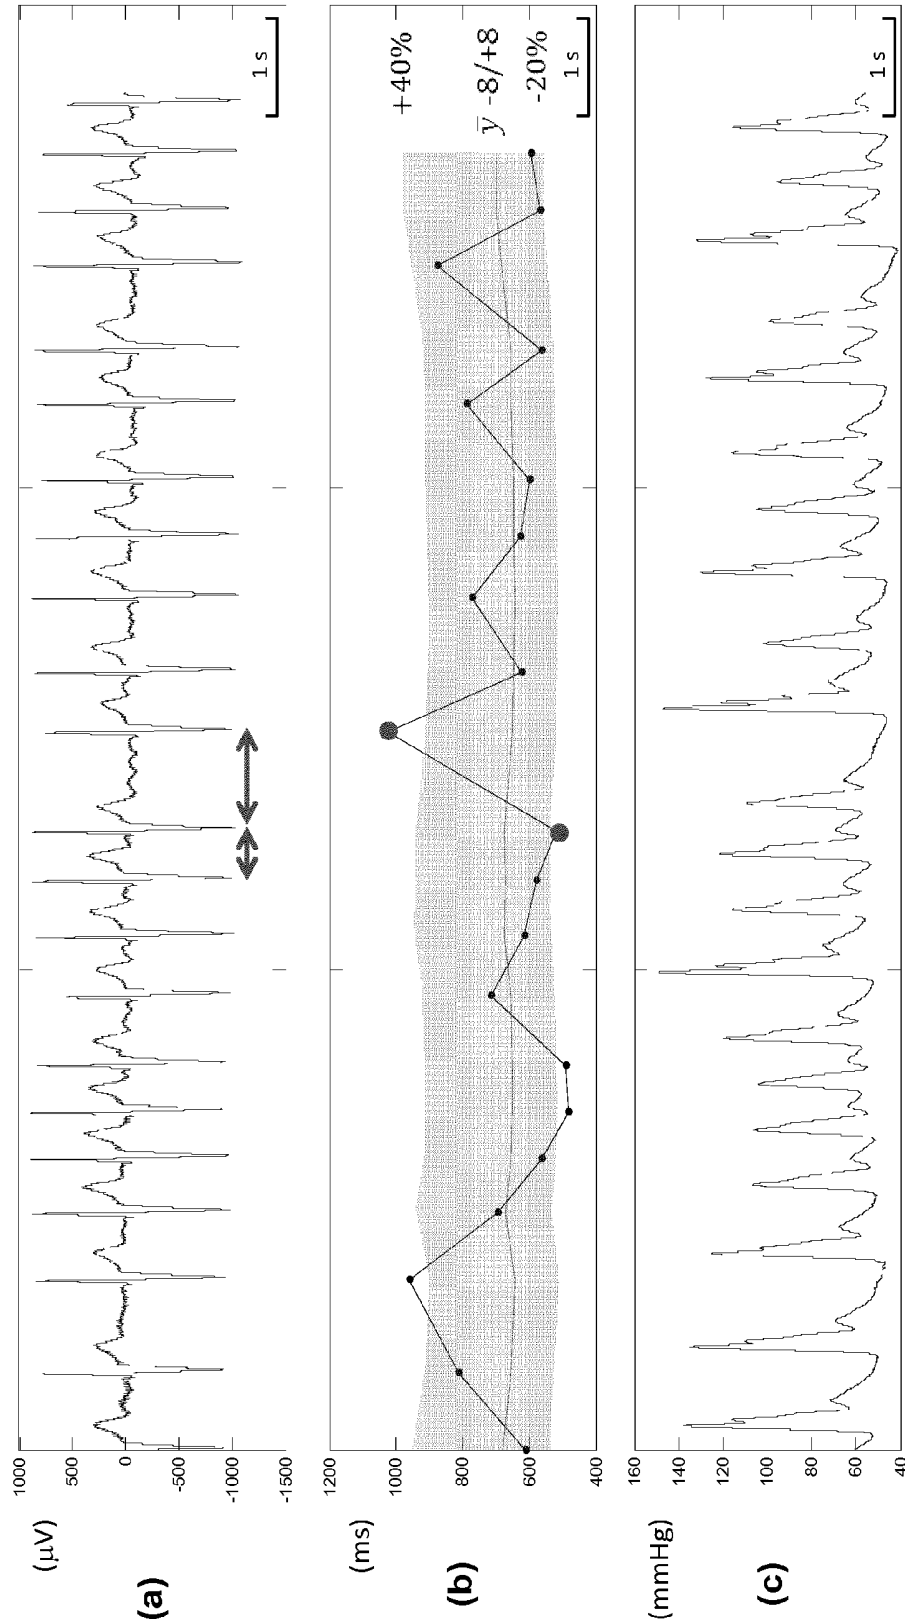


Fig. 10

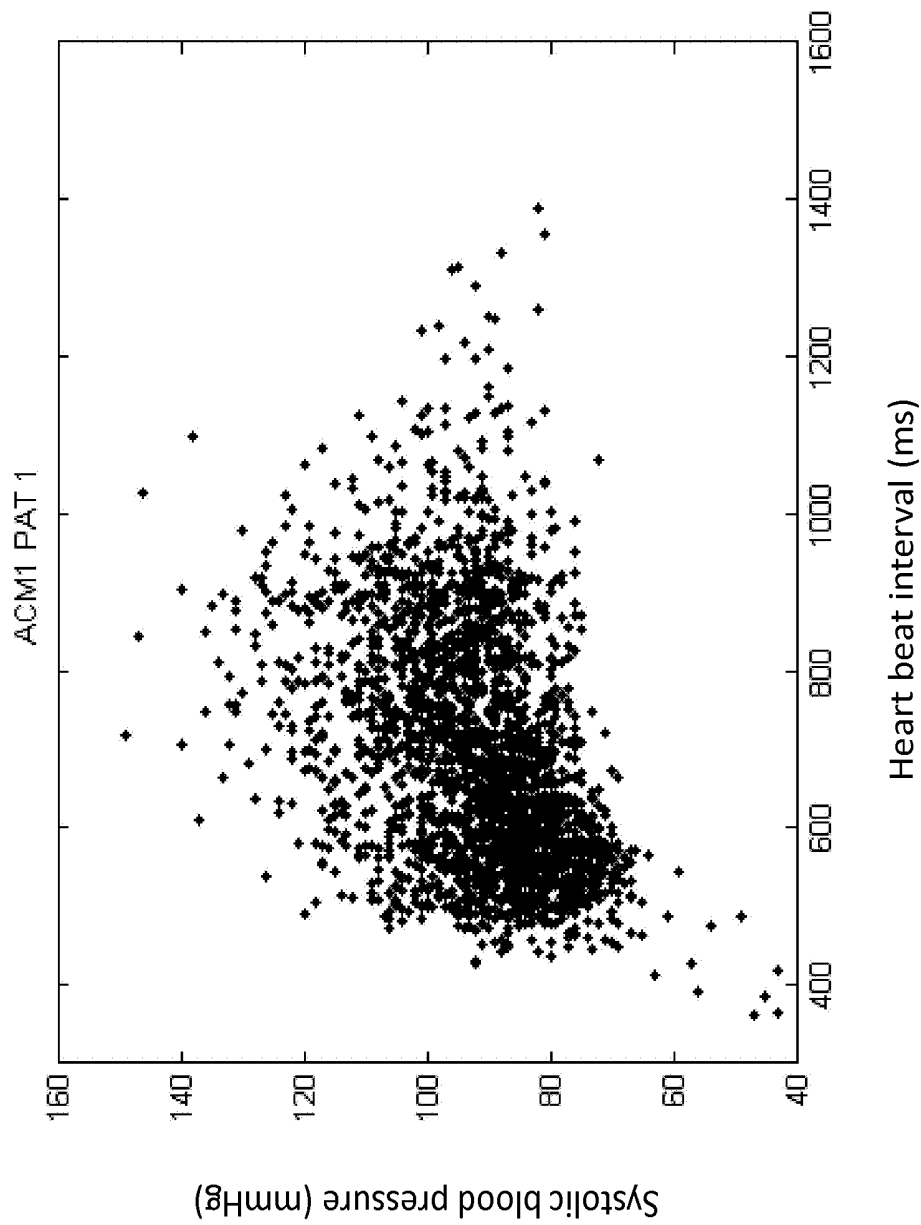


Fig. 11

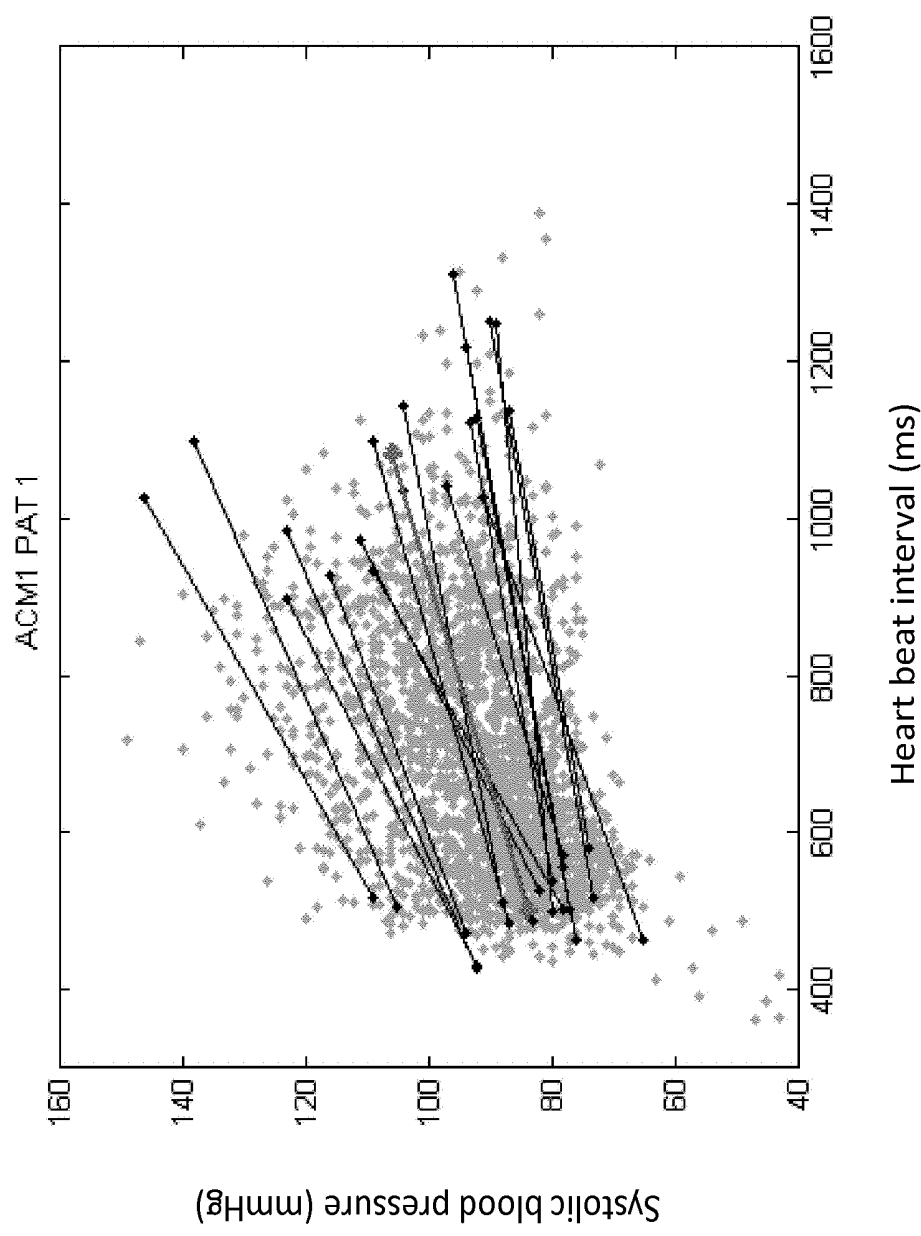


Fig. 12

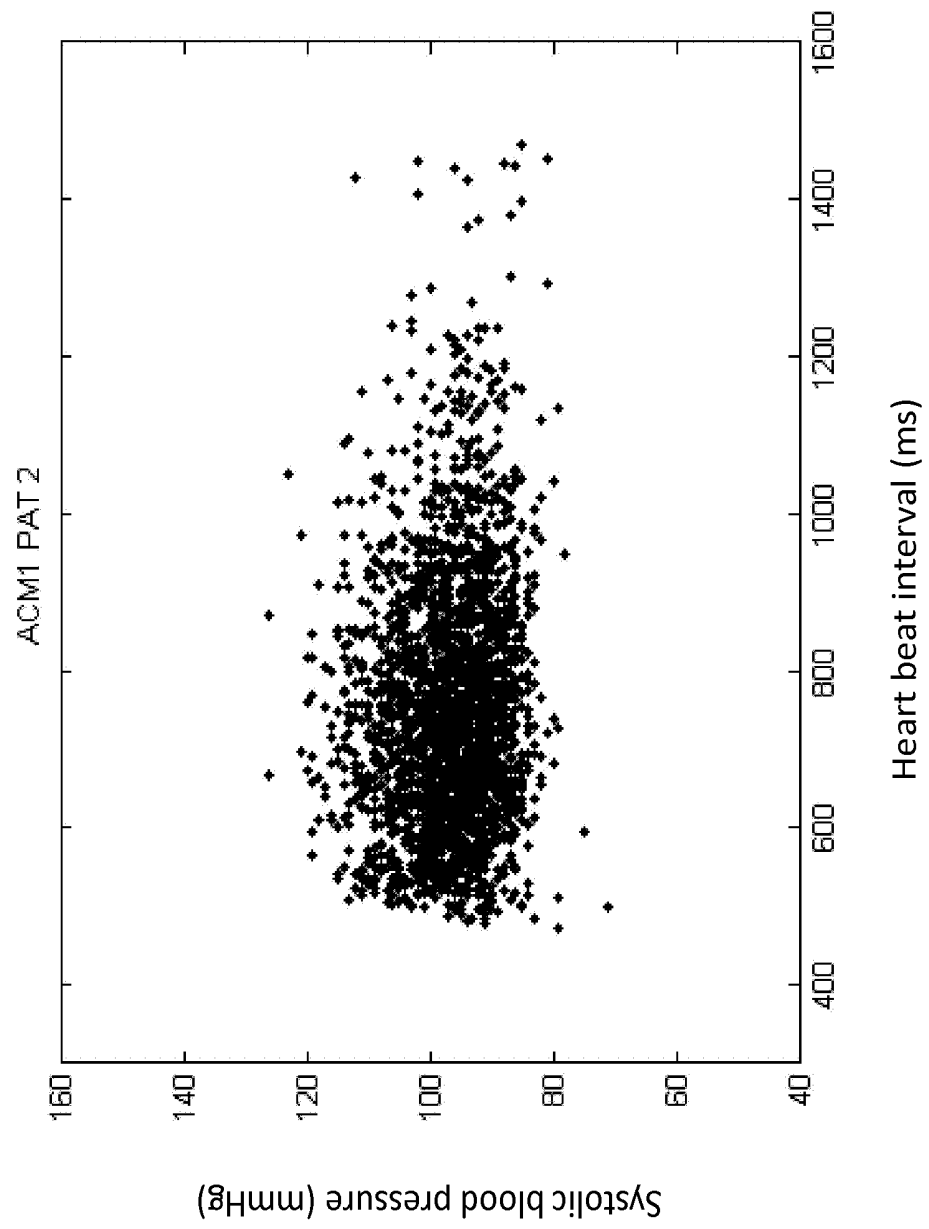


Fig. 13

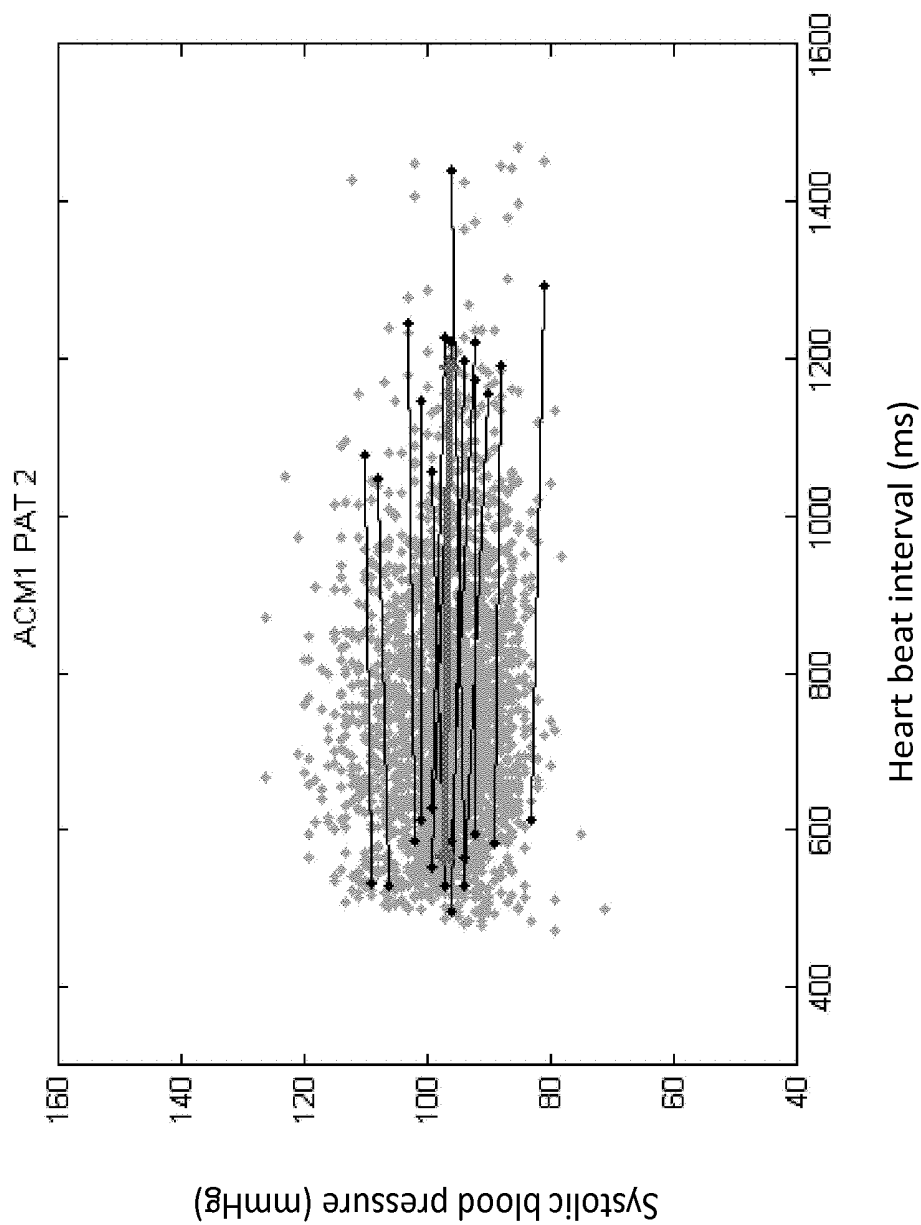


Fig. 14

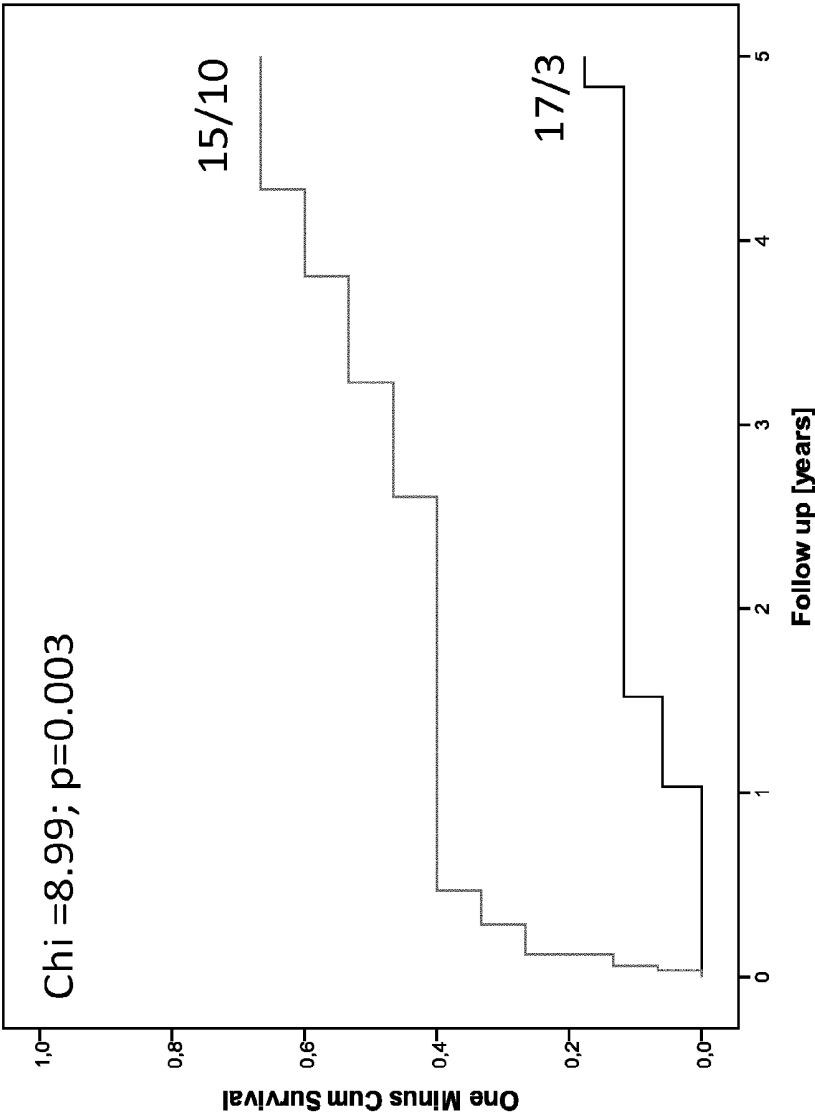


Fig. 15

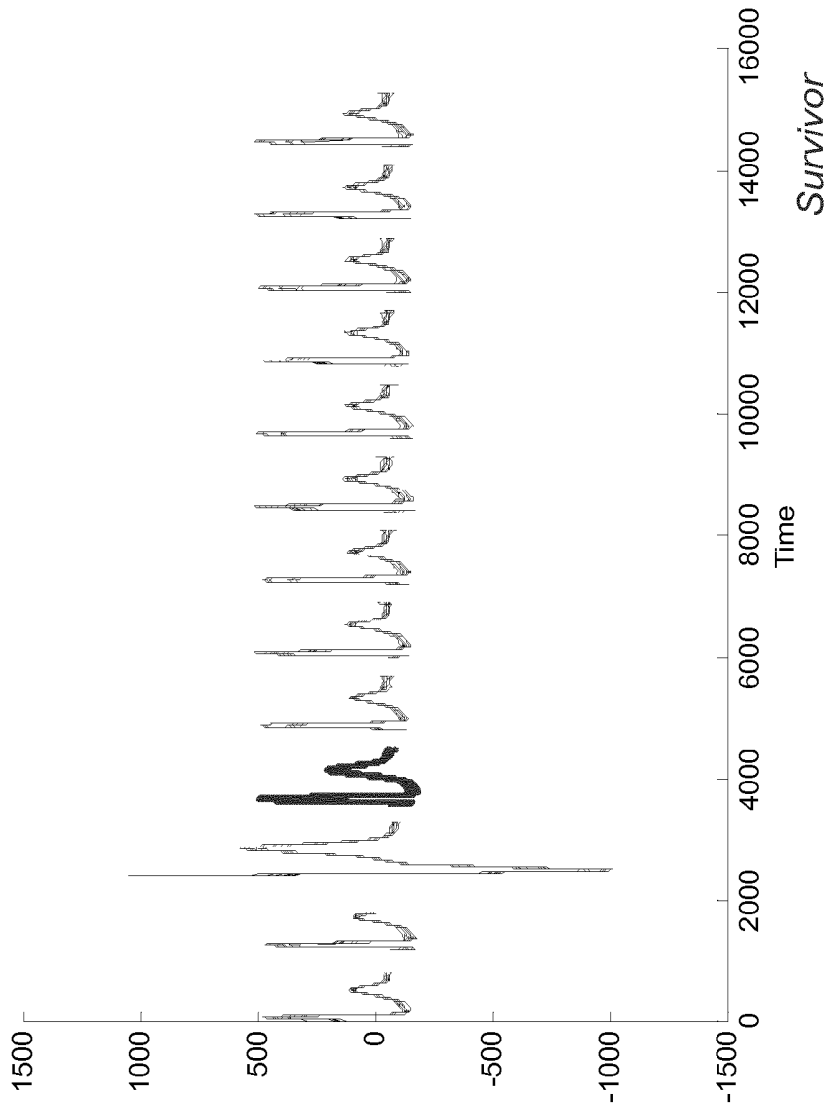


Fig. 16

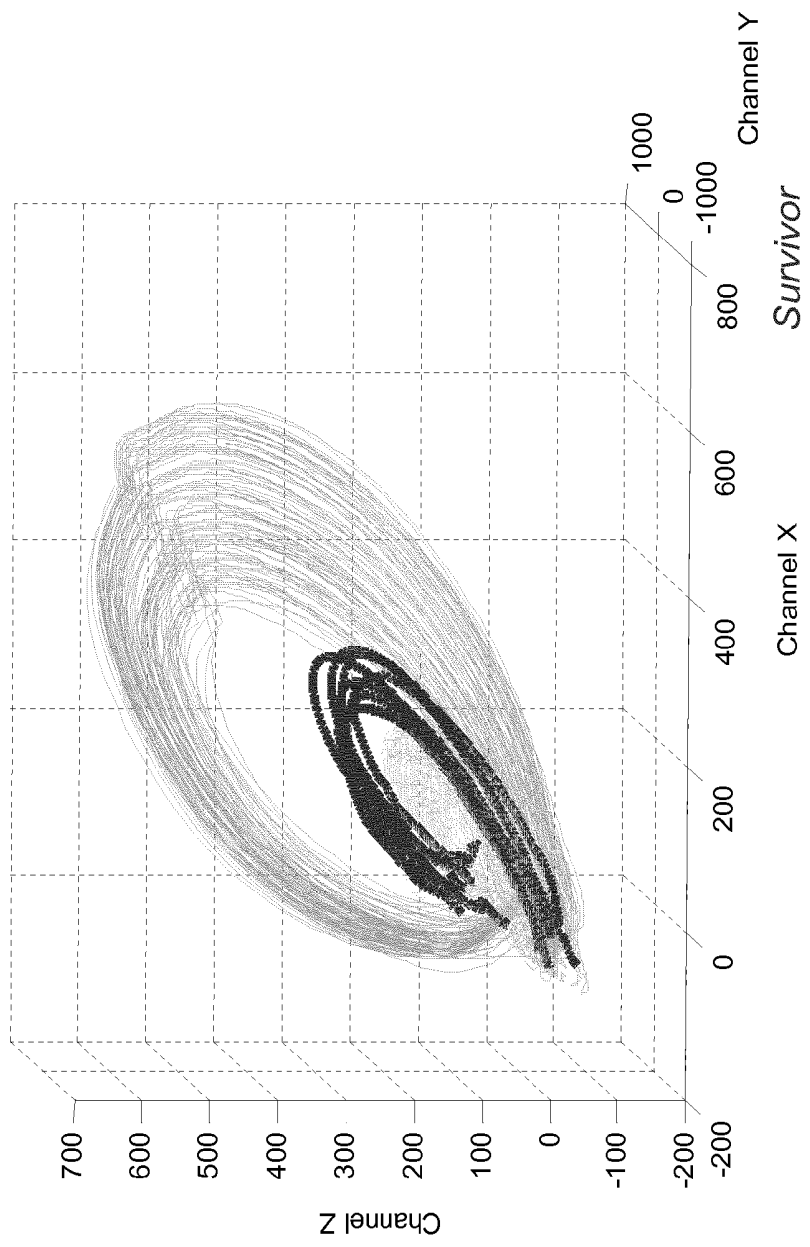


Fig. 17

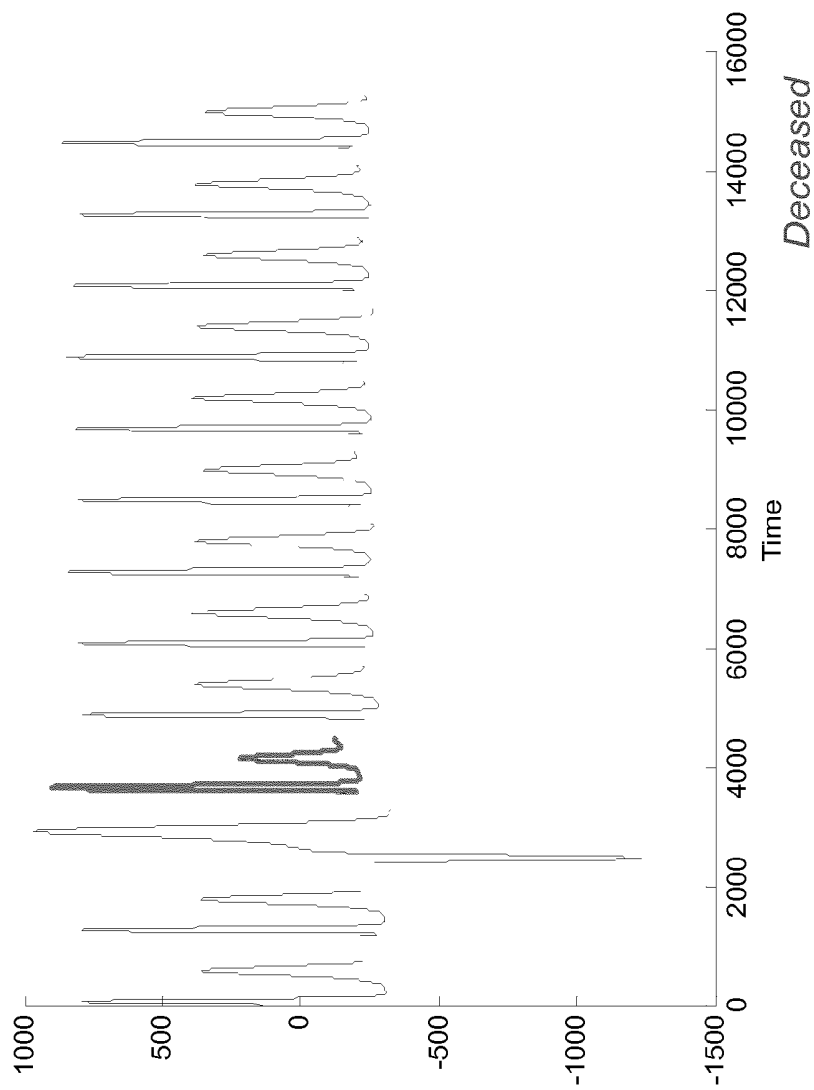


Fig. 18

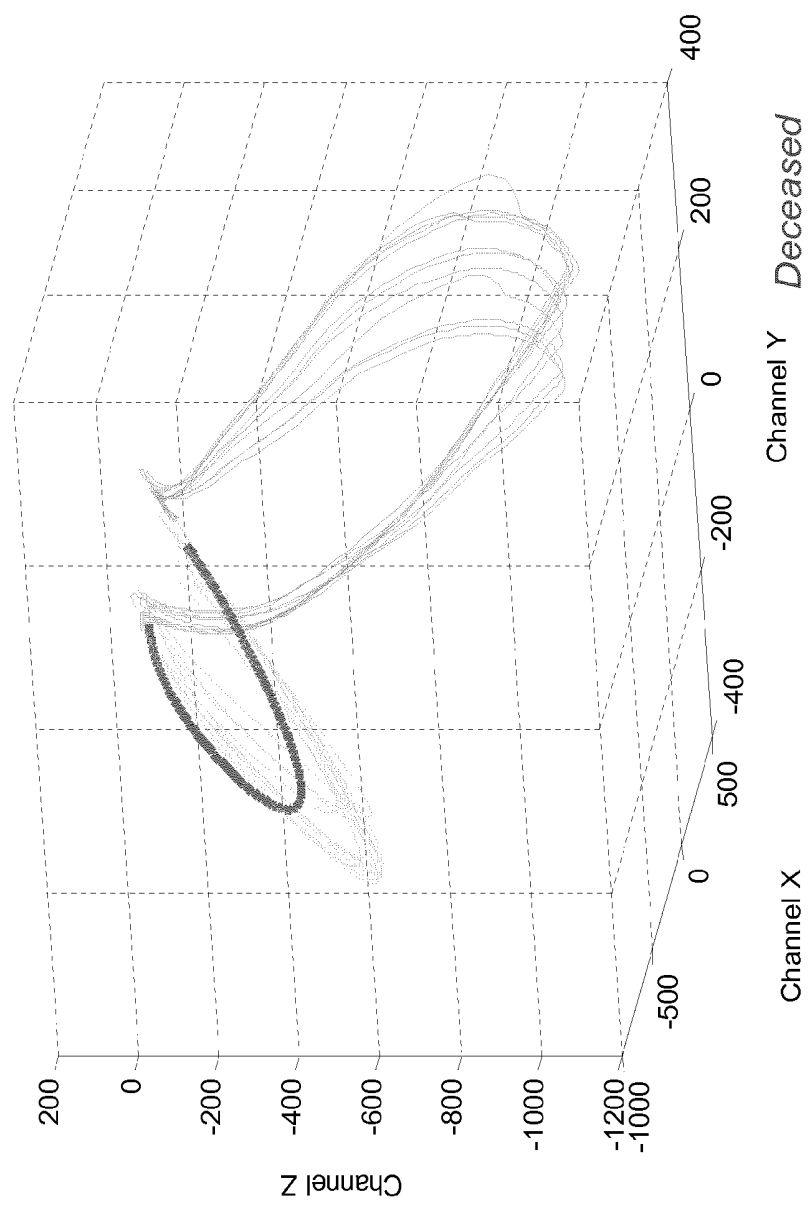


Fig. 19

Variable	univariat			multivariat		
	HR	χ^2	p	HR	χ^2	p
PEST < 1	2.86 (1.39 – 5.90)	8.1	0.004	2.98 (1.44 – 6.15)	8.7	0.003
LVEF < 35 %	2.23 (1.00 – 4.98)	3.8	0.050	1.79 (0.78 – 4.11)	1.9	0.170
VPC ≥ 10 per h	2.45 (1.18 – 5.12)	5.7	0.017	1.84 (0.86 – 3.93)	2.5	0.115
GRACE score ≥ 120	3.13 (1.44 – 6.79)	8.3	0.004	2.72 (1.22 – 6.06)	6.0	0.014

Fig. 20

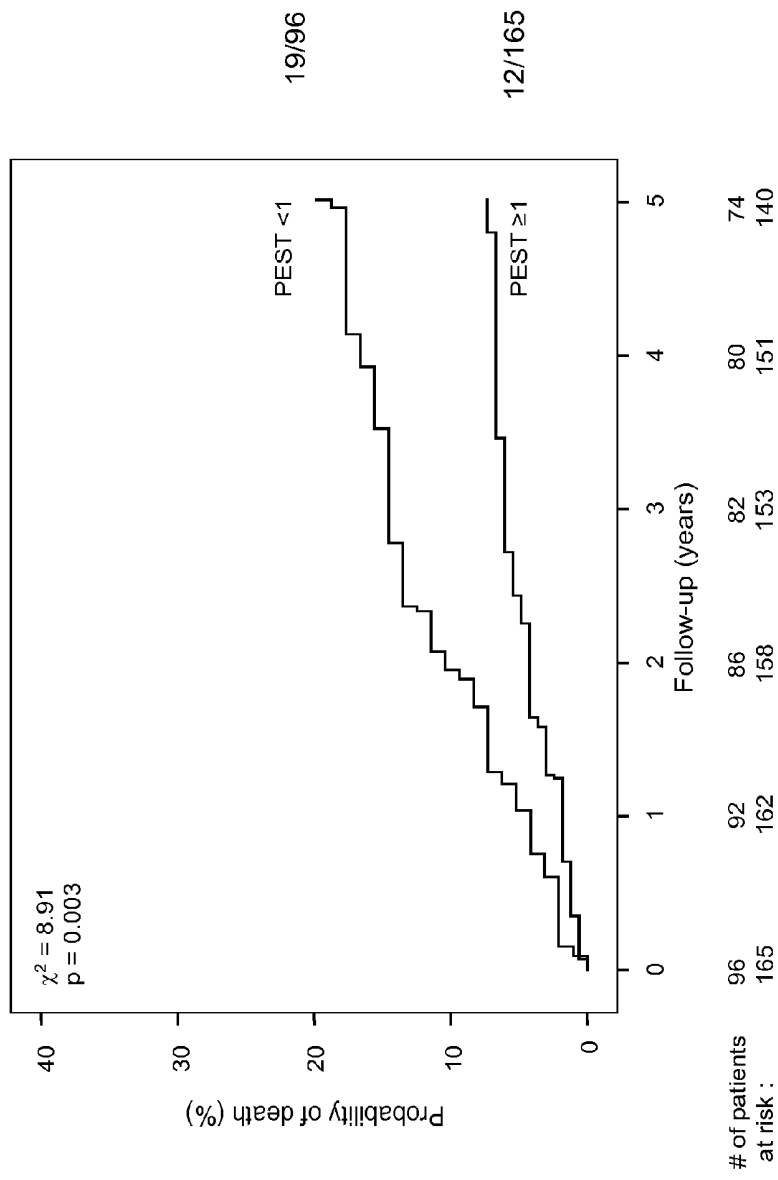


Fig. 21

DEVICE AND METHOD FOR ASSESSING MORTALITY RISK OF A CARDIAC PATIENT

[0001] The invention relates to a device and method for assessing a mortality risk of a cardiac patient based on at least one vital sign or biosignal of said patient.

[0002] Prognostic scores for assessing a mortality risk of a cardiac patient such as LVEF or the GRACE score according to Eagle et al. (Eagle K A, Lim M J, Dabbous O H, et al. "A validated prediction model for all forms of acute coronary syndrome: estimating the risk of 6-month postdischarge death in an international registry", J Am Med Assoc 2004; 291: 2727-33) are well known in the prior art. The elements of the GRACE score include patient-related information such as the age, history of past heart failure, history of myocardial infarction, serum creatinine at admission, cardiac biomarkers status at admission, SBP at admission, pulse at admission, ST deviation at admission, and in-hospital percutaneous coronary intervention. However, mortality risk assessment of cardiac patients such as myocardial infarction patients according to the GRACE score or the LVEF leaves room for improvement regarding the quality of the risk assessment.

[0003] For risk assessment in various cardiac conditions, an improved patient selection for ICD implantation, for cardiac resynchronization therapy, and a contribution to the optimization of heart failure therapy, it is desirable to improve the precision of mortality risk assessment of a cardiac patient.

[0004] The object of the invention is, therefore, to provide a device and method for assessing mortality risk of a cardiac patient with improved precision (at the cost of only minor additional effort) as compared to conventional mortality risk assessment concepts for cardiac patients, in particular for myocardial infarction patients.

[0005] To solve the above object, the invention provides, according to a first inventive aspect, a device for assessing a mortality risk of a cardiac patient based on at least one vital sign or biosignal of said patient, said device comprising:

[0006] A data provision unit being configured to provide at least one data function of at least one vital sign or biosignal of said patient.

[0007] A data processing unit being configured to process data of said at least one data function for assessing a mortality risk of said patient by performing the following actions:

[0008] Selecting at least one data sequence from said at least one data function according to a predetermined routine.

[0009] Computing a specific behavior of at least one parameter of said at least one data function based on said at least one selected data sequence.

[0010] Assessing a mortality risk of said patient based on said computed behavior.

[0011] The term "specific behaviour" is meant to comprise any information which can be taken from any parameter of said at least one data function in relation to other parameters of said at least one data function. It is preferably a quotient indicating a physiological response of said patient to a specific cardiac activity such as on VPL.

[0012] The invention is substantially based on the seminal finding that a specific physiological behavior of a cardiac patient may be used for assessing a mortality risk in (post-) myocardial infarction (MI) patients. More specifically, it has been found that a post-extrasystolic potentiation (PESP) and/or a post-extrasystolic T-wave change (PEST), in particular when following a premature ventricular contraction (or ven-

tricular premature complex (VPC) or ventricular extrasystole (VES)), reflects a strong and independent mortality risk predictor in (post-) myocardial infarction patients.

[0013] PESP is the pulse wave augmentation after a VPC. It relates to cellular calcium homeostasis and is pronounced in heart failure patients, as will be explained further down. This ability of PESP to predict mortality in myocardial infarction (MI) survivors has been successfully tested in studies.

[0014] The physiological basis of PESP has been investigated previously, and various concepts have been developed. It is assumed that the observed PESP pattern consists of a myocardial and a vascular component. The myocardial component is based on myocyte calcium handling: The premature beat leads to a reduced amount of calcium released from the sarcoplasmic reticulum. The resulting smaller calcium transient leads to increased systolic calcium influx through L-type calcium channels and decreased diastolic calcium extrusion through the sodium-calcium exchanger. More calcium is accumulated in sarcoplasmic reticulum during the post-extrasystolic pause and is available to be released during the next contraction. Accordingly, contractile force of the post-extrasystolic beat is elevated. The observed blood pressure pattern is further influenced by the vascular compliance and the decline of the diastolic blood pressure during the postextrasystolic pause.

[0015] PESP in Heart Failure

[0016] PESP in heart failure patients observed in clinical studies reflects a strong risk predictor in post-infarction patients. The following hypothesis, based on both altered myocardial and vascular alterations, might be proposed explaining the presence of PESP in heart failure: In the failing myocardium, the capacity of the sarcoplasmic reticulum to accumulate calcium is reduced due to reduced sarcoplasmic reticulum calcium uptake, increased leak through sarcoplasmic reticulum calcium release channels (ryanodine receptors) and increased expression of the sodium-calcium exchanger. As a consequence, while in the non-failing myocardium, 30% of cycling calcium originates from calcium influx through L-type calcium channels and efflux through the sodium-calcium exchanger, this fraction increases up to 50% in heart failure with a reduction in recirculation fraction. The post-extrasystolic pause allows for a better calcium accumulation in the sarcoplasmic reticulum from higher diastolic calcium levels. In addition, reverse mode sodium-calcium exchange may contribute to sarcoplasmic reticulum calcium loading in failing myocardium.

[0017] The vascular component may result from increased peripheral resistance with a smaller decrease in diastolic aortic pressure during the post-extrasystolic pause which may allow for higher systolic pressure in the subsequent beat of augmented contraction. The proposed myocardial mechanism for PESP may directly explain higher mortality risk. Increased expression of the sodium-calcium exchanger may create either calcium overload in the reversed mode or net inward current in the forward mode. While calcium influx in the reversed mode would cause early afterdepolarizations, forward mode calcium exchange would induce delayed afterdepolarizations. Both early and delayed afterdepolarizations increase the risk of arrhythmias.

[0018] PESP and the Prognostic Role of Ventricular Ectopic Beats

[0019] The findings from clinical studies also advance the understanding of the predictive value of ventricular ectopic frequency in post-MI patients. Frequent VPCs have so far

been perceived as arrhythmia triggers, independent of pro-arrhythmic substrate and modulators, such as impaired cardiac autonomic status. This concept is challenged by the finding that frequent VPCs leading to PESP signify very different prognosis from similarly frequent VPCs without PESP. If, as already described, PESP reflects reduction of trans-sarcoplasmic reticulum calcium currents at the expense of increased trans-plasmamembrane fluxes, these changes might lead to instabilities facilitating the development of ventricular tachyarrhythmias. Thus, patients with PESP and frequent VPCs might be not only at risk of death due to advanced heart failure, but also at increased risk of sudden cardiac death due to sustained ventricular arrhythmias both triggered by VPCs and also facilitated by the calcium handling abnormalities.

[0020] To make the calculation less noise sensitive, it is proposed to relate the first post-VPC pulse wave amplitude to the mean of the subsequent nine pulse wave amplitudes rather than to the pre-VPC pulse wave amplitude. However, when using the ratio between the post- and pre-VPC pulse wave amplitudes, the results are practically the same although reaching slightly lesser statistical significances.

[0021] Potential Clinical Applications

[0022] Assessment of PESP is quantified by analysis of the blood pressure response to VPCs and requires no particular expenditure; PESP can be observed either after spontaneous VPCs or after instrumentally induced VPCs. In this way, programmed ventricular stimulation might also evaluate abnormalities of myocardial calcium cycling. A scale of potential clinical applications may be envisioned, including risk assessment in various cardiac conditions, an improved patient selection for cardiac resynchronization therapy, and a contribution to the optimization of heart failure therapy.

[0023] Preferably, said data provision unit is configured to perform at least one of the following actions:

[0024] Recording said at least one vital sign or biosignal, preferably in digital form.

[0025] Recording said at least one vital sign or biosignal continuously for a predetermined period of time, preferably for at least 30 minutes.

[0026] Recording said at least one vital sign or biosignal with non-invasive recording means, preferably using at least one of the following devices:

[0027] A finger photoplethysmographic device, preferably for continuously recording a blood pressure of said patient.

[0028] An electrocardiogram recorder, preferably a high resolution electrocardiogram recorder with at least 1.6 kHz in orthogonal XYZ leads, preferably for continuously recording an electrocardiogram of said patient.

[0029] Recording said at least one vital sign or biosignal in a resting position of said patient, preferably in a supine resting position of said patient.

[0030] Recording at least two different vital signs or biosignals simultaneously, preferably an electrocardiogram and blood pressure, preferably continuous arterial blood pressure.

[0031] Storing the recorded data in data storage means, preferably in digital form.

[0032] Providing, as at least one data function, at least one recording of at least one of the following vital signs of said patient:

[0033] Body temperature

[0034] Pulse rate or heart rate

[0035] Blood pressure, preferably arterial blood pressure

[0036] Respiratory rate

[0037] Providing, as at least one data function, at least one recording of at least one of the following biosignals of said patient:

[0038] Electroencephalogram (EEG)

[0039] Magnetoencephalogram (MEG)

[0040] Galvanic skin response (GSR)

[0041] Electrocardiogram (ECG)

[0042] Mechanocardiogram (MCG)

[0043] Electromyogram (EMG)

[0044] Providing said at least one data function as a function of said at least one vital sign or biosignal of said patient over the time.

[0045] Enabling verification and/or review and/or manual correction of said at least one data function, preferably including the elimination of artefacts, more preferably enabling review and/or manual correction of QRS classifications so as to differentiate sinus and ventricular premature complexes (VPC).

[0046] Providing at least one data function as a function of blood pressure, preferably continuous arterial blood pressure, over the time, preferably in the units mmHg over ms.

[0047] Providing at least two different data functions from simultaneous recordings of at least two different vital signs or biosignals, preferably simultaneous recordings of electrocardiogram and blood pressure.

[0048] Storing said at least one data function in data storage means, preferably in digital form.

[0049] Loading said at least one data function from data storage means, preferably in digital form.

[0050] The occurrence of a specific cardiac activity and a specific physiological response may be calculated on the basis of various data functions of at least one vital sign or biosignal of said patient, such as an ECG and/or systolic arterial blood pressure. An ECG is the preferred way to measure and diagnose abnormal rhythms of the heart. The invention is, however, not limited to mortality risk assessment on the basis of ECG and/or blood pressure, since surrogates allowing VPC count and PESP and/or PEST assessment may also be derived from other vital signs and biosignals.

[0051] According to the invention, mortality risk assessment for a cardiac patient can be automated and performed within e.g. only 30 minutes using only standard clinical equipment. Moreover, mortality risk assessment according to the invention can be performed remotely from the cardiac patient using only the at least one data function of at least one previously recorded vital sign or biosignal of said patient as an input. The inventive concept significantly improves the quality of risk assessment for said cardiac patient as compared to the conventional mortality risk assessment concepts. The output of the mortality risk assessment according to the invention may be a mortality risk predictor for said cardiac patient within five years after myocardial infarction, such as the number of counted VPCs or variables representing PESP or PEST.

[0052] Simultaneous recordings of ECG and systolic arterial blood pressure are generally preferred data functions. It is desirable that the data provision unit provides access to the raw recording signals and eliminates artefacts where needed.

It is further desirable that the ECG can be reviewed and manually corrected as appropriate in case of heart beat annotations.

[0053] The information on blood pressure in response to a premature ventricular contraction may be derived from a noninvasive continuous recording of arterial blood pressure over the time and can also be visualized e.g. by providing a graph of said data function. Preferably, the continuous arterial blood pressure is simultaneously recorded with an ECG, so that the timing of a premature ventricular contraction calculated from a data function of an ECG can easily be transferred to the data function of blood pressure for the subsequent calculation of the blood pressure variability in response to the premature ventricular contraction. A routine may be computer-implemented and executed by the data processing unit in order to automate the selection of relevant data sequences from the data functions and for computing the specific behavior of the at least one data function parameter based on the selected data sequences according to known mathematic considerations.

[0054] Further preferably, said data processing unit is configured to select said at least one data sequence from said at least one data function by performing at least one of the following actions:

[0055] Identifying specific patterns within said at least one data function, preferably QRS-complexes of an electrocardiogram.

[0056] Identifying data points of said at least one data function correlating with at least one of the following:

[0057] Cardiac activities, preferably cardiac activities of the same kind

[0058] R-peaks of the QRS complexes of an electrocardiogram

[0059] Ventricular systoles

[0060] Measuring the intervals between each subsequent two data points, preferably between successive two R-peaks of QRS complexes of an electrocardiogram.

[0061] Calculating a quotient between an interval of interest, preferably an interval terminated by or initiated by a ventricular extrasystole, and a mean interval, wherein the mean interval is preferably calculated from at least one of the following:

[0062] A number of consecutive intervals preceding and/or succeeding the interval of interest, wherein the number of consecutive intervals is preferably two, three, four, five, six, seven, eight, nine or ten

[0063] A number of consecutive intervals preceding and/or succeeding a ventricular extrasystole, wherein the number of consecutive intervals is preferably two, three, four, five, six, seven, eight, nine or ten

[0064] Selecting a data sequence for further processing in at least one of the following cases:

[0065] The data sequence contains at least one data point correlating with a ventricular extrasystole

[0066] The data sequence contains at least a number of consecutive data points correlating with regular ventricular systoles preceding and/or succeeding a ventricular extrasystole, preferably without interruption by any further ventricular extrasystole, wherein the number of consecutive data points correlating with regular ventricular systoles preceding and/or succeeding a ventricular extrasystole is preferably two, three, four, five, six, seven, eight, nine or ten

[0067] The quotient calculated for at least one interval fulfills at least one mathematical criterion

[0068] The quotients calculated for at least two subsequent intervals fulfill different mathematical criteria

[0069] The quotients calculated for at least two subsequent intervals are out of a predetermined range of values

[0070] The quotient calculated for a first interval of said data sequence is equal to or less than a first value, preferably 0.99, 0.97, 0.9 or 0.8 and/or the quotient calculated for a second interval subsequent to the first interval is equal to or greater than a second value, preferably 1.01, 1.03, 1.3 or 1.4

[0071] The quotient calculated for an interval of said data sequence is equal to or less than a first value, preferably 0.99, 0.97, 0.9 or 0.8 and/or the quotient calculated for a number of subsequent consecutive intervals is equal to or greater than said first value, wherein the number of subsequent consecutive intervals is preferably two, three, four, five, six, seven, eight, nine or ten.

[0072] Still further preferably, said data processing unit is configured to compute a specific blood pressure response to a ventricular extrasystole based on said at least one data sequence, preferably by performing at least one of the following actions:

[0073] Identifying the systolic blood pressure corresponding to at least one cardiac contraction based on said at least one data sequence.

[0074] Identifying the systolic blood pressure for each one of a number of consecutive cardiac contractions preceding and/or succeeding said ventricular extrasystole, wherein the number of consecutive cardiac contractions preceding and/or succeeding said ventricular extrasystole is preferably two, three, four, five, six, seven, eight, nine or ten.

[0075] Calculating the mean systolic blood pressure for a number of consecutive cardiac contractions preceding and/or succeeding said ventricular extrasystole, wherein the number of consecutive cardiac contractions preceding and/or succeeding said ventricular extrasystole is preferably two, three, four, five, six, seven, eight, nine or ten.

[0076] Calculating a blood pressure quotient between a systolic blood pressure corresponding to one cardiac contraction and a mean systolic blood pressure for other cardiac contractions.

[0077] Calculating a blood pressure quotient between the systolic blood pressure corresponding to the first post-extrasystolic cardiac contraction and a mean systolic blood pressure, preferably corresponding to the second to ninth or second to tenth post-extrasystolic cardiac contractions.

[0078] Storing the calculated blood pressure quotient or the mean of a plurality of calculated blood pressure quotients under the variable PESPI.

[0079] Storing the number of calculated blood pressure quotients per time.

[0080] Also preferably, said data processing unit is configured to compute a blood pressure inclination during a characteristic sequence of heart rate intervals based on said at least one data sequence, preferably by performing at least one of the following actions:

- [0081] Identifying the systolic blood pressure corresponding to two consecutive intervals, wherein preferably the quotient between the first one of the two consecutive intervals and the mean of a number of consecutive intervals preceding and/or succeeding said first interval is equal to or less than a first value, preferably 0.99, 0.97, 0.9 or 0.8, and/or the quotient between the second one of the two consecutive intervals and the mean of a number of consecutive intervals preceding and/or succeeding said second interval is equal to or greater than a second value, preferably 1.01, 1.03, 1.3 or 1.4, wherein the number of consecutive intervals preceding and/or succeeding said interval of interest is preferably two, three, four, five, six, seven, eight, nine or ten.
- [0082] Calculating, as a blood pressure inclination, the inclination of a linear function defined by a first data point indicating a systolic blood pressure corresponding to the first interval and a second data point indicating a systolic blood pressure corresponding to the second interval.
- [0083] Storing the calculated blood pressure inclination or the mean of a plurality of calculated blood pressure inclinations under the variable PESp2.
- [0084] Storing the number of calculated blood pressure inclinations, preferably per time.
- [0085] Still further preferably, said data processing unit is configured to compute a T-wave response to a ventricular extrasystole based on said data sequence, preferably by performing at least one of the following actions:
- [0086] Calculating the mean of T-wave amplitudes corresponding to a number of regular ventricular systoles preceding and/or succeeding the first post-extrasystolic T-wave amplitude, preferably without interruption by any further ventricular extrasystole, wherein the number of consecutive ventricular systoles preceding and/or succeeding said first post-extrasystolic T-wave amplitude is preferably two, three, four, five, six, seven, eight, nine or ten.
- [0087] Calculating the T-wave amplitude quotient between the first post-extrasystolic T-wave amplitude and the mean of T-wave amplitudes preceding and/or succeeding said first post-extrasystolic T-wave amplitude.
- [0088] Storing the calculated T-wave amplitude quotient or the mean of a plurality of calculated T-wave amplitude quotients under the variable PEST.
- [0089] Storing the number of calculated T-wave amplitudes, preferably per time.
- [0090] According to a preferred embodiment of the invention, said data processing unit is configured to assess a mortality risk for said patient by providing at least one of the following functions:
- [0091] Allocating said patient to a low risk group under the following conditions:
- [0092] The number of data sequences selected per 30 minutes recording of said at least one data function is zero; or
- [0093] The number of data sequences selected per 30 minutes recording of said at least one data function is less than five; and
- [0094] The number of blood pressure quotients calculated to be greater than 1 per 30 minutes recording of said at least one data function is zero; or
- [0095] The number of blood pressure inclinations calculated to be greater than 4.5 mmHg/s per 30 minutes recording of said at least one data function is zero; or
- [0096] The number of T-wave amplitude quotients calculated to be less than 1 per 30 minutes recording of said at least one data function is zero.
- [0097] Allocating said patient to a medium risk group under the following conditions:
- [0098] The number of data sequences selected per 30 minutes recording of said at least one data function is greater than five; and
- [0099] The number of blood pressure quotients calculated to be greater than 1 per 30 minutes recording of said at least one data function is zero; or
- [0100] The number of blood pressure inclinations calculated to be greater than 4.5 mmHg/s per 30 minutes recording of said at least one data function is zero; or
- [0101] The number of T-wave amplitude quotients calculated to be less than 1 per 30 minutes recording of said at least one data function is zero.
- [0102] Allocating said patient to a high risk group under at least one of the following conditions:
- [0103] The number of data sequences selected per 30 minutes recording of said at least one data function is greater than five
- [0104] The number of T-wave amplitude quotients calculated to be less than 1 per 30 minutes recording of said at least one data function is greater than zero
- [0105] PESp1 is greater than one
- [0106] PESp2 greater than 4.5 mmHg/s
- [0107] PEST is less than one
- [0108] Assessing mortality risk for said patient by calculating a prognostic score based on at least one of the following:
- PESp1
- [0109] PESp2
- [0110] PEST
- [0111] VPC
- [0112] Heart Rate Turbulence, in particular $HRT-TS \leq 2.5$ ms/RRI and/or $HRT-TO \geq 0\%$
- [0113] According to another preferred embodiment of the invention, said device comprises display means for displaying the result of mortality risk assessment.
- [0114] The data provision unit and/or the data processing unit may be configured on an implantable device which is sized to be implanted into a patient's body.
- [0115] Another preferred aspect of the invention relates to a method for assessing a mortality risk of a cardiac patient based on at least one vital sign or biosignal of said patient, preferably using the device according to at least one of the preceding claims, said method comprising the following steps:
- [0116] Providing at least one data function of at least one vital sign or biosignal of said patient.
- [0117] Processing data of said at least one data function for assessing a mortality risk of said patient by performing the following actions:
- [0118] Selecting at least one data sequence from said at least one data function according to a predetermined routine.
- [0119] Computing a specific behavior of at least one parameter of said at least one data function based on said at least one selected data sequence.

[0120] Assessing a mortality risk of said patient based on said computed behavior.

[0121] Still another preferred aspect of the invention relates to a computer-readable medium containing a program, which, when loaded, performs a method for assessing a mortality risk of a cardiac patient based on at least one vital sign or biosignal of said patient comprising the following steps:

[0122] Selecting at least one data sequence from at least one data function of at least one vital sign or biosignal of said patient according to a predetermined routine.

[0123] Computing a specific behavior of at least one parameter of said at least one data function based on said at least one selected data sequence.

[0124] Assessing a mortality risk of said patient based on said computed behavior.

[0125] The method preferably includes all features attributed to and provided by the device according to any one of the preceding embodiments.

[0126] Further preferred embodiments result from combinations of features disclosed in the subclaims with features disclosed in the specification and/or the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0127] FIG. 1 shows exemplary plots of simultaneously recorded electrocardiogram and blood pressure curves of a cardiac patient having a low mortality risk assessment according to the teaching of the present invention, said plots showing data sequences including a ventricular extrasystole.

[0128] FIG. 2 shows superimposed curves of data sequences indicating a systolic blood pressure response to a ventricular extrasystole of a plurality of cardiac patients having a low mortality risk assessment according to the teaching of the present invention, said data sequences including data points correlating with two cardiac contractions preceding said ventricular extrasystole and ten cardiac contractions succeeding said ventricular extrasystole, wherein the systolic blood pressure of the first post-extrasystolic cardiac contraction is lower than the mean systolic blood pressure of eight cardiac contractions subsequent to the first post-extrasystolic cardiac contraction.

[0129] FIG. 3 shows exemplary plots of simultaneously recorded electrocardiogram and blood pressure curves of a cardiac patient having a high mortality risk assessment according to the teaching of the present invention, said plots showing data sequences including a ventricular extrasystole.

[0130] FIG. 4 explains superimposed curves of data sequences indicating a systolic blood pressure response to a ventricular extrasystole of a plurality of cardiac patients having a high mortality risk assessment according to the teaching of the present invention, said data sequences including data points correlating with two cardiac contractions preceding said ventricular extrasystole and ten cardiac contractions succeeding said ventricular extrasystole, wherein the systolic blood pressure of the first post-extrasystolic cardiac contraction is greater than the mean systolic blood pressure of eight cardiac contractions subsequent to the first post-extrasystolic cardiac contraction.

[0131] FIG. 5 shows, on the basis of the exemplary plots according to FIG. 1, the routine according to the first embodiment of the invention for calculating a quotient between the systolic blood pressure of the first post-extrasystolic cardiac

contraction and the mean systolic blood pressure of eight cardiac contractions subsequent to the first post-extrasystolic cardiac contraction.

[0132] FIG. 6 depicts the study population, wherein 680 out of 941 persons of the ART cohort did not show ventricular extrasystoles (VES) and PESP was not calculable for 41 persons, so that the PESP cohort counts 220 persons.

[0133] FIG. 7 shows a table containing the clinical data of the PESP cohort.

[0134] FIG. 8 shows a table containing data calculated according to the Cox regression analysis and indicating the significance of PESP as a mortality risk predictor in relation to other known mortality risk predictors such as LVEF (Gold Standard), ventricular premature contractions (VPC) and the GRACE score.

[0135] FIG. 9 shows a survival curve estimated by the Kaplan-Meier method and indicating the mortality risk i.e. probability of death (%) over time following a myocardial infarction for myocardial infarction patients having a high mortality risk assessment according to the teaching of the first embodiment of the present invention ($PESP > 1$) and for myocardial infarction patients having a low mortality risk assessment according to the teaching of the present invention ($PESP < 1$).

[0136] FIG. 10 shows exemplary plots of simultaneous electrocardiogram (a), heart rate interval (b) and blood pressure curves (c) of a cardiac patient having a high mortality risk assessment according to the teaching of the second embodiment of the present invention, said plots showing data sequences during atrial fibrillation, wherein the data sequence contains two consecutive heart rate intervals for which the quotient between the first heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is less than 0.8 and the quotient between the second heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is greater than 1.4.

[0137] FIG. 11 depicts a coordinate system with data points of systolic blood pressure (mmHg) over heart beat interval which are taken from data sequences of a cardiac patient having a high mortality risk assessment according to the teaching of the present invention, said data sequences containing two consecutive heart rate intervals for which the quotient between the first heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is less than 0.8 and the quotient between the second heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is greater than 1.4.

[0138] FIG. 12 depicts the coordinate system of FIG. 11 with lines connecting respective two data points correlating with the two consecutive heart rate intervals for which the quotient between the first heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is less than 0.8 and the quotient between the second heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is greater than 1.4.

[0139] FIG. 13 depicts a coordinate system with data points of systolic blood pressure (mmHg) over heart beat interval which are taken from data sequences of cardiac patients having a low mortality risk assessment according to the teaching of the second embodiment of the present invention, said data sequences containing two consecutive heart rate intervals for which the quotient between the first heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is less than 0.8 and the quotient between the second heart

rate interval to the mean of eight preceding and eight succeeding heart rate intervals is greater than 1.4.

[0140] FIG. 14 depicts the coordinate system of FIG. 11 with lines connecting respective two data points correlating with the two consecutive heart rate intervals for which the quotient between the first heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is less than 0.8 and the quotient between the second heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is greater than 1.4.

[0141] FIG. 15 shows a survival curve estimated by the Kaplan-Meier method and indicating the mortality risk i.e. probability of death (%) over time following a myocardial infarction for myocardial infarction patients having a high mortality risk assessment according to the teaching of the second embodiment of the present invention (15/10) and for myocardial infarction patients having a low mortality risk assessment according to the teaching of the present invention (17/3).

[0142] FIG. 16 depicts an electrocardiogram recording over the time of a cardiac patient having a low mortality risk assessment according to the teaching of the third embodiment of the present invention, wherein the first post-extrasystolic T-wave amplitude is greater than the mean of three T-wave amplitudes preceding the ventricular extrasystole and three T-wave amplitudes succeeding the ventricular extrasystole.

[0143] FIG. 17 depicts the data of the electrocardiogram recording of FIG. 16 in a three-dimensional coordinate system.

[0144] FIG. 18 depicts an electrocardiogram recording over the time of a cardiac patient having a high mortality risk assessment according to the teaching of the third embodiment of the present invention, wherein the first post-extrasystolic T-wave amplitude is lower than the mean of three T-wave amplitudes preceding the ventricular extrasystole and three T-wave amplitudes succeeding the ventricular extrasystole.

[0145] FIG. 19 depicts the data of the electrocardiogram recording of FIG. 18 in a three-dimensional coordinate system.

[0146] FIG. 20 shows a table containing data calculated according to the Cox regression analysis and indicating the significance of PEST as a mortality risk predictor in relation to other known mortality risk predictors such as LVEF (Gold Standard), ventricular premature contractions (VPC) and the GRACE score.

[0147] FIG. 21 contains a diagram indicating the mortality risk i.e. probability of death (%) over the years following a myocardial infarction for myocardial infarction patients having a high mortality risk assessment according to the teaching of the third embodiment of the present invention ($PEST < 1$) and for myocardial infarction patients having a low mortality risk assessment according to the teaching of the third embodiment of the present invention ($PEST \geq 1$).

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS:

[0148] Data Provision Unit

[0149] The data provision unit is configured to provide simultaneous 30-minute recordings of high resolution ECG of the patient within two weeks after myocardial infarction, and non-invasive arterial blood pressure monitoring of the patient using a finger photoplethysmographic device. Recordings should be made in supine resting position after routine morning medications and the raw signals should be

verified including the elimination of artefacts where needed, wherein QRS classifications should be carefully reviewed and manually corrected as appropriate to differentiate sinus and ventricular premature complexes (VPC) or ventricular extrasystoles (VES). The data may be recorded and stored in digital form.

[0150] Data Processing Unit

[0151] The data processing unit is embodied as analysis software in the preferred embodiments of the invention.

First Embodiment (FIGS. 1 to 9)—Post-Extrasystolic Potentiation (PESP)

[0152] According to the first embodiment, PESP will be used as the mortality risk predictor. In the first embodiment, simultaneous recordings of electrocardiogram (ECG) and blood pressure of a cardiac patient provided by the data provision unit will be analyzed by the data processing unit by performing the following steps:

[0153] 1) Recognition of QRS-complexes from ECG recordings, including identification of ventricular extrasystoles (VES) and determination of heart rate intervals (RRI) (cf. FIGS. 1 and 3).

[0154] 2) Selection of data sequences including VES, the coupling intervals of which (i.e. the intervals terminated by the VES) being shortened by at least x%, preferably 20%, and the post-extrasystolic pauses or breaks (i.e. the intervals initiated by the VES) being at least y%, preferably 40%, longer than the mean of z intervals, preferably five intervals, prior to the ventricular extrasystole (VES) (cf. FIGS. 1 and 3).

[0155] 3) Detection of the systolic arterial blood pressure of the first ten regular heart beats subsequent to the ventricular extrasystole (VES) (cf. FIGS. 2 and 4).

[0156] 4) Calculation of a PESP1 quotient between the systolic blood pressure of the first post-extrasystolic heart beat and the mean of the systolic blood pressure of the subsequent eight ($PESP1 = P_{S1} / \bar{x}P_{S2-S9}$) or nine ($PESP1 = P_{S1} / \bar{x}P_{S2-S10}$) heart beats (cf. FIG. 5).

[0157] 5) assessing mortality risks of said patient based on the computed PESP1 quotient, wherein PESP quotients of >1 are found to be pathological.

[0158] A technical filter could possibly be included, e.g., by 3% in order to minimize the effect of basic noise.

[0159] Alternatively to no. 2, a data sequence containing a ventricular extrasystole (VES), i.e. a VPC, may be selected for calculation of the PESP1 quotient if the VES coupling interval is $\leq 20\%$ premature compared to the mean of preceding five intervals, and if followed by ≤ 10 consecutive sinus beats. Post-ectopic sequences interrupted by artefacts or further ectopic beats should not be used.

[0160] The data processing unit is further configured to store the number of detected VPC and the number of PESP1 quotients greater than 1, and to average the calculated PESP1 quotients if the number of calculated PESP1 quotients within the 30 minute recording is greater than one. VPC count is defined as the number of VPCs within the 30 minute recording (irrespective of whether the VPCs qualified for PESP assessment).

[0161] The mortality risk for said cardiac patient can be assessed on the basis of the number of detected VPCs and PESP1 quotient.

[0162] A study with a study cohort according to FIGS. 6 and 7 aimed at validating the predictive value of PESP in

conjunction with three standard risk predictors, namely VPC count, GRACE score and LVEF.

[0163] VPC is defined as the number of VPCs within the 30 minute recording (irrespective of whether the VPCs qualified for PESP assessment).

[0164] GRACE score is calculated according to Eagle et al. The elements of the GRACE score included age, history of past heart failure, history of myocardial infarction, serum creatinine at admission, cardiac biomarkers status at admission, SBP at admission, pulse at admission, ST deviation at admission, and in-hospital percutaneous coronary intervention.

[0165] LVEF is assessed by left ventricular angiography or biplane echocardiography (Sonos 5500, Hewlett Packard, Palo Alto, Calif., USA).

[0166] GRACE score and LVEF were dichotomized at pre-defined cutoff values of 120 and 35%, respectively. VPC count was dichotomized at its median of per 30 minutes.

[0167] A Cox proportional hazards model was used with all variables entered simultaneously to assess the independence and prognostic value of mortality predictors. Survival curves were estimated by the Kaplan-Meier method and compared by the log-rank test (FIG. 9). The correlation between the four prognostic markers was analysed by the chi-square test (FIG. 8). Differences were considered statistically significant if $p < 0.05$ (IBM SPSS Statistics 20.0, SPSS Inc.).

Second Embodiment (FIGS. 10 to 15)—PESP in Case of Atrial Fibrillation

[0168] Same as the first embodiment, the second embodiment of the invention uses PESP as mortality risk predictor. However, the second embodiment applies to cardiac patient suffering from atrial fibrillation which hinders the detection of ventricular extrasystole (VES) from the electrocardiogram (ECG). Again, simultaneous recordings of electrocardiogram (ECG) and blood pressure of a cardiac patient provided by the data provision unit will be analyzed by the data processing unit, wherein the data processing unit performs the following steps:

[0169] 1) Recognition of QRS-complexes, determination of heart rate intervals (RRI).

[0170] 2) Calculation of a quotient between each RRI and the mean of 8 preceding and succeeding RRIs ($RRI_i / \bar{x}_i RRI_{i-8 \dots i+8}$).

[0171] 3) Identification of consecutive two RRIs, which meet the following criteria: $RRI_i < 80\% \bar{x} RRI_{i-8 \dots i+8}$; $RRI_{i+1} > 140\% \bar{x} RRI_{i+1-8 \dots i+1+8}$

[0172] 4) Identification of the systolic blood pressure of the heart beat terminating RRI_i and RRI_{i+1}.

[0173] 5) Under the presumption of linear relation between RRI and systolic blood pressure (Psys), calculation of PESP2 as the inclination of the linear function defined by the two data points ($RRI_i | Psys_i$) and ($RRI_{i+1} | Psys_{i+1}$).

[0174] 6) In case of several two consecutive intervals meeting the criteria under 3), averaging the PESP2 values calculated for the separate double interval sequences.

[0175] 7) Assessing a mortality risk based on the calculated PESP2, wherein $PESP2 > 4.5$ mmHg/s counts as pathological.

[0176] As shown in FIGS. 10(a) and (b), the depicted data sequence of the electrocardiogram (ECG) contains two consecutive heart rate intervals, for which the quotient between

the first heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is less than 0.8 and the quotient between the second heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is greater than 1.4.

[0177] FIG. 11 shows a coordinate system of systolic blood pressure (mmHg) over heart beat interval including data points taken e.g. from the data sequences shown in FIGS. 10(b) and (c). These data sequences originate from myocardial infarction patients having a high mortality risk assessment according to the teaching of the second embodiment of the present invention and contain two consecutive heart rate intervals for which the quotient between the first heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is less than 0.8 and the quotient between the second heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is greater than 1.4.

[0178] When connecting two corresponding data points of FIG. 11 with lines, the coordinate system according to FIG. 12 results. PESP2 corresponds to the inclination of a line, or the averaged inclination of a plurality of lines connecting two corresponding data points of two consecutive heart rate intervals for which the quotient between the first heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is less than 0.8 and the quotient between the second heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is greater than 1.4. PESP2 of greater than 4.5 mmHg/s is regarded as pathologic.

[0179] FIGS. 13 and 14 depict coordinate systems similar to FIGS. 11 and 12 but include data points taken from the data sequences which originate from cardiac patients having a low mortality risk assessment according to the teaching of the second embodiment of the present invention. As can be seen in FIG. 14, the lines connecting two corresponding data points of two consecutive heart rate intervals for which the quotient between the first heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is less than 0.8 and the quotient between the second heart rate interval to the mean of eight preceding and eight succeeding heart rate intervals is greater than 1.4, are almost parallel to the abscissa. The PESP2 variable calculated from the data points depicted in FIG. 14 amount to about 0.0 mmHg/s and can be regarded as an indicator of a low mortality risk.

Third Embodiment (FIGS. 15 to 21)—Post-Extrasystolic T-Wave Change (PEST)

[0180] Unlike the first and second embodiment, the third embodiment of the invention uses PEST, i.e. a quotient indicative of Post-Extrasystolic T-wave augmentation as mortality risk predictor. According to the third embodiment, only recordings of electrocardiogram (ECG) of a cardiac patient provided by the data provision unit will be analyzed by the data processing unit by performing the following steps:

[0181] 1) Recognition of QRS-complexes, identification of VES.

[0182] 2) Selection of data sequences including VES, wherein each data sequence comprises three regular QRS-complexes preceding the VES and three QRS-complexes succeeding the VES.

[0183] 3) Quantification of T-wave amplitudes of the selected six heart beats through planimetry ($F^{T-3, -2, -1, +1, +2, +3}$).

[0184] 4) Calculation of PEST as the quotient of the first post-extrasystolic T-wave amplitude (F_T) to the mean of

the remaining five T-wave amplitudes ($\bar{x}F_{T-3,-2,-1,+2,+3}$) of the selected data sequence according to the formula:
 $PEST = F_{T+1} / \bar{x}F_{T-3,-2,-1,+2,+3}$

[0185] 5) Assessing the mortality risk of said patient based on PEST, wherein $PEST < 1$ counts as pathological.

[0186] Again, a Cox proportional hazards model was used with all variables entered simultaneously to assess the independence and prognostic value of mortality predictors. Survival curves were estimated by the Kaplan-Meier method and compared by the log-rank test (FIG. 20). The correlation between the four prognostic markers was analysed by the chi-square test (FIG. 21).

[0187] Clinical post-infarction studies revealed that PESP and PEST calculated according to the embodiments of the present invention are strong and independent predictors of mortality risk of myocardial infarction patient.

[0188] A prognostic score based on PESP, PEST, VPC and Heart Rate Turbulence ($HRT-TS \leq 2.5$ ms/RR1 and/or $HRT-TO \geq 0\%$) provides superior results in mortality risk stratification as compared to conventional mortality predictors such as GRACE and LVEF.

1. Device for assessing a mortality risk of a cardiac patient based on at least one vital sign or biosignal of said patient, said device comprising:

- a. A data provision unit being configured to provide at least one data function of at least one vital sign or biosignal of said patient.
- b. A data processing unit being configured to process data of said at least one data function for assessing a mortality risk of said patient by performing the following actions:
 - i. Selecting at least one data sequence from said at least one data function according to a predetermined routine.
 - ii. Computing a specific behavior of at least one parameter of said at least one data function based on said at least one selected data sequence.
 - iii. Assessing a mortality risk of said patient based on said computed behavior.

2. Device according to claim 1, characterized by said data provision unit being configured to perform at least one of the following actions:

- a. Recording said at least one vital sign or biosignal, preferably in digital form.
- b. Recording said at least one vital sign or biosignal continuously for a predetermined period of time, preferably for at least 30 minutes.
- c. Recording said at least one vital sign or biosignal with non-invasive recording means, preferably using at least one of the following devices:
 - i. A finger photoplethysmographic device, preferably for continuously recording a blood pressure of said patient.
 - ii. An electrocardiogram recorder, preferably a high resolution electrocardiogram recorder with at least 1.6 kHz in orthogonal XYZ leads, preferably for continuously recording an electrocardiogram of said patient.
- d. Recording said at least one vital sign or biosignal in a resting position of said patient, preferably in a supine resting position of said patient.

e. Recording at least two different vital signs or biosignals simultaneously, preferably an electrocardiogram and blood pressure, preferably continuous arterial blood pressure.

f. Storing the recorded data in data storage means, preferably in digital form.

g. Providing, as at least one data function, at least one recording of at least one of the following vital signs of said patient:

- i. Body temperature
- ii. Pulse rate or heart rate
- iii. Blood pressure, preferably arterial blood pressure
- iv. Respiratory rate

h. Providing, as at least one data function, at least one recording of at least one of the following biosignals of said patient:

- i. Electroencephalogram (EEG)
- ii. Magnetoencephalogram (MEG)
- iii. Galvanic skin response (GSR)
- iv. Electrocardiogram (ECG)
- v. Mechanocardiogram (MCG)
- vi. Electromyogram (EMG)

i. Providing said at least one data function as a function of said at least one vital sign or biosignal of said patient over the time.

j. Enabling verification and/or review and/or manual correction of said at least one data function, preferably including the elimination of artefacts, more preferably enabling review and/or manual correction of QRS classifications so as to differentiate sinus and ventricular premature complexes (VPC).

k. Providing at least one data function as a function of blood pressure, preferably continuous arterial blood pressure, over the time, preferably in the units mmHg over ms.

l. Providing at least two different data functions from simultaneous recordings of at least two different vital signs or biosignals, preferably simultaneous recordings of electrocardiogram and blood pressure.

m. Storing said at least one data function in data storage means, preferably in digital form.

n. Loading said at least one data function from data storage means, preferably in digital form.

3. Device according to claim 1, characterized by said data processing unit being configured to select said at least one data sequence from said at least one data function by performing at least one of the following actions:

a. Identifying periodic patterns within said at least one data function, preferably QRS-complexes of an electrocardiogram.

b. Identifying data points of said at least one data function correlating with at least one of the following:

- i. Cardiac activities, preferably cardiac activities of the same kind
- ii. R-peaks of the QRS complexes of an electrocardiogram
- iii. Ventricular systoles

c. Measuring the intervals between each subsequent two data points, preferably between successive two R-peaks of QRS complexes of an electrocardiogram.

d. Calculating a quotient between an interval of interest, preferably an interval terminated by or initiated by a

ventricular extrasystole, and a mean interval, wherein the mean interval is preferably calculated from at least one of the following:

- i. A number of consecutive intervals preceding and/or succeeding the interval of interest, wherein the number of consecutive intervals is preferably two, three, four, five, six, seven, eight, nine or ten
 - ii. A number of consecutive intervals preceding and/or succeeding a ventricular extrasystole, wherein the number of consecutive intervals is preferably two, three, four, five, six, seven, eight, nine or ten
- e. Selecting a data sequence for further processing in at least one of the following cases:
- i. The data sequence contains at least one data point correlating with a ventricular extrasystole
 - ii. The data sequence contains at least a number of consecutive data points correlating with regular ventricular systoles preceding and/or succeeding a ventricular extrasystole, preferably without interruption by any further ventricular extrasystole, wherein the number of consecutive data points correlating with regular ventricular systoles preceding and/or succeeding a ventricular extrasystole is preferably two, three, four, five, six, seven, eight, nine or ten
 - iii. The quotient calculated for at least one interval fulfills at least one mathematical criterion
 - iv. The quotients calculated for at least two subsequent intervals fulfill different mathematical criteria
 - v. The quotients calculated for at least two subsequent intervals are out of a predetermined range of values
 - vi. The quotient calculated for a first interval of said data sequence is equal to or less than a first value, preferably 0.99, 0.97, 0.9 or 0.8 and/or the quotient calculated for a second interval subsequent to the first interval is equal to or greater than a second value, preferably 1, 0.1, 1.03, 1.3 or 1.4
 - vii. The quotient calculated for an interval of said data sequence is equal to or less than a first value, preferably 0.99, 0.97, 0.9 or 0.8 and/or the quotient calculated for a number of subsequent consecutive intervals is equal to or greater than said first value, wherein the number of subsequent consecutive intervals is preferably two, three, four, five, six, seven, eight, nine or ten.
4. Device according to claims 1, characterized by said data processing unit being configured to compute a specific blood pressure response to a ventricular extrasystole based on said at least one data sequence, preferably by performing at least one of the following actions:
- a. Identifying the systolic blood pressure corresponding to at least one cardiac contraction based on said at least one data sequence.
 - b. Identifying the systolic blood pressure for each one of a number of consecutive cardiac contractions preceding and/or succeeding said ventricular extrasystole, wherein the number of consecutive cardiac contractions preceding and/or succeeding said ventricular extrasystole is preferably two, three, four, five, six, seven, eight, nine or ten.
 - c. Calculating the mean systolic blood pressure for a number of consecutive cardiac contractions preceding and/or succeeding said ventricular extrasystole, wherein the number of consecutive cardiac contractions preceding and/or succeeding said ventricular extrasystole is preferably two, three, four, five, six, seven, eight, nine or ten.
 - d. Calculating a blood pressure quotient between a systolic blood pressure corresponding to one cardiac contraction and a mean systolic blood pressure for other cardiac contractions.
 - e. Calculating a blood pressure quotient between the systolic blood pressure corresponding to the first post-extrasystolic cardiac contraction and a mean systolic blood pressure, preferably corresponding to the second to ninth or second to tenth post-extrasystolic cardiac contractions.
 - f. Storing the calculated blood pressure quotient or the mean of a plurality of calculated blood pressure quotients under the variable PESPI.
 - g. Storing the number of calculated blood pressure quotients per time.
5. Device according to claim 1, characterized by said data processing unit being configured to compute a blood pressure inclination during a characteristic sequence of heart rate intervals based on said at least one data sequence, preferably by performing at least one of the following actions:
- a. Identifying the systolic blood pressure corresponding to two consecutive intervals, wherein preferably the quotient between the first one of the two consecutive intervals and the mean of a number of consecutive intervals preceding and/or succeeding said first interval is equal to or less than a first value, preferably 0.99, 0.97, 0.9 or 0.8, and/or the quotient between the second one of the two consecutive intervals and the mean of a number of consecutive intervals preceding and/or succeeding said second interval is equal to or greater than a second value, preferably 1.01, 1.03, 1.3 or 1.4, wherein the number of consecutive intervals preceding and/or succeeding said interval of interest is preferably two, three, four, five, six, seven, eight, nine or ten.
 - b. Calculating, as a blood pressure inclination, the inclination of a linear function defined by a first data point indicating a systolic blood pressure corresponding to the first interval and a second data point indicating a systolic blood pressure corresponding to the second interval.
 - c. Storing the calculated blood pressure inclination or the mean of a plurality of calculated blood pressure inclinations under the variable PESPI2.
 - d. Storing the number of calculated blood pressure inclinations, preferably per time.
6. Device according to claim 1, characterized by said data processing unit being configured to compute a T-wave response to a ventricular extrasystole based on said data sequence, preferably by performing at least one of the following actions:
- a. Calculating the mean of T-wave amplitudes corresponding to a number of regular ventricular systoles preceding and/or succeeding the first post-extrasystolic T-wave amplitude, preferably without interruption by any further ventricular extrasystole, wherein the number of consecutive ventricular systoles preceding and/or succeeding said first post-extrasystolic T-wave amplitude is preferably two, three, four, five, six, seven, eight, nine or ten.
 - b. Calculating the T-wave amplitude quotient between the first post-extrasystolic T-wave amplitude and the mean of T-wave amplitudes preceding and/or succeeding said first post-extrasystolic T-wave amplitude.

- c. Storing the calculated T-wave amplitude quotient or the mean of a plurality of calculated T-wave amplitude quotient quotients under the variable PEST.
 - d. Storing the number of calculated T-wave amplitudes, preferably per time.
7. Device according to claim 1, characterized by said data processing unit being configured to assess a mortality risk for said patient by providing at least one of the following functions:
- a. Allocating said patient to a low risk group under the following conditions:
 - i. The number of data sequences selected per 30 minutes recording of said at least one data function is less than five; and
 - ii. The number of blood pressure quotients calculated to be greater than 1 per 30 minutes recording of said at least one data function is zero; or
 - iii. The number of blood pressure inclinations calculated to be greater than 4.5 mmHg/s per 30 minutes recording of said at least one data function is zero; or
 - iv. The number of T-wave amplitude quotients calculated to be less than 1 per 30 minutes recording of said at least one data function is zero.
 - b. Allocating said patient to a medium risk group under the following conditions:
 - i. The number of data sequences selected per 30 minutes recording of said at least one data function is greater than five; and
 - ii. The number of blood pressure quotients calculated to be greater than 1 per 30 minutes recording of said at least one data function is zero; or
 - iii. The number of blood pressure inclinations calculated to be greater than 4.5 mmHg/s per 30 minutes recording of said at least one data function is zero; or
 - iv. The number of T-wave amplitude quotients calculated to be less than 1 per 30 minutes recording of said at least one data function is zero.
 - c. Allocating said patient to a high risk group under at least one of the following conditions:
 - i. The number of data sequences selected per 30 minutes recording of said at least one data function is greater than five
 - ii. The number of T-wave amplitude quotients calculated to be less than 1 per 30 minutes recording of said at least one data function is greater than zero
 - iii. PESP1 is greater than one
 - iv. PESP2 greater than 4.5 mmHg/s
 - v. PEST is less than one
- d. Assessing mortality risk for said patient by calculating a prognostic score based on at least one of the following:
- i. PESP1
 - ii. PESP2
 - iii. PEST
 - iv. VPC
 - v. Heart Rate Turbulence, in particular $HRT-TS < 2.5$ ms/RR1 and/or $HRT-TO \geq 0\%$
8. Device according to claim 1, characterized by said device comprising display means for displaying the result of mortality risk assessment.
9. Method for assessing a mortality risk of a cardiac patient based on at least one vital sign or biosignal of said patient, preferably using the device according to claims 1, said method comprising the following steps:
- a. Providing at least one data function of at least one vital sign or biosignal of said patient.
 - b. Processing data of said at least one data function for assessing a mortality risk of said patient by performing the following actions:
 - i. Selecting at least one data sequence from said at least one data function according to a predetermined routine.
 - ii. Computing a specific behavior of at least one parameter of said at least one data function based on said at least one selected data sequence.
 - iii. Assessing a mortality risk of said patient based on said computed behavior.
10. Computer-readable medium containing a program, which, when loaded, performs a method for assessing a mortality risk of a cardiac patient based on at least one vital sign or biosignal of said patient comprising the following steps:
- a. Selecting at least one data sequence from at least one data function of at least one vital sign or biosignal of said patient according to a predetermined routine.
 - b. Computing a specific behavior of at least one parameter of at least one data function based on said at least one selected data sequence.
 - c. Assessing a mortality risk of said patient based on said computed behavior.
- * * * * *

专利名称(译)	用于评估心脏病患者的死亡风险的装置和方法		
公开(公告)号	US20160063207A1	公开(公告)日	2016-03-03
申请号	US14/782036	申请日	2014-03-28
[标]申请(专利权)人(译)	SCHMIDT GEORG		
申请(专利权)人(译)	SCHMIDT , GEORG		
当前申请(专利权)人(译)	SCHMIDT , GEORG		
[标]发明人	SCHMIDT GEORG		
发明人	SCHMIDT, GEORG		
IPC分类号	G06F19/00 A61B5/00 A61B5/0205 A61B5/04 A61B5/0456 A61B5/0476 A61B5/0488		
CPC分类号	A61B5/7264 G06F19/3431 A61B5/7275 A61B5/021 A61B5/0205 G06F19/3406 A61B5/0488 A61B5/0476 A61B5/0456 A61B5/04008 A61B5/02055 A61B5/6826 G16H40/63 G16H50/30		
优先权	2013001675 2013-04-02 EP		
外部链接	Espacenet USPTO		

摘要(译)

用于基于所述患者的至少一个生命体征或生物信号评估心脏病患者的死亡风险的装置和方法技术领域本发明涉及一种用于基于至少一个生命体征或生物信号评估心脏病患者的死亡风险的装置和方法。所述病人与常规死亡率风险评估概念相比，为了改善心脏病患者的风险分层质量，本发明提供了一种用于基于所述患者的至少一个生命体征或生物信号评估心脏病患者的死亡风险的装置，所述装置包括数据提供单元，其被配置为提供所述患者的至少一个生命体征或生物信号的至少一个数据功能，数据处理单元被配置为处理所述至少一个数据功能的数据以评估所述患者的死亡风险通过执行以下动作：根据预定程序从所述至少一个数据函数中选择至少一个数据序列；基于所述至少一个所选数据序列计算所述至少一个数据函数的至少一个参数的特定行为；并基于所述计算的行为评估所述患者的死亡风险。还公开了相应的方法和计算机可读介质，当加载时，执行所述方法的步骤。

