



US010072967B2

(12) **United States Patent**
Mirov et al.

(10) **Patent No.:** **US 10,072,967 B2**
(45) **Date of Patent:** **Sep. 11, 2018**

(54) **INTEGRATED WEARABLE NOISE
DOSIMETER**

A61B 5/7405; A61B 5/7246; A61B
5/165; A61B 5/4818; A61B 5/681; A61B
5/0816; A61B 5/0533; A61B 5/024; A61B
5/021; H04R 29/008

See application file for complete search history.

(71) Applicant: **Verily Life Sciences LLC**, Mountain
View, CA (US)

(72) Inventors: **Russell Norman Mirov**, Los Altos, CA
(US); **John Lapetina**, Los Altos Hills,
CA (US); **Florence Thng**, Mountain
View, CA (US)

(73) Assignee: **Verily Life Sciences LLC**, Mountain
View, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 441 days.

(21) Appl. No.: **14/698,155**

(22) Filed: **Apr. 28, 2015**

(65) **Prior Publication Data**

US 2016/0320231 A1 Nov. 3, 2016

(51) **Int. Cl.**
G01H 3/10 (2006.01)
A61B 5/0205 (2006.01)

(Continued)

(52) **U.S. Cl.**
CPC **G01H 3/10** (2013.01); **A61B 5/0205**
(2013.01); **A61B 5/165** (2013.01); **A61B**
5/4818 (2013.01);

(Continued)

(58) **Field of Classification Search**
CPC ... G01H 3/10; G01H 3/14; A61B 5/11; A61B
5/14542; A61B 5/0205; A61B 5/742;

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,726,057 A * 2/1988 Doerry H04M 17/023
379/123
7,495,998 B1 * 2/2009 Deligeorges G01S 3/8006
367/127

(Continued)

FOREIGN PATENT DOCUMENTS

JP H0894428 4/1996
WO 2014/198570 12/2014


Primary Examiner — Toan Le

(74) *Attorney, Agent, or Firm* — McDonnell Boehnen
Hulbert & Berghoff LLP

(57) **ABSTRACT**

Systems and methods are described that may provide audio information about an environment around a wearable device. Such audio information may be correlated with other biometric data to provide physiological information, e.g. regarding a wearer of the wearable device. For example, an illustrative method includes receiving an audio signal via a microphone of a wearable device and rectifying the audio signal with a peak detector. The method further includes amplifying the rectified signal with a logarithmic amplifier and causing an analog to digital converter (ADC) to sample the logarithmic signal. The method also includes causing the ADC to convert the sampled logarithmic signal to a digital output and storing the digital output in a memory of the wearable device. In some embodiments, the method includes transmitting the digital output to a computing device, which may correlate the digital output with other biometric data.

20 Claims, 6 Drawing Sheets

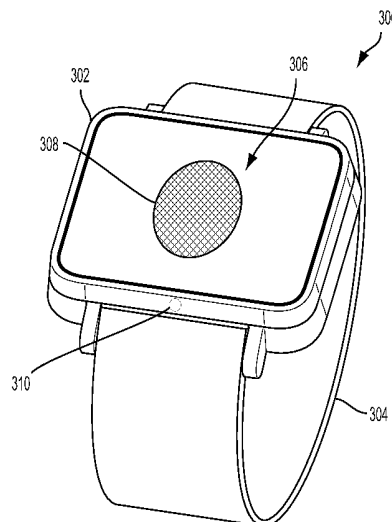

- (51) **Int. Cl.**
A61B 5/00 (2006.01)
G01H 3/14 (2006.01)
H04R 29/00 (2006.01)
A61B 5/16 (2006.01)
A61B 5/021 (2006.01)
A61B 5/024 (2006.01)
A61B 5/053 (2006.01)
A61B 5/08 (2006.01)
A61B 5/11 (2006.01)
A61B 5/145 (2006.01)
A61B 7/00 (2006.01)
- (52) **U.S. Cl.**
CPC *A61B 5/681* (2013.01); *A61B 5/6891*
(2013.01); *A61B 5/742* (2013.01); *A61B*
5/7405 (2013.01); *G01H 3/14* (2013.01);
H04R 29/008 (2013.01); *A61B 5/021*
(2013.01); *A61B 5/024* (2013.01); *A61B*
- 5/0533 (2013.01); *A61B 5/0816* (2013.01);
A61B 5/11 (2013.01); *A61B 5/14542*
(2013.01); *A61B 5/4815* (2013.01); *A61B*
5/6803 (2013.01); *A61B 5/7246* (2013.01);
A61B 7/003 (2013.01); *A61B 2560/0242*
(2013.01)
- (56) **References Cited**
U.S. PATENT DOCUMENTS
- | | | | | |
|--------------|-----|---------|-----------------|-------------------------------|
| 8,398,538 | B2 | 3/2013 | Dothie et al. | |
| 8,771,204 | B2 | 7/2014 | Telfort et al. | |
| 2006/0241510 | A1 | 10/2006 | Halperin et al. | |
| 2008/0294019 | A1* | 11/2008 | Tran | <i>A61B 5/0006</i>
600/301 |
| 2013/0102908 | A1 | 4/2013 | Ser et al. | |
| 2014/0247154 | A1 | 9/2014 | Proud | |
- * cited by examiner

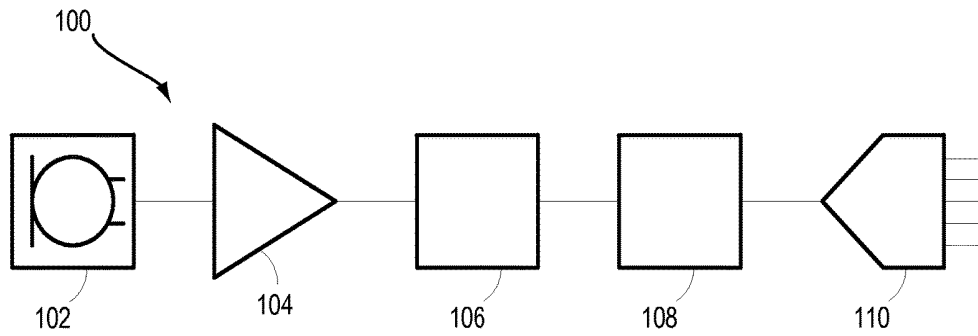


Figure 1A

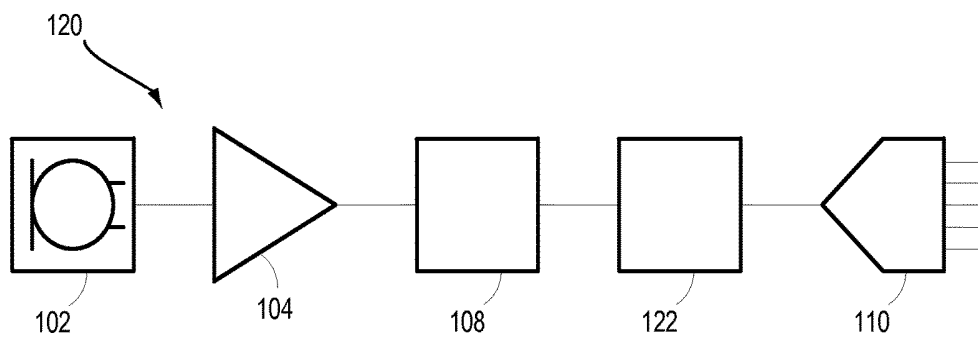


Figure 1B

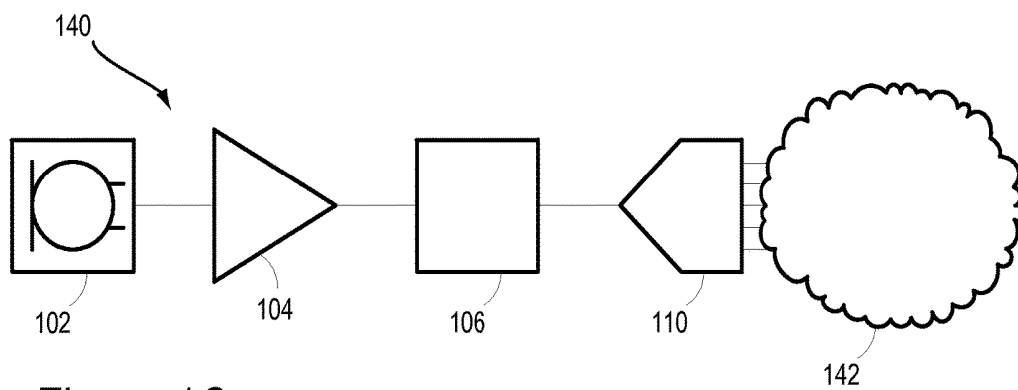


Figure 1C

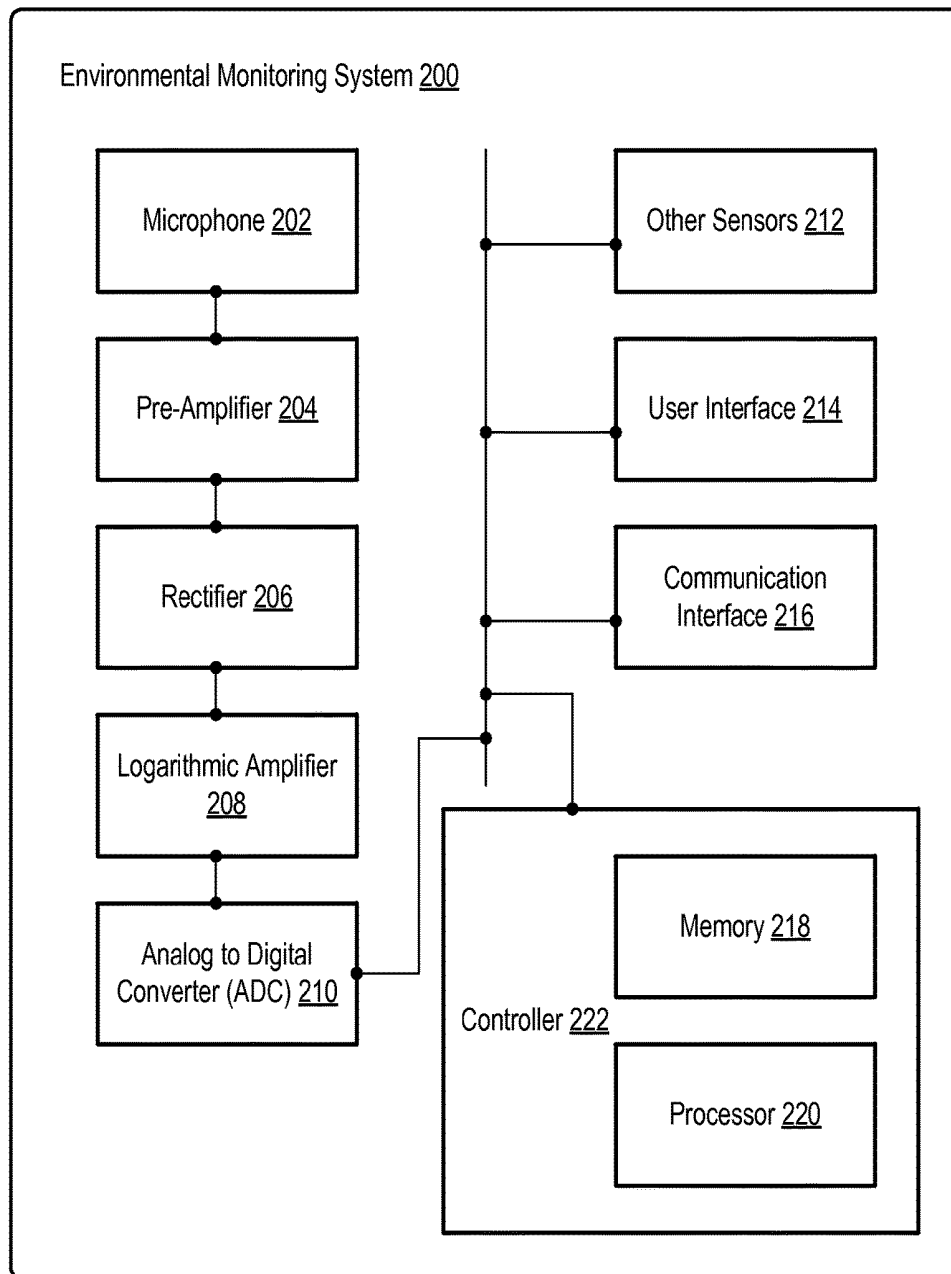


Figure 2

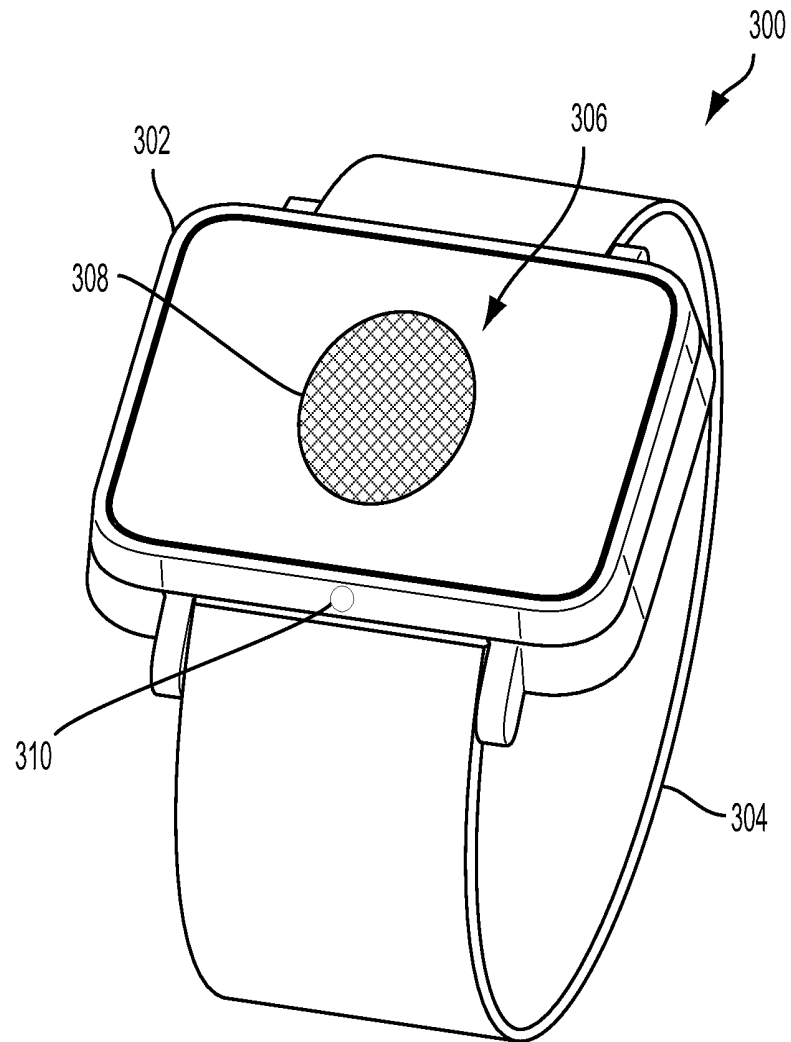


Figure 3

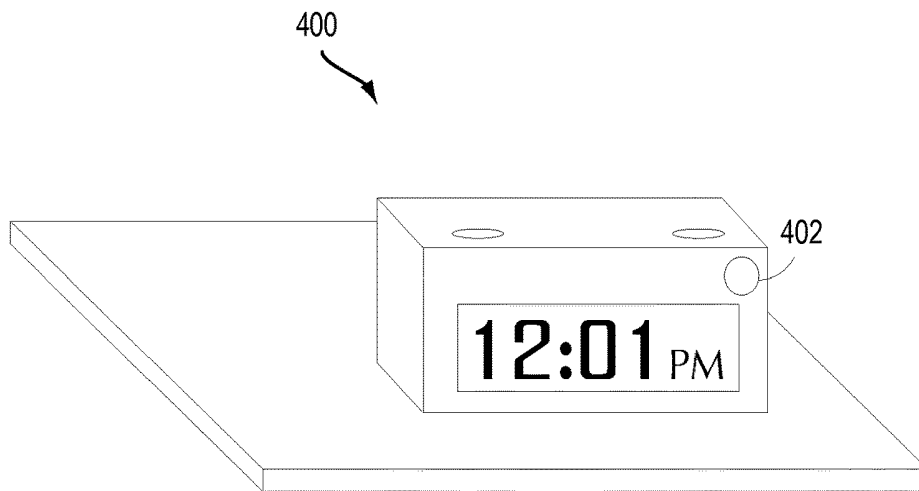


Figure 4A

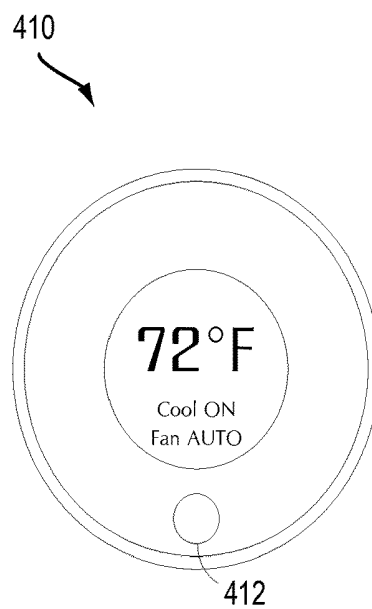


Figure 4B

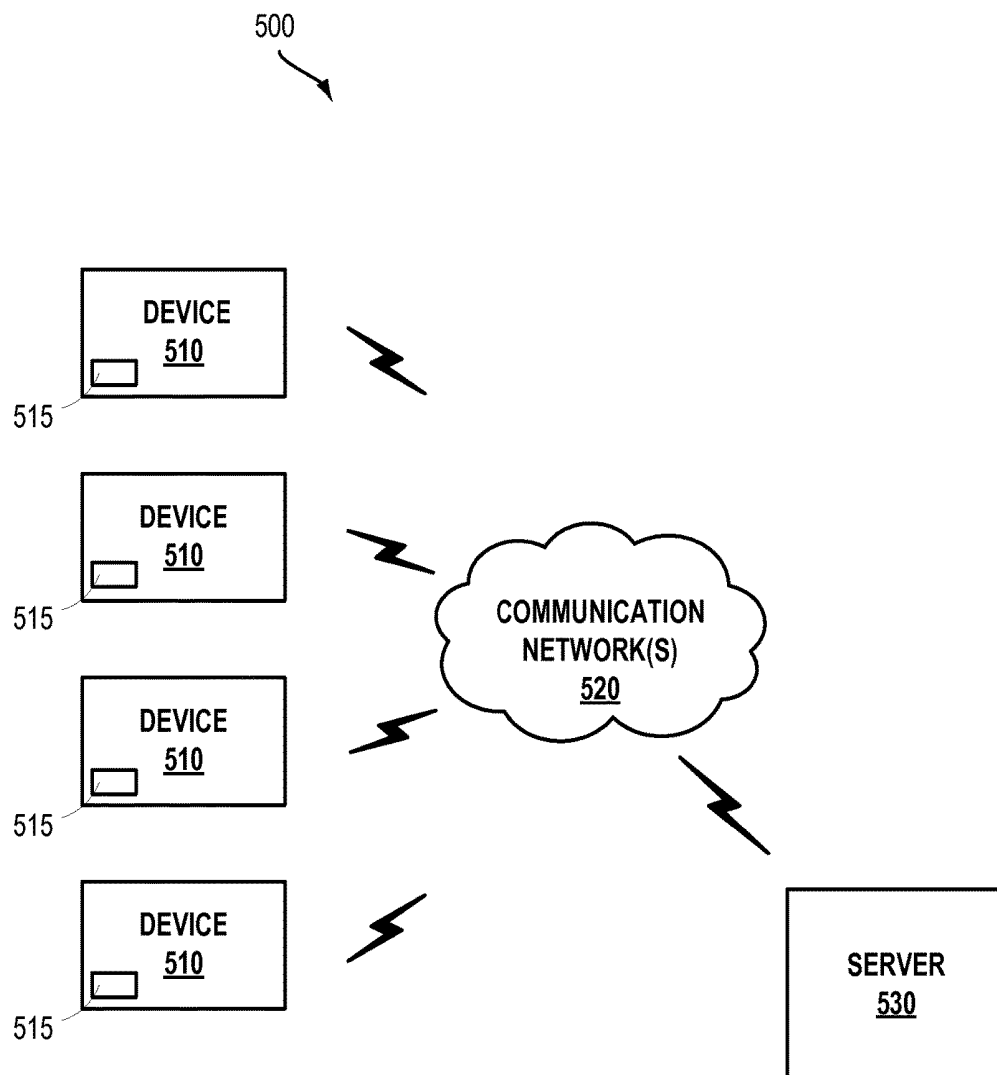


Figure 5

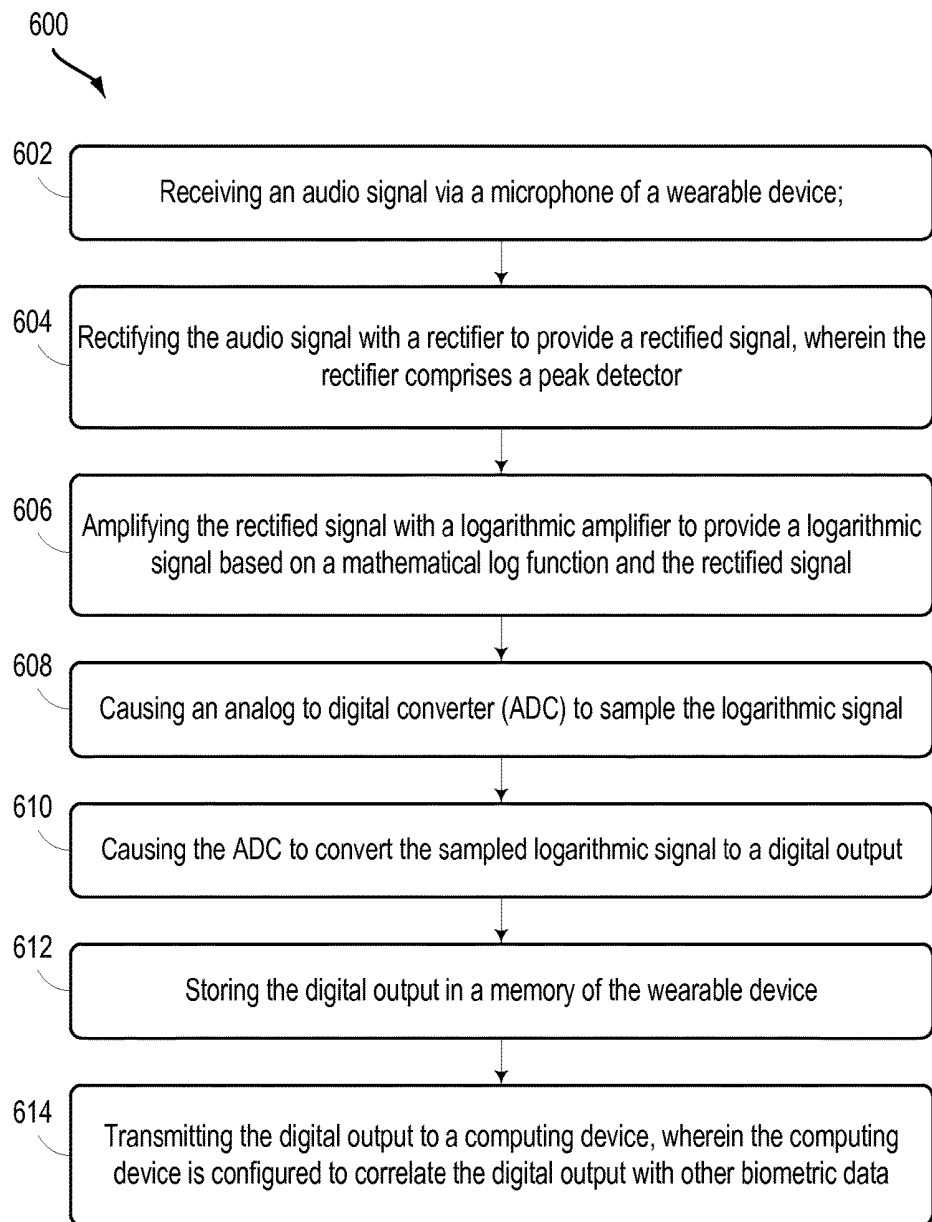


Figure 6

1

**INTEGRATED WEARABLE NOISE
DOSIMETER****BACKGROUND**

An environmental monitoring device may provide information about a sound pressure level of an environment around the monitoring device.

SUMMARY

In a first aspect, a system is provided. The system includes a microphone configured to provide an audio signal and a rectifier communicatively coupled to the microphone. The system also includes a logarithmic amplifier communicatively coupled to the rectifier. A combination of the logarithmic amplifier and the rectifier is configured to provide a rectified logarithmic signal based on a mathematical log function and the audio signal. The system additionally includes an analog to digital converter (ADC) communicatively coupled to the logarithmic amplifier. The ADC is configured to sample the rectified logarithmic signal and provide a digital output based on the sampled rectified logarithmic signal. The system further includes a controller that includes a memory and a processor. The controller is configured to carry out instructions. The instructions include, at predetermined time intervals, causing the ADC to sample the rectified logarithmic signal and storing the digital output in the memory. The instructions also include transmitting the digital output to a computing device. The computing device is configured to correlate the digital output with other biometric data.

In a second aspect, a system is provided. The system includes a microphone configured to provide an audio signal, a logarithmic amplifier communicatively coupled to the microphone, a rectifier communicatively coupled to the logarithmic amplifier, an analog to digital converter (ADC) communicatively coupled to the rectifier, and a controller. The logarithmic amplifier is configured to provide a logarithmic signal based on a mathematical log function and the audio signal. The rectifier is configured to provide a rectified signal based on the logarithmic signal. The ADC is configured to sample the rectified signal and provide a digital output based on the sampled rectified signal. The controller includes a memory and a processor. The controller is configured to carry out instructions. The instructions include, at predetermined time intervals, causing the ADC to sample the rectified signal and storing the digital output in the memory. The instructions also include transmitting the digital output to a computing device. The computing device is configured to correlate the digital output with other biometric data.

In a third aspect, a system is provided. The system includes a microphone configured to provide an audio signal, a rectifier communicatively coupled to the microphone, an analog to digital converter (ADC) communicatively coupled to the rectifier, and a controller. The rectifier is configured to provide a rectified signal based on the audio signal. The ADC is configured to sample the rectified signal and provide a digital output based on the sampled rectified signal. The controller includes a memory and a processor. The controller is configured to carry out instructions. The instructions include, at predetermined time intervals, causing the ADC to sample the rectified signal and storing the digital output in the memory. The instructions also include providing a logarithmic output based on a mathematical log function and the digital output. The instructions further

2

include transmitting the digital output to a computing device, wherein the computing device is configured to correlate the digital output with other biometric data.

In a fourth aspect, a method is provided. The method includes receiving an audio signal via a microphone of a wearable device and rectifying the audio signal with a rectifier to provide a rectified signal. The rectifier includes a peak detector. The method further includes amplifying the rectified signal with a logarithmic amplifier to provide a logarithmic signal based on a mathematical log function and the rectified signal. The method also includes causing an analog to digital converter (ADC) to sample the logarithmic signal. The method yet further includes causing the ADC to convert the sampled logarithmic signal to a digital output. The method additionally includes storing the digital output in a memory of the wearable device. The method also includes transmitting the digital output to a computing device. The computing device is configured to correlate the digital output with other biometric data.

Other aspects, embodiments, and implementations will become apparent to those of ordinary skill in the art by reading the following detailed description, with reference where appropriate to the accompanying drawings.

BRIEF DESCRIPTION OF THE FIGURES

FIG. 1A illustrates a system, according to an example embodiment.

FIG. 1B illustrates a system, according to an example embodiment.

FIG. 1C illustrates a system, according to an example embodiment.

FIG. 2 illustrates a schematic block diagram of an environmental monitoring system, according to an example embodiment.

FIG. 3 illustrates a wearable device, according to an example embodiment.

FIG. 4A illustrates a device, according to an example embodiment.

FIG. 4B illustrates a device, according to an example embodiment.

FIG. 5 illustrates a system, according to an example embodiment.

FIG. 6 illustrates a method, according to an example embodiment.

DETAILED DESCRIPTION

In the following detailed description, reference is made to the accompanying figures, which form a part hereof. In the figures, similar symbols typically identify similar components, unless context dictates otherwise. The illustrative embodiments described in the detailed description, figures, and claims are not meant to be limiting. Other embodiments may be utilized, and other changes may be made, without departing from the scope of the subject matter presented herein. It will be readily understood that the aspects of the present disclosure, as generally described herein, and illustrated in the figures, can be arranged, substituted, combined, separated, and designed in a wide variety of different configurations, all of which are explicitly contemplated herein.

I. Overview

The present disclosure discloses embodiments in which a device is configured to record data related to an acoustic environment around the device. For example, a sound pres-

sure level (SPL) of the environment around the device may be recorded and tracked over a long period of time (e.g. weeks, months, and/or years). The SPL data may relate to a particular environment (e.g. a room or an area in the case of a static device) and/or a local environment around the device (e.g. near a wearer of a wearable device). SPL data may be useful to track medical conditions such as breathing, sleep apnea, or environmental conditions, such as ambient noise levels in a work environment, at concerts, etc. In an example embodiment, the SPL data may be detected and processed using a wearable biotelemetry device. Alternative uses may include home security or environmental monitoring systems.

In an example embodiment, a wearable device may be configured to measure and record SPL data without the possibility of capturing intelligible acoustic content, e.g. without recording actual conversations or other recognizable sounds. For example, the wearable device may include a small form factor microphone. The microphone may be a device that transduces sounds, e.g. pressure waves in air, into an electrical signal. The microphone may operate based on electromagnetic induction, piezoelectricity, or a change in capacitance, among other modes of operation. The signal produced by the microphone may be amplified by a pre-amplifier circuit (which may be a component of the microphone). In some embodiments, however, a pre-amplifier is not present.

The signal from the pre-amplifier circuit may be passed through a rectifying circuit that may modify the signal. Rectifying circuits may include an envelope detector, a peak detector, and/or a trough detector, among other types of rectifying circuits. For example, a peak detector may include a rectifying circuit that includes at least one capacitive element. Furthermore, the peak detector may be configured to provide an output signal based on the peak amplitude of the unprocessed signal.

The rectifying circuit may produce a relatively slowly changing voltage that may represent the instantaneous amplitude of the audio waveform. The response time of the circuit is slow enough such that individual syllables of speech are detectable, but not identifiable. In an example embodiment, the response time of the circuit may be configured to distinguish a respiration rate (or snoring) from conversation or other identifiable sounds.

Within the scope of the present disclosure, the rectifying circuit may include analog signal processing hardware. By performing the signal rectification using analog hardware (versus software or digital signal processing), security and privacy concerns may be reduced or eliminated. For example, it may be more difficult to obtain identifiable or recognizable audio signals when the recorded signals are passed substantially directly to signal processing hardware without intervening digital signal handling.

Before and/or after the signal is rectified, the signal may be passed through a logarithmic amplifier (Log Amp). The Log Amp may be configured to convert a voltage signal to decibels. The Log Amp may additionally or alternatively include filters with controlled response to provide different “weightings” to the detected audio based on, for instance, the frequency components of the signal. For example, the output of the Log Amp may convert and/or translate the voltage signal to a signal that may relate to decibel A-weighting (dBA).

In an example embodiment, decibel A-weighting may be applied to the logarithmic signal, which may convert the logarithmic signal to a recognized measure of SPL. Specifically, dBA has been adopted as an environmental noise measurement standard and may offer a comparison between

the detected audio signals and well-known real-world noise sources (rock concert, airplane takeoff, etc.). Other frequency-related weightings are possible, including, but not limited to, B-, C-, D-, and Z-weightings.

The output of the Log Amp may be passed to an analog to digital converter (ADC). The output of the ADC may be saved locally and/or transmitted to cloud storage and/or cloud computing devices. Uploading to cloud storage and/or cloud computing devices may occur in “real time.” Alternatively or additionally, uploading could occur periodically at predetermined time intervals, or at other times.

The microphone, rectifier, the Log Amp, and/or other components of the system may be configured to handle audio signals at +20 dBA or quieter. For example, the system may be configured to capture breathing, gasping, or talking noises from a wearer of the wearable biotelemetry device. Accordingly, the system may include components configured to reduce or minimize signal noise, e.g. low noise preamplifiers, noise filters, etc. Additionally or alternatively, some or all of the components of the system may be configured to handle relatively loud audio signals (e.g. +120 dBA or louder). Accordingly, the system may be configured to handle a large range of SPL values, such as multiple signal gain and/or attenuation stages.

Example embodiments may include several different variations regarding the order of how signals are processed in the system. For instance, the signal may pass through the Log Amp before passing through the rectifier circuit, or vice versa. Other combinations of rectification, amplification, and/or filtering may be implemented under the scope of the present disclosure.

Other processing and/or sampling may be performed on the signal using hardware or software. For instance, an analog to digital converter (ADC) may be configured to sample the signal as sampled data. The signal may be sampled at frequencies such as 50 Hz or 60 Hz, but other sampling frequencies are possible. The sampled data may be stored locally, for example in system memory. Alternatively or additionally, the sampled data may be uploaded to a network (e.g. a cloud server), which may store or aggregate data about noise levels.

In an example embodiment, a system may include a microphone, a pre-amplifier, a peak detector, a log amplifier, and an analog to digital converter (ADC). In another example embodiment, a system may additionally or alternatively include a trough detector. The system may include hardware and/or software configured to perform the functions of a log amplifier. Additionally or alternatively, further functions (e.g. filtering) may be performed using further signal processing hardware and/or software.

In an example embodiment, the sampled data may be correlated with other biometric data or parameters. For example, a sleep apnea condition may be diagnosed and/or treated by correlating the sampled SPL and/or dBA data with respiration and/or movement data of the wearer of a biotelemetry device. Alternatively, for example to measure sleep quality, the sampled SPL and/or dBA data may be correlated with other data such as blood pressure, heart rate, blood oxygen saturation, respiration, and/or movement. In another example related to measuring stress level, the sampled SPL and/or dBA data may be correlated with heart rate, blood pressure, and/or galvanic skin response. In yet another example, mental health and/or general health issues related to speech may be tracked using the sampled SPL and/or dBA data in conjunction with other data such as movement. Many other data correlations may be made with the sampled SPL data. The data correlations may be performed by a comput-

ing device, which may be a wearable biotelemetry device or another computing device, such as a cloud computing network.

II. System Examples

FIG. 1A illustrates a system 100, according to an example embodiment. System 100 includes a microphone 102 configured to provide an audio signal. That is, the microphone 102 may be configured to convert an acoustic sound or a sound pressure level into the audio signal, which may be an electrical signal. The microphone 102 may be one of, or any combination of, a fiber optic microphone, a dynamic microphone, a condenser microphone, an electret condenser microphone, a ribbon microphone, a MEMS microphone, and/or a piezoelectric microphone. Other types of microphones are contemplated herein. The microphone 102 may be integrated into another electronic device, e.g. a smartphone or a wearable computing device. Alternatively or additionally, the microphone 102 may be an externally coupled to another device, e.g. via a cable.

The system 100 may include a pre-amplifier 104. The pre-amplifier 104 may amplify an electrical signal from the microphone 102. In an example embodiment, the pre-amplifier 104 may apply gain to the electrical signal from the microphone 102. The pre-amplifier 104 may include one or more gain stages. In an example embodiment, the pre-amplifier 104 may be incorporated into, and/or housed with, the microphone 102. In other embodiments, the pre-amplifier 104 is not included in the system 100.

The system 100 also includes a rectifier 106 communicatively coupled to the microphone 102 or the pre-amplifier 104. The rectifier 106 may convert a varying or alternating current into a direct current. The rectifier 106 may be a stand-alone part or the rectifier may include electronic components arranged in an electrical circuit. For example, the rectifier 106 may include a silicon diode, a thyristor, a crystal rectifier, or another type of rectifier. In an example embodiment, the rectifier 106 includes a single-phase, half-wave rectifier circuit. However, other rectifier circuits are contemplated herein, e.g. a single-phase, full-wave rectifier circuit. In an example embodiment, the rectifier 106 may include a filter circuit. Thus, in such situations, the rectifier 106 may provide filtering and/or other types of signal processing to the audio signal.

The rectifier 106 is configured to provide a rectified signal based on the audio signal. In an example embodiment, the rectifier 106 includes a peak-hold circuit, which may also be termed a peak detector or an envelope detector. The peak detector may take as its input the audio signal provided by the microphone 102 or pre-amplifier 104 and may output the peak output voltage of the audio signal. In an example embodiment, the peak detector may include adjustable characteristics, such as attack time and/or decay time. The peak detector may be configured to “hold” a peak voltage for a much longer time than the peak voltage may exist in the input audio signal. The peak detector circuit may include at least one operational amplifier, a diode, and a capacitor. Additionally or alternatively, the peak detector circuit may include a point contact device. Other types of circuits configured to rectify a varying electrical signal and/or track a peak amplitude of the varying electrical signal are contemplated herein.

The system 100 also includes a logarithmic amplifier 108 communicatively coupled to the rectifier 106. The logarithmic amplifier 108 is configured to provide a logarithmic signal based on a mathematical log function and the rectified

signal from the rectifier 106. Namely, the logarithmic amplifier 108 may provide an output voltage that is a multiple of the natural logarithm of the input voltage. The logarithmic amplifier 108 may include one or more amplification or gain stages, e.g. four 30-dB amplification stages. The logarithmic amplifier 108 may be similar or identical to a Maxim AN 36211 or a Texas Instruments TL441. In an example embodiment, the logarithmic amplifier 108 includes a base-band logarithmic amplifier or a demodulating logarithmic amplifier.

The system 100 may include the rectifier 106 and logarithmic amplifier 108 in various arrangements. For example, the signal flow may go through the rectifier 106 and then the logarithmic amplifier 108, or vice versa. In an example embodiment, a combination of the rectifier 106 and the logarithmic amplifier 108 may provide a signal that is both rectified and modified (e.g. multiplied) based on a mathematical log function. In such a scenario, the provided signal may be a rectified logarithmic signal.

The system 100 also includes an analog to digital converter (ADC) 110 communicatively coupled to the logarithmic amplifier 108. The ADC 110 is configured to convert the continuous time, continuous amplitude signal from the logarithmic amplifier 108 to a discrete time, discrete amplitude digital signal. Namely, the ADC 110 is configured to sample the rectified logarithmic signal and provide a discrete digital output proportional to the sampled rectified logarithmic signal. The discrete digital output may include a conversion error at least based on the bit resolution of the ADC 110. The ADC 110 may have a 16-bit resolution, however other resolutions are possible. The sampling rate of the ADC 110 may be 10-100 samples per second, however other sampling rates are possible.

The system 100 may be configured to detect and record sounds as quiet as +20 dBA (e.g., breathing) and as loud as +120 dBA (e.g., a concert). Thus, system 100 may be configured and/or designed with low-noise components and multiple gain stages to provide a low noise floor and wide dynamic range.

Other arrangements of some or all of the elements of system 100 are possible. For example, FIGS. 1B and 1C illustrate two such other arrangements. FIG. 1B illustrates a system 120, according to an example embodiment. System 120 may include a microphone 102 and a pre-amplifier 104 arranged similarly to system 100 as illustrated and described in reference to FIG. 1A. System 120 may include a logarithmic amplifier 108 communicatively coupled to the microphone 102 and/or the pre-amplifier 104. The logarithmic amplifier 108 may be configured to provide a logarithmic signal based on a mathematical log function and the audio signal, as described above.

System 120 may further include a trough detector 122 communicatively coupled to the logarithmic amplifier 108. The trough detector 122 may be a rectifier configured to track the audio signal and hold a voltage level based on a minimum level, magnitude, and/or amplitude of the audio signal. The system 120 may also include the ADC 110 communicatively coupled to the trough detector 122.

In some embodiments, the system 120 may include a trough detector 122 or a peak detector based on a polarity of the logarithmic amplifier 108. Additionally or alternatively, the rectifier 106 and/or the trough detector 122 may include a peak excursion detector. Other signal processing devices configured to modify a sound and provide output signal, such that the output signal is unidentifiable or untraceable to one or more people who produced the sound, are considered herein.

As a further alternative, FIG. 1C illustrates a system **140**, according to an example embodiment. System **140** may include a microphone **102**, a pre-amplifier **104**, and a rectifier **106** with a similar arrangement as that in system **100**, illustrated and described in reference to FIG. 1A. System **140** may also include the ADC **110** communicatively coupled to the rectifier **106**.

System **140** may include a digitized output of the ADC **110** being handled, modified, and/or processed by a computer according to software instructions **142**. The software instructions **142** may be stored as non-transitory computer readable media. Further, software instructions **142** may be stored in a memory and the software instructions **142** may be executed by a processor. The computer may modify the digitized output of the ADC **110** by performing one or more functions according to the software instructions **142**. The one or more functions may include a logarithmic multiplication. In other words, the software instructions **142** and processor may be configured to provide a logarithmic amplification of the digitized signal from the ADC **110**. The software instructions **142** may be configured to carry out further functions on the digitized signal.

It is understood that other combinations of analog and/or digital signal processing stages, components, or other elements are possible within the scope of this disclosure.

FIG. 2 illustrates a schematic block diagram of an environmental monitoring system **200**, according to an example embodiment. The environmental monitoring system **200** may include some or all of the same elements as systems **100**, **120**, and/or **140**, as illustrated and described in reference to FIGS. 1A, 1B, and 1C, respectively. In an example embodiment, environmental monitoring system **200** includes a microphone **202**, a pre-amplifier **204**, a rectifier **206**, a logarithmic amplifier **208**, and an ADC **210**, which may be communicatively coupled in a series arrangement. Such an arrangement of elements may operable to provide a digitized signal that relates to an acoustic environment around the environmental monitoring system **200**. As described above, other arrangements of the microphone **202**, pre-amplifier **204**, rectifier **206**, logarithmic amplifier **208**, and/or the ADC **210** are possible.

The environmental monitoring system **200** may also include other sensors **212**. The other sensors **212** may include one or more sensors configured to measure, monitor, qualify and/or quantify various biometric data. Many types of biometric data are contemplated within the scope of this disclosure. For example, the other sensors **212** may be configured to measure blood pressure, heart rate, galvanic skin response, respiration, analyte concentration, movement, blood oxygen saturation, or other biometric data.

The environmental monitoring system **200** may further include a user interface **214**. The user interface **214** may include a display, a touchscreen, one or more indicator lights, or another type of interface configured to provide information to a user and/or to obtain input from a user. In an example embodiment, the user interface **214** may include a touchscreen display that provides information indicative of the sound pressure level of the environment around the environmental monitoring system **200**.

The environmental monitoring system **200** may include a communication interface **216**. The communication interface **216** may be operable to provide a wired and/or wireless connection to another computing device and/or a computing network, e.g. the Internet and/or a cloud computing system. In an example embodiment, the communication interface **216** may be a wireless network interface controller, which

may interact with a wireless network via a communication protocol such as IEEE 802.11, ZIGBEE, and/or BLUETOOTH.

The environmental monitoring system **200** may further include a controller **222**. The controller **222** may include a memory **218** and a processor **220**. The controller **222** is configured to carry out instructions. The instructions may include, at predetermined time intervals, causing the ADC **210** to sample the logarithmic signal. For example, the controller **222** may cause the ADC **210** to sample the logarithmic signal at a sampling rate, e.g. 50 samples/second. The instructions may also include storing the digital output from the ADC **210** in the memory **218**.

The instructions may further include transmitting the digital output to a computing device. In an example embodiment, the transmitting may include transmitting the digital output to another computing device via communication interface **216**. In another embodiment, the transmitting may include transmitting the digital output to the controller **222**. In both scenarios, the computing device may be configured to correlate the digital output with other biometric data. The other biometric data may include any data obtained by the other sensors **212**. Additionally or alternatively, the other biometric data may include data calculated and/or inferred by a computing device based on one or more further types of biometric data.

FIG. 3 illustrates a wearable device **300**, according to an example embodiment. The wearable device **300** may be worn around an arm, similar to a watch. Alternatively or additionally, the wearable device **300** may be worn around a neck (e.g. a necklace), and/or at other locations. In an example embodiment, the wearable device **300** may include a face **302** and a band **304**. The band **304** may be operable to fasten the wearable device **300** to an arm and/or a wrist of a user. In the alternative, it is understood that band **304** may include a necklace, chain, adhesive, or another mechanical device configured to couple the wearable device **300** to a user.

The face **302** may include a display **306**. The display **306** may be a touchscreen, however, other types of displays and/or indicators are contemplated. In an example embodiment, the display **306** may provide an indication **308** to a user. The indication **308** may include information indicative of a sound pressure level (SPL) of the environment of the wearable device **300**.

In an example embodiment, the wearable device **300** may include a microphone **310**. The microphone **310** may be the microphone **102** or **202**, as illustrated and described in reference to FIGS. 1A-1C and 2. The microphone **310** may be operable to record the SPL of an environment around the wearable device **300**. SPL data may capture sounds made by the user, particularly during sleep, such as gasping for breath, snoring, sneezing, wheezing, and/or other breathing sounds. Additionally, SPL data may include sounds nearby the user, such as an ambient noise level. Sound level data may be saved by the wearable device **300** and/or uploaded to another computing device.

Any or all of the elements of environmental monitoring system **200** may be incorporated, fully or in part, into the wearable device **300**. For example, the wearable device **300** may include other sensors configured to detect other types of biometric data, such as heart rate and blood pressure. By combining SPL data with the other biometric data, various inferences may be made regarding the health of a user of the wearable device **300**.

For example, in an effort to measure sleep quality, the sampled SPL data may be correlated with other data such as

blood pressure, heart rate, blood oxygen saturation, respiration, and/or movement. That is, if SPL data indicates gasping for breath during sleep and the user's blood oxygen saturation is below a predetermined level, an inference may be made that a user's sleep quality may be poor.

Furthermore, the SPL data in combination with other biometric data may be useful to help provide health professionals with evidence to support a particular diagnosis. As an example, if, during sleep, a) SPL data indicates snoring and gasping for breath, b) the user's blood pressure is elevated above a predetermined level, and c) a movement rate was high, an inference may be made that the user may be suffering from a sleep apnea condition. Other health related inferences and/or diagnoses may be made based on the SPL data as well as the SPL data in combination with other biometric data.

In a scenario where a user may be suffering from a medical condition, the system and methods herein may include further functions and/or instructions configured to provide biometric feedback to a user in an effort to provide treatment and/or alleviate symptoms related to the medical condition. In an example embodiment, biometric data obtained by the systems and methods described herein may be used to determine a sleep apnea condition. In such a scenario, the system may provide a local notification (e.g. a subconscious or conscious alert) to "nudge" the user back into a normal sleep pattern. For example, the system may be configured to provide audio feedback, e.g. the controller may cause an audio feedback device and a speaker to state: "roll onto your side," "insert your oral appliance," or "please wear your CPAP device." Other types of user feedback are possible, such as a vibration alert, a chime, or another type of alert.

In another example related to measuring stress level, the sampled SPL and/or dBA data may be correlated with heart rate, blood pressure, stress-related analytes, and/or galvanic skin response. In such a scenario, a correlation that suggests an elevated stress level may trigger an indication 308 to a user of the wearable device 300. For example, an indication 308 such as, "Take a deep breath", "Go for a run", or "Practice mindfulness for 5 minutes" may be presented to the user of the wearable device 300 via the display 306 in an effort to reduce the user's stress level.

In yet another example, mental health and/or general health issues related to speech may be tracked using the sampled SPL and/or dBA data in conjunction with other data such as movement. For example, a user of the wearable device 300 may speak a phrase once a day, once a week, or over a different period. The sampled SPL data associated with the verbalized phrase may change over time, which may indicate a change in verbal, mental, and/or physical ability. As such, the SPL data may be used to track, diagnose, and/or evaluate the changing condition of the user over a period of time.

It is understood that SPL data and/or other biometric data may be recorded and correlated over a variety of time periods. For instance, SPL data may be monitored and/or stored over days, weeks, months, or years.

While FIG. 3 illustrates a wearable device 300, various elements of environmental monitoring system 200 may be incorporated into other types of devices. For example, some or all of the elements of environmental monitoring system 200 may be incorporated into a static device as part of a home appliance or another type of substantially fixed or static device.

FIG. 4A illustrates a device 400, according to an example embodiment. Device 400 may be configured to have some or

all of the functionality of a clock radio or similar device. In an example embodiment, device 400 may be placed near a bedside or another sleep environment. Device 400 may include microphone 402, which may be similar or identical to microphone 202 as illustrated and described in reference to FIG. 2.

FIG. 4B illustrates a device 410, according to an example embodiment. Device 410 may be configured to have some or all the functionality of a thermostat and/or another type of environmental monitoring device. Device 410 may include a microphone 412, which may be similar or identical to microphone 202 as illustrated and described in reference to FIG. 2.

It is understood that environmental monitoring system 200 may take the form of, or be incorporated into, a variety of different objects, systems, and/or devices. For example, environmental monitoring system 200 may be incorporated into a wall-mounted clock, a "wall-wart" plug, a smoke detector, a carbon monoxide detector, a glass-break sensor, a smartphone, a tablet, a desktop computer, or any number of other objects. These other possible embodiments are contemplated herein.

FIG. 5 illustrates a system 500, according to an example embodiment. System 500 may include a plurality of devices 510, which may be similar or identical to environmental monitoring system 200. Each of the plurality of devices 510 may include one or more sensors 515. The one or more sensors 515 may be operable to provide SPL data and/or biometric data as described elsewhere herein. Each of the plurality of devices 510 may be configured to provide the SPL and/or the other biometric data to a server 530 via one or more communication networks 520. The server 530 may perform some or all of the correlations between the SPL data and the biometric data.

In an example embodiment, the plurality of devices 510 may be located in physical proximity to one another, e.g. within the same building, near a concert venue, within a same neighborhood or another shared environment. In such a scenario, SPL data from the plurality of devices 510 may be aggregated to obtain an average sound pressure level of the shared environment. Such aggregate SPL data may be useful to monitor noise levels at a job site and/or in a residential setting. Other uses for aggregated SPL data are possible.

III. Method Examples

FIG. 6 illustrates a method 600, according to an example embodiment. The method 600 includes blocks that may be carried out in any order. Furthermore, various blocks may be added to or subtracted from method 600 within the intended scope of this disclosure. The method 600 may correspond to steps that may be carried out using any or all of the devices and systems illustrated and described in reference to FIGS. 1A-1C, 2, 3A-3B, 4A-4B, and 5.

Block 602 includes receiving an audio signal via a microphone of a wearable device. The audio signal may include sounds in an environment around and/or near the wearable device. The audio signal may have an associated sound pressure level, as described herein. The wearable device may include the wearable device 300, as illustrated and described in relation to FIG. 3. Alternatively, the wearable device may include a different wearable computing device or mobile device, such as a smartphone or a tablet. The microphone may include a built-in microphone of the wearable device. Alternatively or additionally, the microphone may include an external microphone.

Block **604** includes rectifying the audio signal with a rectifier to provide a rectified signal. In an example embodiment, the rectifier includes a peak detector. The peak detector could be similar or identical to the peak-hold circuit described in reference to system **100**.

Block **606** includes amplifying the rectified signal with a logarithmic amplifier to provide a logarithmic signal based on a mathematical log function and the rectified signal. As described elsewhere herein, the logarithmic amplifier may be configured to provide a logarithmic signal based on a mathematical log function and the signal from the peak-hold circuit.

Block **608** includes causing an analog to digital converter (ADC) to sample the logarithmic signal. In an example embodiment, a controller, such as controller **222** described in reference to FIG. **2**, may control a sampling trigger and/or the sampling rate of the ADC. In such a scenario, the controller may be configured to cause the ADC to sample the logarithmic signal at a sampling rate, such as 10-100 samples/second. Other sampling rates are possible.

Block **610** includes causing the ADC to convert the sampled logarithmic signal to a digital output. Converting the sampled logarithmic signal may include digitizing the logarithmic signal by performing a bit conversion. In an example embodiment, the ADC may include a bit resolution of 16-bits. In such a scenario, the analog logarithmic signal may be converted into a 16-bit digitized output based on an amplitude or another characteristic of the logarithmic signal.

Block **612** includes storing the digital output in a memory of the wearable device. In other words, the digitized output from the ADC may be stored in a memory, such as the memory **218** of environmental monitoring system **200**. Alternatively, the digital output need not be stored locally at the wearable device, but may rather be directly uploaded or otherwise transmitted to another computing device.

Block **614** includes transmitting the digital output to a computing device. Transmitting the digital output may include uploading the digital output to the computing device via a communications interface, such as communication interface **216** of environmental monitoring system **200**. The computing device may include a server, a computing network, and/or a cloud computing network. The computing device may be configured to correlate the digital output with other biometric data, so as to form inferences or provide evidence for the diagnosis of various health-related conditions.

As described elsewhere herein, the wearable device may include at least one other sensor, which may be configured to obtain other biometric data. The other biometric data may include, but should not be limited to, respiration data, movement data, blood pressure data, heart rate data, blood oxygen saturation data, and galvanic skin response data.

The particular arrangements shown in the Figures should not be viewed as limiting. It should be understood that other embodiments may include more or less of each element shown in a given Figure. Further, some of the illustrated elements may be combined or omitted. Yet further, an illustrative embodiment may include elements that are not illustrated in the Figures.

While various examples and embodiments have been disclosed, other examples and embodiments will be apparent to those skilled in the art. The various disclosed examples and embodiments are for purposes of illustration and are not intended to be limiting, with the true scope being indicated by the following claims.

What is claimed is:

1. A system comprising:

a microphone configured to provide an audio signal;
a rectifier communicatively coupled to the microphone;
a logarithmic amplifier communicatively coupled to the rectifier, wherein a combination of the logarithmic amplifier and the rectifier is configured to provide a rectified and logarithmically amplified signal based on a mathematical log function and the audio signal;
an analog to digital converter (ADC) communicatively coupled to the logarithmic amplifier; and
a controller comprising a memory and a processor, wherein the controller executes instructions stored in the memory so as to carry out operations, the operations comprising:

at predetermined time intervals, causing the ADC to sample the rectified and logarithmically amplified signal and provide a digital output, wherein the rectified and logarithmically amplified signal comprises an output of the combination of the logarithmic amplifier and the rectifier;

storing the digital output in the memory

transmitting the digital output to a computing device, wherein the computing device is configured to correlate the digital output with other biometric data; and

triggering an indication relating to a user's health via a user interface, wherein the indication is based on a comparison between the digital output and the other biometric data.

2. The system of claim **1**, further comprising a pre-amplifier communicatively coupled to the microphone, wherein the pre-amplifier is configured to provide an amplified signal based on the audio signal.

3. The system of claim **1** wherein the rectifier comprises a peak detector circuit, wherein the peak detector circuit comprises a rectifier circuit and a filter circuit.

4. The system of claim **1** wherein the logarithmic amplifier comprises a baseband logarithmic amplifier.

5. The system of claim **1** wherein the rectifier and the logarithmic amplifier comprise a demodulating logarithmic amplifier.

6. The system of claim **1** wherein the system comprises a wearable device, wherein the wearable device comprises at least one other sensor, wherein the at least one other sensor is configured to obtain the other biometric data, and wherein the operations further comprise comparing the digital output with the other biometric data obtained by the at least one other sensor.

7. The system of claim **1** wherein the other biometric data comprises at least one of: respiration data, movement data, blood pressure data, heart rate data, blood oxygen saturation data, or galvanic skin response data.

8. The system of claim **1** wherein the microphone, rectifier, logarithmic amplifier, and ADC are housed within a housing.

9. A system comprising:

a microphone configured to provide an audio signal;

a logarithmic amplifier communicatively coupled to the microphone, wherein the logarithmic amplifier is configured to provide a logarithmically amplified signal based on a mathematical log function and the audio signal;

a rectifier communicatively coupled to the logarithmic amplifier, wherein the rectifier is configured to provide a rectified and logarithmically amplified signal based on the logarithmically amplified signal;

an analog to digital converter (ADC) communicatively coupled to the rectifier; and

13

a controller comprising a memory and a processor, wherein the controller executes instructions stored in the memory so as to carry out operations, the operations comprising:

at predetermined time intervals, causing the ADC to sample the rectified and logarithmically amplified signal and provide a digital output, wherein the rectified and logarithmically amplified signal comprises an output of a combination of the logarithmic amplifier and the rectifier;

storing the digital output in the memory;

transmitting the digital output to a computing device, wherein the computing device is configured to correlate the digital output with other biometric data; and

triggering an indication relating to a user's health via a user interface, wherein the indication is based on a comparison between the digital output and the other biometric data.

10. The system of claim 9 wherein the rectifier comprises a trough detector circuit.

11. The system of claim 9 wherein the system comprises a wearable device, wherein the wearable device comprises at least one other sensor, and wherein the at least one other sensor is configured to obtain the other biometric data.

12. The system of claim 9 wherein the other biometric data comprises at least one of: respiration data, movement data, blood pressure data, heart rate data, blood oxygen saturation data, or galvanic skin response data.

13. A system comprising:

a microphone configured to provide an audio signal;

a rectifier communicatively coupled to the microphone, wherein the rectifier is configured to provide a rectified signal based on the audio signal;

an analog to digital converter (ADC) communicatively coupled to the rectifier; and

a controller comprising a memory and a processor, wherein the controller executes instructions stored in the memory so as to carry out operations, the operations comprising:

at predetermined time intervals, causing the ADC to sample the rectified signal and provide a digital output, wherein the rectified signal comprises an output of a combination of the microphone and the rectifier;

storing the digital output in the memory;

providing a logarithmic output based on a mathematical log function and the digital output;

transmitting the logarithmic output to a computing device, wherein the computing device is configured to correlate the logarithmic output with other biometric data; and

14

triggering an indication relating to a user's health via a user interface, wherein the indication is based on a comparison between the digital output and the other biometric data.

14. The system of claim 13, further comprising a pre-amplifier communicatively coupled to the microphone, wherein the pre-amplifier is configured to provide an amplified signal based on the audio signal.

15. The system of claim 13 wherein the rectifier comprises a peak detector circuit, wherein the peak detector circuit comprises a rectifier circuit and a filter circuit.

16. The system of claim 13 wherein the system comprises a wearable device, wherein the wearable device comprises at least one other sensor, and wherein the at least one other sensor is configured to obtain the other biometric data.

17. The system of claim 13 wherein the other biometric data comprises at least one of: respiration data, movement data, blood pressure data, heart rate data, blood oxygen saturation data, or galvanic skin response data.

18. A method comprising:

receiving an audio signal via a microphone of a wearable device;

rectifying the audio signal with a rectifier to provide a rectified signal, wherein the rectifier comprises a peak detector;

amplifying the rectified signal with a logarithmic amplifier to provide a rectified and logarithmically amplified signal based on a mathematical log function and the rectified signal;

causing an analog to digital converter (ADC) to sample the rectified and logarithmically amplified signal, wherein the rectified and logarithmically amplified signal comprises an output of the combination of the logarithmic amplifier and the rectifier;

causing the ADC to convert the sampled rectified and logarithmically amplified signal to a digital output;

storing the digital output in a memory of the wearable device;

transmitting the digital output to a computing device, wherein the computing device is configured to correlate the digital output with other biometric data; and

triggering an indication relating to a user's health via a user interface, wherein the indication is based on a comparison between the digital output and the other biometric data.

19. The method of claim 18 wherein the wearable device comprises at least one other sensor, and wherein the at least one other sensor is configured to obtain the other biometric data.

20. The method of claim 18 wherein the other biometric data comprises at least one of: respiration data, movement data, blood pressure data, heart rate data, blood oxygen saturation data, or galvanic skin response data.

* * * * *

专利名称(译)	集成可穿戴式噪音剂量计		
公开(公告)号	US10072967	公开(公告)日	2018-09-11
申请号	US14/698155	申请日	2015-04-28
申请(专利权)人(译)	实实在在的生命科学LLC		
当前申请(专利权)人(译)	实实在在的生命科学LLC		
[标]发明人	MIROV, RUSSELL NORMAN LAPETINA, JOHN THNG, FLORENCE		
发明人	MIROV, RUSSELL NORMAN LAPETINA, JOHN THNG, FLORENCE		
IPC分类号	G01H3/10 H04R29/00 A61B5/0205 A61B5/16 A61B5/00 G01H3/14 A61B7/00 A61B5/145 A61B5/11 A61B5/08 A61B5/053 A61B5/024 A61B5/021		
CPC分类号	G01H3/10 A61B5/165 A61B5/4818 A61B5/681 A61B5/6891 A61B5/742 A61B5/7405 G01H3/14 H04R29/008 A61B5/0205 A61B2560/0242 A61B5/021 A61B5/024 A61B5/0533 A61B5/0816 A61B5/11 A61B5/14542 A61B5/4815 A61B5/6803 A61B5/7246 A61B7/003		
审查员(译)	LE, 数学		
其他公开文献	US20160320231A1		
外部链接	Espacenet		

摘要(译)

描述了可以提供关于可穿戴设备周围的环境的音频信息的系统和方法。这种音频信息可以与其他生物识别数据相关联，以提供生理信息，例如，关于可穿戴设备的佩戴者。例如，说明性方法包括经由可穿戴设备的麦克风接收音频信号并用峰值检测器对音频信号进行整流。该方法还包括用对数放大器放大整流信号并使模数转换器（ADC）对对数信号进行采样。该方法还包括使ADC将采样的对数信号转换为数字输出并将数字输出存储在可穿戴设备的存储器中。在一些实施例中，该方法包括将数字输出发送到计算设备，该计算设备可以将数字输出与其他生物测量数据相关联。

