



(19) **United States**
(12) **Patent Application Publication**
ELSER

(10) **Pub. No.: US 2013/0217980 A1**
(43) **Pub. Date: Aug. 22, 2013**

(54) **EQUINE WIRELESS PHYSIOLOGICAL MONITORING SYSTEM**

(71) Applicant: **DR. ANDREW H. ELSER, V.M.D., P.C.**, (US)

(72) Inventor: **Andrew H. ELSER**, West Chester, PA (US)

(73) Assignee: **DR. ANDREW H. ELSER, V.M.D., P.C.**, Lewisville, PA (US)

(21) Appl. No.: **13/845,682**

(22) Filed: **Mar. 18, 2013**

Related U.S. Application Data

(63) Continuation of application No. 11/273,678, filed on Nov. 14, 2005, now Pat. No. 8,398,560.

(60) Provisional application No. 60/627,215, filed on Nov. 12, 2004.


Publication Classification

(51) **Int. Cl.**
A61D 99/00 (2006.01)
A61B 7/00 (2006.01)
A61B 5/0488 (2006.01)
A61B 5/0476 (2006.01)

A61B 5/00 (2006.01)
A61B 5/08 (2006.01)
A61B 5/03 (2006.01)
A61B 5/087 (2006.01)
A61B 5/145 (2006.01)
A61B 5/01 (2006.01)
A61B 5/0408 (2006.01)
A61B 5/0496 (2006.01)
(52) **U.S. Cl.**
CPC *A61D 99/00* (2013.01); *A61B 5/0408* (2013.01); *A61B 7/003* (2013.01); *A61B 5/0488* (2013.01); *A61B 5/0476* (2013.01); *A61B 5/0496* (2013.01); *A61B 5/0809* (2013.01); *A61B 5/03* (2013.01); *A61B 5/087* (2013.01); *A61B 5/082* (2013.01); *A61B 5/14539* (2013.01); *A61B 5/01* (2013.01); *A61B 5/0059* (2013.01)
USPC 600/301; 600/529; 600/595; 600/509; 600/484; 600/483

(57) **ABSTRACT**

An accelerometer senses equine respiratory structural vibrations. The accelerometer includes a sensing surface configured to be attached to one of hair, skin, bone, ligament, cartilage, and other tissue of a horse. The accelerometer is responsive to respiratory structural vibrations of the horse and outputs a signal corresponding to the respiratory structural vibrations.

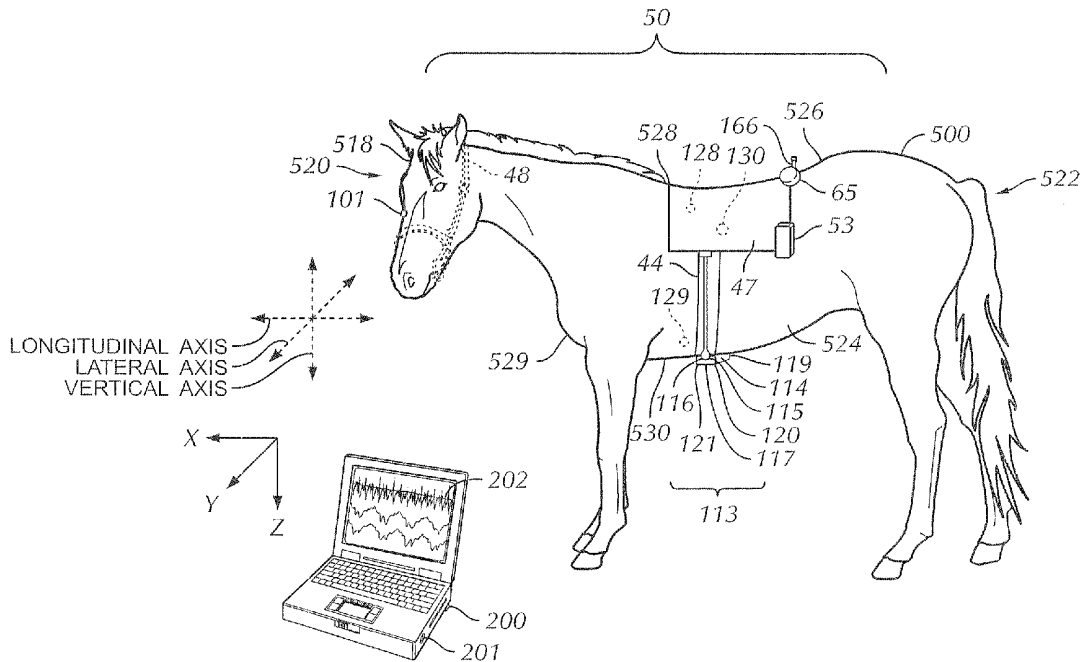

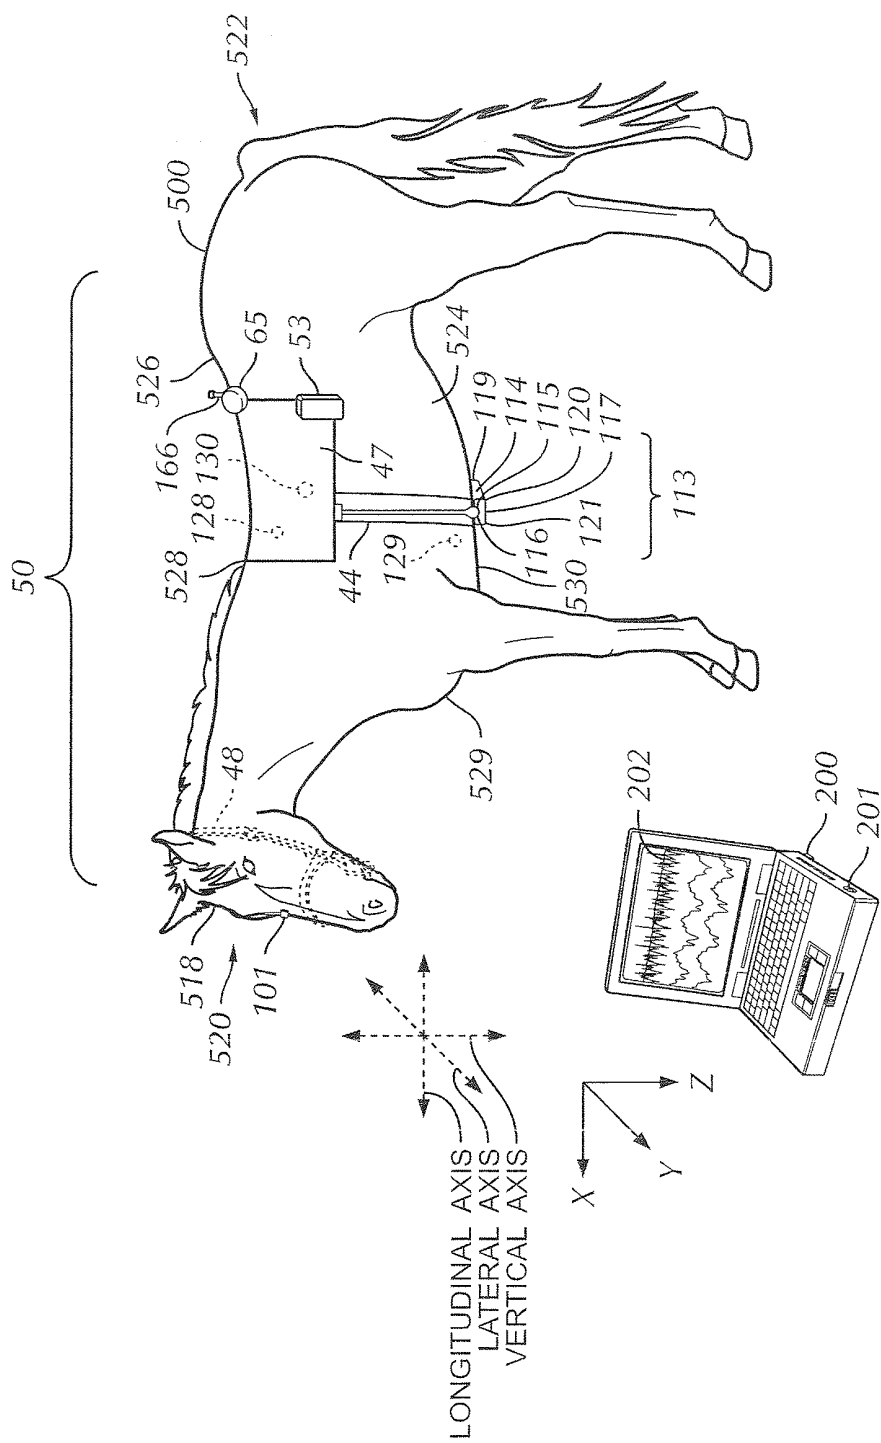


FIG. 1

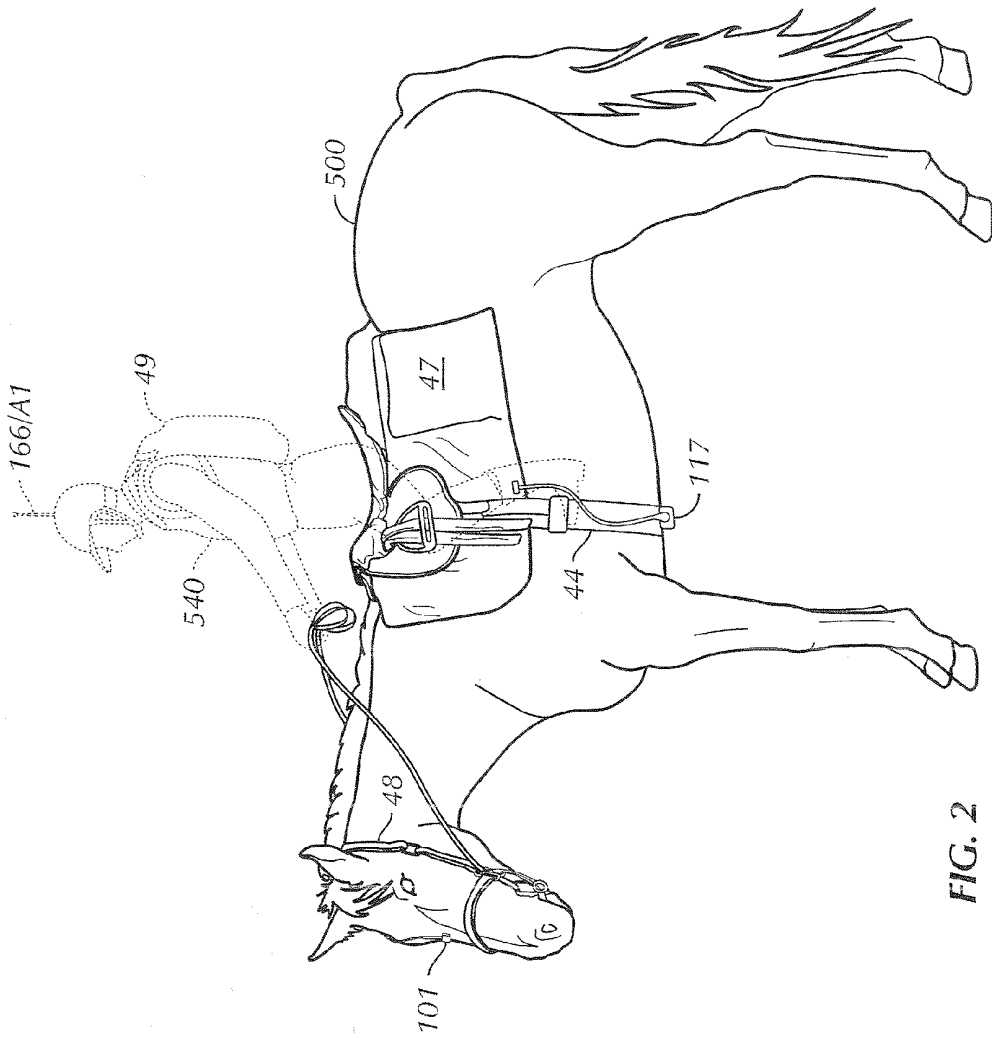


FIG. 2

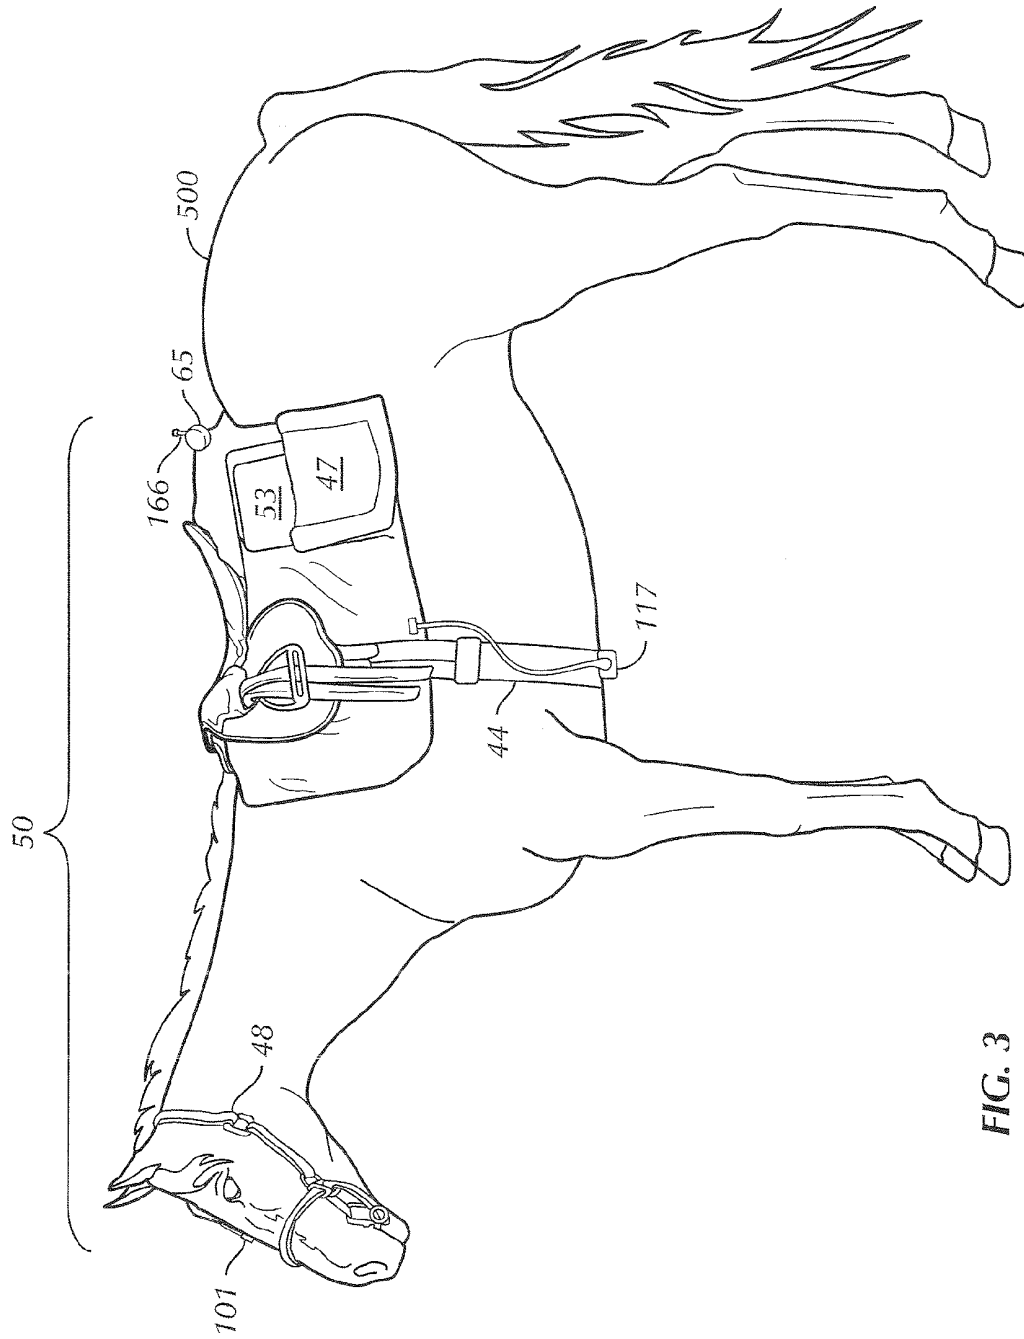


FIG. 3

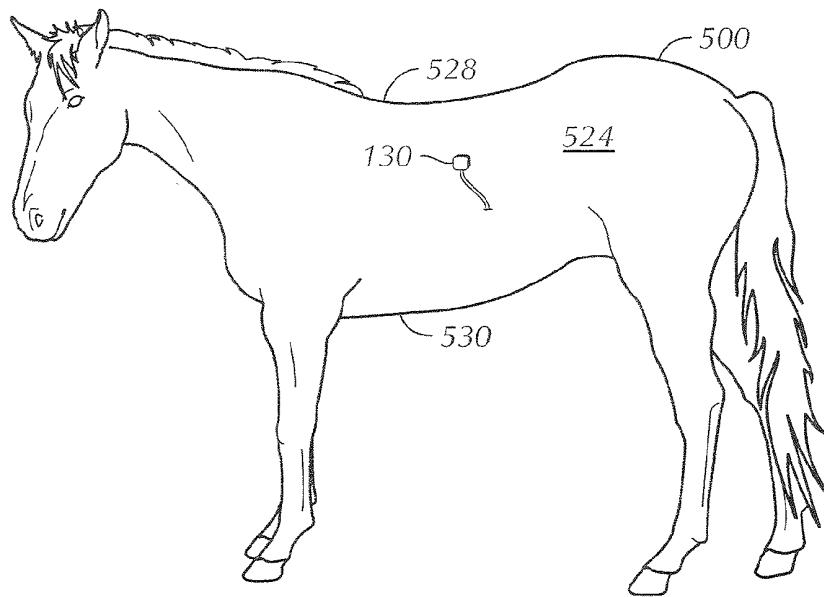


FIG. 4

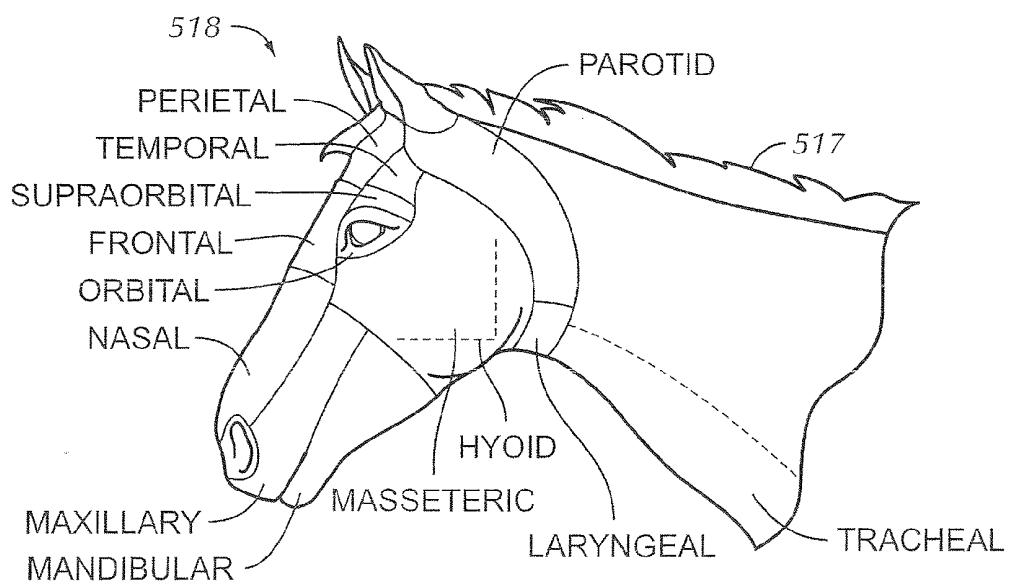


FIG. 23
(PRIOR ART)

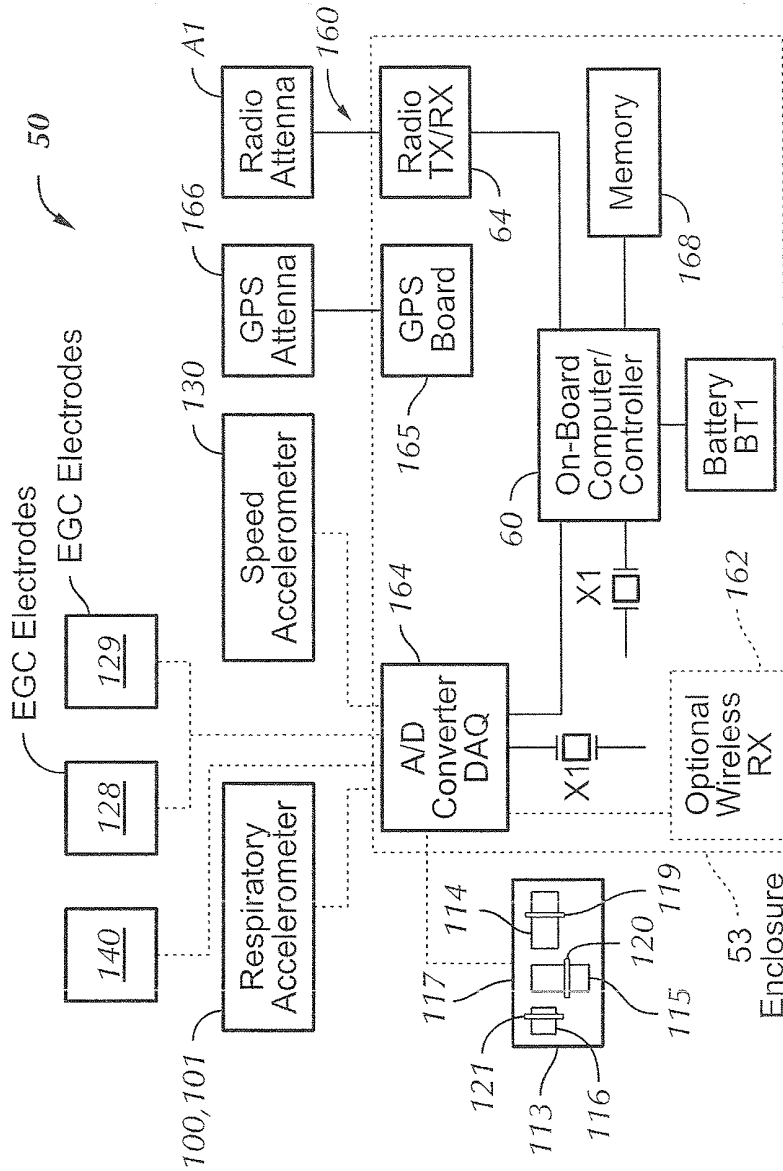


FIG. 5

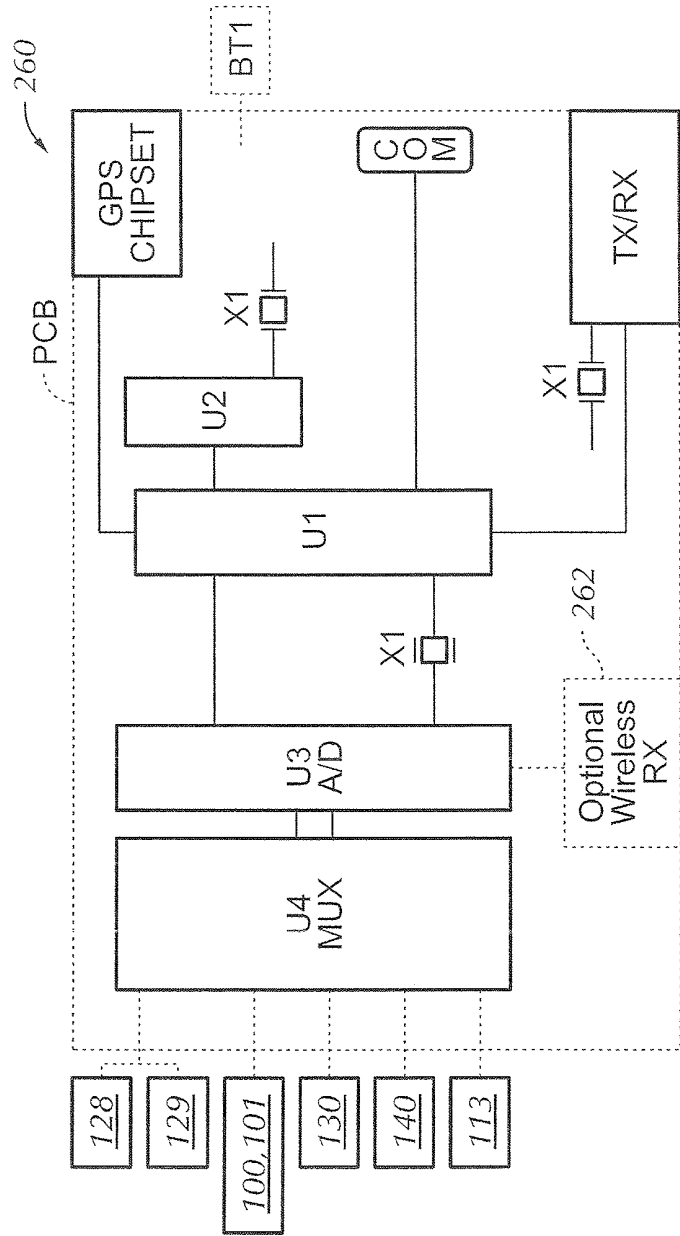


FIG. 6

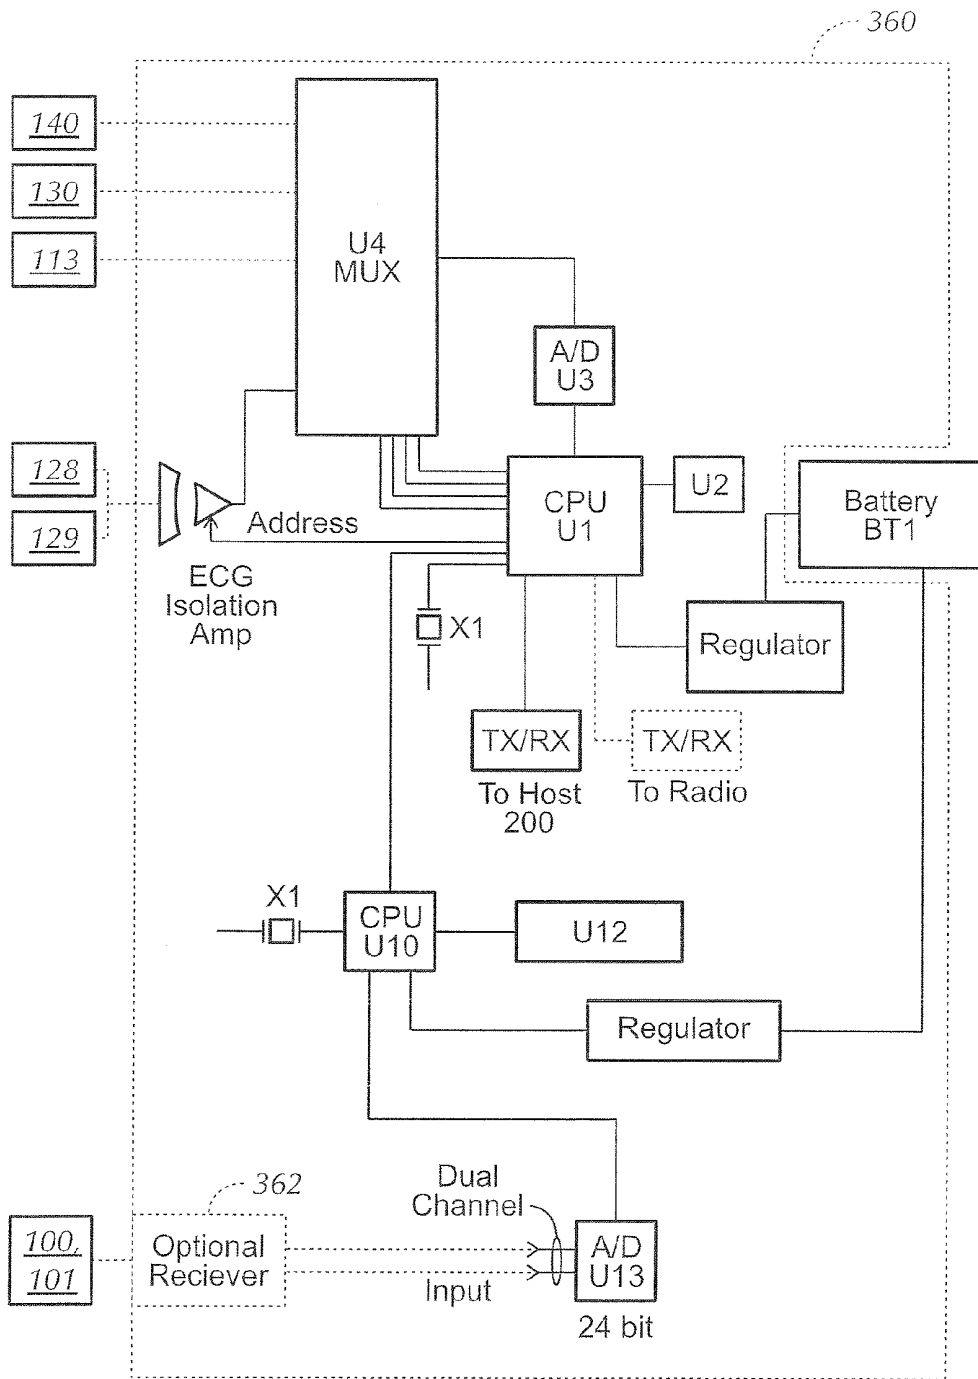


FIG. 7

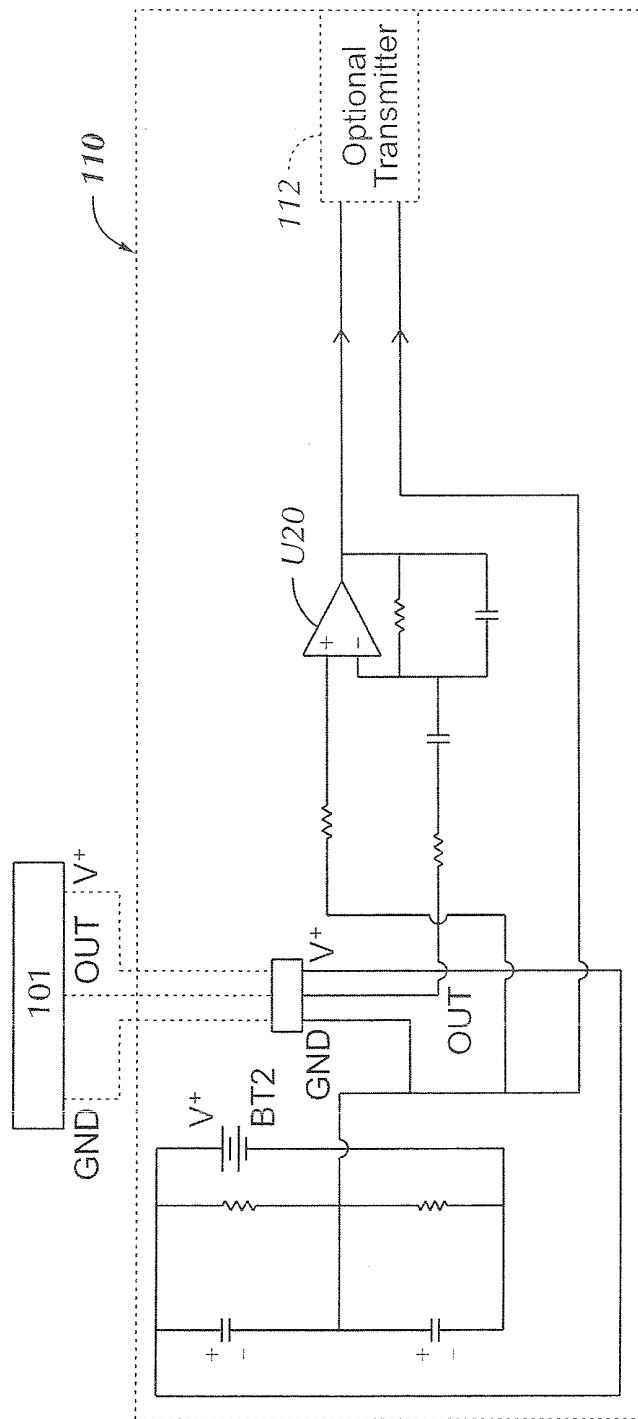
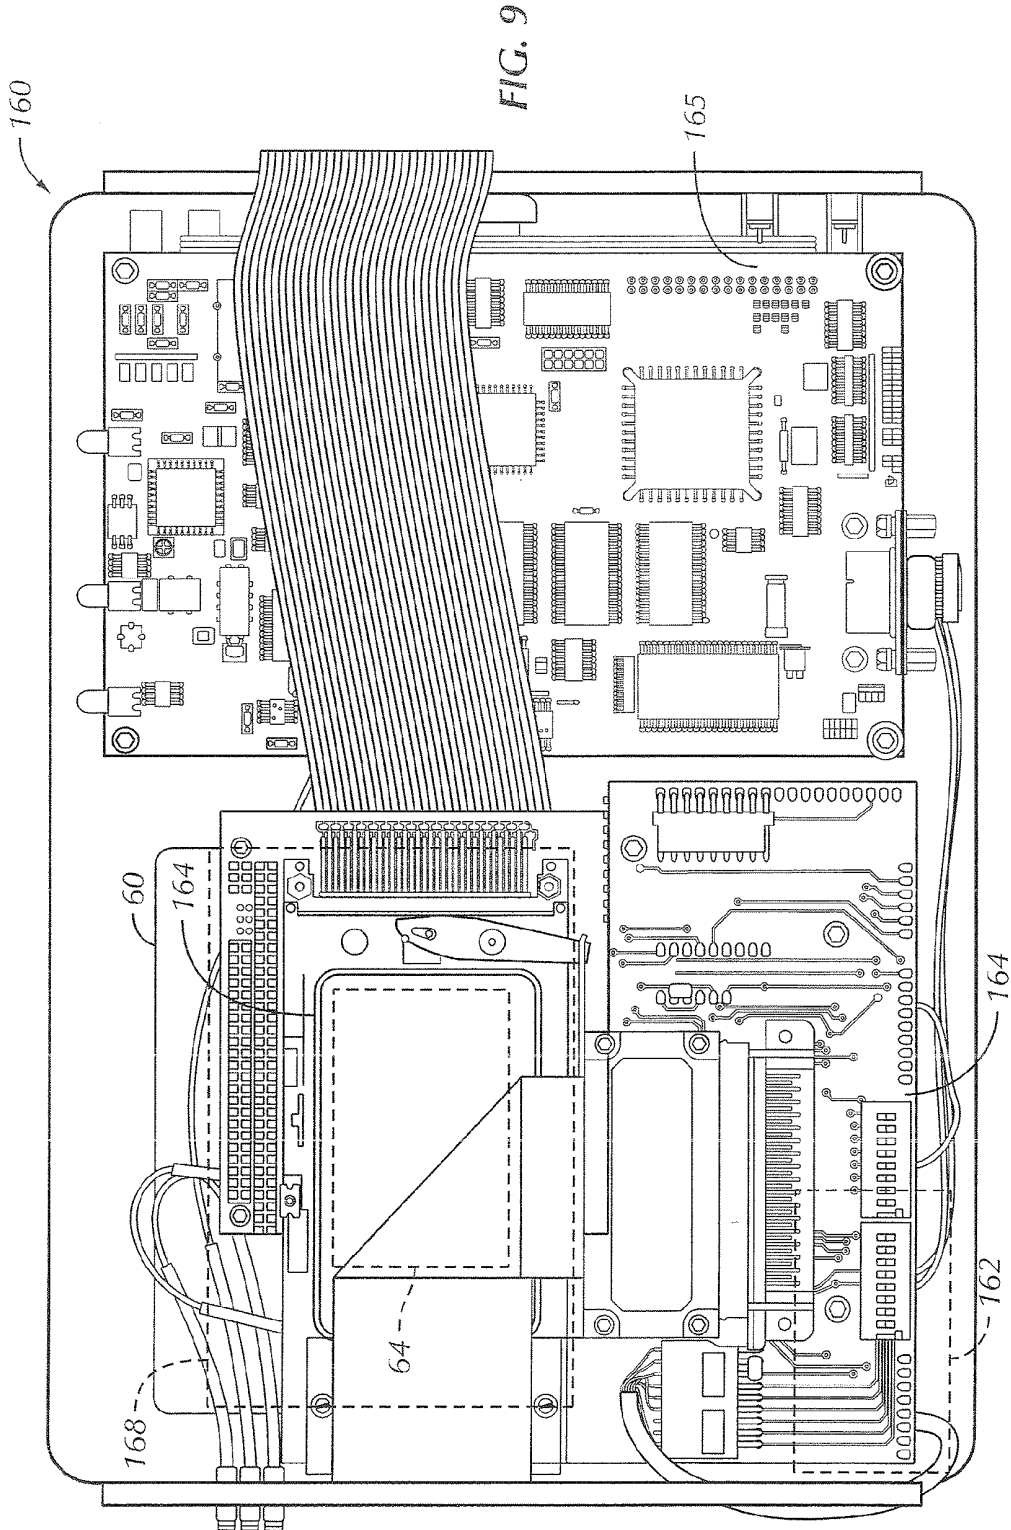
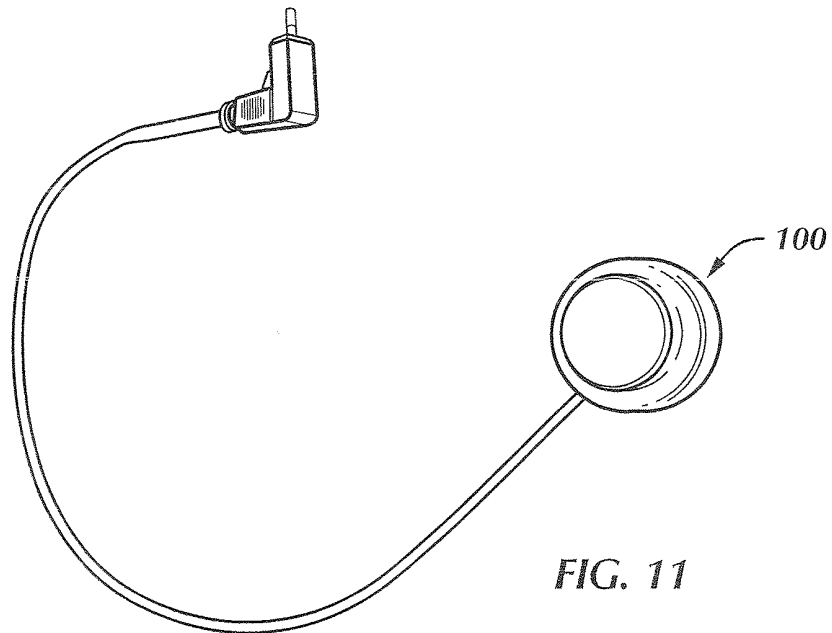
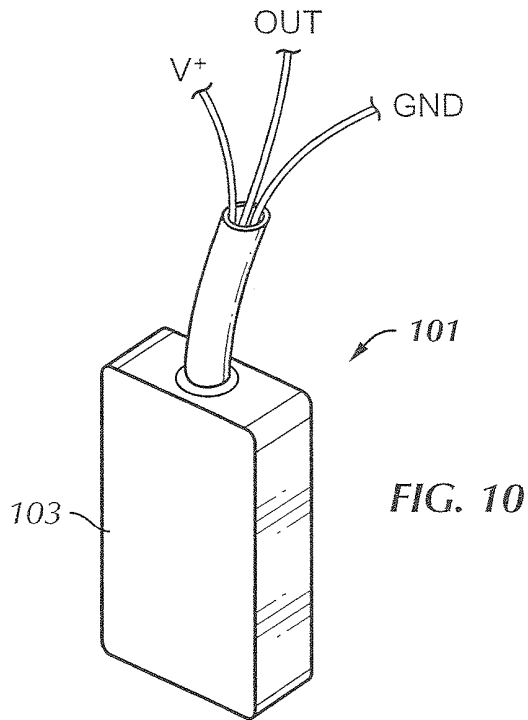


FIG. 8





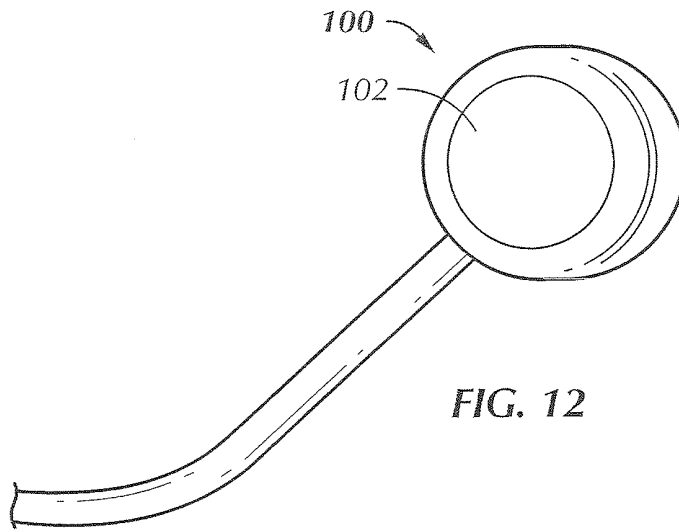


FIG. 12

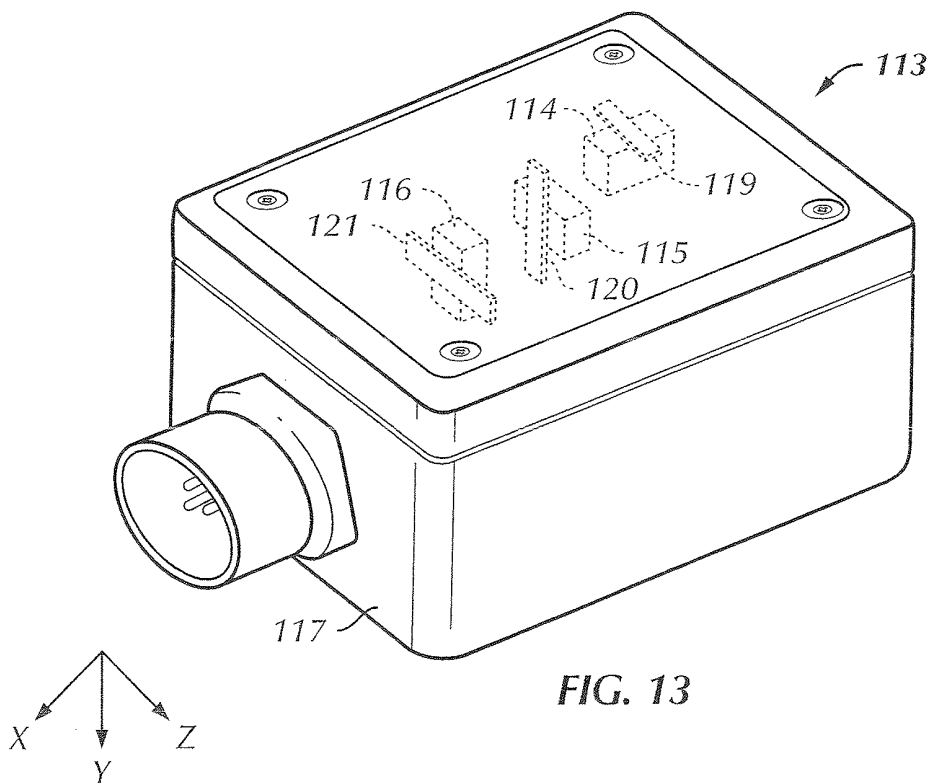


FIG. 13

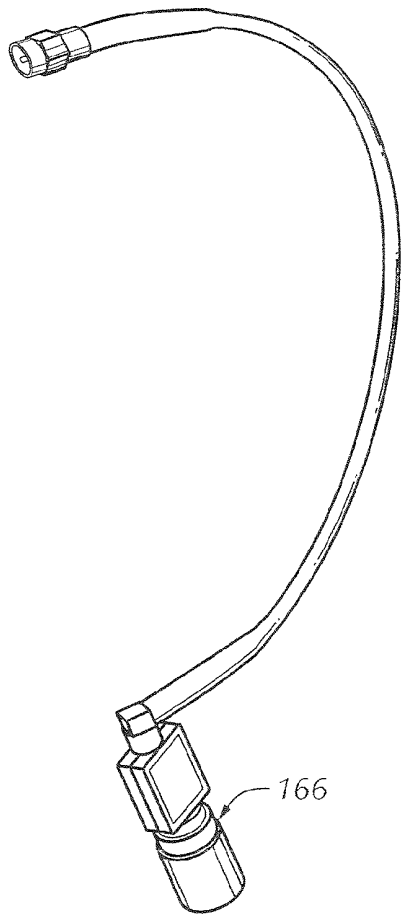


FIG. 14

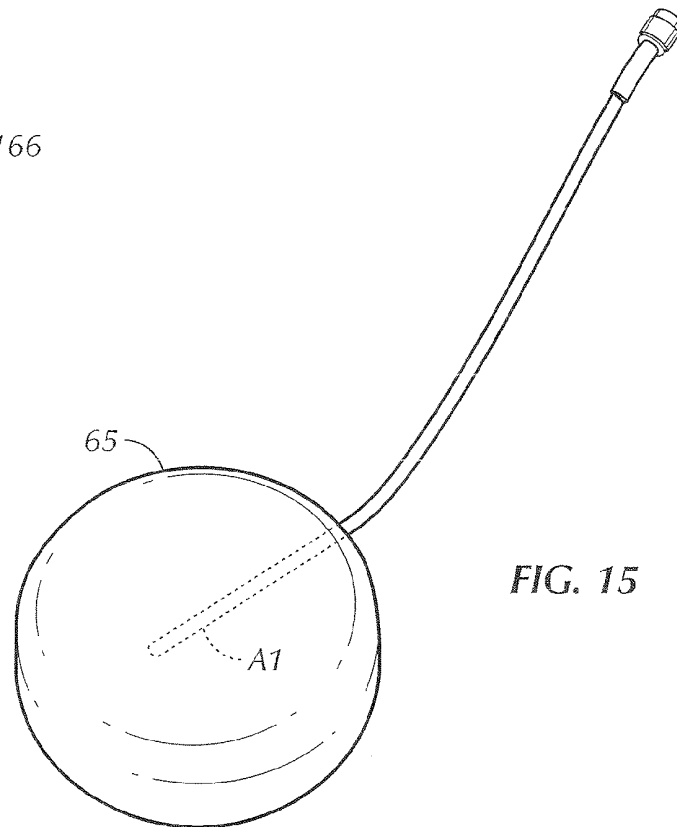


FIG. 15

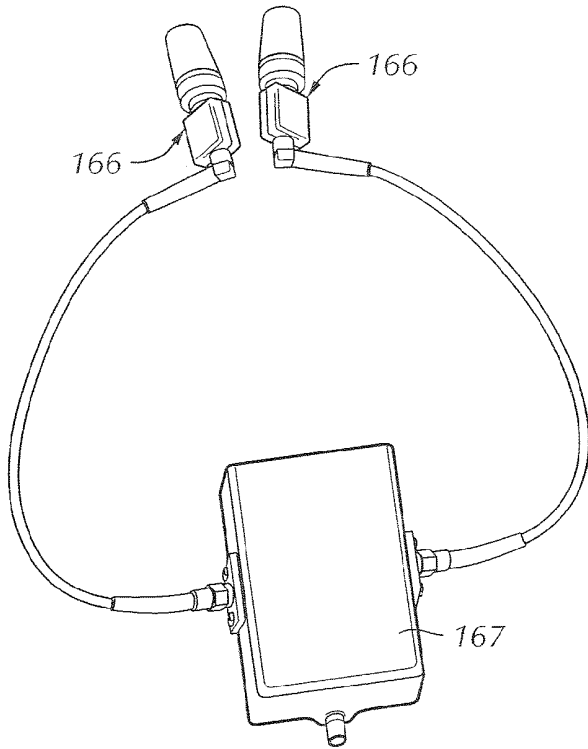


FIG. 16

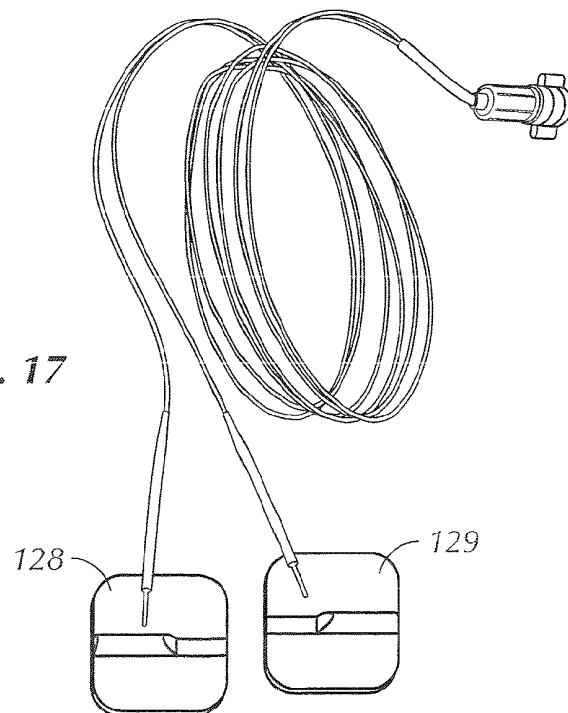


FIG. 17

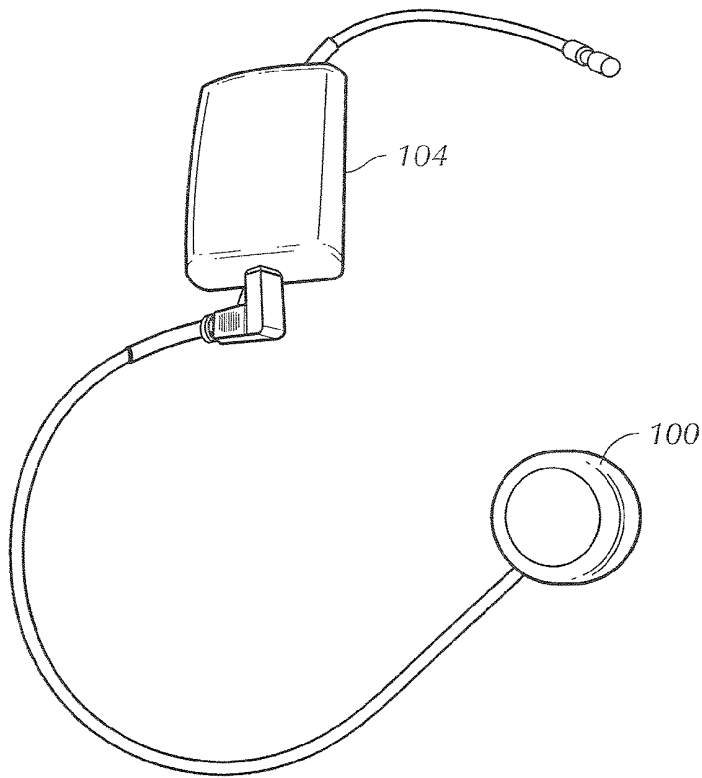


FIG. 18

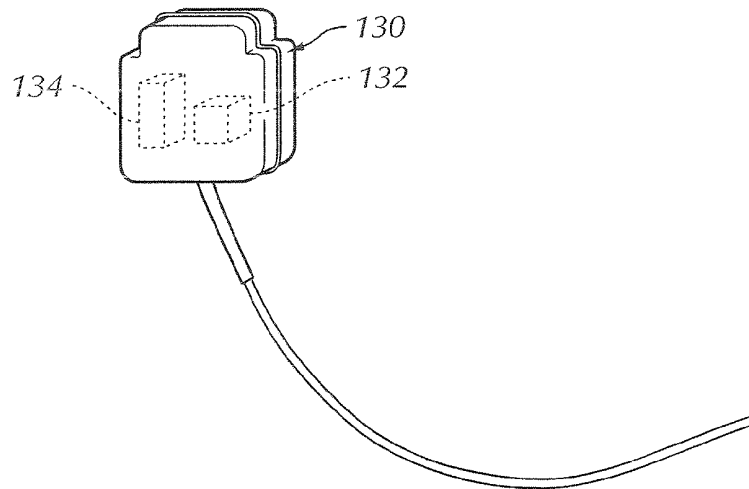
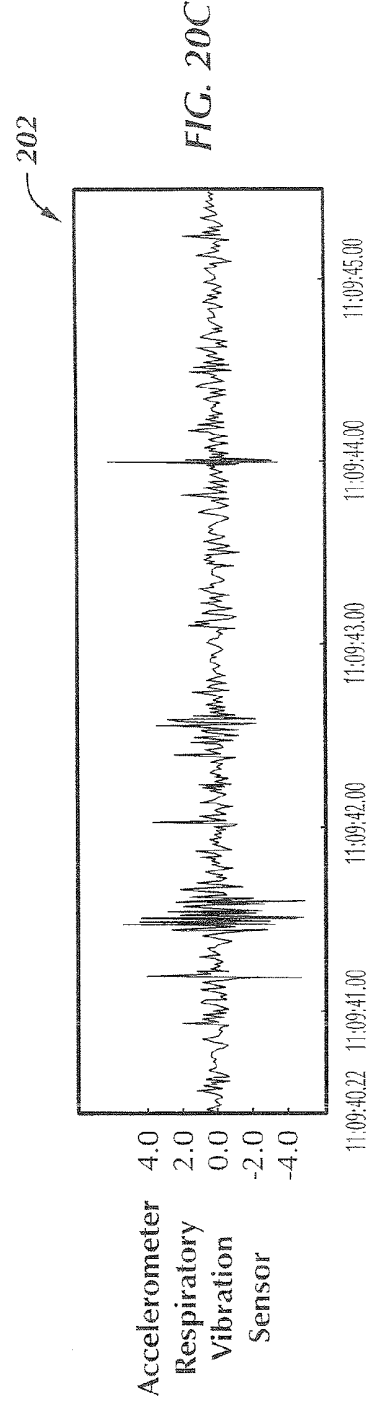
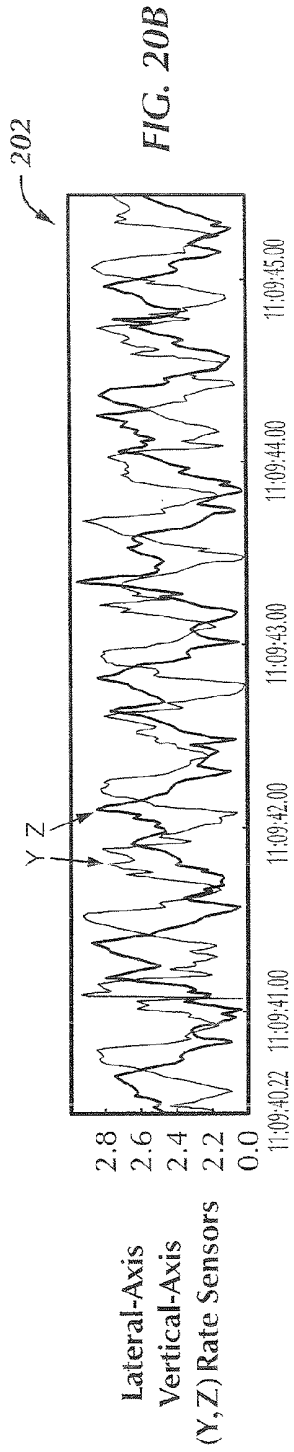
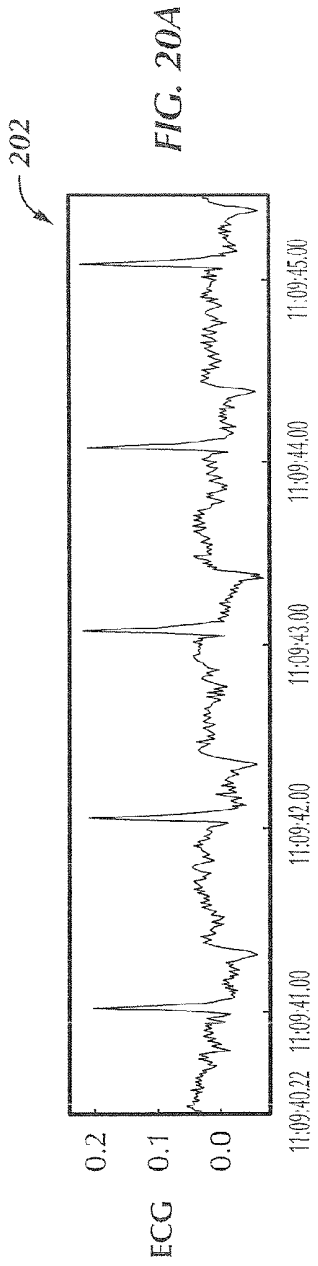
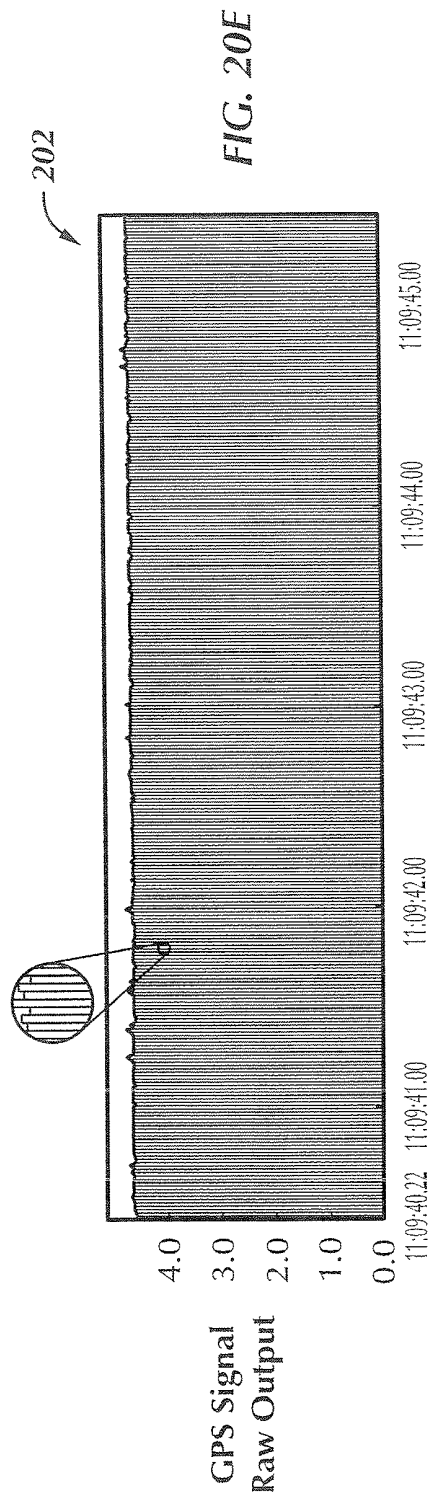
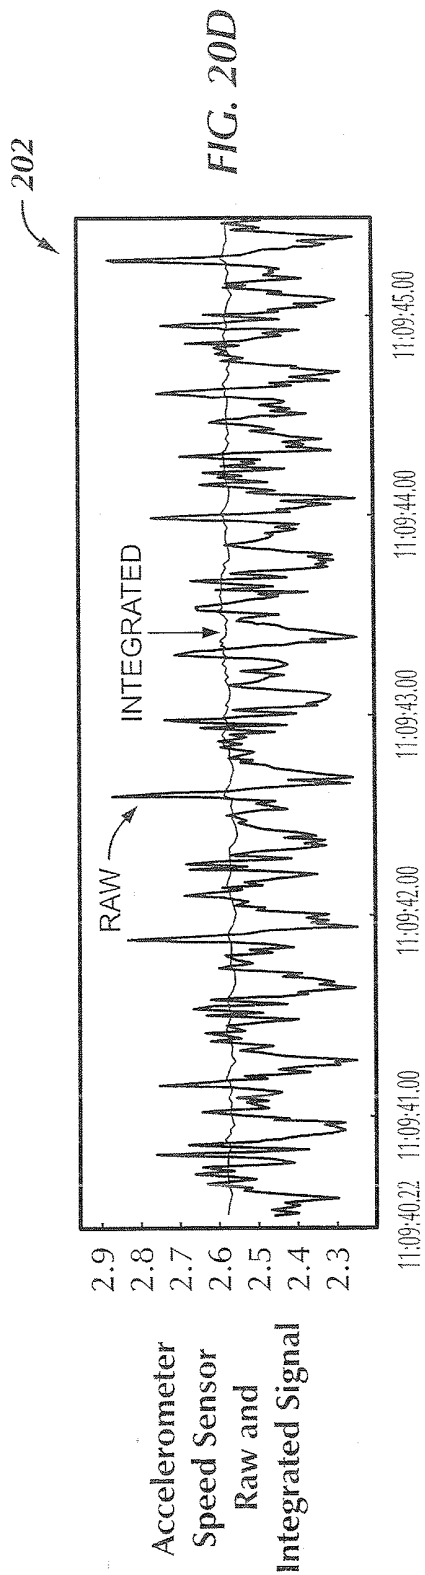
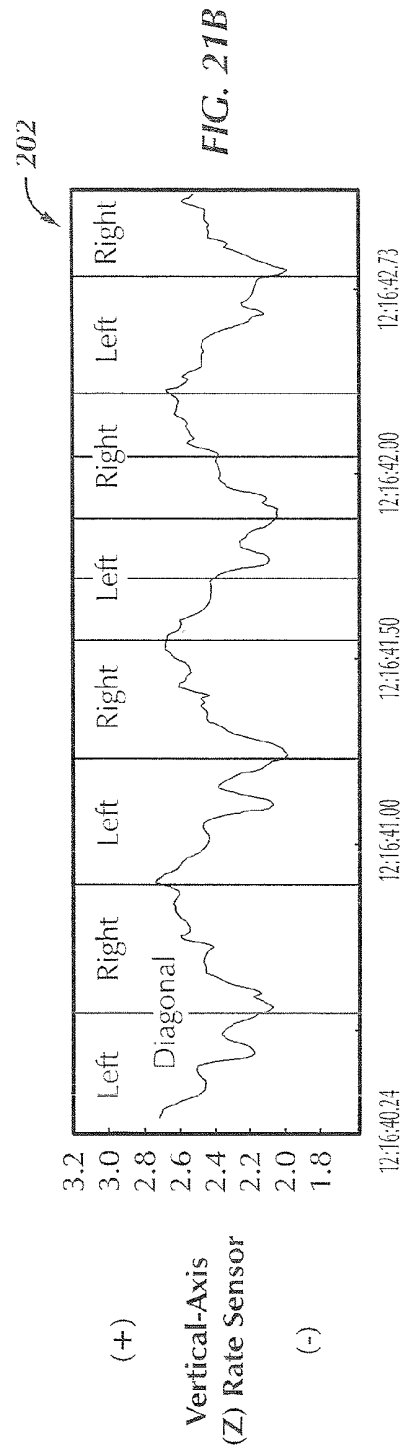
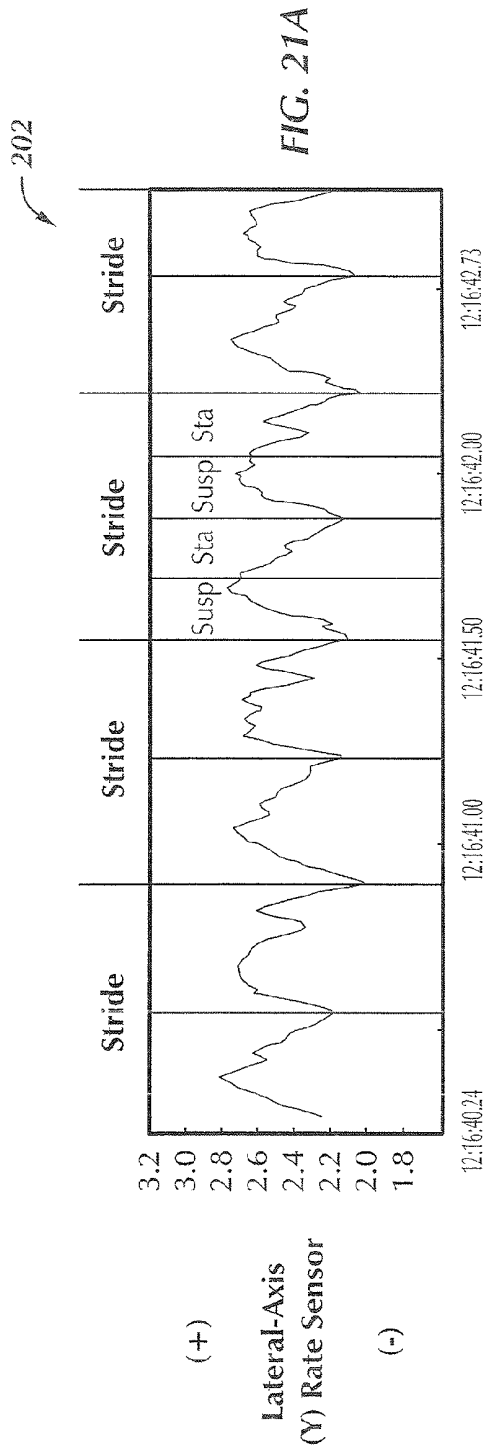
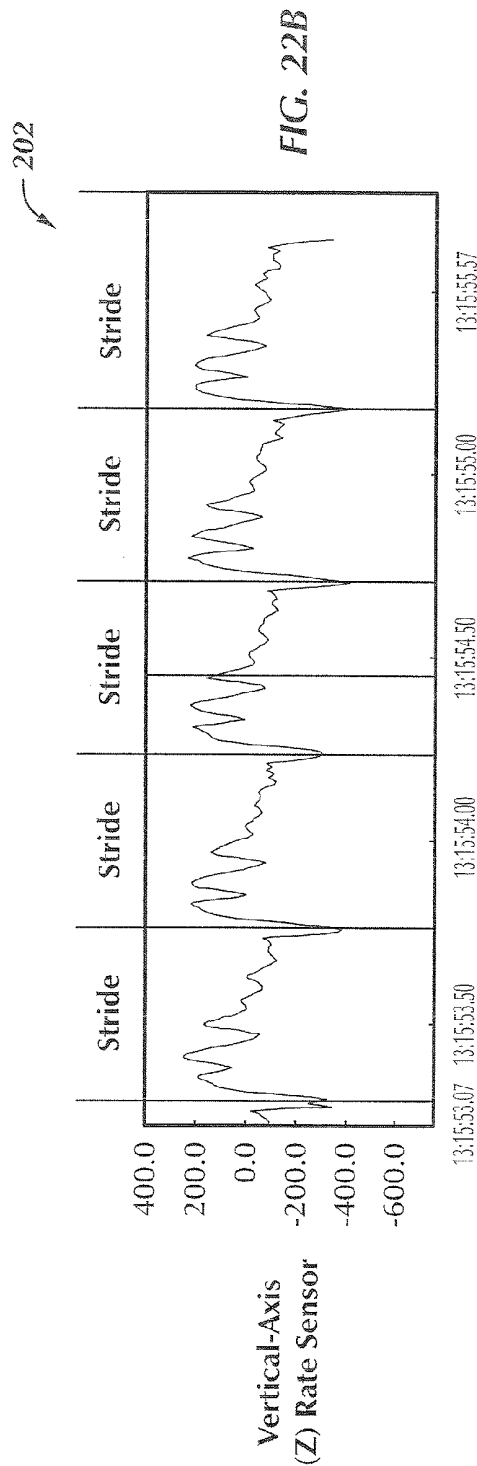
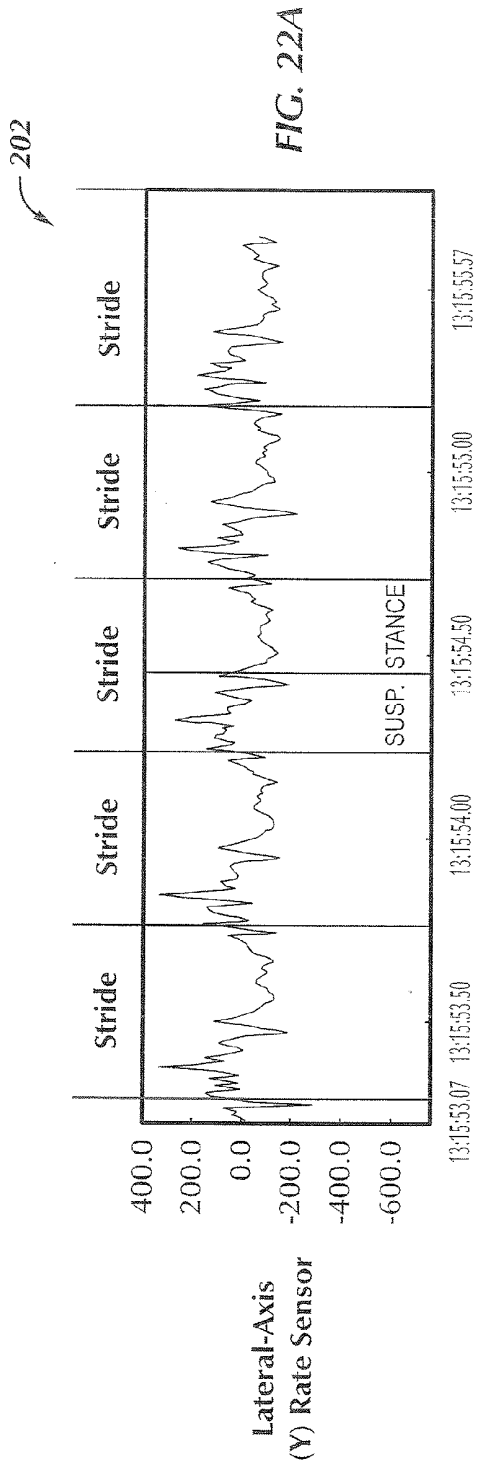




FIG. 19









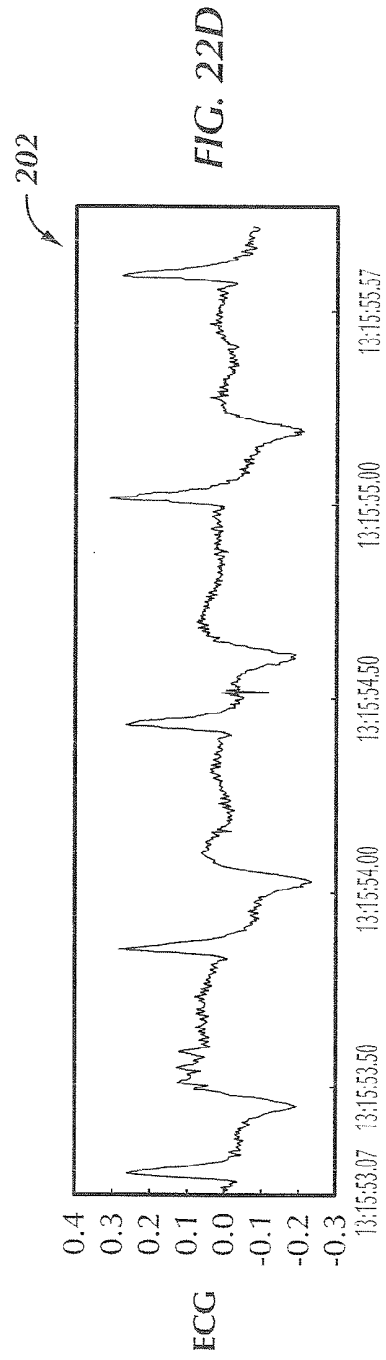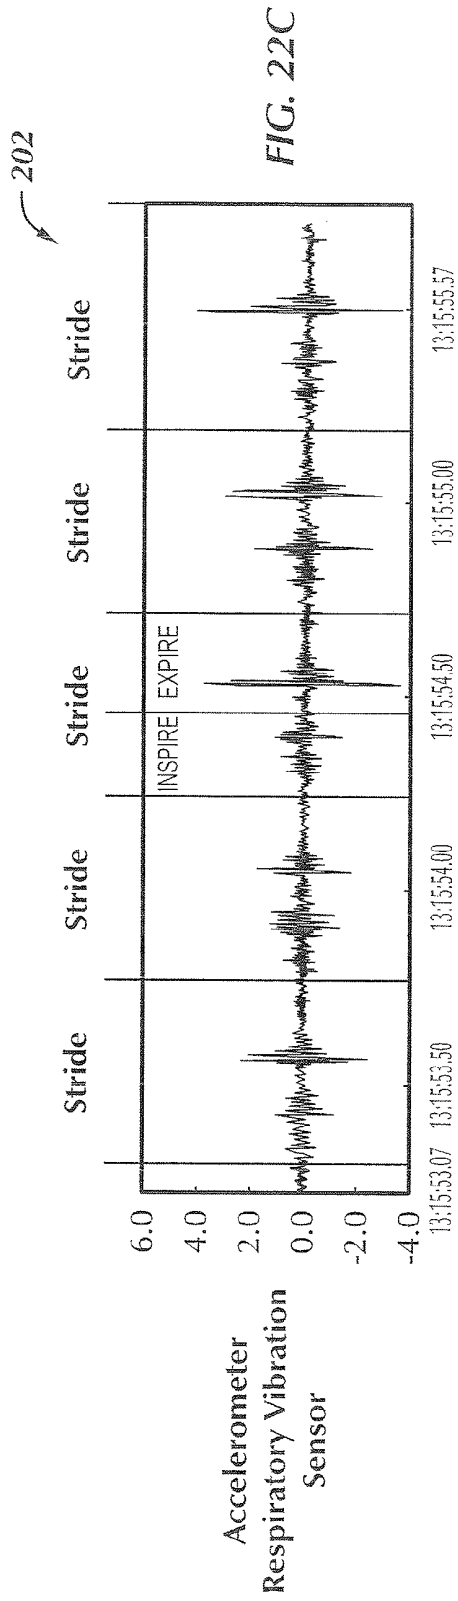

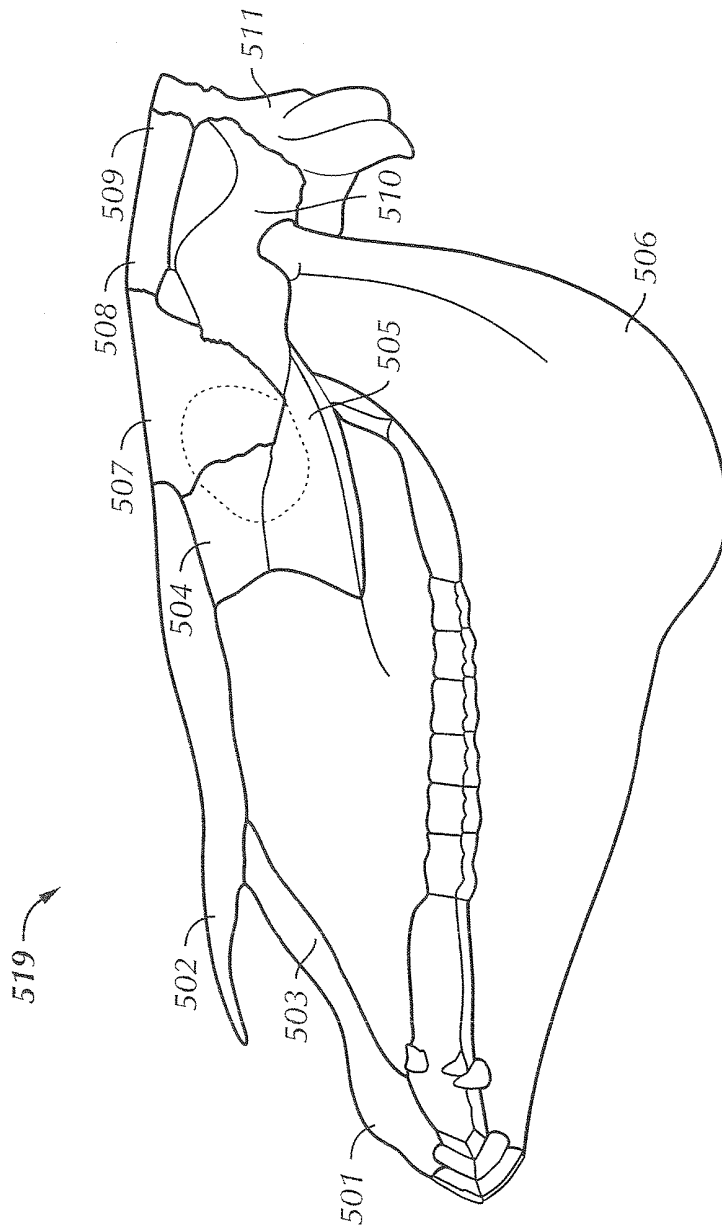


FIG. 24
(PRIOR ART)

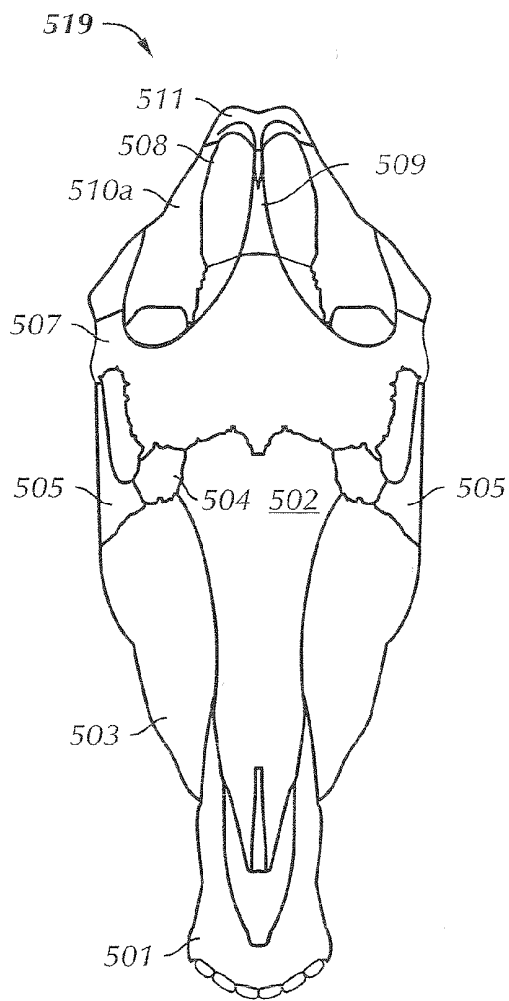


FIG. 25
(PRIOR ART)

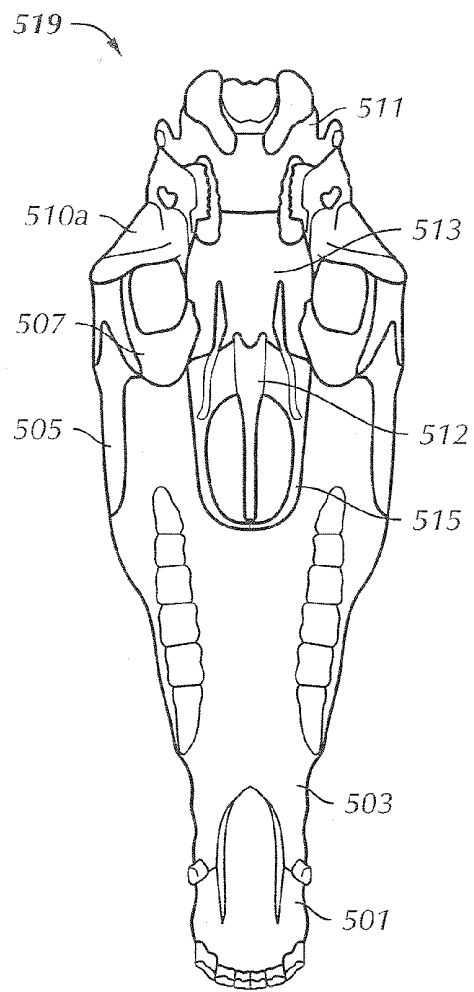


FIG. 26
(PRIOR ART)

EQUINE WIRELESS PHYSIOLOGICAL MONITORING SYSTEM

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation application of U.S. patent application Ser. No. 11/273,678, filed on Nov. 14, 2005, entitled "Equine Wireless Physiological Monitoring System," currently pending, which claims priority to U.S. Provisional Patent Application No. 60/627,215, filed on Nov. 12, 2004, entitled "Equine Wireless Physiological Monitoring System," the entire contents of all of which are incorporated by reference herein.

BACKGROUND OF THE INVENTION

[0002] The present invention relates to an apparatus and procedure to identify the interactions between the respiratory, locomotor, and cardiovascular systems of the exercising horse. The present invention relates to an equine physiological monitoring system, and more particularly, to a portable wireless equine physiological monitoring system and a method for using the equine physiological monitoring system.

[0003] Evaluating the interrelationships between the respiratory, locomotor, and cardiovascular systems is valuable in the understanding of equine exercise physiology. In order to study these relationships suitable devices and methods are needed to first detect the individual functions such that the combined functions and relationships can be assessed. It is desirable for these devices and methods to be usable and adaptable to a wide variety of conditions under which the exercising horse may be placed.

[0004] It is desirable therefore to design a system of suitable devices, communication and methods of using said system devices and communication simultaneously such that interrelationships of the respiratory, locomotor, and cardiovascular systems of the exercising horse can be accurately studied. To assist in this assessment, it is desirable to provide an accelerometer that senses equine respiratory structural vibrations. It is also desirable to provide an equine motion sensor utilizing angular rate and accelerometer sensors to detect equine locomotion.

[0005] Further, it is desirable to provide a wireless system disposed on a horse or proximate to the horse that is configured to monitor equine physiological systems. It is also desired that the system presents the data suitable for the study of the physiological interactions of the exercising horse.

[0006] Moreover, it is desirable to provide a wireless equine physiological monitoring system for monitoring interactions of physiological events of an exercising horse. It is desirable to provide a wireless equine physiological monitoring system for monitoring interactions of physiological events of an exercising horse such as electrocardiographic data, respiratory data, motion data, speed or the like. Even further, it is desirable to provide an equine physiological monitoring system for monitoring interactions of physiological events of an exercising horse that collects or stores data which is synchronized with respect to time.

BRIEF SUMMARY OF THE INVENTION

[0007] Briefly stated the present invention comprises an accelerometer that senses equine respiratory structural vibrations. The accelerometer includes a sensing surface config-

ured to be attached to one of hair, skin, bone, ligament, cartilage, and other tissue of a horse. The accelerometer is responsive to respiratory structural vibrations of the horse and outputs a signal corresponding to the respiratory structural vibrations.

[0008] The present invention also comprises a motion sensor that senses equine motion in multi-dimensional space. The motion sensor includes at least one angular rate sensor and at least one accelerometer. The at least one angular rate sensor and the at least one accelerometer are configured to be mounted proximate to a horse so as to move with the horse. The at least one angular rate sensor detects angular rotation data relative to a first-axis. The at least one accelerometer is mounted proximate to the at least one angular rate sensor and is configured to output multi-dimensional motion data of the horse.

[0009] The present invention also comprises a speed sensor that senses equine speed. The speed sensor includes an accelerometer that detects acceleration and deceleration in a longitudinal-axis of a horse and a lateral-axis angular rate sensor configured to be mounted proximate to the accelerometer. The longitudinal-axis is defined through a length of the horse as measured between the cranial and the caudal aspects of the horse. The accelerometer is configured to be mounted proximate to the horse. The lateral-axis angular rate sensor detects angular rotation data relative to the lateral-axis of the horse. The lateral-axis being defined through a width of the body of the horse as measured between the right and left lateral sides of the horse.

[0010] The present invention also comprises a speed sensor that senses equine speed. The speed sensor includes a global positioning system (GPS) receiver that receives GPS data from GPS satellites. The GPS receiver updates GPS data at least once per second. The GPS receiver is configured to be mounted proximate to a horse so as to move with the horse. The GPS receiver is configured to perform at least one of outputting data proportional to speed and calculating speed of the horse from the updated GPS data.

[0011] The present invention also comprises a speed sensor that senses equine speed. The speed sensor includes at least one Doppler transceiver that transmits an electromagnetic signal and receives a reflected or transponded version of the electromagnetic signal. The at least one Doppler transceiver is configured to be mounted proximate to a horse so as to move with the horse. The at least one Doppler transceiver is configured to perform at least one of outputting data proportional to speed and calculating speed of the horse based on the difference in time/frequency between the transmitted and received electromagnetic signal.

[0012] The present invention also comprises a wireless equine physiological monitoring system that includes a respiratory sensor and a memory. The respiratory sensor is configured to be mounted proximate to a horse. The respiratory sensor detects respiratory data of the horse and outputs the detected respiratory data of the horse. The memory at least temporarily stores the detected respiratory data. The detected respiratory data is synchronized with respect to time.

[0013] The present invention also comprises a wireless equine physiological monitoring system. The wireless equine physiological monitoring system includes a respiratory detection sensor configured to be mounted proximate to a horse and a memory configured to be mounted proximate to the horse. The respiratory detection sensor detects and outputs detected respiratory data. The memory at least tempo-

rarily stores the detected respiratory data of the horse. The detected respiratory data is synchronized with respect to real time. The wireless equine physiological monitoring system also includes a real time trend display that wirelessly receives the detected respiratory data. The trend display displays the detected respiratory data with respect to time as the detected respiratory data is received.

[0014] The present invention also comprises a wireless equine physiological monitoring system. The wireless equine physiological monitoring system includes a speed sensor configured to be mounted proximate to a horse. The speed sensor detects and outputs detected speed data of the horse. The wireless equine physiological monitoring system also includes a real-time trend display that wirelessly receives the detected speed data. The trend display displays the detected speed data with respect to time as the detected speed data is received.

[0015] The present invention also comprises a wireless equine physiological monitoring system. The wireless equine physiological monitoring system includes a single-axis angular rate sensor configured to be mounted proximate to a horse so as to move with the horse. The single-axis angular rate sensor detects and outputs angular rotation data relative to the single-axis. The single-axis is one of a lateral-axis, a vertical-axis and a longitudinal-axis. The lateral-axis is defined through a width of the body of the horse as measured between the right and left lateral sides of the horse, the vertical-axis is defined through a height of the body of the horse as measured between the dorsal and ventral aspects of the horse and the longitudinal-axis is defined through a length of the horse as measured between the cranial and the caudal aspects of the horse. The wireless equine physiological monitoring system also includes a real-time trend display that wirelessly receives the detected angular rotation data relative to the single-axis. The trend display displays the detected angular rotation data relative to the single-axis with respect to time as the detected angular rotation data relative to the single-axis is received.

[0016] The present invention also comprises a wireless equine physiological monitoring system. The wireless equine physiological monitoring system includes a respiratory detection sensor and a second sensor, each configured to be mounted proximate to the horse. The respiratory detection sensor detects and outputs detected respiratory data. The second sensor detects and outputs detected second sensor data. The second sensor is at least one of a lateral-axis angular rate sensor, a longitudinal-axis angular rate sensor, a vertical-axis angular rate sensor, an accelerometer, a speed sensor, an electrocardiogram (ECG) electrode configuration set, an electromyography (EMG) sensor configuration set, an electroencephalograph (EEG) sensor configuration set, electrooculogram (EOG) sensor configuration set, an impedance pneumogram (ZPG) sensor configuration set, a pressure sensor, a gas flow sensor, a gas detection sensor, a pH sensor, a temperature sensor, an imaging sensor, an optical sensor and a blood constituent sensor. The wireless equine physiological monitoring system also includes one of a trend display and a computer that wirelessly receives the detected respiratory data and the detected second sensor data. The respective one of the trend display and the computer displays at least one of the detected respiratory data and the detected second sensor data. The detected respiratory data and the detected second sensor data are synchronized with respect to real time.

[0017] The present invention also comprises a wireless equine physiological monitoring system. The wireless equine

physiological monitoring system includes a speed sensor and a second sensor, each configured to be mounted proximate to the horse. The speed sensor detects and outputs at least one of detected raw data for calculating speed and calculated speed data. The second sensor detects and outputs detected second sensor data. The second sensor is at least one of a lateral-axis angular rate sensor, a longitudinal-axis angular rate sensor, a vertical-axis angular rate sensor, an accelerometer, a respiratory detection sensor, an ECG electrode configuration set, an EMG sensor configuration set, an EEG sensor configuration set, EOG sensor configuration set, a ZPG sensor configuration set, a pressure sensor, a gas flow sensor, a gas detection sensor, a pH sensor, a temperature sensor, an imaging sensor, an optical sensor and a blood constituent sensor. The wireless equine physiological monitoring system also includes one of a trend display and a computer that wirelessly receives the detected second sensor data and at least one of detected raw data for calculating instantaneous speed and calculated instantaneous speed data. The respective one of the trend display and the computer displays the detected second sensor data and at least one of the detected raw data for calculating instantaneous speed and the calculated instantaneous speed data. The second sensor data and at least one of the detected raw data for calculating instantaneous speed and the calculated instantaneous speed data are synchronized with respect to time.

[0018] The present invention also comprises an equine physiological monitoring system. The equine physiological monitoring system includes a portable controller having a memory, a lateral-axis angular rate sensor, a vertical-axis angular rate sensor, an ECG electrode configuration set and a respiratory detection sensor. All of the devices are configured to be mounted proximate to a horse so as to move with the horse. The lateral-axis angular rate sensor is in communication with the controller and sends the controller detected angular rotation data relative to the lateral-axis. The vertical-axis angular rate sensor is in communication with the controller and sends the controller detected angular rotation data relative to the vertical-axis. The ECG electrode configuration set is in communication with the controller and sends the controller detected ECG data. The respiratory detection sensor is in communication with the controller and sends the controller detected respiratory data. The memory at least temporarily stores the detected angular rotation data relative to the lateral-axis, the detected angular rotation data relative to the vertical-axis, the detected ECG data and the detected respiratory data. The detected angular rotation data relative to the lateral-axis, the detected angular rotation data relative to the vertical-axis, the detected ECG data and the detected respiratory data are synchronized with respect to time.

[0019] The present invention also comprises a method of monitoring physiological data of an exercising horse. The method includes mounting a sensing surface of an accelerometer directly to one of hair and skin of a horse. The accelerometer detects respiratory structural vibration data. The horse is exercised. The respiratory structural vibration data is stored, at least temporarily, in a memory.

[0020] The present invention also comprises a method of monitoring physiological data of an exercising horse. The method includes mounting a sensing surface of an accelerometer directly to one of hair and skin of a horse. The accelerometer detects respiratory structural vibration data. The horse is exercised. The respiratory structural vibration data is converted to a corresponding signal and the corresponding

signal is wirelessly transmitted. The wirelessly transmitted corresponding signal is received at an audio generating device. The detected respiratory structural vibration data is stored, at least temporarily, in a memory. The audio generating device emits audible sound in real time based on the corresponding signal.

[0021] The present invention also comprises a method of monitoring interactions of physiological events of an exercising horse. The method includes placing a respiratory detection sensor and a second sensor proximate to the horse so as to move with the horse. The respiratory detection sensor detects and outputs detected respiratory data. The second sensor detects and outputs detected second sensor data. The second sensor is at least one of a lateral-axis angular rate sensor, a longitudinal-axis angular rate sensor, a vertical-axis angular rate sensor, an accelerometer, a speed sensor, an ECG electrode configuration set, an EMG sensor configuration set, an EEG sensor configuration set, EOG sensor configuration set, a ZPG sensor configuration set, a pressure sensor, a gas flow sensor, a gas detection sensor, a pH sensor, a temperature sensor, an imaging sensor, an optical sensor and a blood constituent sensor. The method further includes wirelessly receiving, at one of a trend display and a computer, the detected respiratory data and the detected second sensor data and displaying, on one of the trend display and the computer, the detected respiratory data and the detected second sensor data. The detected respiratory data and the detected second sensor data are synchronized with respect to time.

[0022] The present invention also comprises a method of monitoring interactions of physiological events of an exercising horse. The method includes placing a speed sensor and a second sensor proximate to the horse so as to move with the horse. The speed sensor detects and outputs at least one of detected raw data for calculating instantaneous speed and calculated instantaneous speed data. The second sensor detects and outputs detected second sensor data. The second sensor is at least one of a lateral-axis angular rate sensor, a longitudinal-axis angular rate sensor, a vertical-axis angular rate sensor, an accelerometer, a respiratory detection sensor, an ECG electrode configuration set, an EMG sensor configuration set, an EEG sensor configuration set, EOG sensor configuration set, a ZPG sensor configuration set, a pressure sensor, a gas flow sensor, a gas detection sensor, a pH sensor, a temperature sensor, an imaging sensor, an optical sensor and a blood constituent sensor. The method further includes wirelessly receiving, at one of a trend display and a computer, the detected second sensor data and at least one of detected raw data for calculating instantaneous speed and calculated instantaneous speed data and simultaneously displaying, on one of the trend display and the computer, the detected second sensor data and at least one of detected raw data for calculating instantaneous speed and calculated instantaneous speed data. The detected respiratory data and the detected second sensor data are synchronized with respect to time.

[0023] The present invention also comprises a method of monitoring interactions of physiological events of an exercising horse. The method includes mounting a lateral-axis angular rate sensor, a vertical-axis angular rate sensor and a speed sensor proximate to the horse so as to move with the horse. The lateral-axis angular rate sensor detects angular rotation data relative to the lateral-axis. The vertical-axis angular rate sensor detects angular rotation data relative to the vertical-axis. The speed sensor detects speed data of the horse. The method further includes mounting an electrocardiogram

(ECG) electrode configuration set directly to the horse and mounting a sensing surface of a respiratory detection transducer directly to one of hair and skin of the horse. The ECG electrode configuration set detects ECG data. The respiratory detection transducer detects respiratory data. The method further includes exercising the horse and receiving, at one of a trend display and a computer, the detected angular rotation data relative to the lateral-axis, the detected angular rotation data relative to the vertical-axis, the detected speed data, the detected ECG data and the detected respiratory data. The method further includes displaying, on one of the trend display and the computer, the detected angular rotation data relative to the lateral-axis, the detected angular rotation data relative to the vertical-axis, the detected speed data, the detected ECG data and the detected respiratory data. The detected angular rotation data relative to the lateral-axis, the detected angular rotation data relative to the detected vertical-axis, the detected speed data, the detected ECG data and the detected respiratory data are synchronized with respect to time.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0024] The foregoing summary, as well as the following detailed description of preferred embodiments of the invention, will be better understood when read in conjunction with the appended drawings. For the purpose of illustrating the invention, there are shown in the drawings embodiments which are presently preferred. It should be understood, however, that the invention is not limited to the precise arrangements and instrumentalities shown.

[0025] In the drawings:

[0026] FIG. 1 a perspective view of a horse having a wireless equine physiological monitoring system in accordance with the preferred embodiments of the present invention mounted thereon;

[0027] FIG. 2 is a perspective view of a horse having the wireless equine physiological monitoring system in accordance with the preferred embodiments of the present invention mounted thereon with a saddle pad with an on-board computer/controller mounted within the saddle pad;

[0028] FIG. 3 is a side elevational view of a horse having the wireless equine physiological monitoring system in accordance with the preferred embodiments of the present invention mounted thereon with an on-board computer/controller exposed;

[0029] FIG. 4 is an enlarged side elevational view of a horse showing a speed accelerometer and mounting position therefor;

[0030] FIG. 5 is a schematic diagram depicting a wireless equine physiological monitoring system in accordance with a first preferred embodiment of the present invention;

[0031] FIG. 6 is a schematic block diagram depicting a wireless equine physiological monitoring system in accordance with a second preferred embodiment of the present invention;

[0032] FIG. 7 is a schematic block diagram depicting a wireless equine physiological monitoring system in accordance with a third preferred embodiment of the present invention;

[0033] FIG. 8 is a schematic block diagram depicting a respiratory structural vibration accelerometer control circuit in accordance with preferred embodiments of the present invention;

[0034] FIG. 9 is a top plan view of one possible implementation of the wireless monitoring system of FIG. 5;

[0035] FIG. 10 is a perspective view of a sensing surface of a first respiratory vibration accelerometer/sensor in accordance with the preferred embodiments of the present invention;

[0036] FIG. 11 is a top view of a second respiratory vibration accelerometer/sensor in accordance with the preferred embodiments of the present invention;

[0037] FIG. 12 is a perspective view of a sensing surface of the second respiratory vibration accelerometer/sensor of FIG. 11;

[0038] FIG. 13 is perspective view of a combined lateral-axis and vertical-axis angular rate sensors in accordance with the preferred embodiments of the present invention;

[0039] FIG. 14 is a perspective view of a GPS antenna for use with various preferred embodiments of the present invention;

[0040] FIG. 15 is a perspective view of a radio antenna enclosure in accordance with the preferred embodiments of the present invention;

[0041] FIG. 16 is a perspective view of a dual-antenna splitting device in accordance with the preferred embodiments of the present invention, shown with two GPS antennas attached;

[0042] FIG. 17 is a top plan view of a dual-electrode electrocardiogram sensor in accordance with the preferred embodiments of the present invention;

[0043] FIG. 18 is a perspective view of a wireless sensor transmitter attached to the respiratory vibration accelerometer/sensor of FIG. 11;

[0044] FIG. 19 is a bottom plan view of a speed accelerometer and associated circuitry in accordance with the preferred embodiments of the present invention;

[0045] FIGS. 20A-20E are screen shots of a trend display with a plurality of sensor trends synchronized in real time in accordance with preferred embodiments of the present invention;

[0046] FIGS. 21A-21B are screen shots of a trend display having an angular-rate motion sensor trends synchronized in time in accordance with the preferred embodiments of the present invention;

[0047] FIGS. 22A-22D are screen shots of a trend display having angular-rate motion sensor trends, an accelerometer respiratory sensor trend and an electrocardiogram sensor trend synchronized in time in accordance with the preferred embodiments of the present invention;

[0048] FIG. 23 is a prior art side elevational rendering of a head and neck of a horse depicting anatomical regions;

[0049] FIG. 24 is a prior art side elevational rendering of a skull of a horse showing locations of major bones of the skull;

[0050] FIG. 25 is a prior art dorsal (top-down) rendering of a skull of a horse showing locations of major bones of the skull; and

[0051] FIG. 26 is a prior art ventral (bottom-up) rendering of a skull of a horse showing locations of major bones of the skull.

DETAILED DESCRIPTION OF THE INVENTION

[0052] Certain terminology is used in the following description for convenience only and is not limiting. The words “right,” and “left,” “lower,” and “upper” designate directions in the drawings to which reference is made. The words “inwardly” and “outwardly” refer to directions toward

and away from, respectively, the geometric center of the object discussed and designated parts thereof. The terminology includes the words above specifically mentioned, derivatives thereof and words of similar import. Additionally, the words “a” and “an,” as used in the claims and in the corresponding portions of the Specification, means “at least one.”

[0053] For frame of reference, as used herein, FIG. 1 shows that a horse 500 has a cranial aspect 520, a caudal aspect 522, a left lateral side 524, a right lateral side 526, a dorsal aspect (top) 528 and a ventral aspect (bottom) 530. In three-dimensional space (X-axis, Y-axis, Z-axis), the horse 500 will be referenced as having a longitudinal-axis (X-axis), a lateral-axis (Y-axis) and a vertical-axis (Z-axis). The longitudinal-axis is defined through a length of the horse 500 as measured between the cranial and the caudal aspects 520, 522 of the horse 500. The lateral-axis is defined through a width of the body of the horse 500 as measured between the right and left lateral sides 524, 526 of the horse 500. The vertical-axis is defined through a height of the body of the horse 500 as measured between the dorsal aspect 528 and the ventral aspect 530 of the horse 500. This frame of reference establishing longitudinal, lateral and vertical axes (X, Y, Z) is relative and should not be construed as limiting. Any labels or orientations of (imaginary) axes may be utilized without departing from the present invention. In other words, tilting, shifting or rotating an axis or the frame of reference with respect to a horse 500 or ground is still within the scope of the invention. The horse 500 also includes a chest region 529 (FIG. 1). The locomotor system of the Horse 500 includes at least the musculoskeletal, neural and viscera systems.

[0054] FIG. 23 shows a prior art rendering of a head 518 and neck 517 of a horse 500 depicting anatomical regions. The anatomical regions include a maxillary region, a mandibular region, a masseteric region, a hyoid region, a laryngeal region, a tracheal region, a nasal region, a frontal region, an orbital region, a supraorbital region, a temporal region, a parietal region and a parotid region. Generally, the aforementioned regions correspond to the bone(s) and/or cartilage(s) in that region, underneath the hair and skin of the horse 500. FIGS. 24-26 are prior art renderings of a skull 519 of a horse 500 showing locations of major bones 501-515 of the skull 519. The skull 519 includes the following bones 501-515: incisive 501, nasal 502, maxilla 503, lacrimal 504, zygomatic 505, mandible 506, frontal 507, parietal 508, interparietal 509, temporal 510 (petrous and tympanic parts), temporal 510a (squamous part), occipital 511, vomer 512, sphenoid 513, pterygoid 514 and palatine 515.

[0055] Referring to the drawings in detail, FIGS. 1-5 show an equine physiological monitoring system 50 in accordance with a first preferred embodiment of the present invention. The equine physiological monitoring system 50 includes an on-board data acquisition control circuit 160 and a plurality of sensors 100, 101, 113, 114, 115, 116, 119, 120, 121, 128, 129, 130, 140, 165. FIG. 1 shows the placement of the equine physiological monitoring system 50 on a horse 500 with the location of each of the sensors 100 (FIGS. 11-12), 101, 113, 114, 115, 116, 119, 120, 121, 128, 129, 130, 140 (FIGS. 5-7), 165 (FIGS. 5 and 9).

[0056] The equine physiological monitoring system 50 is designed to be worn by the horse 500 while it is exercising with a rider 540 (phantom in FIG. 2), or while pulling a vehicle (not shown) such as a sulky or unencumbered by either. Alternately, components of the on-board data acquisition control circuit 160 and some or part of the plurality of

sensors 100, 101, 113, 114, 115, 116, 119, 120, 121, 128, 129, 130, 140, 165, etc., can be worn by the rider/driver 540 or carried in a vehicle that the horse 500 is pulling. It is contemplated that the rider/driver 540 of the horse 500 may also be monitored while monitoring the horse 500 to document and/or observe the interactions between the rider/driver/vehicle and the horse 500.

[0057] It may also be desired that only the sensors 100, 101, 113, 114, 115, 116, 119, 120, 121, 128, 129, 130, 140, 165 are attached to the horse 500 and that all data is sent wirelessly to the on-board data acquisition control circuit 160, a remote host computer 200 or a trend display 202 (e.g., a laptop computer 200 running trending software that forms the trend display 202). For example, each of the plurality of sensors 100, 101, 113, 114, 115, 116, 119, 120, 121, 128, 129, 130, 140, 165 can be configured to have a wireless transmitter 104 (see e.g., FIG. 18) that transmits electromagnetic signals such as radiofrequency (RF) waves, Infrared (IR) or the like. Wirelessly transmitting sensor data may be less obtrusive on the horse 500 being monitored, even if the data is only wirelessly transmitted from the sensors 100, 101, 113, 114, 115, 116, 119, 120, 121, 128, 129, 130, 140, 165 to the on-board data acquisition control circuit 160.

[0058] The equine physiological monitoring system 50 includes one or more of a respiratory detection sensor 100, 101, a kinematic and kinetic motion sensor 113, an electrocardiogram (ECG) electrode configuration set 128, 129 and a speed sensor 130, 165. The equine physiological monitoring system 50 may also include a second sensor 140 (FIG. 5) configured to be mounted proximate to the horse 500. The second sensor 140 detects and outputs detected second sensor data. The second sensor 140 is at least one of a lateral-axis angular rate sensor 115, a longitudinal-axis angular rate sensor 114, a vertical-axis angular rate sensor 116, an accelerometer 119, 120, 121, a speed sensor 130, 165, (140), an ECG electrode configuration set 128, 129 (FIG. 17), an electromyography (EMG) sensor configuration set, an electroencephalograph (EEG) sensor configuration set, electrooculogram (EOG) sensor configuration set, an impedance pneumogram (ZPG) sensor configuration set, a pressure sensor, a gas flow sensor, a gas detection sensor, a pH sensor, a temperature sensor, an imaging sensor, an optical sensor and a blood constituent sensor.

[0059] The wireless equine physiological monitoring system 50 also includes the real-time trend display 202 (FIGS. 20A-20E, 21A-21B, and 22A-22D) that wirelessly receives the detected data from one or more of the sensors 100, 101, 113, 114, 115, 116, 119, 120, 121, 128, 129, 130, 140, 165. The trend display 202 displays the detected data with respect to time as the detected data is received (i.e., real-time trending). The detected respiratory data may also be stored (i.e., data-logging) in the on-board data acquisition control circuit 160 and/or at the host computer 200 and/or on a storage device for later review and analysis (i.e., historical trending). The trend display 202 may be a chart recorder. The recorder may be a paper chart recorder or a virtual chart recorder. The trend display 202 may be graphically displayed through a video display or a projector. The video display may be a liquid crystal display (LCD), a light emitting diode (LED) display, a cathode-ray tube (CRT) display and a plasma screen display.

[0060] FIG. 5 is a schematic diagram depicting the wireless equine physiological monitoring system 50. The wireless equine physiological monitoring system 50 includes an enclosure 53 which houses the on-board data acquisition

control circuit 160. The on-board data acquisition control circuit 160 includes an on-board computer/controller 60, a data acquisition (DAQ) system or card 164 (FIG. 9), a global positioning system (GPS) receiver board 165 (FIG. 9), a transmitter or transceiver 64 and a battery or other power source BT1. An external antenna A1 is coupled to the transceiver 64. FIG. 15 shows an enclosure 65 for the antenna A1. The on-board computer 60 may include a microprocessor, a memory storage device 168, random access memory (RAM) and typical connections such as keyboard, mouse, monitor, universal serial bus (USB), communications port and a network connection.

[0061] A prototype of the monitoring system 50 utilized a DAQCard-AI 16E-4 commercially available from National Instruments, Austin, Tex., connected to a model number PCM 9570 computer commercially from Advantech, Irvine, Calif. The DAQ card 164 includes signal conditioning circuitry for receiving a variety of different analog and/or digital signals at a plurality of different voltage and/or current levels. The DAQ card 164 may multiplex the signals through an analog to digital (A/D) converter and utilize serial, parallel, USB, Ethernet or any other communication medium to communicate the data acquired to the on-board computer/controller 60. These components are disposed in an enclosure 53, which can be situated in or on the saddle pad 47, a girth 44, a harness on the horse 500, a rider/driver 540, a cart, remotely or the like. Of course, a more simplified on-board data acquisition control circuit 160 or a dedicated local data logger may be used instead.

[0062] Preferably, the on-board data acquisition control circuit 160 has a clock X1 in either the DAQ card 164 or the on-board computer/controller 60 in order to synchronize acquired data with respect to time. Preferably, the clock X1 is a real time clock that can be calibrated and/or synchronized with another external clock, as necessary. Preferably, all data collected, displayed and/or stored is synchronized with respect to time. Preferably, the on-board data acquisition control circuit 160 has a real time clock X1 and the data is synchronized with respect to real time so that the data can be analyzed based on time events and/or can be synchronized with real time data from other sources.

[0063] As shown in FIGS. 6-7, a dedicated control circuit 260, 360 can incorporate all of the functionality of the aforementioned DAQ card 164 and on-board computer/controller 60, and more, on one or more printed circuit boards (PCBs).

[0064] Each of the plurality of sensors 100, 101, 113, 114, 115, 116, 119, 120, 121, 128, 129, 130, 140, 165 are shown being coupled to the DAQ card 164, and the DAQ card 164 being coupled to the on-board computer/controller 60. However, one or more of the plurality of sensors 100, 101, 113, 114, 115, 116, 119, 120, 121, 128, 129, 130, 140, 165 may be directly coupled to the on-board computer/controller 60. Preferably, each of the plurality of sensors 100, 101, 113, 114, 115, 116, 128, 129, 130, 140 has a built-in or a close-coupled wireless transmitter 104 (see FIG. 18) for sending data to the on-board data acquisition control circuit 160 wirelessly.

[0065] For example, one or more sensors 100, 101, 113, 114, 115, 116, 128, 129, 130, 140 can be configured to transmit a wireless signal such as an IR, RF, Bluetooth or the like, using a wireless transmitter 104. Bluetooth is the registered trademark of Bluetooth SIG, Inc., Bellevue, Wash. Reducing the hard-wired connections between the sensors 100, 101, 113, 114, 115, 116, 128, 129, 130, 140 and the DAQ card 164 and on-board computer/controller 60 and/or eliminating the

on-board data acquisition control circuit **160** makes it somewhat less intrusive on the subject horse **500** that is being monitored. Additionally, wirelessly transmitting sensor data makes it possible to monitor a horse **500**, in real time, while the horse **500** is exercising.

[0066] The memory storage device **168** for the on-board data acquisition control circuit **160** may be a floppy disk drive, a CD read only memory (ROM) player/recorder, a tape player, a DVD player/recorder, a flash memory device such as a flash random access memory (flash-RAM) drive, a removable flash RAM or the like. The memory storage device **168** for the on-board data acquisition control circuit **160** may alternatively be a USB flash memory device (i.e., a USB memory key or a memory stick).

[0067] Optionally, the on-board data acquisition control circuit **160** also has input/output capability for video, wireless data I/O (e.g., WiFi), parallel, serial and multi-channel outputs. The on-board data acquisition control circuit **160** may receive data from video cameras, scanning devices or other more intelligent or complicated equipment in addition to and in conjunction with the sensor data.

[0068] Alternatively, the on-board data acquisition control circuit **160** may be implemented by a software program for a conventional personal digital assistant (PDA) that has wireless transmit/receive capabilities such as IR, Bluetooth, RF or the like. The PDA can be placed in a pouch on a saddle pad **47** or could be carried by a rider/driver **540** or held on the sidelines as the horse **500** is exercising. For example, the rider/driver **540** may wear a belt or backpack **49** for storing the on-board data acquisition control circuit **160**.

[0069] The respiratory detection sensor **100** (FIGS. **11-12**), **101** (FIGS. **1-3** and **10**) may be a microphone or an accelerometer. A microphone is an electroacoustic transducer that responds to sound waves (acoustical waves) and outputs a corresponding electrical wave. An accelerometer **100**, **101** senses an inertial reaction of a proof mass for measuring linear or angular acceleration. An accelerometer **100**, **101** can detect and measure vibrations of a generally elastic or semi-elastic solid.

[0070] Preferably, the respiratory detection sensor **100**, **101** is a respiratory vibration accelerometer **100**, **101** that is responsive to equine respiratory structural vibrations.

[0071] FIG. **10** shows a first respiratory vibration accelerometer **101** in accordance with the preferred embodiments of the present invention. The first respiratory vibration accelerometer **101** is a piezoelectric accelerometer such as a piezoelectric crystal or a piezoelectric film accelerometer. The first respiratory vibration accelerometer **101** has a sensing surface **103** configured to be attached to one of hair, skin, bone, ligament, cartilage, and other tissue of a horse **500**, such that the attachment is nearly an integral part of the hair, skin, bone, ligament, cartilage, and other tissue. Preferably, the respiratory vibration accelerometer **101** includes an internal seismic mass or proof mass (not shown) that acts on a small element of piezo-polymeric film (not shown). The first respiratory vibration accelerometer **101** has lead wires for supply V+, output OUT and ground GND. Preferably, the respiratory vibration accelerometer **101** has a wide frequency response, good phase response and a relatively wide dynamic range. Preferably, the respiratory vibration accelerometer **101** has a frequency range of less than 2 Hz to about 20 KHz.

[0072] The raw voltage output from respiratory vibration accelerometer **100**, **101** can be converted to engineering units by its calibration factor to read in mV/g, where g is approxi-

mately 9.8 meters/second-second (s^2). Thus, the data can be quantified as the accelerations of the structures being sensed. Additionally, velocities and displacements of respiratory structural signals can be ascertained. From these data one may gain insights into the kinetics, kinematics, time functions, shapes, sizes or the like of respiratory structures. Preferably, data sensed by respiratory vibration accelerometer **100**, **101** contains information relating to other body systems, e.g., the mechanics and locomotion of the horse **500** and cardiovascular events such as a cardiac rhythm and rate. These data can be separated from the parent data and their influences and interactions established.

[0073] The respiratory vibration accelerometer **100**, **101** can be used in the study of varying ground and climatic conditions, genotypes, phenotypes, feeding and training strategies, influences of riders **540**, drivers, or unencumbered by either, riding, driving equipment and training aids, pharmacological agents, medical and developmental histories, shoeing, metabolic, physiologic and psychological states, and intra and inter species communications and vocalizations.

[0074] FIGS. **11-12** show a second respiratory vibration accelerometer **100** in accordance with the preferred embodiments of the present invention. Preferably, the vibration transducer **100** is an accelerometer such as a moving coil/mass-spring. Preferably, the accelerometer **100** is lightweight (e.g., about 13 grams). One preferred accelerometer is described in U.S. Pat. No. 5,461,193 (Schertler), the contents of which are incorporated by reference herein. The respiratory vibration accelerometer **100** includes a sensing surface **102** configured to be attached to one of hair, skin, bone, ligament, cartilage, and other tissue of a horse **500**. The output from respiratory vibration accelerometer **100** can be quantified in a similar fashion as respiratory vibration accelerometer **101**.

[0075] Other types of respiratory vibration accelerometers **100**, **101** such as other configurations of a moving mass-spring accelerometer, a micro-electro-mechanical systems (MEMS) accelerometer, a micro-machined silicon accelerometer, another variety piezoelectric accelerometer, a potentiometric accelerometer, a linear variable differential transformer (LVDT) accelerometer, a fiber-optic accelerometer, a variable reluctance accelerometer and a variable capacitance accelerometer or the like can also be used for the same purpose.

[0076] Preferably, the sensing surface **102**, **103** of the respiratory vibration accelerometer **100**, **101** is affixed or attached using temporary adhesive, such as product number 34-3376 commercially available from National Starch and Chemical Co., Salisbury, N.C., directly to the skin overlying the nasal bones **502** of the horse **500** (i.e., the nasal region in FIG. **23**). It is also anticipated that the respiratory vibration accelerometer **100**, **101** can be bonded to the skin and/or hair using a liquid suture such as N-butylcyanoacrylate or Close commercially available from B. Braun Medical, Bethlehem, Pennsylvania, or other similar liquid suture product. It is important during the fixation process that the sensing surface **102**, **103** of the respiratory vibration accelerometer **100**, **101** be tightly adhered to the skin or hair of the horse **500**, preferably without any air or liquid interface, such that the sensing surface **102**, **103** of the respiratory vibration accelerometer **100**, **101** is at least partially in direct contact with the skin or hair of the horse **500**. This is accomplished by first removing any excessive hair with clippers and then prepping the desired area with alcohol to remove loose hair and debris. Next, the

adhesive is applied to the outer circumference of the sensing surface **102, 103** of the respiratory vibration accelerometer **100, 101** which is then pressed onto the desired recording area. Thus, the respiratory vibration accelerometer **100, 101** is intimately attached to the hair or skin of the horse **500** so as to become a nearly integral component. The respiratory vibration accelerometer **100, 101** is responsive to respiratory structural vibrations of the horse **500** and outputs a signal corresponding to the respiratory structural vibrations.

[0077] The respiratory vibration accelerometer **100, 101** is preferably adhered, glued, epoxied or bonded directly to one of hair, skin, bone, ligament, cartilage, and other tissue of a horse **500**. But, the respiratory vibration accelerometer **100, 101** may be mechanically coupled to one of hair, skin, bone, ligament, cartilage, and other tissue of a horse **500** or mechanically held in direct contact with one of hair, skin, bone, ligament, cartilage, and other tissue of a horse **500** without departing from the invention. It is contemplated that the respiratory vibration accelerometer **100, 101** can be attached directly to bone, cartilage or ligaments of the horse **500** by, for example, surgical implantation or the like.

[0078] In one embodiment, the sensing surface **102, 103** of the respiratory vibration accelerometer **100, 101** is adhered, glued, epoxied or bonded directly to attached to one of hair, skin, bone, ligament, cartilage, and other tissue of a horse **500** to create a vacuum condition between the sensing surface **102, 103** of the respiratory vibration accelerometer **100, 101** and the respective one of hair, skin, bone, ligament, cartilage, and other tissue of the horse **500**.

[0079] It is further contemplated that the respiratory vibration accelerometer **100, 101** can be mounted inside the head **518** of the horse **500**.

[0080] Preferably, the nasal region is chosen because respiratory structural vibrations readily pass into the nasal bones **502** underlying the skin and through the skin in this area and thus are detected quite easily by the respiratory vibration accelerometer **100, 101**. Other sites of attachment for the respiratory vibration accelerometer **100, 101** include, but are not limited to, the hair and/or skin overlying the nasal turbinates, the larynx, the trachea, maxillary region, the masseteric region, the hyoid region (i.e., the ventral portion of the hyoid apparatus), the laryngeal region, the tracheal region, the frontal region, the orbital region, the supraorbital region, the chest region **529**, the temporal region, the parietal region, the parotid region, or the like. These alternate sites of attachment also allow for the detection of different types and levels of vibrations. Further, respiratory vibration accelerometers **100, 101** configured in different ways can also enhance the detection of types and levels of vibrations. Thus, as the horse **500** exercises, the respiratory structural vibrations are sensed by the respiratory vibration accelerometer **100, 101** and the resulting electrical impulses pass via a cable or wirelessly to the DAQ card **164**.

[0081] FIG. **8** is a schematic block diagram of an accelerometer control circuit **110** in accordance with preferred embodiments of the present invention. The accelerometer control circuit **110** includes a battery or other power source **BT2**, an amplifier **U20** and suitable biasing components, such as resistors and capacitors, for supplying a voltage signal to the respiratory vibration accelerometer **101**, if necessary, and for receiving a data signal from the respiratory vibration accelerometer **101** in order to send data. The accelerometer control circuit **110** is particularly designed for the respiratory vibration accelerometer **101**, but a similar accelerometer con-

trol circuit **110** can be utilized for the respiratory vibration accelerometer **100**. The primary difference between the first respiratory vibration accelerometer **100** and the second respiratory vibration accelerometer **101** is that the second respiratory vibration accelerometer **101** requires supply power **V+** while the first respiratory vibration accelerometer **100** does not.

[0082] Optionally, the accelerometer control circuit **110** includes a wireless transmitter **112** configured to transmit data. Preferably, the wireless transmitter **112** is configured to transmit frequencies as low as a few hertz (Hz). Sensing, recording and storing frequencies in the less than or equal to 2 Hz to 200 Hz range is of interest in order to fully appreciate respiratory structural vibrations. Generally, commercially available wireless transmitter/receiver units and recording units are not designed to address these frequencies in an accurate manner, if at all. Preferably, the various embodiments of the present invention accurately sense, record and store respiratory vibration data from less than or equal to 2 Hz to greater than or equal to 10 kHz.

[0083] The respiratory vibration accelerometer **100, 101** may be hardwired or wired directly to the control circuit **160** or the control circuit **160** may include an optional wireless receiver **162** for receiving data wirelessly from the optional wireless transmitter **112** of the respiratory vibration accelerometer control circuit **110**. Alternatively, as shown in FIG. **18**, the respiratory vibration accelerometer **100, 101** can be attached to a wireless transmitter **104**, affixed directly to the horse **500** by glue, adhesive, or the like or affixed by a clip and/or strap to a mane of the horse, a bridle, a halter **48** or other device of the horse **500**, with a corresponding wireless receiver. The corresponding receiver is electrically connected to the DAQ card **164**. This arrangement negates the need for cable to be strung from the respiratory vibration accelerometer **100, 101** on the head **518** of the horse **500** along the neck **517** to the DAQ card **164**. It is anticipated that other types of wireless transmitters/receiver combinations using any frequency and any communication protocol that is minimally susceptible to noise can be used for the same purpose.

[0084] FIGS. **1** and **13** show the motion sensor **113** that senses equine motion in multi-dimensional space (X, Y, Z). The kinematic and kinetic motion sensor **113** includes at least one angular rate sensor **114, 115, 116** and at least one accelerometer **119, 120, 121**. The at least one angular rate sensor **114, 115, 116** and the at least one accelerometer **119, 120, 121** are configured to be mounted proximate to a horse **500** so as to move with the horse **500**. The at least one angular rate sensor **114, 115, 116** detects angular rotation data relative to a first-axis. The at least one accelerometer **119, 120, 121** is mounted proximate to the at least one angular rate sensor **114, 115, 116** and is generally orthogonal to the first-axis. Preferably, the motion sensor **113** includes a first-axis angular rate sensor **114**, a second-axis angular rate sensor **115** and the third-axis angular rate sensor **116** and a first accelerometer **119**, a second accelerometer **120** and a third accelerometer **121**, respectively. The first-axis angular rate sensor **114**, the second-axis angular rate sensor **115** and the third-axis angular rate sensor **116** and the first accelerometer **119**, the second accelerometer **120** and the third accelerometer **121** are all configured to be mounted proximate to the horse **500** so as to move with the horse **500**. The first-axis angular rate sensor **114** detects angular rotation data relative to the first-axis, and the first accelerometer **119** is mounted proximate to the first-axis angular rate sensor **114** and is disposed orthogonal to the

first-axis. The second-axis angular rate sensor **115** detects angular rotation data relative to the second-axis, and the second accelerometer **120** is mounted proximate to the second-axis angular rate sensor **115** and is disposed orthogonal to the second-axis. The third-axis angular rate sensor **116** detects angular rotation data relative to the third-axis, and the third accelerometer **121** is mounted proximate to the third-axis angular rate sensor **116** and is disposed orthogonal to the third-axis.

[0085] The first-axis is one of the lateral-axis, the vertical-axis and the longitudinal-axis, the second-axis is one of the other of the lateral-axis, the vertical-axis and the longitudinal-axis and the third-axis is the remaining one of the other of the lateral-axis, the vertical-axis and the longitudinal-axis. The kinematic and kinetic motion sensor **113** could be implemented with only one of the first-axis angular rate sensor **114**, the second-axis angular rate sensor **115** and third-axis angular rate sensor **116**. Thus, the angular rate sensors **114**, **115**, **116** are mounted mutually orthogonal to each other. Optionally, additional angular rate sensors **114**, **115**, **116** and/or additional accelerometers **119**, **120**, **121** can be provided in the motion sensor **113** that are aligned with other axes. The motion sensor **113** may be implemented with other sensor technologies in addition to or in replacement of angular rate sensors **114**, **115**, **116** and/or accelerometers **119**, **120**, **121**.

[0086] The motion sensor **113** that includes at least one of an angular rate sensor **114**, **115**, **116** and at least one accelerometer **119**, **120**, **121**, as described in the various embodiments herein, senses phase shifts of the respiratory locomotor coupling relationship exhibited by the exercising horse **500**. The accelerometer(s) **119**, **120**, **121** within the motion sensor **113** allows for the estimation of the metabolic energy expenditure that occurs during the respiratory locomotor phase shifts. Further, the various configurations of the angular rate sensors **114**, **115**, **116** and accelerometers **119**, **120**, **121** sense the variations in movements of the horse **500** due to respiratory mechanics, metabolic energy expenditure, speed of movement, cardiovascular events or the like. The motion sensor **113** is configured to output multi-dimensional motion data of the horse **500**.

[0087] The motion sensor **113** can be used in the study of varying ground and climatic conditions, genotypes, phenotypes, feeding and training strategies, influences of riders **540**, drivers, or unencumbered by either, riding, driving equipment and training aids, pharmacological agents, medical and developmental histories, shoeing, metabolic, physiologic and psychological states, and intra and inter species communications and vocalizations.

[0088] The trend display **202** displays the detected angular rotation data relative to at least one of the first-axis, the second-axis and the third-axis rotation data with respect to time as the detected angular rotation data relative to the single-axis is received (i.e., real-time trending). The detected angular rotation data relative to at least one of the first-axis, the second-axis and the third-axis rotation data with respect to time may also be stored in the on-board data acquisition control circuit **160** and/or at the host computer **200** and/or on a storage device **168**, **206** for later review and analysis (i.e., historical trending).

[0089] Preferably, the kinematic and kinetic motion sensor **113** is enclosed within a small enclosure **117** that is then mounted onto a girth **44** (i.e., a strap overlying the ventral side **530** of the horse **500**). This area is chosen because it is in the central plane, and close to the center of mass of the horse **500**.

The kinematic and kinetic motion sensor **113** may also be mounted or affixed directly to the hair or skin of the horse **500**. However, the kinematic and kinetic motion sensor **113** can be mounted in other locations on or near the horse **500** without departing from the present invention. The signals generated by the angular rate sensors **114**, **115**, **116** and the accelerometers **119**, **120**, **121** pass by cable to the DAQ card **164** and then to the on-board computer/controller **60**. Optionally, a wireless transmitter is built into the kinematic and kinetic motion sensor **113** enabling the kinematic and kinetic motion sensor **113** to communicate data wirelessly to the on-board data acquisition control circuit **160** and/or to the host computer **200** and/or to the trend display **202**.

[0090] Real time viewing of the graphed signals allows the observer to immediately discern basic locomotor parameters that help in elucidating the interrelationships among body systems of the horse **500**. For example, for each gait type and stride, there is a unique and distinct rotation of the horse **500** around the lateral-axis (pitch) that is detected by the “Y” sensor **114**, **115**, **116**. From the waveform that is generated one can deduce the gait (i.e., walk, trot, pace, canter or gallop), the stride frequency and phase of the stride (i.e., stance or suspension). The “Z” sensor **114**, **115**, **116** measures the distinct rotations of a gait type and stride around the vertical-axis (yaw) the waveform from which strengthens the deduction of type of gait, stride frequency, and is particularly useful in determining gait phase (i.e., right versus left lead for canter and gallop or right versus left diagonal for the trot). With these types of basic observations and more extensive analysis, one can better appreciate the synergies that exist in the exercising horse **500**.

[0091] The ECG electrode configuration set **128**, **129** includes at least two self-adhering electrodes **128**, **129** such as product number **664** commercially available from Uni-Patch, Wabasha Minn. The ECG electrode configuration set **128**, **129** may include a plurality of electrodes **128**, **129**. The ECG electrode configuration set **128**, **129** is used for obtaining the electrocardiogram. The ECG electrodes **128**, **129** are configured in a Base-Apex lead system, which is the most common method of recording exercising ECGs of horses **500**. There are many other types of ECG electrodes that can be used for the same purpose. As shown in FIG. 1, the ECG electrodes **128**, **129** are situated under the saddle pad **47** and a girth **44**, next to the skin and held in place by adhesive. Prior to placement, the electrode attachment sites on the horse **500** are prepped with alcohol to remove debris that could interfere with detection of the ECG. The electrical signals generated by the ECG electrodes **128**, **129** pass via cable to the data acquisition board (DAQ) **164** and then to the on-board computer/controller **60**.

[0092] Any number of additional ECG electrodes **128**, **129** can be utilized without departing from the present invention. It is anticipated that more than two electrodes **128**, **129** are used to record the ECG waveform. The ECG is used to detect cardiac rhythm and rate. Further, use of the time synchronization function of the system allows for precise comparison of cardiac data with the respiratory locomotor events and speed. For example, some types of cardiac arrhythmias can change respiratory and locomotor patterns of exercising horses **500**. In addition, some cardiac rhythm disturbances may only occur at a particular speed or metabolic state.

[0093] The equine physiological monitoring system **50** also includes a speed sensor **130** that senses equine speed. The speed sensor or transducer **130** (FIG. 19) is, in one embodi-

ment, an accelerometer **132** that detects acceleration and deceleration in a longitudinal-axis of a horse **500**. The speed sensor **130** is configured to be mounted proximate to the horse **500**. Preferably, the speed sensor **130** is mounted in the longitudinal-axis on one of the lateral sides **524**, **526** of the horse **500** and is firmly adhered to the skin/hair of the horse **500** with temporary adhesive. The speed sensor **130** is connected by cable to the DAQ card **164**. Thus, the speed sensor **130** is used to measure the overall accelerations and decelerations of the horse **500** in the horizontal plane. Preferably, the speed sensor **130** yields a positive signal output when the horse **500** is moving in the forward direction. When the acceleration signal is integrated over time (i.e., mathematical integral) it yields the speed of the horse **500**. Optionally, a lateral-axis angular rate sensor **134** is mounted proximate to the speed accelerometer **130**. The lateral-axis angular rate sensor **134** detects angular rotation data relative to the lateral-axis of the horse **500**. The lateral-axis angular rate sensor **134** provides compensation for slippage in placement or changes in orientation of the speed accelerometer **132** with respect to the horse **500** and relative to the ground.

[**10094**] An alternative method of obtaining the speed of the horse **500** utilizes Global Positioning System (GPS) technology. The system includes a GPS receiver board **165** (FIG. **9**) incorporated into the enclosure **53** with its output signal cable attached to the data acquisition board (not shown). The GPS receiver board **165** receives GPS data from GPS satellites. The GPS receiver board **165** updates GPS data more than once per second. Preferably, the GPS receiver board **165** updates at least five (5) times per second. The GPS receiver board **165** is configured to perform at least one of outputting data proportional to speed and calculating speed of the horse **500** from the updated GPS data. Thus, the GPS receiver board **165** may itself calculate speed from the received GPS data, or the GPS receiver board **165** may simply output raw data from which the speed can be calculated by the on-board data acquisition control circuit **160** or by the remote host computer **200**, for example.

[**10095**] Since it is known from high speed video filming of running horses **500** that speed fluctuations within a single stride can be as much as five (5) miles per hour (MPH) or greater, frequent updates of a GPS system is desirable in order to more accurately measure stride components, respiratory, locomotor and cardiac events. A GPS receiver board **165** (FIG. **9**) may be an "Invicta **210**" commercially available from Raven Industries, Sioux Falls, S.D. The GPS antenna **166** is mounted on the top back portion of the saddle pad **47**. Alternatively, the GPS antenna **166** can be mounted in other locations such as other parts of the horse **500** or on the rider **540** or on the cart/sulky or the like. The Invicta GPS receiver board **165** outputs a signal that is proportional to speed ten (10) times per second (i.e., about 45 Hz per mile per hour). There are other manufacturers of GPS boards that update more than once per second. FIG. **16** shows a dual-antenna splitting device **167** in accordance with the preferred embodiments of the present invention, having two GPS antennas **165** attached thereto for improving reception.

[**10096**] An alternative method of obtaining the speed of the horse **500** utilizes at least one Doppler transceiver that transmits an electromagnetic signal and receives a reflected or transponded version of the electromagnetic signal. The electromagnetic signal may be a radar signal, a microwave signal, an infrared signal or the like. The signal may also be an ultrasonic signal without departing from the invention. The

Doppler transceiver is configured to be mounted proximate to a horse **500** so as to move with the horse **500**. The Doppler transceiver is configured to perform one of outputting data proportional to speed and calculating speed of the horse **500** based on the difference in time/frequency between the transmitted and received electromagnetic signal. Preferably, at least one compensation transceiver is mounted in conjunction with the Doppler transceiver. The compensation transceiver also transmits an electromagnetic signal and receives a reflected or transponded version of the electromagnetic signal. The compensation transceiver is configured to mount in an opposite orientation as compared to the Doppler transceiver, and the compensation transceiver is configured to compensate the Doppler transceiver for uneven surface conditions and/or movements of the horse **500** based on the difference in time/frequency between the transmitted and received electromagnetic signal.

[**10097**] The resulting data that is generated from the respiratory vibration accelerometer **100**, **101**, the motion sensor **113**, the ECG electrode configuration set **128**, **129**, and the speed accelerometer **130** (and/or the GPS receiver board **165**) are collected and stored in the memory **168** of the on-board data acquisition control circuit **160**. In the first preferred embodiment, this data acquisition process as well as all subsequent processes are performed using a commercial software program such as LABVIEW 6.x, commercially available from National Instruments, Austin, Tex. Other software packages and display or trending techniques can be utilized. For example, dedicated paper or paperless (virtual) chart recorders or dedicated displays in general may be used in lieu of or in addition to, a host computer **200**. Preferably, each data point displayed or logged is time synchronized, so as to permit an overall analysis of what happens or happened at any given point in time (i.e., real time or historical look back). Custom control and/or display software can also be utilized as a user interface without departing from the present invention.

[**10098**] Simultaneously to the data being stored or logged in the memory **168** of the on-board data acquisition control circuit **160**, the data is also transmitted via the transceiver **64** by radio signal. For example, the transceiver can be a product number AIR-LMC352, commercially available from Cisco Systems, San Jose, Calif. The transceiver **64** is connected to the on-board computer/controller **60** and transmits data via an antenna(s) **A1** to the host computer **200** which also has a similar transceiver coupled thereto. This host computer **200** is located within data sending and receiving range of the on-board data acquisition control circuit **160** mounted on the horse **500**. Preferably, the radio system operates in a frequency range of about 900 Hz to about 5.8 gigahertz (GHz). However, it is anticipated that other types of radios and or frequency ranges can be used for the same purpose. The subsequent received data is displayed in real time, or approximately real time depending on the sampling rate, such that one can observe the exercise events as they occur (i.e., real-time trending). Some data transformation is performed during the real time observation such that data viewed has some interpretable value or auditory output or the like. For instance, the GPS data proportional to speed is converted to speed. The data is also written as a single file to a hard drive or other memory storage device of the host computer **200**. The data may be written as a plurality of separate files in combination or by the particular variable being trended. The host computer

200 also utilizes the LABVIEW software to display the data, i.e., thereby forming a trend display **202** (FIGS. **20A-20E**, **21A-21B**, and **22A-22D**).

[**0099**] The host computer **200** may utilize other software packages commercially available or custom written for the application in order to display the data as a trend, via indicators, bar graphs, data tables or the like. The software may include scaling for variable ranges, units, resolution, alarming, high and low limits or the like. The software may include the ability to overlay multiple variables on the same trend or to display multiple variables on separate trend axes on the same screen (e.g., FIGS. **20A-20E**, **21A-21B**, and **22A-22D**) aligned in time. The stored data file may be in a conventional tabular format, in a database or in a comma-separated-variable (csv) format or the like, which can be imported into a spreadsheet or other data handling software package for manipulation and analysis.

[**0100**] At the conclusion of an exercise event, the enclosure **53**, located on the horse **500** is removed, and the data file located in the memory **168** of the on-board data acquisition control circuit **160** is transferred to the host computer **200** or to another backup memory device (i.e., as an historical or data logged file). The data file that resides on the host computer **200** collected via the transceivers **64** can be compared to the data file transferred from the on-board computer/controller **60** to check for missing data that may have resulted from a malfunction of the wireless communication link and/or the computers **60**, **200**. The redundant saving of data files helps to ensure that an exercise event does not have to be repeated due to data loss.

[**0101**] FIG. **6** is a schematic block diagram depicting a control circuit **260** mounted on a printed circuit PCB in accordance with a second preferred embodiment of the present invention. The control circuit **260** includes a controller **U1**, a memory **U2**, an A/D converter **U3**, a clock **X1** and a transmitter or transceiver **TX/RX**. The controller **U1** may be a microprocessor, a microcontroller, an application specific integrated circuit (ASIC) or the like. The controller **U1** may include built-in A/D and D/A conversion as well, in addition to or in lieu of the A/D converter **U3**. The A/D converter **U3** has a digital resolution such as 8-24 bit resolution. The control circuit **260** may include a multiplexer **U4** for multiplexing a plurality of signals to a single-channel A/D converter **U3**. Optionally, the A/D converter **U3** is a multi-channel A/D chip with built in multiplexing.

[**0102**] The respiratory vibration accelerometer **100**, **101** may be hardwired to the control circuit **260** or the control circuit **260** may include an optional wireless receiver **262** for receiving data wirelessly from the optional wireless transmitter **112** of the respiratory vibration accelerometer control circuit **110**.

[**0103**] The control circuit **260** may optionally include a built in GPS chipset such that a separate GPS receiver board **165** is not needed. Likewise, the control circuit **260** may optionally include a transmitter or transceiver chip set (e.g., a wireless Ethernet circuit) such that an external transceiver **64** is not needed. The memory **U2** may be a flash-RAM chip or a removable flash-RAM card. The control circuit **260** may be implemented on a plurality of printed circuit boards PCBs and/or daughter boards.

[**0104**] FIG. **7** is a schematic block diagram depicting a control circuit **360** mounted on a printed circuit PCB in accordance with a third preferred embodiment of the present invention. The control circuit **360** is similar to the control circuit

260. The control circuit **360** includes a first controller **U1**, a second controller **U10**, a first memory **U2**, a second memory **U12**, a first A/D converter **U3**, a second A/D converter **U13**, a first clock **X1**, a second clock **X2** and a transmitter or transceiver **TX/RX**. Preferably, the first and second clocks **X1**, **X2** are real time clocks. The controllers **U1** and **U10** may be a microprocessor, a microcontroller, an application specific integrated circuit (ASIC) or the like. The controllers **U1** and **U10** may include built-in A/D and D/A conversion as well, in addition to or in lieu of the A/D converters **U3** and **U13**. The A/D converters **U3** and **U13** have a digital resolution such as 8-24 bit resolution. The control circuit **360** may include a multiplexer **U4** for multiplexing a plurality of signals to a single-channel A/D converter **U3**. Optionally, the A/D converter **U3** is a multi-channel A/D chip with built in multiplexing. The first A/D converter **U3** may have a first resolution, such as 16-bit resolution, and the second A/D converter **U13** may have a second resolution, such as 24-bit resolution. The first controller **U1** is coupled to the second controller **U10** by a communication bus such as a serial bus, a parallel bus, a USB, an inter-integrated circuit (I²C) bus or the like, in order for the second controller **U10** to communicate and/or exchange data with the first controller **U1**.

[**0105**] The second controller **U10**, the second memory **U12**, the second clock **X2** and the second A/D converter **U13** are dedicated to monitoring the respiratory vibration accelerometer **100**, **101**. Since the respiratory vibration data has a wide range of frequencies, a higher resolution A/D converter **U13** may be desirable along with a dedicated controller **U10** to continuously monitor the signal with higher sampling rates than other signals. The respiratory vibration accelerometer **100**, **101** may be hardwired to the control circuit **360** or the control circuit **360** may include an optional wireless receiver **362** for receiving data wirelessly from the optional wireless transmitter **112** of the respiratory vibration accelerometer control circuit **110**. Alternately, both controllers **U1**, **U10** are linked to the same real time clock **X1**, **X2**.

[**0106**] The control circuit **360** may optionally include a built in GPS chipset such that a separate GPS receiver board **165** is not needed. Likewise, the control circuit **360** may optionally include a transmitter or transceiver chip set (e.g., a wireless Ethernet circuit) such that an external transceiver **64** is not needed. The memory **U2** and **U12** may be a flash-RAM chip or a removable flash-RAM card.

[**0107**] In one configuration, the equine physiological monitoring system **50** includes a portable computer/controller **60**, **U1**, having a memory **U2**, a lateral-axis angular rate sensor **115**, a vertical-axis angular rate sensor **116**, a speed sensor **130**, **165**, an ECG electrode configuration set **128**, **129** and a respiratory detection sensor **100**, **101**. All of the devices are configured to be mounted proximate to a horse **500** so as to move with the horse **500**. The lateral-axis angular rate sensor **115** is in communication with the computer/controller **60**, **U1** and sends the computer/controller **60**, **U1** detected angular rotation data relative to the lateral-axis. The vertical-axis angular rate sensor **116** is in communication with the computer/controller **60**, **U1** and sends the computer/controller **60**, **U1** detected angular rotation data relative to the vertical-axis. The speed sensor **130**, **165** is in communication with the computer/controller **60**, **U1** and sends the computer/controller **60**, **U1** detected speed data of the horse **500**. The ECG electrode configuration set **128**, **129** is in communication with the computer/controller **60**, **U1** and sends the computer/controller **60**, **U1** detected ECG data. The respiratory detection

sensor **100, 101** is in communication with the computer/controller **60, U1** and sends the computer/controller **60, U1** detected respiratory data. The memory **168, U2** at least temporarily stores the detected angular rotation data relative to the lateral-axis, the detected angular rotation data relative to the vertical-axis, the detected speed data, the detected ECG data and the detected respiratory data. Preferably, all of the detected data is synchronized with respect to time as it is acquired and/or stored. Preferably, all of the detected data is synchronized with respect to real time. The synchronized data stored in the memory **168, U2, U12** can be simultaneously viewed in real time or later as an historical trend.

[0108] In another configuration, the wireless equine physiological monitoring system **50** includes a respiratory detection sensor **100, 101** and a second sensor **140**, each mounted proximate to the horse **500** so as to move with the horse **500** while the horse **500** is exercising over ground (i.e., in a natural environment such as in a field or on a track). In this configuration, the respiratory detection sensor **100, 101** may be a microphone or any other respiratory sensor, and need not be limited to a respiratory vibration accelerometer. The respiratory detection sensor **100, 101** detects and outputs detected respiratory data while the horse **500** is exercising. The second sensor **140** detects and outputs detected second sensor data. The second sensor **140** is at least one of a lateral-axis angular rate sensor **114, 115, 116**, a longitudinal-axis angular rate sensor **114, 115, 116**, a vertical-axis angular rate sensor **114, 115, 116**, an accelerometer **119, 120, 121**, a speed sensor **130, 165**, an ECG electrode configuration set **128, 129**, an EMG sensor configuration set, an EEG sensor configuration set, EOG sensor configuration set, an ZPG sensor configuration set, a pressure sensor, a gas flow sensor, a gas detection sensor, a pH sensor, a temperature sensor, an imaging sensor, an optical sensor and a blood constituent sensor. The trend display **202** or the host computer **200** functioning as a trend display **202** wirelessly receives the detected respiratory data and the detected second sensor data. The trend display **202** or the host computer **200** functioning as a trend display **202** simultaneously displays the detected respiratory data and the detected second sensor data. The displayed data is synchronized with respect to time (i.e., a real-time trend). Preferably, the displayed data is synchronized with respect to real time. Additionally, at least some portions of the respiratory data can be converted and simultaneously outputted as an audible signal in real time while displaying other data that is synchronized with respect to time.

[0109] In another configuration, the wireless equine physiological monitoring system **50** includes a speed sensor **130, 165** and the second sensor **140**, each mounted proximate to the horse so as to move with the horse **500**. The speed sensor **130, 165** detects and outputs at least one of detected raw data for calculating speed and calculated speed data. The second sensor **140** detects and outputs detected second sensor data. The trend display **202** or the host computer **200** functioning as a trend display **202** wirelessly receives the calculated speed data and the detected second sensor data. The trend display **202** or the host computer **200** functioning as a trend display **202** simultaneously displays the calculated speed data and the detected second sensor data. The simultaneously displayed data is synchronized with respect to time (i.e., a real-time trend). Preferably, all of the displayed data is synchronized with respect to real time.

[0110] Alternately, the wireless equine physiological monitoring system **50** includes a speed sensor (not shown in

detail) that monitors the speed of the horse **500** remotely from the horse **500** and transmits the remotely acquired speed data to the host computer **200** and/or to the on-board control circuit **160, 260, 360**. The remote speed monitoring may be performed using one or more of Doppler radar, transponder-based Doppler speed determination, pseudolite-based Doppler speed determination, optical ground pattern recognition, continuous or pulsed sonar, cellular telephone triangulation, cellular telephone time-lapse, radio-direction finder with distance measuring equipment (DME), very high frequency (VHF) omni-directional ranging with DME, Rayleigh fading, Doppler multi-path spreading, pseudolite triangulation and ranging, anemometer, light direction and ranging (LIDAR), optical tracking, optical DME, RF ranging and triangulation, stopwatch/chronograph or the like. Preferably, the remotely acquired speed data is also synchronized with respect to time and the various clocks **X1** are able to be synchronized with respect to each other. Preferably, all of the data is synchronized with respect to real time.

[0111] In another configuration, the wireless equine physiological monitoring system **50** includes a single-axis angular rate sensor **114, 115, 116** mounted proximate to a horse **500** so as to move with the horse **500**. The single-axis angular rate sensor **114, 115, 116** detects and outputs angular rotation data relative to the single-axis. The trend display **202** or the host computer **200** functioning as a trend display **202** wirelessly receives the detected angular rotation data relative to the single-axis. The trend display **202** or the host computer **200** functioning as a trend display **202** displays the detected angular rotation data relative to the single-axis with respect to time as the detected angular rotation data relative to the single-axis is received (i.e., a real-time trend).

[0112] In another configuration, the respiratory vibration accelerometer **100, 101** is attached to one of hair, skin, bone, ligament, cartilage, and other tissue of a horse **500**, so that the respiratory vibration accelerometer **100, 101** detects respiratory structural vibration data. Either a transceiver (not shown) sends the respiratory structural vibration data to the computer/controller **60** or the transceiver (not shown) sends the data to the host computer **200**. Either the on-board computer/controller **60** or the transceiver **64** converts the respiratory structural vibration data to a corresponding signal and wirelessly transmits the corresponding signal to a receiving device. The wirelessly transmitted data is received at an audio generating device such as a host computer **200** having a speaker **201** or a simple hand-held radio (e.g., a walkie-talkie) having a speaker (not shown). The detected respiratory structural vibration data is stored at the on-board data acquisition control circuit **160** and/or the host computer **200** while the audio generating device simultaneously emits audible sound, in real time, based on the corresponding signal. This allows an observer to "listen" to portions of the respiratory data (i.e., within the audible range) while observing other trends or observing the exercising horse or the like, while still being able to store the respiratory data for later retrieval and historical analysis.

[0113] It is contemplated that the on-board data acquisition control circuit **160** can be a conventional MP3 player/recorder that receives a signal input, performs analog to digital conversion (A/D) and stores the received signal in a compressed data file. It is also contemplated that the on-board data acquisition control circuit **160** can be a commercially available data logger such as a DI-710 Data Logger commercially available from Dataq Instruments, Inc., Akron, Ohio.

[0114] FIGS. 20A-20E show a condensed five (5) second display of the output from multiple sensors 128, 129, 115, 116, 100, 101, 130, 165 while a horse 500 is trotting. Any combination of graphs or trends may be simultaneously displayed on the trend display 202 without departing from the invention. Preferably the trends are all time synchronized so that particular events can be detected easily. Preferably, the trends are all time synchronized in real time. However, the trends can also be displayed singly and/or only historically.

[0115] FIG. 20A shows ECG data with a normal rhythm (no arrhythmias) and a calculated heart rate of 60 beats per minute (BPM) being displayed on the trend display 202. FIG. 20B shows data from the lateral-axis and vertical axis angular rate sensors 115, 116 which is also displayed on the trend display 202. This trend display gives an indication that respiration and locomotion are out of phase as well as how the horse 500 is modulating the stiffness of its body and limbs. Further, data from the lateral axis sensor 115 demonstrates that the horse 500 is taking seven (7) strides per five (5) seconds (i.e., 1.4 strides per second), and data from the vertical axis angular rate sensor 116 confirms the stride rate and also demonstrates which diagonal the horse 500 is exhibiting. FIG. 20C shows data from the respiratory vibration accelerometer 100, 101 being displayed on the trend display 202. These data represent accelerations of the respiratory structural changes that are occurring during exercise and the potential influences of the locomotor and cardiovascular systems on these structures. In addition, the respiratory structural vibrations can be used to ascertain the overall as well as the inspiratory and expiratory respiratory segments and any irregularities thereof. FIGS. 20D-20E shows data from either the speed accelerometer 130 or GPS receiver board 165, raw and/or integrated data, being displayed on the trend display 202. The voltage output shown in FIG. 20D is converted to acceleration (feet/second²) using the manufacturer's specifications and then calculating the first integral which yields speed in feet per second (ft/sec) indicated by the line labeled "integrated" on the trend of FIG. 20D. It can be appreciated that one can ascertain the speed of the horse 500. These speed measurements can be used to evaluate cardiac rhythm and rate at various speeds as well as at what speeds respiratory locomotor events are occurring. In addition, these speed measurements are used to calculate various respiratory locomotor variables. A basic example is the calculation of stride length by the formula:

$$\text{Stride length} = \text{speed} / \text{stride frequency}$$

The raw GPS signal output shown on the bottom trend of FIG. 20E can be used for the same purpose as the speed accelerometer data. In this case the signal is first converted to speed by the formula:

$$45 \text{ Hz} = 1 \text{ MPH}$$

[0116] thus, yielding a speed measurement every 0.1 seconds based on the update rate of GPS receiver 165 of at least 10 times per second. It is anticipated that other models of GPS receiver 165 and/or manufacturers will have different methods of outputting speed measurements.

[0117] It is desirable to identify at what speed a particular physiological event occurs. For example, it is of interest to know if an arrhythmia occurs when the horse 500 exceeds 25.5 MPH or that the horse 500 has a respiratory locomotor phase shift when the horse 500 exceeds 30.2 MPH or the like.

This is especially true if the identified physiological event is relatively repeatable for a given horse 500.

[0118] Preferably, the data is all synchronized with respect to time to permit a user to more easily identify interactions between the monitored physiological data. Preferably, the data is synchronized with respect to time as the data is acquired and stored or acquired and transmitted. Preferably, all of the data is synchronized with respect to real time.

[0119] FIGS. 21A-21B show a 2.5 second time period to illustrate use of the angular rate sensors 114, 115, 116 to determine stride frequency and basic components of the trotting stride of a horse 500. FIG. 21A shows data from the lateral-axis angular rate sensor 115 which clearly demonstrates four (4) strides per 2.5 seconds, thus a stride frequency of 1.6 strides per second. FIG. 21B shows data from the vertical-axis angular rate sensor 116 which confirms the stride frequency and also identifies which diagonal the horse 500 is exhibiting during each half of the stride. Rotation of the sensor in the negative direction signifies that the left front leg and right rear leg are moving forward. Thus, by convention, the horse 500 is said to be exhibiting the "left diagonal" likewise as the sensor rotates in the positive direction the right front leg and the left rear leg are moving forward thus by convention the horse 500 would be exhibiting the "right diagonal". In addition, the suspension and stance phases that occur during each diagonal of the trotting stride are noted. In addition, this horse 500 is exhibiting a locomotion disorder.

[0120] FIGS. 22A-22D show a 2.5 second display of a horse 500 galloping. FIG. 22A shows data from the lateral-axis angular rate sensor 114, 115, 116 demonstrating that the stride frequency is 5 strides per 2.5 seconds, or 2 strides per second. FIG. 22B shows data from the vertical-axis angular rate sensor 116 that confirms the gallop frequency of 2 strides per second and also identifies by its phase shift relative to the lateral-axis angular rate sensor 114, 115, 116 waveform that the horse 500 is on its left lead. If the horse 500 were on its right lead then the major stride components exhibited by the vertical-axis angular rate sensor 114, 115, 116 would be shifted to the left. The respiratory accelerometer 100, 101 sensor output charted in FIG. 22C shows that the overall respiratory cycle is synchronized in a 1:1 ratio with the overall gallop cycle and that the inspiratory and expiratory portions of respiration occur during specific phases of the gallop stride cycle, i.e., that inspiration mainly occurs during the suspension phase of the stride and that expiration mainly occurs during the stance phase of the stride. FIG. 22D shows an ECG signal of 5 beats per 2.5 seconds yields a heart rate of 120 BPM. Because the trace is an ECG signal and not just a heart rate monitor, it is possible to discern that there are no arrhythmias present in this trace.

[0121] The data can be displayed with respect to the time domain, the frequency domain and their amplitudes and/or a combination of the time domain and the frequency domain and amplitudes. Converting sensor data between the time domain and the frequency domain and vice-versa is within the scope of the present invention.

[0122] The above examples illustrate how one can obtain simultaneous information regarding the respiratory, locomotive, and cardiovascular systems of the exercising horse 500 in order to assist in observing their interactions during exercise events of the horse 500. Those skilled in the art can appreciate that with further analysis, one can study the interactions of the physiological and biometric systems of the exercising horse 500. Further, this method allows those

skilled in the art, such as an equine veterinarian, to identify and analyze differences, irregularities and abnormalities within and between each of the systems of a single horse **500** or multiple horses **500**.

[0123] The equine physiological monitoring system **50** can be used in the study of varying ground and climatic conditions, genotypes, phenotypes, feeding and training strategies, influences of riders **540**, drivers, or unencumbered by either, riding, driving equipment and training aids, pharmacological agents, medical and developmental histories, shoeing, metabolic, physiologic and psychological states, and intra and inter species communications and vocalizations.

[0124] While the present invention has been described with respect to horses **500**, embodiments of the present invention are also equally applicable with other animals such as camels, dogs, elephants or the like.

[0125] From the foregoing, it can be seen that the present invention comprises a portable wireless equine physiological monitoring system and a method for using the equine physiological monitoring system. It will be appreciated by those skilled in the art that changes could be made to the embodiments described above without departing from the broad inventive concept thereof. It is understood, therefore, that this invention is not limited to the particular embodiments disclosed, but it is intended to cover modifications within the spirit and scope of the present invention as defined by the appended claims.

I claim:

1. An equine physiological monitoring system for monitoring interactions of physiological events of an exercising horse, the system comprising:

- (a) a first sensor configured to be mounted proximate to the horse so as to move with the horse, the first sensor outputting detected first sensor data and being at least one of a respiratory detection sensor, a motion sensor, an electrocardiogram (ECG), or a speed sensor; and
- (b) a second sensor configured to be mounted proximate to the horse so as to move with the horse, the second sensor outputting detected second sensor data, wherein the detected first and second data are both synchronized with respect to time.

2. The equine physiological monitoring system of claim **1**, wherein the first sensor is a respiratory detection sensor outputting detected respiratory data and the second sensor is an imaging sensor outputting detected image data.

3. The equine physiological monitoring system of claim **2**, further comprising an electrocardiogram (ECG) electrode configuration set configured to be mounted proximate to the horse so as to move with the horse, the ECG electrode configuration set detecting and outputting detected cardiac data of the horse, wherein the detected cardiac data is synchronized with respect to time with the respiratory data and the image data.

4. The equine physiological monitoring system of claim **3**, further comprising a speed sensor configured to be mounted proximate to the horse so as to move with the horse, the speed sensor outputting detected speed data, wherein the detected speed data is synchronized with respect to time with the respiratory data, the image data, and the cardiac data.

5. The equine physiological monitoring system of claim **4**, further comprising a motion sensor configured to be mounted proximate to the horse so as to move with the horse, the motion sensor outputting detected motion data in multi-dimensional space, wherein the detected motion data is syn-

chronized with respect to time with the respiratory data, the image data, the cardiac data, and the speed data.

6. The equine physiological monitoring system of claim **5**, wherein the motion sensor includes at least one of a lateral-axis angular rate sensor, a longitudinal-axis angular rate sensor, a vertical-axis angular rate sensor, or an accelerometer.

7. The equine physiological monitoring system of claim **2**, wherein the respiratory sensor is at least one of a microphone or a respiratory vibration accelerometer.

8. The equine physiological monitoring system of claim **1**, wherein the first sensor is a speed sensor outputting detected speed data and the second sensor is an imaging sensor outputting detected image data.

9. The equine physiological monitoring system of claim **8**, wherein the speed sensor includes a global positioning system (GPS) receiver receiving GPS data from GPS satellites.

10. The equine physiological monitoring system of claim **8**, further comprising an electrocardiogram (ECG) electrode configuration set configured to be mounted proximate to the horse so as to move with the horse, the ECG electrode configuration set detecting and outputting detected cardiac data of the horse, wherein the detected cardiac data is synchronized with respect to time with the speed data and the image data.

11. The equine physiological monitoring system of claim **1**, wherein the first sensor is a motion sensor outputting detected motion data in multi-dimensional space and the second sensor is an imaging sensor outputting detected image data.

12. The equine physiological monitoring system of claim **11**, wherein the motion sensor includes at least one of a lateral-axis angular rate sensor, a longitudinal-axis angular rate sensor, a vertical-axis angular rate sensor, or an accelerometer.

13. The equine physiological monitoring system of claim **11**, further comprising an electrocardiogram (ECG) electrode configuration set configured to be mounted proximate to the horse so as to move with the horse, the ECG electrode configuration set detecting and outputting detected cardiac data of the horse, wherein the detected cardiac data is synchronized with respect to time with the motion data and the image data.

14. The equine physiological monitoring system of claim **1**, further comprising a controller having a memory, the detected first sensor data and second sensor data being sent to the controller to be at least temporarily stored in the memory.

15. The equine physiological monitoring system of claim **14**, wherein the memory is mounted to the horse.

16. The equine physiological monitoring system of claim **1**, further comprising one of a trend display and a computer that wirelessly receives the detected first sensor data and second sensor data and displays the received first sensor data and the second sensor data synchronized with respect to time.

17. The equine physiological monitoring system of claim **1**, wherein the second sensor is one of a lateral-axis angular rate sensor, a longitudinal-axis angular rate sensor, a vertical-axis angular rate sensor, an accelerometer, a speed sensor, an electrocardiogram (ECG) electrode configuration set, an electromyography (EMG) sensor configuration set, an electroencephalograph (EEG) sensor configuration set, an electrooculogram (EOG) sensor configuration set, an impedance pneumogram (ZPG) sensor configuration set, a pressure sen-

sor, a gas flow sensor, a gas detection sensor, a pH sensor, a temperature sensor, an imaging sensor, an optical sensor, or a blood constituent sensor.

* * * * *

专利名称(译)	马无线生理监测系统		
公开(公告)号	US20130217980A1	公开(公告)日	2013-08-22
申请号	US13/845682	申请日	2013-03-18
[标]申请(专利权)人(译)	安德鲁博士h埃尔瑟V M的三维pç		
当前申请(专利权)人(译)	DR. ANDREW H.埃尔瑟, V.M.D., P.C.		
[标]发明人	ELSER ANDREW H		
发明人	ELSER, ANDREW H.		
IPC分类号	A61D99/00 A61B7/00 A61B5/0488 A61B5/0476 A61B5/00 A61B5/08 A61B5/03 A61B5/087 A61B5/145 A61B5/01 A61B5/0408 A61B5/0496		
CPC分类号	A61B5/0205 A61B5/0013 A61B5/0245 A61B5/1112 A61B5/112 A61B2503/40 A61B5/0059 A61B7/003 A61B5/14539 A61B5/087 A61B5/082 A61B5/0809 A61D99/00 A61B5/0488 A61B5/0476 A61B5/0408 A61B5/03 A61B5/01 A61B5/0496 A61B5/08 A01K29/005		
优先权	60/627215 2004-11-12 US		
外部链接	Espacenet USPTO		

摘要(译)

加速度计感测马的呼吸结构振动。加速度计包括感测表面，该感测表面被配置成附接到马的毛发，皮肤，骨骼，韧带，软骨和其他组织中的一个上。加速度计响应于马的呼吸结构振动并输出对应于呼吸结构振动的信号。

