



US 20180220962A1

(19) **United States**

(12) **Patent Application Publication**
Palley et al.

(10) **Pub. No.: US 2018/0220962 A1**

(43) **Pub. Date: Aug. 9, 2018**

(54) **SYSTEM FOR PHYSIOLOGICAL MONITORING**

A61B 5/024 (2006.01)

A61B 5/1455 (2006.01)

A61B 5/11 (2006.01)

(71) Applicant: **Spire, Inc.**, San Francisco, CA (US)

(52) **U.S. Cl.**

CPC *A61B 5/6804* (2013.01); *A61B 5/0004*

(2013.01); *A61B 5/0816* (2013.01); *A61B*

5/02427 (2013.01); *A61B 5/113* (2013.01);

A61B 5/1118 (2013.01); *A61B 5/1116*

(2013.01); *A61B 5/1112* (2013.01); *A61B*

5/14551 (2013.01)

(72) Inventors: **Jonathan Palley**, San Francisco, CA (US); **Benjamin Yule**, San Francisco, CA (US); **Dylan Jackson**, San Francisco, CA (US); **Zhao Zhao**, San Francisco, CA (US); **Ross Rudolph**, San Francisco, CA (US); **Margaret Robb**, San Francisco, CA (US); **Neema Moraveji**, San Francisco, CA (US)

(57)

ABSTRACT

(21) Appl. No.: **15/891,173**

A system for monitoring biosignals of a user, including an attachment module configured to secure the system at an inner surface of a garment of the user; a flexible layer coupled to the attachment module, wherein the flexible layer and the attachment module cooperatively define a housing lumen; an electronics subsystem arranged within the housing lumen, the electronics subsystem including a first sensor, wherein the first sensor outputs a first signal; a respiratory sensor, wherein the respiratory sensor outputs a respiration signal, and a processing module that receives the first signal, the respiration signal, and the proximity signal, and generates a processed biometric output based on the first signal and the respiration signals.

(22) Filed: **Feb. 7, 2018**

Related U.S. Application Data


(60) Provisional application No. 62/455,712, filed on Feb. 7, 2017, provisional application No. 62/507,974, filed on May 18, 2017.

Publication Classification

(51) **Int. Cl.**

A61B 5/00 (2006.01)

A61B 5/08 (2006.01)

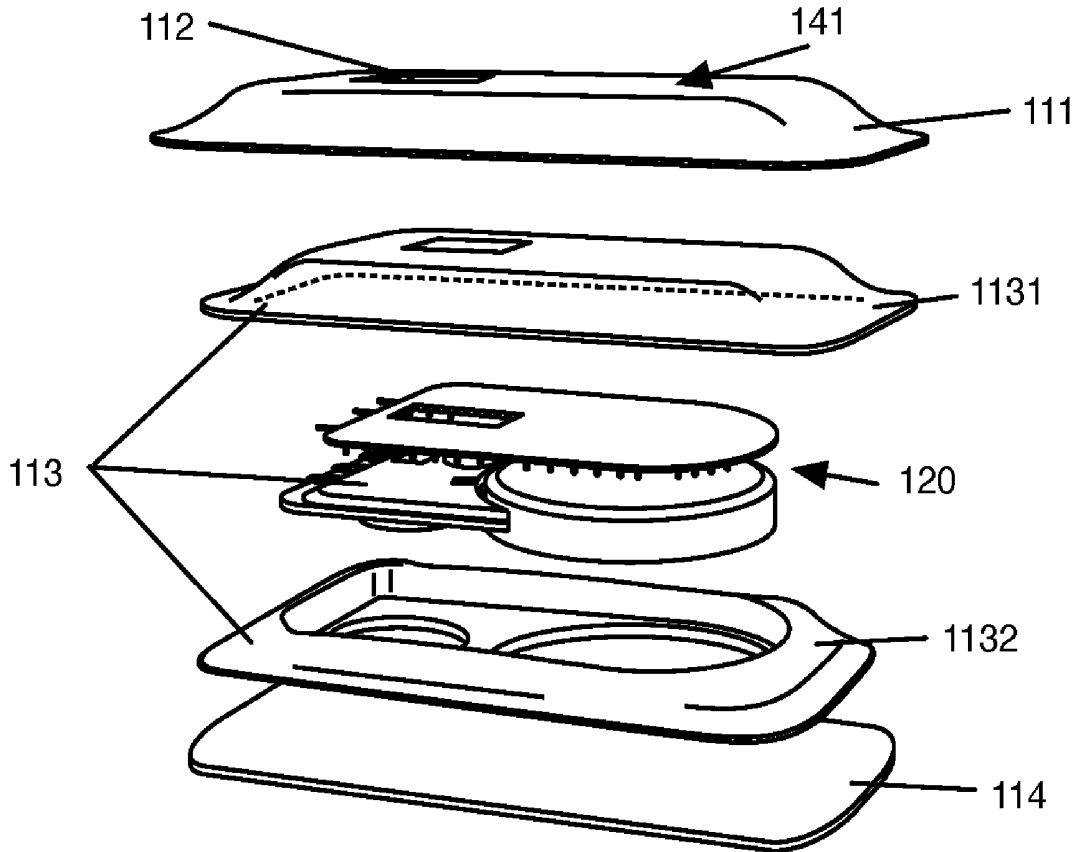

100 ↘

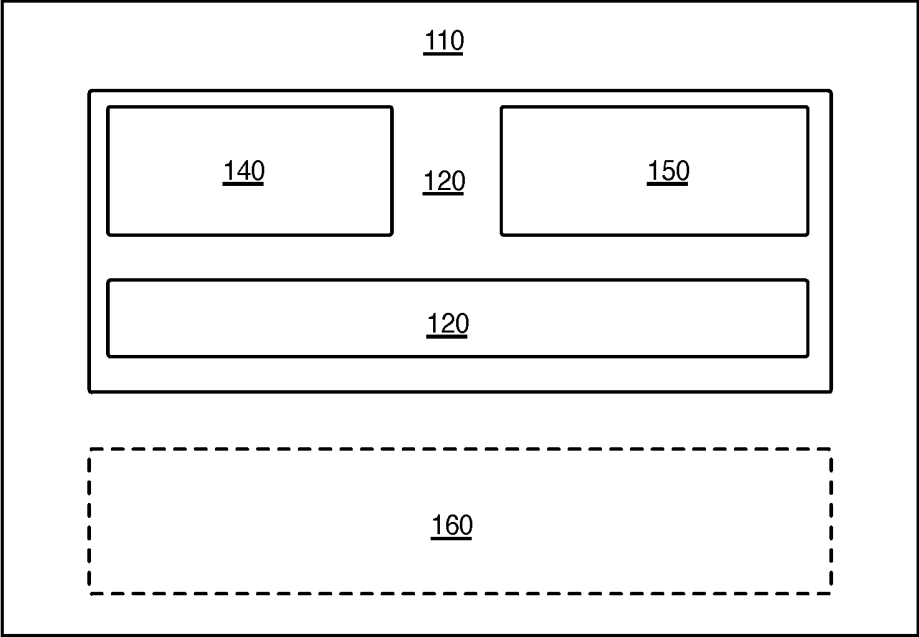


FIGURE 1

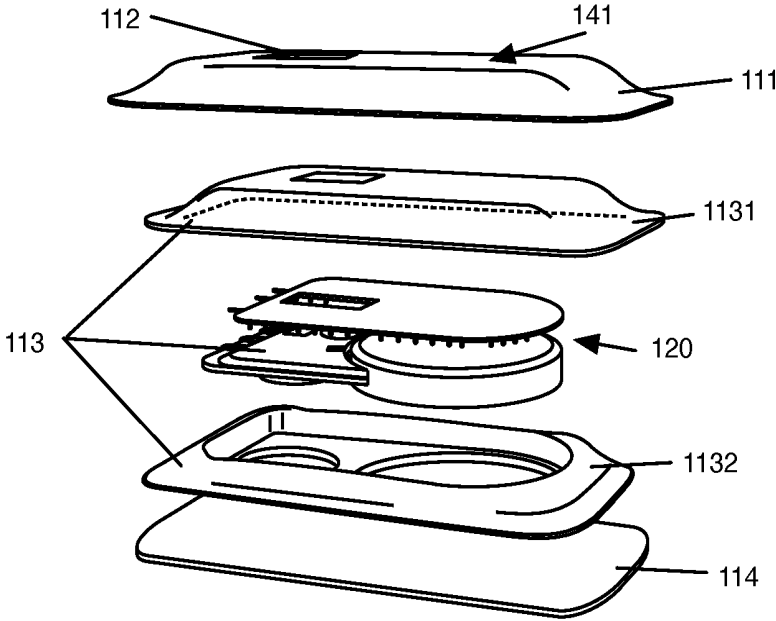


FIGURE 2

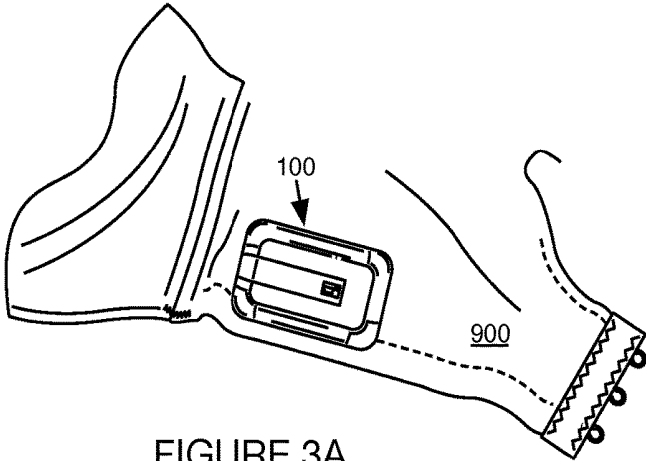


FIGURE 3A

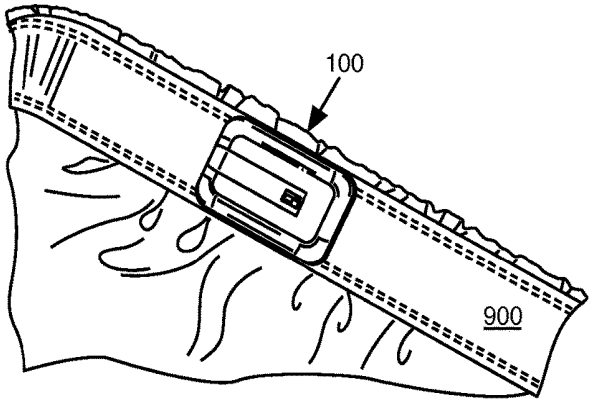


FIGURE 3B

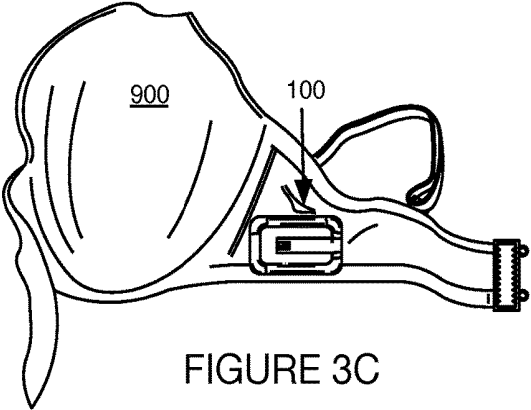


FIGURE 3C

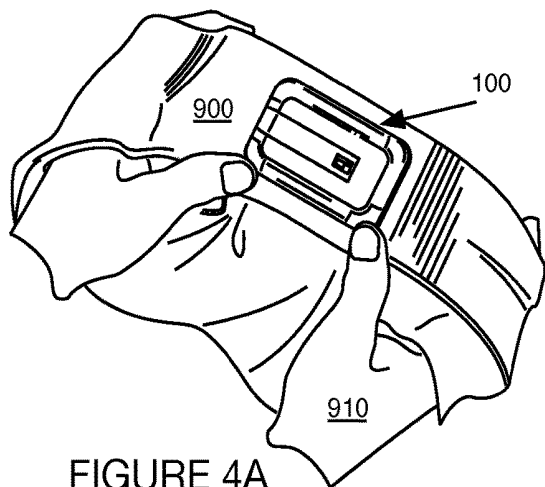


FIGURE 4A

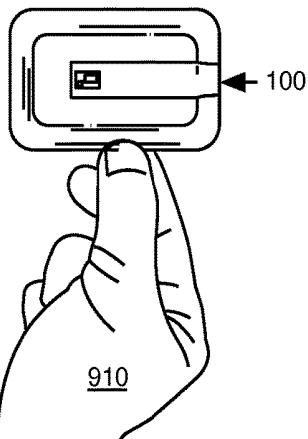


FIGURE 4B

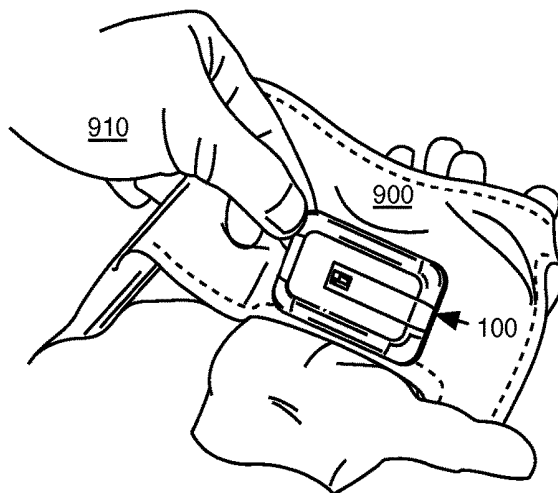


FIGURE 4C

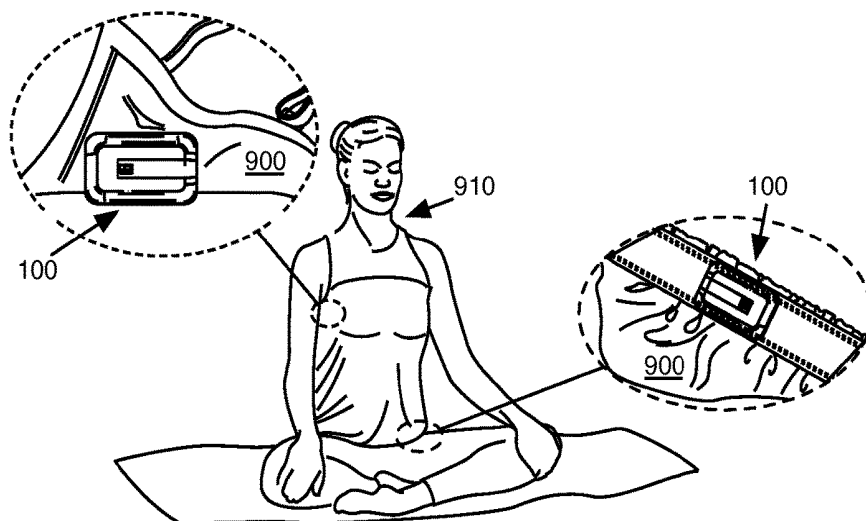


FIGURE 5

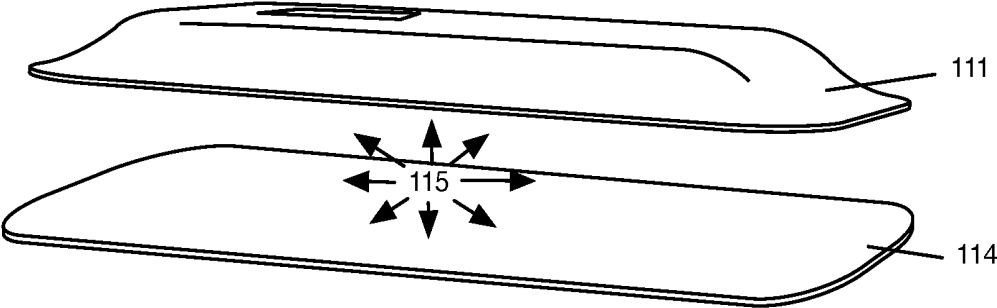


FIGURE 6

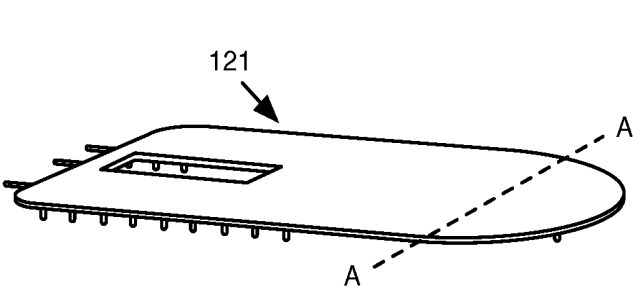


FIGURE 7A




FIGURE 7B

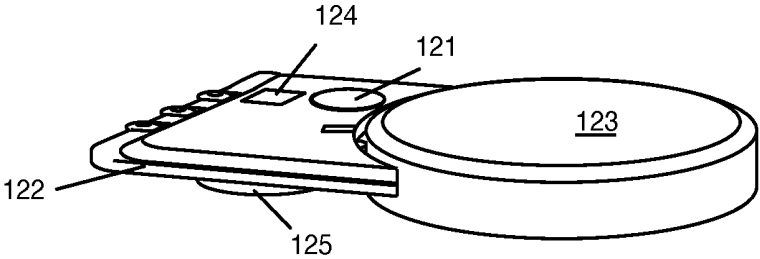


FIGURE 8

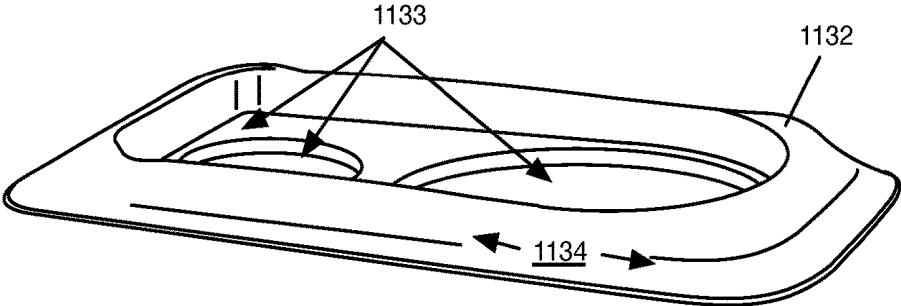


FIGURE 9

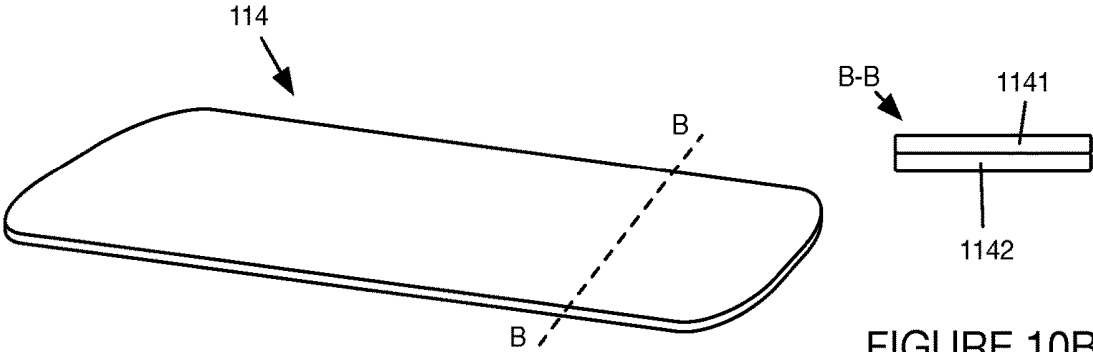


FIGURE 10A

FIGURE 10B

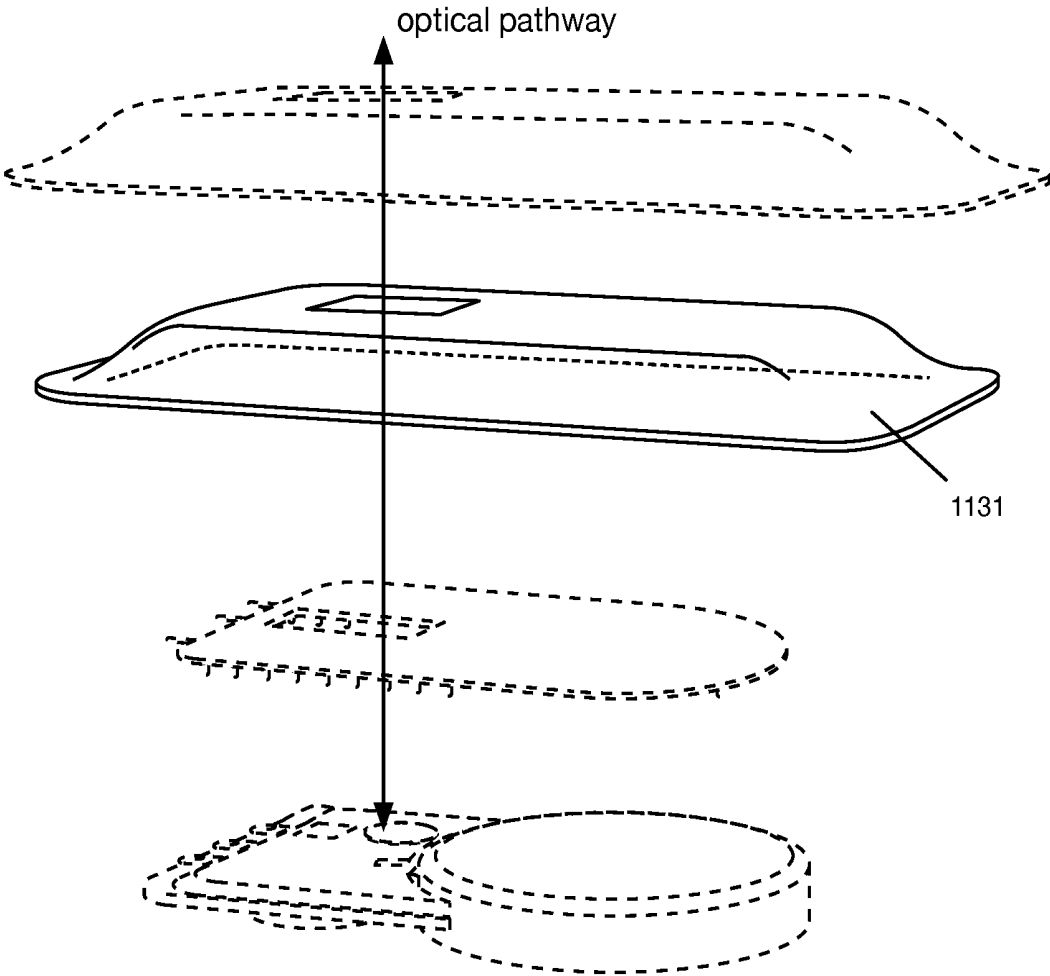


FIGURE 11

SYSTEM FOR PHYSIOLOGICAL MONITORING

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 62/455,712, filed 7 Feb. 2017, and U.S. Provisional Application No. 62/507,974, filed 18 May 2017, each of which is incorporated herein in its entirety by this reference.

TECHNICAL FIELD

[0002] This invention relates generally to the biosignal monitoring device field, and more specifically to a new and useful system and for monitoring biosignals.

BACKGROUND

[0003] Respiration parameters can provide profound insight into an individual's wellbeing. Respiration parameters can be indicative of physiological and/or mental states of an individual, as well as prognostic with regard to diagnosis of medical conditions. In examples, respiration parameters and other biometric parameters can provide insight into an individual's stress levels, and can be evidential of more serious pulmonary disorders, such as disorders associated with chronic obstructive pulmonary disease (COPD). Traditionally, however, respiration and other biometric parameter monitoring has occurred in a clinical setting, contributing to the development of respiration monitoring devices that are motion-limiting, lack portability, are not easily integrated into the daily lives of user, and/or are difficult to use. There is thus a need in the biosignal monitoring device field to create a new and useful system for monitoring respiration. This invention provides such a new and useful system and method.

BRIEF DESCRIPTION OF THE FIGURES

[0004] FIG. 1 depicts a schematic of an embodiment of a system for physiological monitoring;

[0005] FIG. 2 depicts an exploded view of a specific example of a system for physiological monitoring;

[0006] FIGS. 3A-3C depict a variation of an embodiment of the system attached to an internal surface of various garments;

[0007] FIGS. 4A-4C depict variations of an embodiment of the system being removed from and/or attached to a garment;

[0008] FIG. 5 depicts a plurality of a particular embodiment of the system attached to multiple garments worn by a user during an activity;

[0009] FIG. 6 depicts an exploded view of a portion of a variation of the system;

[0010] FIGS. 7A-7B depict a perspective view and cutaway view, respectively of a portion of a variation of the system;

[0011] FIG. 8 depicts a perspective view of a portion of a variation of the system;

[0012] FIG. 9 depicts a perspective view of a portion of a variation of the system;

[0013] FIGS. 10A-10B depict a perspective view and cutaway view, respectively of a portion of a variation of the system; and

[0014] FIG. 11 depicts an exploded perspective view of a portion of an example embodiment of the system, and an example optical pathway therethrough.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0015] The following description of the preferred embodiments of the invention is not intended to limit the invention to these preferred embodiments, but rather to enable any person skilled in the art to make and use this invention.

1. System Overview

[0016] As shown in FIG. 1, an embodiment of a system 100 for monitoring physiological metrics of a user comprises: a housing 110 including an attachment module, and an electronics module 120 including a communication module 130, respiration sensing module 140 and a proximity sensing module 150. The system can, in variations, include a supplementary sensing module 160, as well as any other suitable components. The system can be integrable (e.g., removably couple-able) with garments 900 (e.g., textile-based garments, woven garments, non-woven garments, etc.) such as underwear, brassieres, spandex undergarments, hats, visors, and any other suitable wearable articles. The garments are preferably garments designed to contact the skin of the user (e.g., undergarments), but can additionally or alternatively include outerwear, accessories, and/or any other suitable garments that do or do not directly contact a user's skin.

[0017] In some variations, the system can include multiple instances of the components (e.g., housing, sensing modules, etc.) packaged into discrete system units (e.g., integrated modules). For example, as shown in FIG. 5, the system can include multiple units, each unit coupled to a single garment of a set of garments worn by the user. In another example, the system can include multiple units, each unit coupled to various garments that the user can choose to wear at any given time. However, the system can include one or more units having any suitable correspondence to a set of garments owned and/or worn by the user (e.g., an outfit or outfits).

[0018] The system is preferably configured to attach (e.g., by way of the attachment module) to an interior surface of a garment (e.g., waistband, bra, belt, etc.). The powered portions of the system (e.g., the electronics module) are preferably operable between an active mode and a standby mode based on proximity to the user (e.g., based on whether the user is wearing the garment or not). For example, the system can be operable such that motion of the user activates one or more sensor(s) of the system (e.g., a capacitor-based sensor, a piezoelectric transducer for respiratory cadence detection, etc.).

[0019] The system is preferably configured such that integration of the system with a garment preserves the physical comfort of the garment and the system does not create discomfort and/or irritation. Thus, the system is preferably manufactured, in whole or in part, out of soft, flexible, and/or resilient materials such as thin films, compressed silicone compounds, woven fabrics, non-woven fabrics, foam substrates, and any other materials suitable for maintaining wearer comfort. Soft-goods manufacturing techniques (e.g., sheet cutting, die cutouts, thermal bonding, sewing, etc.) are preferably used to manufacture components

of the system, but additionally or alternatively any suitable manufacturing techniques can be used.

[0020] The system 100 functions to provide a garment-integrable system for tracking human physiology metrics. Thus, the system 100 can add physiology-tracking and other sensing capabilities to any suitable garment or wearable article (e.g., a garment that did not previously have such a capability). The system 100 can additionally or alternatively function to detect signals indicative of a user's respiration characteristics and to provide data relevant to the user's respiration characteristics for further analysis, such that the user's respiration behavior can be monitored. The system 100 can also function to provide information regarding the user's respiration characteristics to the user and/or other entity at a user interface, to monitor and/or indicate physiological and/or mental states of the user based upon the tracked physiological metrics. The system 100 can additionally or alternatively function to facilitate diagnosis of medical conditions with pulmonary indications (e.g., by providing respiratory function data to a physician). The system 100 can additionally or alternatively function to detect signals indicative of any suitable biometric parameters (e.g., photoplethysmography for cardiovascular health monitoring) and provide data relevant to the user's physiological status for further analysis.

2. Benefits

[0021] Variations of the system 100 can confer several benefits and/or advantages. First, variants of the system 100 can be temporarily, permanently, or semi-permanently integrated with a user's (e.g., wearer's) existing clothing to facilitate physiological monitoring in a home setting (e.g., in-home monitoring for the elderly) or any other suitable setting. As such, the functionality of the system can be added to any textile, garment, or similar wearable article, independently of the stylistic choices or preferences of the wearer (e.g., because it can be integrated post-purchase into any garment of the user's choice). Examples of garments 900 to which the system can be attached are shown in FIGS. 3A-3C. An example of a user wearing a garment with an attached system as herein described is shown in FIG. 5.

[0022] Second, variations of the system 100 can be disposable and reversibly integrated with single-use and/or disposable garments such as hospital gowns, latex gloves, and any other suitable single- or limited-use garments. This can enable physiological monitoring of patients in a hospital setting, scientists in a field setting, or any other suitable entities in any other suitable settings.

[0023] Third, variations of the system 100 can be used for local environmental sensing via integration with safety equipment (e.g., carbon monoxide detection for underground miners can be enabled through integration of the system with hardhats worn by the miners).

[0024] Fourth, variations of the system 100 can be configured or otherwise assembled to enable features that enhance usability and operation in the context of clothing and wearable articles. For example, variations of the system 100 can be substantially waterproof to enable washing of the system 100 in a washing machine; waterproofing can be achieved in any suitable manner (e.g., via the inclusion of impermeable rubberized encapsulation layers between an inner surface of the housing and the electronics module). Preferably, the system 100 is sufficiently waterproof to withstand at least 60 washing cycles in a washing machine;

alternatively, the system 100 can be configured to withstand any suitable number of washing cycles. Variations of the system 100 can additionally be manufactured from materials that do not substantially degrade when heated (e.g., at temperatures commonly reached in a clothes dryer) to allow the system 100 to be attached to clothes that are washed and dried through conventional means.

[0025] Fifth, variations of the system 100 can be sufficiently waterproof to enable integration into swimwear and/or wearable articles and/or equipment worn in submerged aqueous environments (e.g., swim caps, goggles, etc.). This can enable monitoring of physiological characteristics and/or parameters of a swimming athlete or individual.

[0026] Sixth, variations of the system 100 can provide advantages in the technical field of garment manufacturing, by enabling any manufactured garment to be granted "smart" (e.g., data gathering, physiological monitoring, data transmission, etc.) capabilities by way of the system 100. The garment fabrication manufacturing line need not be retooled to provide these capabilities, because the system 100 can be integrated post-manufacture via the attachment module of the system 100.

[0027] Seventh, variations of the system 100 can integrate advantageously with aspects of user behavior and psychology. For example, the user does not need to remember to "put on" the system 100, because it is integrated with garments that the user already wears regularly and/or intends to wear. In some variations of the system 100, the user does not need to remember to actively charge the device, because it harvests energy from the environment (e.g., thermal energy from the user, electrical energy from the user, thermal energy from the washing machine and/or dryer, etc.). Variations of the system 100 can also operate without adhering a sensor to the skin of a user, which can irritate the skin of the user and/or cause excessive discomfort to the user.

[0028] Eighth, variations of the system 100 can be configured to have a form-factor suitable for enhancing user comfort and the ability to integrate the system with a garment. For example, the system can be arranged in a layered configuration to provide a compact form-factor that minimizes the occupied volume between an inner surface of the garment and the body of the user, in order to achieve a comfortable fit for the user. The external shape of the system can also be adapted to enhance user comfort; for example, the system can include a bevel about the edge of the system that is smoothly rounded or otherwise shaped to prevent irritation while the garment is worn (e.g., during use cases that cause lateral movement between the user and the system). The materials used to coat the system can be selected in order to enhance user comfort; for example, the system can include an exterior surface layer made of cloth (e.g., natural cloth, synthetic cloth, woven cloth, unwoven cloth, etc.) such that primarily soft materials contact the user when the garment (e.g., to which the system is coupled) is worn.

[0029] However, the system 100 can afford any other suitable benefits and/or advantages.

1.1 Housing

[0030] The housing 110 functions to retain and protect components of the system 100. The housing 110 can provide one or more user-coupling surfaces at which contact sensors of the sensing modules (e.g., respiratory sensing module,

proximity sensing module, supplementary sensing module, etc.) can make direct contact with a user (e.g., the skin of a user). The housing **110** can also define one or more openings **112** through which non-contact sensors (e.g., optical sensors) can establish indirect communicative coupling (e.g., an optical pathway as shown in FIG. **11**) to the user. The housing **110** preferably includes an outer layer **111**, a support structure **113** (e.g., a shell), and an attachment module **114**. In variations, the support structure of the housing can be omitted and/or embodied by another portion of the system **100**. The housing **110** can optionally include any other suitable components for retaining, supporting, enclosing, or otherwise suitably coupling to components of the system **100** and coupling components of the system to a garment, accessory, and/or a user. The outer layer **111** and attachment module **114** preferably cooperatively enclose the components of the system **100** (e.g., the sensing modules, electronics module, the support structure, etc.) within a housing lumen **115**, as shown in FIG. **6**, but can additionally or alternatively be otherwise arranged. The support structure of the housing preferably provides structural support to enclosed components of the system **100**, such as by ensuring adequate load transfer to force sensors (e.g., touch-sensitive sensors, capacitive touch sensors, etc.) while transmitting loads around components that are not designed to bear substantial load (e.g., printed circuit boards, solder joints, etc.). The support structure can include multiple discrete components; for example, the support structure can include a shell and foam filler material that are discrete components. In another example, the support structure can be made up of a contiguous volumetric body that fills the portions of the housing lumen **115** devoid of other components. However, the support structure can provide structural support in any other suitable manner.

[0031] The housing **110** preferably defines a partially deformable lumen and/or volume **115** (e.g., partially defined by a flexible substrate that can be deformed), but can additionally or alternatively define any suitable volume (e.g., a rigid volume). The housing can define a footprint having any suitable shape (e.g., rectangular footprint, polygonal footprint, ellipsoidal footprint, etc.). The housing can have any suitable geometry, but preferably defines a large aspect ratio (e.g., 2:1) in the projected area, as well as a shallow distance (e.g., between 1 and 10 mm) in the depth direction (e.g., in the direction extending between the user and the interior surface of the garment to which the system **100** is attached). In a specific example, as shown in FIG. **6**, the housing defines a housing lumen **115**, wherein the housing lumen is cooperatively formed by the attachment module **114** and a flexible outer layer **111** coupled to the attachment module at an edge of the attachment module.

[0032] The outer layer **111** of the housing, an example of which is shown in FIG. **2**, functions to shield portions of the system **100** from contact with the external environment. At least a portion of the outer layer is preferably manufactured from soft materials (e.g., woven fabrics, non-woven fabrics) to provide a comfortable, non-irritating interface to the user. Accordingly, the outer layer can function to provide a user-coupling interface to the system that is comfortable for the wearer of the garment to which the system is coupled. The outer layer preferably defines at least one opening **112** for a portion of one or more of the respiratory sensing module, proximity sensing module, and the supplementary sensing module to access the external environment; for

example, the outer layer can define an opening for a PPG sensor (e.g., as shown in FIG. **11**). In some variations, the opening can include a transparent window that physically separates the external environment from a sensor, but permits the passage of electromagnetic radiation (e.g., light) between the interior lumen of the housing and the external environment (e.g., light from an optical pulse oximeter, light gathered by a PPG sensor, etc.). However, the outer layer can be otherwise suitably configured.

[0033] The support structure **113** of the housing functions to resiliently retain the components of the system **100** enclosed by the housing to enable operation of the system and prevent breakage. As shown in FIG. **2**, the support structure preferably includes a resilient layer **1131** (e.g., a thermally-formed semi-rigid plastic layer) that defines an opening, similar in size, shape, and location to the opening **112** defined in variations of the outer layer. The opening in the support structure can, in a first example, provide a path between the electronics module **120** (e.g., a portion of the electronics module wherein a sensor is located) and the external environment (e.g., by way of a corresponding opening in the outer layer) for one or more sensors (e.g., a PPG sensor).

[0034] As shown in FIG. **9**, the support structure can include a shell **1132** defining one or more voids **1133**, configured to receive and retain the electronics module and sensor modules. The shell is preferably arranged adjacent to the attachment module (e.g., at a surface of the substrate opposing the attachment layer and/or adhesive layer), but can, in variations, be separated from the attachment module by one or more layers and/or other system components. The shell is preferably made up of a resilient material, such as silicone, plastic (e.g., PVC, ABS, HDPE, etc.), high density foam, and the like, but can additionally or alternatively be made up of any suitable material. In a first example, as shown in FIGS. **2** and **9**, the shell defines an oblong ellipsoidal depression arranged to receive the electronics module. In another specific example, as shown in FIG. **9**, the shell **1132** defines a bevel **1134** about its outer edge that defines the volumetric shape of the system, and is curved such that the external shape minimizes sharp edges or other stark morphological features that could cause user discomfort. The shell can, in variations such as that depicted in FIG. **2**, be formed of multiple pieces, wherein a first piece (e.g., piece **1132**) defines the one or more voids for receiving components and a second piece defines the external shape and is adapted to couple to the first piece in a stacked configuration (e.g., piece **1131**). However, the shell can be otherwise suitably configured.

[0035] The support structure **113** can also include foam filler material that occupies portions of the housing lumen defined by the housing that are not otherwise occupied by system components. The foam filler material can, in variations, provide thermal insulation to passively manage heat transfer among components of the system (e.g., including an energy harvesting mechanism that converts thermal energy into electrical energy).

[0036] The attachment module **114**, an example of which is shown in FIGS. **2** and **10A**, functions to couple the system to a wearable article, and to cooperatively enclose components of the system **100** in combination with the outer layer of the housing. The attachment module **114** can include a substrate **1141** and an attachment layer **1142**, as shown in FIG. **10B**, and any other suitable attachment mechanisms.

The substrate is preferably a resilient material (e.g., a polycarbonate substrate), but can additionally or alternatively be any suitable material. The substrate preferably defines a broad surface, at which the attachment layer is arranged. In a first variation the attachment layer **1142** is an adhesive layer, but in alternative variations the attachment layer can include any suitable mechanism for attachment to a wearable article (e.g., one side of a hook-and-loop fastener, one or more buttons, a zipper, etc.).

[0037] In a specific example, the adhesive layer includes a two-part silicone elastomer adhesive, wherein the two parts are mechanically mixed upon coupling of the system to a garment. In this example, one of the two parts of the adhesive is preferably encapsulated within the other of the two parts (e.g., within microbeads), but in related examples the two parts can be otherwise oriented in relation to one another prior to mixing (e.g., in separate containers).

[0038] The attachment layer preferably covers the entirety of at least one side of the attachment module, but can additionally or alternatively cover any suitable portion of the attachment module and/or other portions of the housing, in whole or in part. In one variation, the system includes an attachment module arranged at opposing sides of the housing, such that the system can be attached to a garment at either of the two opposing sides. In this variation, the attachment module can include one or more openings or otherwise provide for an optical pathway between a sensor of the system (e.g., a PPG sensor) and the skin of the user, in whichever configuration the system is coupled to the user.

1.3 Electronics Module

[0039] The electronics module **120** functions to transfer power and control instructions among components of the system **100**. The electronics module **120** can additionally or alternatively function to route sensor data between sensors, signal conditioning electronics, control module(s), and communication module(s), as well as to provide a physical substrate for attachment and structural support of electronic components of the system **100**. The electronics module can be operable between several modes, including a charging mode. The charging mode can implement a sensor for detecting that the system is in a condition for charging (e.g., via thermal energy harvesting, via inductive charging, via direct electrical connection, etc.). Detecting that the system is in a condition for thermal energy harvesting can include measuring a temperature (e.g., relative to a threshold temperature), measuring a temperature gradient (e.g., relative to a threshold temperature gradient), or determining any other suitable condition in any suitable manner (e.g., according to a laundry schedule, an adaptive schedule that learns the thermal environment of the system as a function of time by iteratively implementing a set of rules, etc.). As such, the system can operate in the charging mode whenever a threshold temperature differential is detected (e.g., after drying of a garment to which the system is coupled, etc.). Detecting that the system is in a condition for inductive charging can include monitoring a voltage and/or current at a node of a signaling circuit, and operating the system in the charging mode in response to the voltage and/or current at the node exceeding a threshold value (e.g., based on a received electromagnetic wave).

[0040] The electronics module is preferably arranged within the housing **110** (e.g., supported by a resilient shell **1132** of the support structure of the housing), but can

alternatively be otherwise suitably arranged. The electronics module is preferably connected to powered components of the system (e.g., sensor modules, communication module) by way of direct electrical connections (e.g., printed traces and solder joints, flexible jumper wires, etc.), but can be otherwise suitably electrically connected. In variations, the electronics module includes thermally conductive pathways between the external environment of the system and portions of the electronics module (e.g., for thermal energy harvesting at the electronics module). For example, the electronics module can include thermal pathways that direct heat to portions of the electronics module having different thermal properties (e.g., specific heats, thermal conductivities, etc.) that cause a voltage to be generated in the presence of a temperature gradient, and further include electrical circuitry to harvest (e.g., store) energy from the generated voltage. The electronics module **120** can include one or more sensors **121**, a substrate **122**, a battery **123**, charging circuitry **124**, and a signal processing module **125**. The electronics module **120** can also include a communication module **130**, a respiration sensing module **140**, and a proximity sensing module **150**. The electronics module preferably includes a printed circuit board to which each of the components of the electronics module is electrically and/or mechanically coupled. However, the electronics module **120** can additionally or alternatively include any suitable electronic components.

[0041] The substrate **122** of the electronics module functions to provide a physical attachment location, structure support, and integrated electronic connectivity to system components. In a specific example, the substrate **122** includes a printed circuit board (PCB). However, the substrate can additionally or alternatively include any suitable electronic component attachment and/or support mechanism.

[0042] The battery **123** of the electronics module functions to store and provide electrical power to components of the system. In a specific example, the battery is a non-chargeable **2032** coin cell lithium battery. In another specific example, the battery is a rechargeable cell (e.g., lithium polymer battery pack). However, the battery can additionally or alternatively include any suitable power storage and delivery device (e.g., a capacitor) and/or any other suitable chargeable and/or non-chargeable device.

[0043] The charging circuitry **124** of the electronics module functions to convert energy from various forms into a form usable by the system (e.g., to electrical energy). Forms of energy convertible by the charging circuitry include thermal energy, electromagnetic (e.g., inductively-coupled, capacitively-coupled, propagating) energy, mechanical energy (e.g., generated by movement of the wearer and captured using an eccentric rotary pendulum), and any other suitable form of energy. The charging circuitry can include a battery capacity monitor. In a specific example, the battery capacity monitor includes a known resistance load, and is operable between a monitoring mode and a non-monitoring mode. The monitoring mode includes switching the battery terminals across the load of known resistance, measuring the voltage drop across the load, and computing the state of the battery based on the measured voltage (e.g., the state of the battery as represented by a point on a current-voltage characteristic curve).

[0044] In a first variation, the charging circuitry can function to harvest thermal energy. In this variation, the charging

circuitry includes one or more heat flux channels (e.g., thermally conductive pathways surrounded by thermally insulating material) and a thermal energy converter. The heat flux channels preferably define thermally conductive paths extending away from an external surface of the system and toward the charging circuitry, and are in direct thermal contact with portions of the charging circuitry (e.g., the thermal energy converter). The external surface can be user-coupling (e.g., to extract thermal energy from a user's body heat), in contact with the ambient environment (e.g., to extract thermal energy from ambient heat), or any other suitable external surface. In a specific example, the charging circuitry includes a housing segment, a heat collector, thermally conductive filler material, and a heat flux channel arranged in series between the external surface and the charging circuitry.

[0045] In a second variation, the charging circuitry can function to harvest ambient radiofrequency (RF) energy. In this variation, the charging circuitry includes one or more conductive loops arranged within the housing; in examples, the conductive loops can be arranged to maximize the circumscribed area of each loop (e.g., around the perimeter of the internal lumen of the housing) at multiple azimuthal angles about an axis of the system. The charging circuitry in this variation can also include RF power conversion circuitry coupled to the conductive loops and configured to transform voltage generated by background RF (and/or other electromagnetic radiation) waves passing through the conductive loops into stored electrical energy. Background RF can be incidentally generated, and thus include wireless router signals (e.g., generated as part of an in-home wireless internet network), cellular radio signals, or any other suitable background RF signals. RF radiation can additionally or alternatively be generated for the purpose of powering the system (e.g., the system can be placed in a drawer with RF-reflective walls, wherein RF radiation is injected into the drawer which acts as a lossy cavity from which the charging circuitry can harvest energy) or for any other suitable purpose.

[0046] In a third variation, the charging circuitry functions to inductively charge the system. In this variation, the charging circuitry includes a secondary coil coupled to the battery. The secondary coil is inductively coupled to the primary coil of a charging station (e.g., a charging element of a base station), which generates alternating-current waveforms through the primary coil that induce alternating-current waveforms in the secondary coil. Energy can then be harvested by the charging circuitry from the induced alternating-current waveforms.

[0047] The signal processing module of the electronics module functions to process signals generated by sensing modules and/or other components of the system. The signal processing module can include a processor. The signal processing module can be operated between several modes, including a sampling mode. The sampling mode can include cascade sampling of multiple sensor modules, in which samples are collected from the multiple sensor modules sequentially. The sampling mode can additionally or alternatively include sampling from each sensor module in a synchronized manner (e.g., collecting samples from each sensor module substantially simultaneously). However, the signal processing module can be otherwise operated in any suitable mode to perform any suitable signal processing function. Furthermore, signal processing associated with the

system **100** can additionally or alternatively be implemented in the cloud (i.e., using remote processing systems, such as Amazon Web Services cloud computing services, using other cloud computing platforms, etc.) in relation to one or more of data transmission, data processing, data storage, data retrieval, and/or any other suitable processing relation functions.

1.2.A Communications Module

[0048] The communication module **130** functions to enable pairing of the system **100** with a database. The communication module **130** can also function to transmit gathered data for reception by a computing system. The communication module can be operable between several modes, including a pairing mode, a broadcasting mode, and an encoding mode. The pairing mode can include communicating with a hub (e.g., a base station) in order to identify the instance of the system **100** being worn by the user (e.g., in cases in which the user wears various garments, each of which is integrated with an instance of the system) and establish a data link between the system and a network connected to the base station (e.g., the internet). The broadcasting mode can include transmitting data (e.g., over a Bluetooth link) for collection (e.g., by a base station, by a mobile device, etc.). The encoding mode can include storing data at a storage module of the system for later retrieval. In a first variation, the encoding mode includes reconfiguring an internal circuit (e.g., an FPGA) of the communication module to modulate a signal according to a pattern that encodes a recorded data set, such that the data set can be communicated as a modulated signal (e.g., a modulated radio signal, a modulated inductive charging signal, etc.). In a specific example implementation of the encoding mode, heart rate data is encoded and stored in onboard memory as a state of a modulator of the communication module, and during inductive charging of the system the current transmission between the system and the inductive charger is modulated according to the modulator state and the modulated current is read at the inductive charger (e.g., the base station) and decoded as heart rate data.

[0049] The communication module preferably includes at least one radio (e.g., Bluetooth, Bluetooth low energy, Bluetooth smart, cellular, or any other suitable radio). In variations, the communication module includes multiple radios corresponding to different frequency bands and/or communication protocols, for use in different circumstances (e.g., a cellular radio that turns on when the system is fully charged for high bandwidth transmission, and a BLE/BTsmart radio that wakes periodically for low power burst transmissions at lower bandwidth). However, the communication module can include any suitable number of any suitable communication mechanisms. The communication module is preferably arranged within the housing (e.g., supported by the silicone shell of the support structure of the housing), and is preferably coupled to (e.g., powered by) the electronics module, but can be otherwise suitably arranged and otherwise Suitably Connected.

1.2.B Respiration Sensing Module

[0050] The respiration sensing module **140** functions to measure the respiratory function of a user of the system. Measuring the respiratory function can include detecting a set of signals indicative of a set of respiratory characteristics

of the user. The respiration sensing module **140** can include a sensor **121** configured to detect a set of signals indicative of a set of respiration characteristics (e.g., respiration signals) of the user, and functions to sense movement of a portion of the user's body, wherein the movement results from the user's respiration. At least a portion of the respiration sensing module **140** is preferably in direct force-contact with the user (e.g., with the user's clothing, with the user's skin) in a manner that provides robust force transmission between the user and the respiration sensing module at a sensor-user interface **141**. The sensor-user interface can be at the external surface of the system **100**, in variations wherein the respiration sensor is contained within the housing lumen, and include solid system components (e.g., portions of the support structure) that transmit force to the force sensor of the respiration sensing module. However, in additional or alternative variations, portions of the respiration sensing module **140** are disposed at the exterior surface of the system **100** and are in direct adjacent contact with the user. After coupling, the sensor-user interface is preferably substantially fixed, such that motion detection associated with breathing can be easily distinguished from any other motion (e.g., gross motions of the user). The sensor-user interface is preferably located proximal to the user's torso (e.g., abdomen region, hip region, chest region); however, the sensor-user interface can be located at any suitable location relative to the user. Alternatively, the sensor-user interface can be non-fixed, and the system **100** can be configured to distinguish motion of the user's body associated with breathing from other detected motions (e.g., motion of the sensor relative to the user's body, gross motions of the user).

[0051] Preferably, the sensor of the respiration sensing module **140** functions to detect motions of the user's chest and/or abdominal wall produced during the user's breathing. Additionally, the respiration sensing module **140** is preferably non-invasive in detecting signals indicative of the user's respiration behavior; however, the respiration sensing module **140** can comprise invasive or minimally invasive elements. Alternatively, the respiration sensing module **140** can function based upon any other suitable plethysmography-based sensing method, any other suitable mechanical sensing method (e.g., acoustic sensing), and/or any suitable sensing method (e.g., ultrasound respiration sensing). Additionally, the respiration sensing module **140** preferably detects signals indicative of the user's respiration characteristics substantially continuously and in real time; however, the respiration sensing module **140** can alternatively or additionally detect signals intermittently and/or not in real time.

[0052] In a first variation, the respiration sensing module **140** preferably comprises a sensor including at least one element configured to deflect (e.g., in compression) in response to movements of the user's body produced by the user's breathing. The element of the sensor is preferably configured to provide a robust connection with the user, such that deflections associated with the user's breathing are detected with minimal interference due to other motions of the user and/or sensor. In the first variation, the respiration sensing module can thus be positioned between the user's clothing and the user's skin, coupled robustly to an article of the user's clothing, and/or coupled to the user using any one

or more of an adhesive (e.g., permanent adhesive, non-permanent adhesive), strap, clip, or other suitable coupling element.

[0053] In a first example of the first variation, as shown in FIG. 7, the respiration sensor **142** comprises two layers of a capacitive sensor **121** having four layers. The two layers from which the respiration sensor signal is generated are, in this example, the innermost two layers. However, in related examples, the layers from which the respiration sensor signal is generated can be the outermost two layers, or any other suitable combination of two layers of a capacitive sensor having any suitable number of layers.

[0054] Variations of the respiration sensor can, however, include any suitable embodiment, variation, or example of the respiration sensors and methods of use thereof described in U.S. application Ser. No. 14/174,466, titled "System and Method for Monitoring Respiration", and filed on 6 Feb. 2014, which is herein incorporated in its entirety by this reference.

[0055] The set of respiration characteristics preferably comprises any one or more of: respiration rate (e.g., breaths per second), depth of breath, shallowness of breath, thoracic variations, tidal volume (or an estimation thereof), inspiratory flow (e.g., peak value, mean value), expiratory flow (e.g., peak value, mean value), fractional inspiratory time, work of breathing, phase angle, any other suitable respiration characteristic, and any other suitable derivative of a respiration characteristic. Additionally, the set of respiration characteristics detected by the respiration sensing module **140** can indicate respiration events associated with laughter, sighing, wheezing, coughing, apnea, and/or any other suitable event associated with the user's respiration.

1.2.C Proximity Sensing Module

[0056] The proximity sensing module **150** functions to detect when the garment with which the system **100** is integrated is being worn by the user (e.g., in order to operate the system in a low-power-mode to preserve battery power when not in use). The proximity sensing module **150** preferably includes at least one proximity sensor **151** that generates a signal indicative of the proximity of the user to the system **100**. In a specific example, as shown in FIG. 7, the proximity sensor **151** comprises two layers **152** of a capacitive sensor **121** having four layers. The two layers from which the proximity sensor signal is generated are, in this example, the outermost two layers. However, in related examples, the layers from which the respiration sensor signal is generated can be the innermost two layers, or any other suitable combination of two layers of a capacitive sensor having any suitable number of layers. As such, a dual-region or multi-region capacitive sensor having multiple layers can provide regions associated with respiration sensing, and regions associated with capacitive sensing.

[0057] The proximity sensing module can optionally include an accelerometer, a temperature sensor, and/or any other suitable sensor that can collect data indicative that the garment to which the system is attached is being worn by a user. For example, accelerometer data can be analyzed to determine that the system is proximal an individual that is walking or running, and the system (e.g., the signal processing module of the system) can determine that the garment with which the system is integrated is being worn. In another example, the temperature sensor of the proximity sensing module can detect a temperature within a range of

normal body temperatures (e.g., 98 degrees Fahrenheit) of a human, and the system can thus determine that the sensor is proximal a wearer of the garment. However, the proximity sensing module 150 can otherwise suitably determine the proximity of the system to a user and/or whether the garment attached to the system is presently being worn.

[0058] The supplementary sensing module 160 functions to detect a supplemental set of signals from the user. The supplementary sensing module 160 can additionally function to provide additional data that facilitates processing of the set of signals indicative of the set of respiration characteristics. The supplementary sensing module 160 can include one or more: accelerometers, gyroscopes, digital compasses, analog compasses, pressure sensors (e.g., barometric pressure sensors), temperature sensors (e.g., thermocouples, thermistors), optical sensors (e.g., optical heart rate sensors), digital bio-impedance sensors, microphones (e.g., MEMS based microphone for acoustic sensing), PPG sensors, and any other suitable sensors. Outputs of the sensor(s) of the supplementary sensing module 160 can form the basis for any suitable actions of the previously described operating modes, as well as any other suitable operating modes (e.g., the system can be operated in a charging mode based on a measurement of a temperature sensor of the supplementary sensing module).

1.5 Specific Examples

[0059] In a first specific example, as shown in FIG. 1i, the system includes a photoplethysmographic (PPG) sensor that detects a pulse oximeter signal at the skin of the user, and combines the pulse oximeter signal with a signal from an accelerometer to mitigate artifacts produced in the pulse oximeter signal due to bulk movement of the user. In a related specific example, the system includes a force sensor that generates a touch force signal proportional to movement of the user's skin proximal a contact point of a PPG sensor of the system, and combines the touch force signal with the signal from the PPG sensor to mitigate artifacts in the signal resulting from skin movement of the user. In this example, the respiration sensor and proximity sensor are integrated into a single capacitive sensor comprising four layers, wherein the innermost layers generate the proximity sensing signal and the outermost layers generate the respiration sensor signal. The capacitive sensor, in this example, also defines an opening through which the PPG sensor extends from the electronics module to an external surface of the system (e.g., as shown in FIG. 11). Accordingly, in this example, the capacitive sensor is arranged in a stacked configuration between the electronics module and the shell of the housing.

[0060] In a second specific example, data from the accelerometer can be used to distinguish motion of the user not associated with the user's respiration characteristics from motion of the user associated with the user's respiration characteristics. For example, motion of the user associated with walking or exercising may produce signal detection at the respiration sensing module, and the accelerometer can be used to separate interfering data resulting from walking or exercising from data directly associated with the user's respiration characteristics. As such, the accelerometer data can be used to filter out interfering data in order to extract data relevant to the user's respiration characteristics. The accelerometer can be a single axis accelerometer, but can also be a dual- or triple-axis accelerometer. Furthermore,

data from the accelerometer can function to provide enriching data associated with, for example, the user's posture (e.g., upright, laying down, slouching, sitting, etc.) and/or the user's activity (e.g., exercise, resting, sleeping, etc.).

[0061] In a third specific example, data from the gyroscope can be used to distinguish motion of the user not associated with the user's respiration characteristics from motion of the user associated with the user's respiration characteristics. The gyroscope thus functions to detect orientation of the system 100, which can be used to facilitate data processing and/or can be used to enrich data for further analyses. For example, motion of the user associated with laying down or sitting upright may produce signal detection at the respiration sensing module, and the gyroscope can be used to separate interfering data resulting from laying down or sitting upright from data directly associated with the user's respiration characteristics. As such, the gyroscope data can be used to filter out interfering data in order to extract data relevant to the user's respiration characteristics. The gyroscope can be a single axis accelerometer, but can also be a dual- or triple-axis gyroscope. Furthermore, data from the gyroscope can function to provide enriching data associated with, for example, the user's posture (e.g., upright, laying down, slouching, sitting, etc.) and/or the user's activity (e.g., exercise, resting, sleeping, etc.).

[0062] In a fourth specific example, data from the GPS can indicate that the user is at a gym, and can be used to provide a label or tag for respiration signals collected while the user is at the gym. In another example, data from the GPS can indicate that the user is in a stressful environment (e.g., examination room, hospital, etc.) and can be used to provide a label or tag for respiration signals collected while the user is in the stressful environment. In yet another example, data from the GPS can indicate that the user is in a non-stressful environment (e.g., restaurant, home) and can be used to provide a label or tag for respiration signals collected while the user is in the non-stressful environment. Data from the GPS and/or other sensors of the supplementary sensing module 120 can additionally or alternatively be used to guide the user in monitoring his/her respiration behavior once the system 100 detects that the user is in any suitable environment. For example, data from the GPS can be used to guide the user's breathing behavior once the GPS and/or accelerometer has indicated that the user is exercising.

[0063] In a fifth specific example embodiment, the system includes an attachment module defining a first surface and a second surface opposing the first surface, wherein the first surface includes an adhesive layer that secures the system at an inner surface of a skin-contacting garment wearable by the user. The example embodiment also includes a shell arranged at the second surface of the attachment module, wherein the shell defines a recessed region, and wherein the shell defines a bevel about an outer edge of the shell. The example embodiment also includes a flexible layer attached to the second surface of the attachment module and enclosing the shell, wherein the flexible layer defines a first opening. The example embodiment also includes an electronics subsystem arranged within the recessed region between the shell and the flexible layer. The electronics subsystem of the example embodiment includes a first sensor, wherein the first sensor is an optical sensor that outputs a first signal, wherein the first signal can be associated with one or more cardiovascular parameters including one or more of: heart rate, heart rate variability, blood

pressure, blood pressure variability, measures of blood vessel stiffness, measures indicative of atherosclerosis, and/or other relevant cardiovascular health parameters.

[0064] The electronics subsystem of the example embodiment also includes a set of capacitive layers arranged between the first sensor and the flexible layer, a first pair of the set of capacitive layers acting as a respiratory sensor and second pair of the set of capacitive layers acting as a proximity sensor, wherein the set of capacitive layers defines a second opening aligned with the first opening and the optical sensor of the first sensor. The respiratory sensor outputs a respiration signal, and the proximity sensor outputs a proximity signal. The electronics subsystem of the example embodiment includes a processing module that receives the first signal, the respiration signal, and the proximity signal, outputs a processed biometric output based on the first signal and respiration signal, and controls the electronics subsystem based on the proximity signal.

[0065] The first sensor of the fifth example embodiment can be a photoplethysmographic (PPG) sensor that defines an optical pathway that extends through the first and second openings, away from the attachment module. The electronics subsystem of the fifth example embodiment can include an energy harvesting mechanism. In particular, the energy harvesting mechanism can be operable between a harvesting mode and a standby mode, by the processing module, based on the proximity signal. The harvesting mode can include converting thermal energy into electric energy and powering the electronics subsystem using the electric energy, and the standby mode can include passively storing the electric energy.

[0066] A sixth specific example embodiment includes an attachment module configured to secure the system at an inner surface of a garment of the user. The sixth example embodiment also includes a flexible layer coupled to the attachment module, wherein the flexible layer and the attachment module cooperatively define a housing lumen. The sixth example embodiment also includes an electronics subsystem arranged within the housing lumen. The electronics subsystem of the sixth example embodiment includes a first sensor that outputs a first signal, a respiratory sensor that outputs a respiration signal, and a processing module. The processing module receives the first signal, the respiration signal, and the proximity signal, and generates a processed biometric output based on the first signal and respiration signal.

[0067] The attachment module of the sixth example embodiment can include an adhesive layer that semi-permanently bonds the attachment module to the garment of the user.

[0068] The first sensor of the sixth example embodiment can be an optical sensor (e.g., a PPG sensor) and the respiratory sensor can be a force sensor (e.g., a capacitive touch sensor). In such cases, the processing module can modify the first signal based on the respiration signal in generating the processed biometric output. In particular, the processing module can determine a set of signal artifacts based on the respiration signal and remove the set of signal artifacts from the first signal in generating the processed biometric output. However, the processing module can otherwise suitably process the respiration signals.

[0069] The sixth example embodiment can include a shell arranged within the housing lumen, wherein the shell defines a recessed region and a bevel about an outer edge of the

shell. In such cases, the electronics subsystem can be arranged within the recessed region of the shell.

[0070] The electronics subsystem of the sixth example embodiment can include a proximity sensor, and can be operable between an active mode and a standby mode based on a proximity signal output by the proximity sensor. The active mode can include powering the first sensor and respiratory sensor and processing the first signal and respiration signal at the processing module. The standby mode can include passively maintaining the first sensor and respiratory sensor in an off state. In some examples, the proximity sensor can be made up of a first pair of capacitive layers, and the respiratory sensor can be made up of a second pair of capacitive layers. The first and second pairs of capacitive layers can be contiguous, and can be arranged between the first sensor and the flexible layer of the sixth example embodiment. In a related example, the second pair of capacitive layers is arranged between the first pair of capacitive layers, and wherein the first and second pairs of capacitive layers define an opening through which the first sensor is exposed (e.g., optically exposed).

[0071] The electronics subsystem of the sixth example embodiment can include an energy harvesting mechanism, and the processing module can be configured to control the energy harvesting module between a harvesting mode and a standby mode, as described above in relation to the fifth example embodiment. The processing module can additionally or alternatively be configured to control the energy harvesting module between the harvesting mode and the standby mode based on a temperature signal output by a temperature sensor of the electronics subsystem, wherein the harvesting mode includes converting thermal energy into electric energy and powering the electronics subsystem using the electric energy, and wherein the standby mode includes passively storing the electric energy. The processing module can also be configured to control the energy harvesting module between the harvesting mode and the standby mode based on the proximity signal, or based on any other suitable signal. In a related example, the harvesting mode can include converting mechanical energy into electric energy and powering the electronics subsystem using the electric energy.

[0072] The electronics subsystem of the sixth example embodiment can include a data storage module (e.g., portion of the communication module) operable between a plurality of modes including an encoding mode. The data storage module can include an internal circuit (e.g., a field programmable gate array). The encoding mode can include reconfiguring the internal circuit such that the internal circuit modulates an input signal to produce an output signal, wherein the output signal encodes the processed biometric output.

[0073] Variations of the system 100 can include any combination or permutation of the described components, processes, and/or operating modes. Furthermore, various processes of the preferred method and/or operation modes or techniques of the system can be embodied and/or implemented at least in part as a machine configured to receive a computer-readable medium storing computer-readable instructions. The instructions are preferably executed by computer-executable components preferably integrated with a system and one or more portions of the control module 155 and/or a processor. The computer-readable medium can be stored on any suitable computer readable media such as

RAMs, ROMs, flash memory, EEPROMs, optical devices (CD or DVD), hard drives, floppy drives, or any suitable device. The computer-executable component is preferably a general or application specific processor, but any suitable dedicated hardware device or hardware/firmware combination device can additionally or alternatively execute the instructions.

[0074] The FIGURES illustrate the architecture, functionality and operation of possible implementations of systems, methods and computer program products according to preferred embodiments, example configurations, and variations thereof. In this regard, each block in the flowchart or block diagrams may represent a module, segment, step, or portion of code, which comprises one or more executable instructions for implementing the specified logical function(s). It should also be noted that, in some alternative implementations, the functions noted in the block can occur out of the order noted in the FIGURES. For example, two blocks shown in succession may, in fact, be executed substantially concurrently, or the blocks may sometimes be executed in the reverse order, depending upon the functionality involved. It will also be noted that each block of the block diagrams and/or flowchart illustration, and combinations of blocks in the block diagrams and/or flowchart illustration, can be implemented by special purpose hardware-based systems that perform the specified functions or acts, or combinations of special purpose hardware and computer instructions.

[0075] As a person skilled in the art will recognize from the previous detailed description and from the figures and claims, modifications and changes can be made to the preferred embodiments of the invention without departing from the scope of this invention defined in the following claims.

We claim:

1. A system for monitoring biosignals of a user, comprising:

an attachment module defining a first surface and a second surface opposing the first surface, wherein the first surface comprises an adhesive layer configured to secure the system at an inner surface of a garment wearable by the user;

a shell arranged at the second surface of the attachment module, wherein the shell defines a recessed region;

a flexible layer attached to the second surface of the attachment module and enclosing the shell, wherein the flexible layer defines a first opening;

an electronics subsystem arranged within the recessed region between the shell and the flexible layer, the electronics subsystem comprising:

an optical sensor that outputs a first signal;

a set of capacitive layers arranged between the first sensor and the flexible layer, a first pair of the set of capacitive layers comprising a respiratory sensor and second pair of the set of capacitive layers comprising a proximity sensor, wherein the set of capacitive layers defines a second opening aligned with the first opening and the optical sensor, wherein the respiratory sensor outputs a respiration signal, and wherein the proximity sensor outputs a proximity signal, and

a processing module that receives the first signal, the second respiration signal, and the proximity signal, outputs a processed biometric analysis based on the

first signal and the respiration signal, and controls the electronics subsystem based on the proximity signal.

2. The system of claim 1, wherein the optical sensor comprises a photoplethysmographic (PPG) sensor defining an optical pathway that extends through the first and second openings, away from the attachment module.

3. The system of claim 1, wherein the electronics subsystem further comprises an energy harvesting mechanism.

4. The system of claim 3, wherein the energy harvesting mechanism is operable between a harvesting mode and a standby mode, by the processing module, based on the proximity signal.

5. The system of claim 4, wherein, in the harvesting mode, the energy harvesting mechanism converts thermal energy into electric energy during at least one of washing and drying of the garment, and powers the electronics subsystem using the electric energy, and wherein the standby mode comprises passively storing the electric energy.

6. A system for monitoring biosignals of a user, comprising:

an attachment module configured to secure the system at an inner surface of a garment of the user;

a flexible layer coupled to the attachment module, wherein the flexible layer and the attachment module cooperatively define a housing lumen;

an electronics subsystem arranged within the housing lumen, the electronics subsystem comprising:

a first sensor, wherein the first sensor outputs a first signal;

a respiratory sensor, wherein the respiratory sensor outputs a respiration signal,

a proximity sensor that outputs a proximity signal, and a processing module that receives the first signal, the respiration signal, and the proximity signal, and generates a processed biometric analysis based on the first signal and the respiration signal.

7. The system of claim 6, wherein the attachment module comprises an adhesive layer configured to semi-permanently bond the attachment module to the garment of the user.

8. The system of claim 6, wherein the first sensor comprises an optical sensor, wherein the respiratory sensor comprises a force sensor, and wherein the processing module modifies the first signal based on the respiration signal in generating the processed biometric analysis.

9. The system of claim 8, wherein the processing module determines a set of signal artifacts based on the respiration signal, and removes the set of signal artifacts from the first signal in generating the processed biometric analysis.

10. The system of claim 8, wherein the optical sensor comprises a photoplethysmography (PPG) sensor, and wherein the force sensor comprises a capacitive sensor.

11. The system of claim 6, further comprising a shell arranged within the housing lumen, wherein the shell defines a recessed region and a bevel about an outer edge of the shell, and wherein the electronics subsystem is arranged within the recessed region of the shell.

12. The system of claim 6, wherein the electronics subsystem is operable between an active mode and a standby mode based on a proximity signal output by the proximity sensor, wherein the active mode comprises:

powering the first sensor and respiratory sensor and processing the first signal and respiration signal at the processing module, and the standby mode comprises:

passively maintaining the first sensor and respiratory sensor in an off state.

13. The system of claim **12**, wherein the proximity sensor comprises a first pair of capacitive layers, wherein the respiratory sensor comprises a second pair of capacitive layers, and wherein the proximity sensor and the respiratory sensor are arranged between the first sensor and the flexible layer.

14. The system of claim **13**, wherein the second pair of capacitive layers is arranged between the first pair of capacitive layers, and wherein the first and second pairs of capacitive layers define an opening through which the first sensor is exposed.

15. The system of claim **6**, wherein the electronics subsystem further comprises an energy harvesting mechanism, wherein the processing module is configured to control the energy harvesting module between a harvesting mode and a standby mode.

16. The system of claim **15**, wherein the processing module is configured to control the energy harvesting module between the harvesting mode and the standby mode based on a temperature signal output by a temperature sensor of the electronics subsystem, wherein the harvesting mode comprises converting thermal energy into electric

energy and powering the electronics subsystem using the electric energy, and wherein the standby mode comprises passively storing the electric energy.

17. The system of claim **15**, wherein the processing module is configured to control the energy harvesting module between the harvesting mode and the standby mode based on the proximity signal.

18. The system of claim **17**, wherein, in the harvesting mode, the energy harvesting mechanism converts thermal energy into electric energy during at least one of washing and drying of the garment, and powers the electronics subsystem using the electric energy, and wherein the standby mode comprises passively storing the electric energy.

19. The system of claim **6**, wherein the electronics subsystem further comprises a data storage module operable between a plurality of modes including an encoding mode, wherein the data storage module comprises an internal circuit, wherein the encoding mode comprises reconfiguring the internal circuit such that the internal circuit modulates an input signal to produce an output signal, wherein the output signal encodes the processed biometric analysis.

20. The system of claim **19**, wherein the internal circuit comprises a field programmable gate array

* * * * *

专利名称(译)	生理监测系统		
公开(公告)号	US20180220962A1	公开(公告)日	2018-08-09
申请号	US15/891173	申请日	2018-02-07
[标]申请(专利权)人(译)	史拜公司		
申请(专利权)人(译)	尖顶, INC.		
当前申请(专利权)人(译)	尖顶, INC.		
[标]发明人	PALLEY JONATHAN YULE BENJAMIN JACKSON DYLAN ZHAO ZHAO RUDOLPH ROSS ROBB MARGARET MORAVEJI NEEMA		
发明人	PALLEY, JONATHAN YULE, BENJAMIN JACKSON, DYLAN ZHAO, ZHAO RUDOLPH, ROSS ROBB, MARGARET MORAVEJI, NEEMA		
IPC分类号	A61B5/00 A61B5/08 A61B5/024 A61B5/1455 A61B5/11		
CPC分类号	A61B5/6804 A61B5/0004 A61B5/0816 A61B5/02427 A61B5/14551 A61B5/1118 A61B5/1116 A61B5/1112 A61B5/113 A61B5/02438 A61B2562/0219 A61B5/6823 A61B5/721 A61B2560/0412		
优先权	62/455712 2017-02-07 US 62/507974 2017-05-18 US		
外部链接	Espacenet USPTO		

摘要(译)

一种用于监控用户的生物信号的系统，包括配置成将系统固定在用户的衣服的内表面上的附件模块；连接到附接模块的柔性层，其中柔性层和附接模块共同限定壳体内腔；电子子系统设置在壳体内腔中，电子子系统包括第一传感器，其中第一传感器输出第一信号；呼吸传感器，其中呼吸传感器输出呼吸信号；以及处理模块，接收第一信号，呼吸信号和接近信号，并基于第一信号和呼吸信号产生处理过的生物测定输出。

