



US 20180139789A9

(19) **United States**  
(12) **Patent Application Publication**  
**Agrawal et al.**

(10) **Pub. No.: US 2018/0139789 A9**  
(48) **Pub. Date: May 17, 2018**  
**CORRECTED PUBLICATION**

(54) **SYSTEM AND METHOD FOR ASSOCIATING DEVICES BASED ON BIOMETRIC INFORMATION**

(71) Applicant: **QUALCOMM Incorporated**, San Diego, CA (US)  
(72) Inventors: **Avneesh Agrawal**, Bangalore KRN (IN); **Chong Uk Lee**, Cupertino, CA (US); **Kamran Moallemi**, Carlsbad, CA (US); **David Jonathan Julian**, San Diego, CA (US); **Manuel Eduardo Jaime**, Solana Beach, CA (US); **Robert Keith Douglas**, San Diego, CA (US); **Lu Xiao**, San Diego, CA (US); **Gregory Gordon Rose**, San Diego, CA (US)

**Related U.S. Application Data**

(63) Continuation of application No. 11/692,100, filed on Mar. 27, 2007, now Pat. No. 8,886,125.  
(60) Provisional application No. 60/792,035, filed on Apr. 14, 2006.

**Publication Classification**

(51) **Int. Cl.**  
*H04W 76/02* (2006.01)  
*H04B 5/00* (2006.01)  
*A61B 5/0404* (2006.01)  
*A61B 5/00* (2006.01)  
(52) **U.S. Cl.**  
CPC ..... *H04W 76/023* (2013.01); *A61B 5/0015* (2013.01); *A61B 5/0404* (2013.01); *H04B 5/0031* (2013.01)

(21) Appl. No.: **14/504,659**


(22) Filed: **Oct. 2, 2014**

**Prior Publication Data**

(15) Correction of US 2015/0024689 A1 Jan. 22, 2015  
See (60) Related U.S. Application Data.  
(65) US 2015/0024689 A1 Jan. 22, 2015

(57) **ABSTRACT**

Various operations may be performed based on a distance-related function associated with two or more devices. For example, an association procedure for two or more devices may be based on one or more determined distances. Similarly, presence management may be based on one or more determined distances. A distance-related function may take various form including, for example, a distance between devices, two or more distances between devices, a rate of change in a relative distance between devices, relative acceleration between devices, or some combination of two or more of the these distance-related functions.

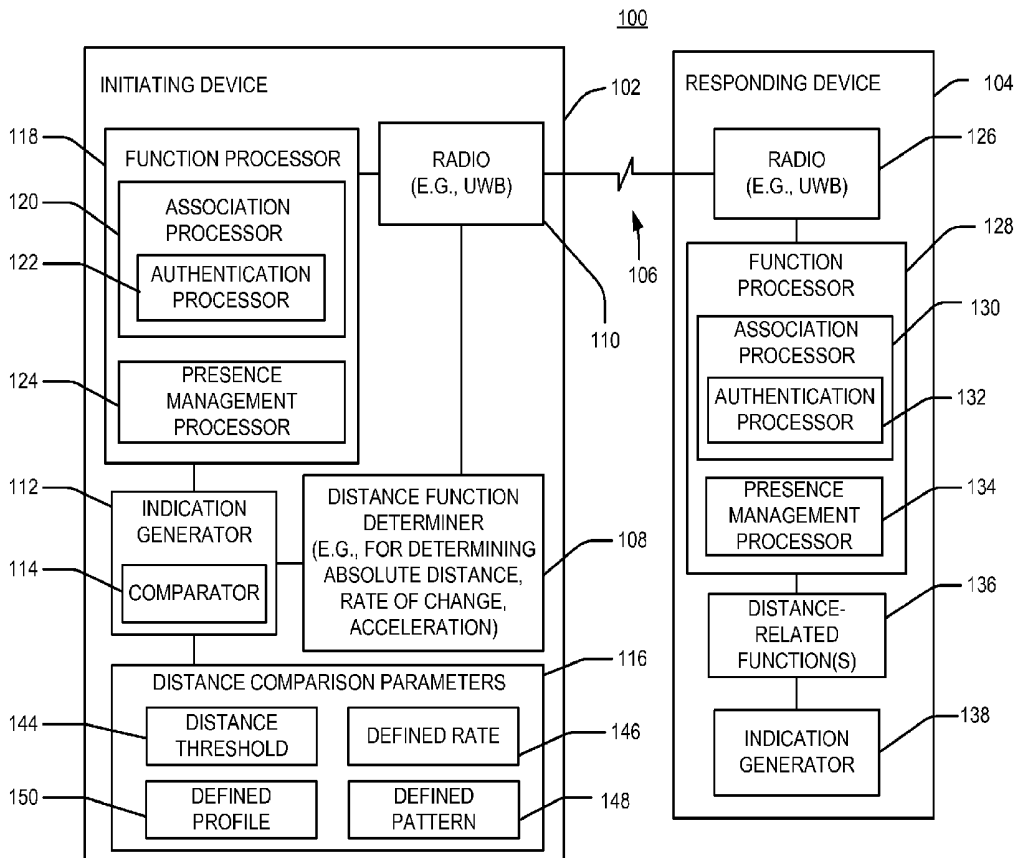

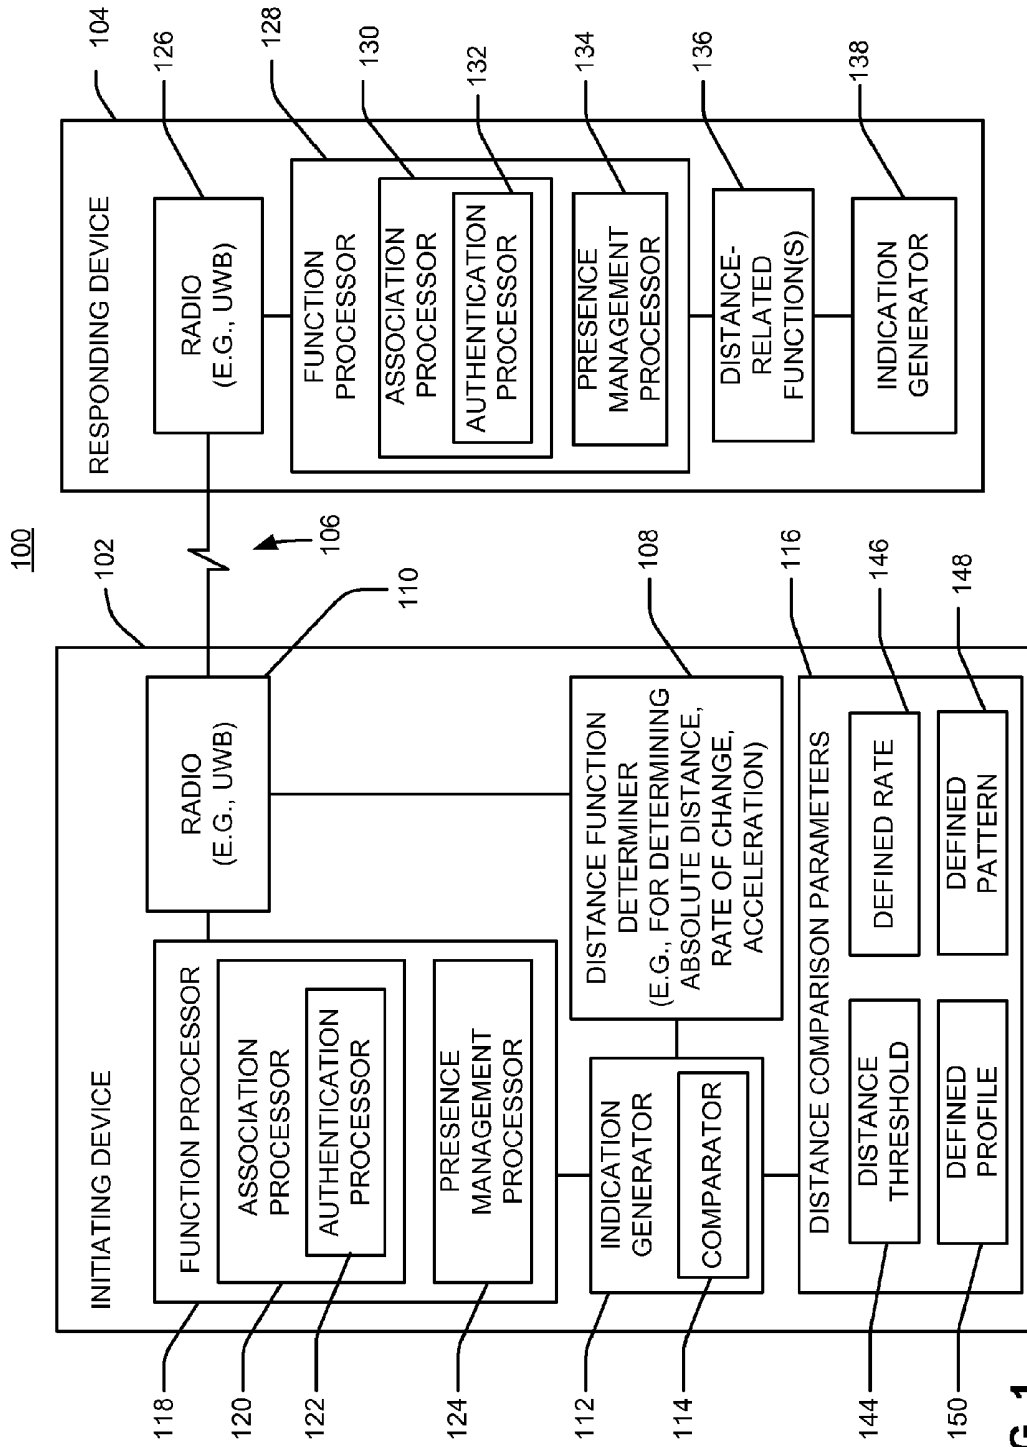


FIG. 1

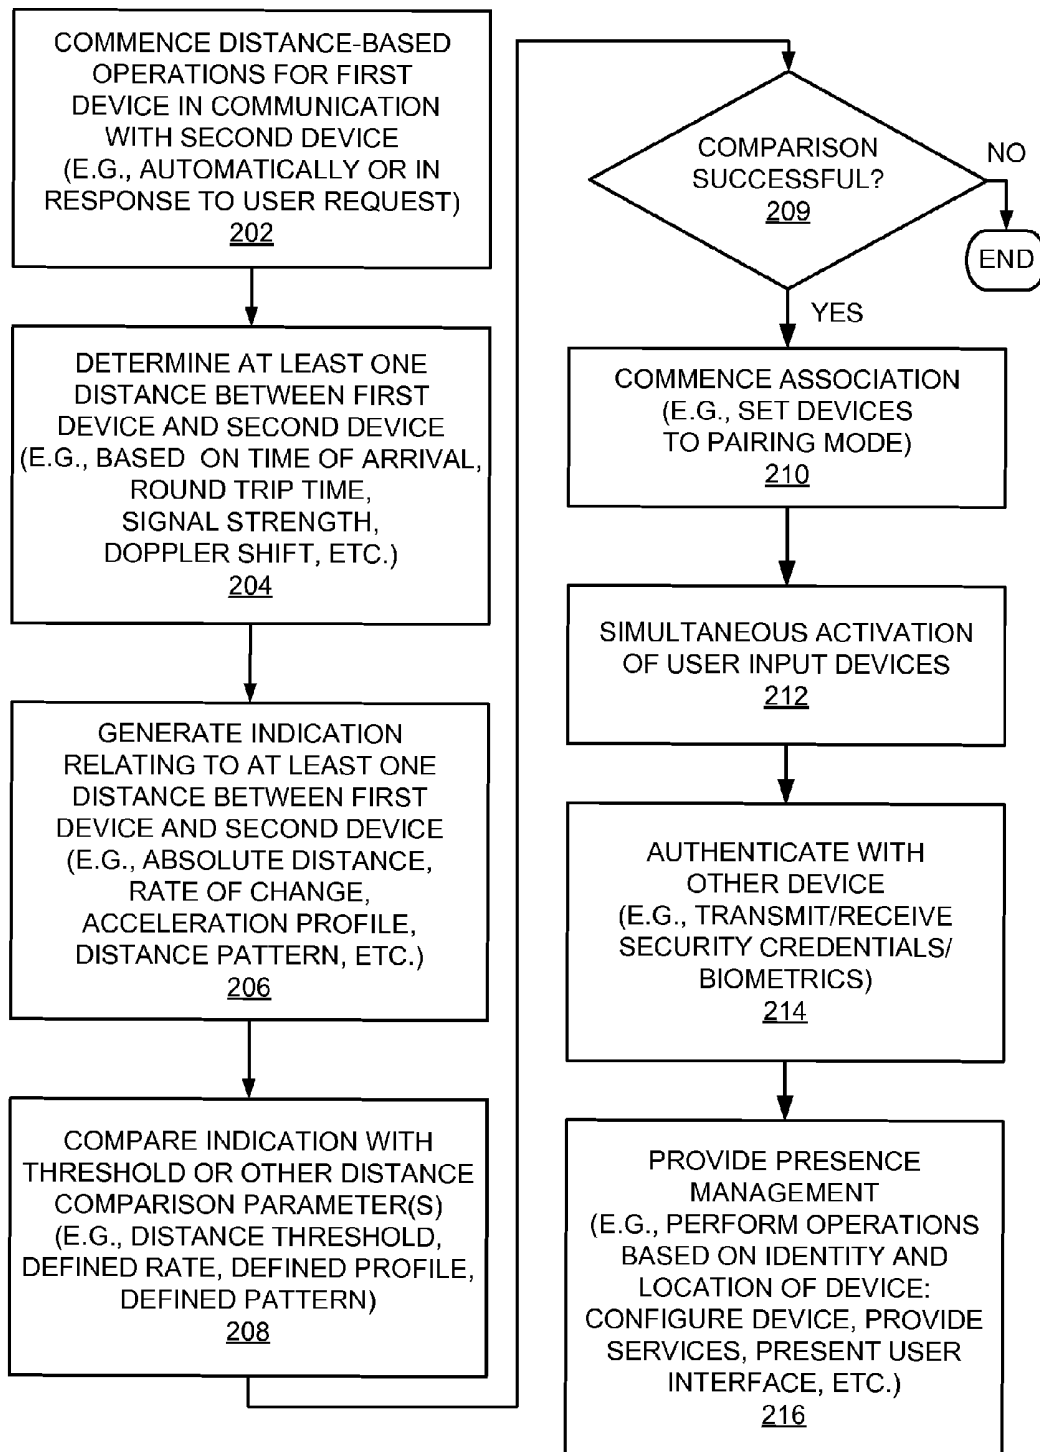


FIG. 2

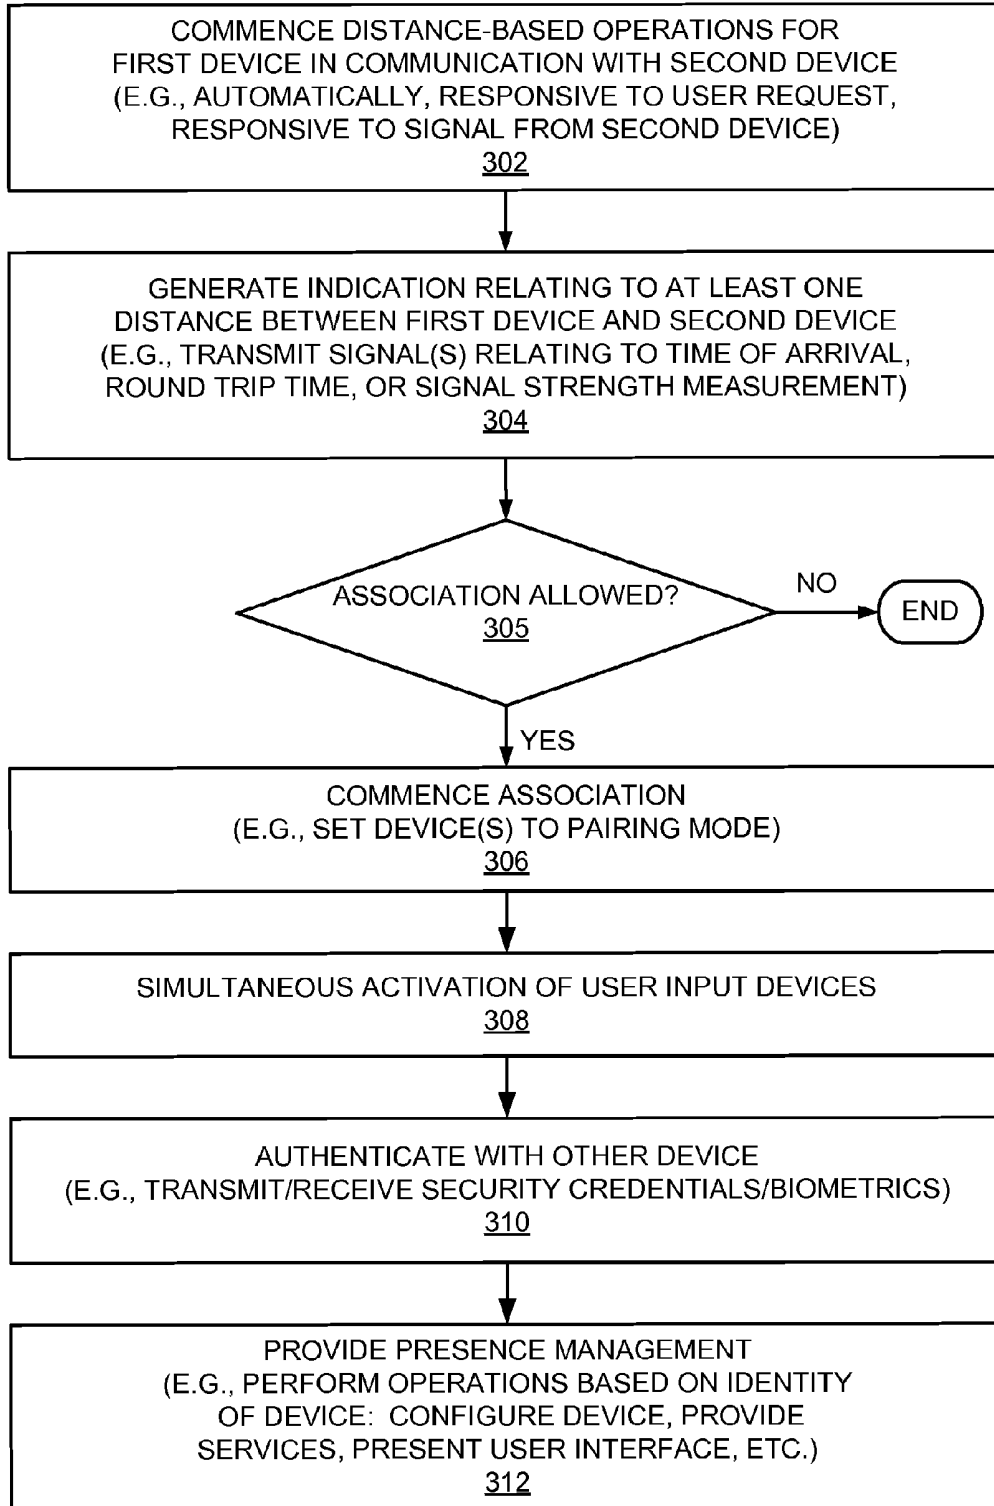


FIG. 3

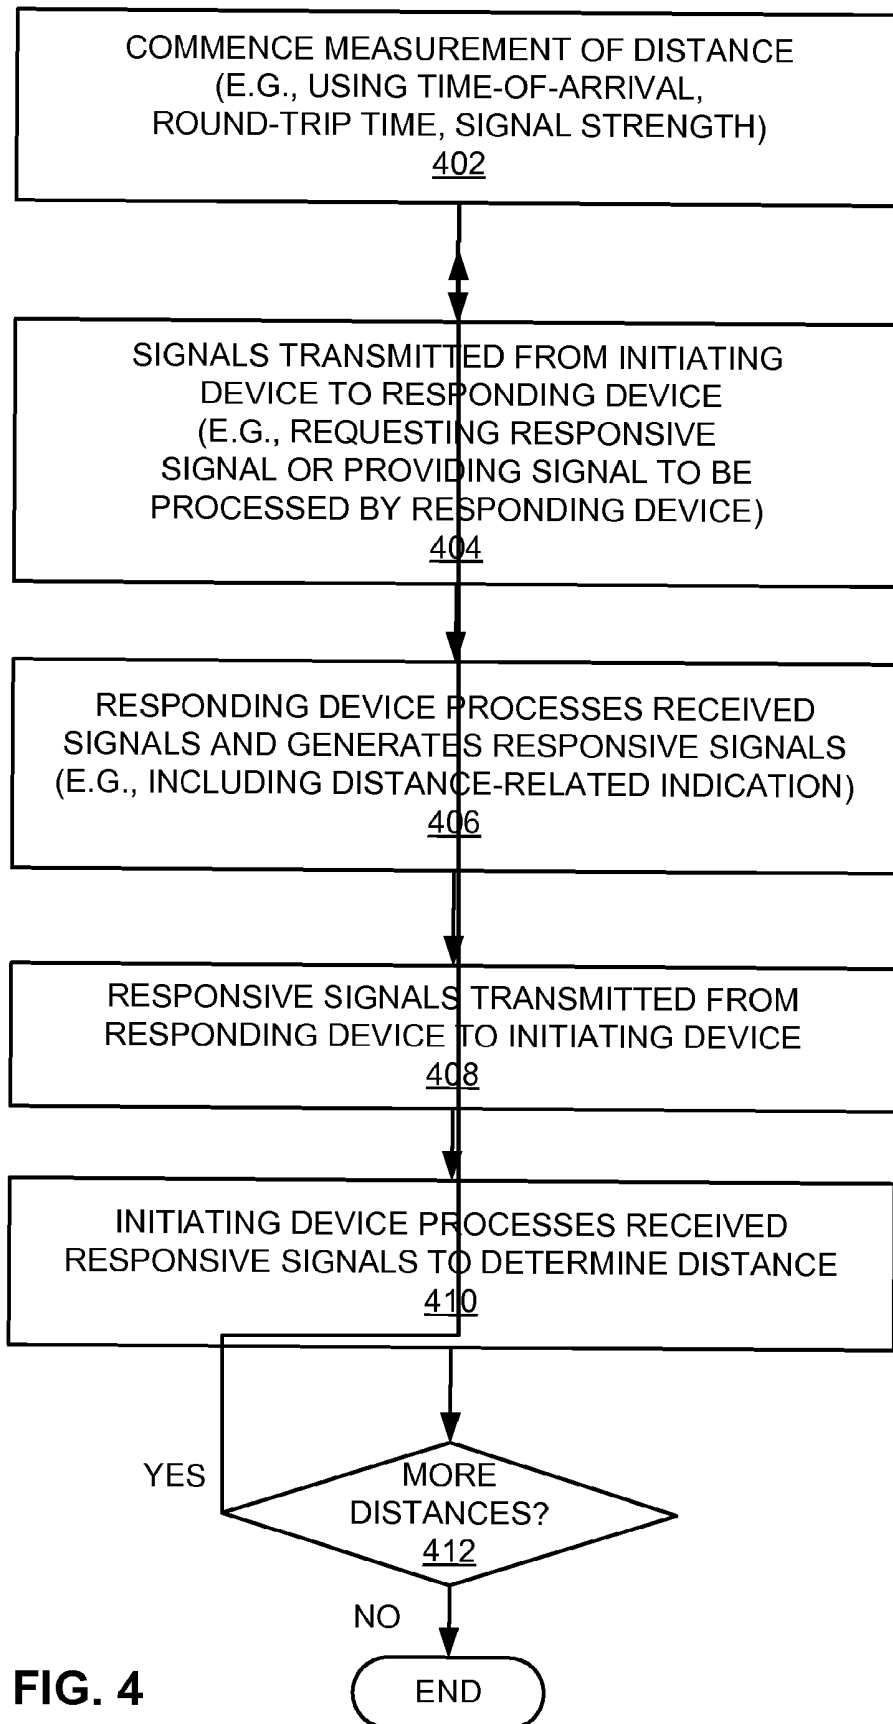


FIG. 4

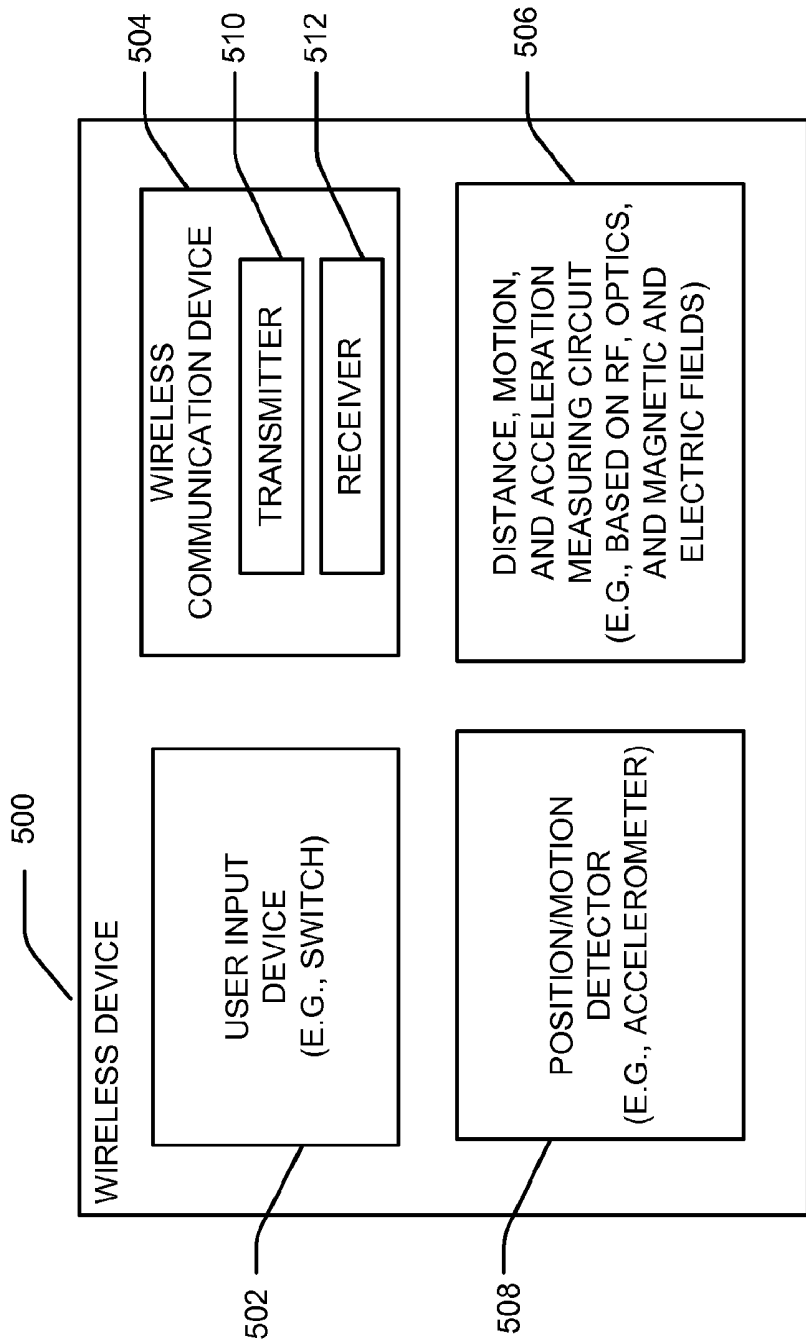


FIG. 5

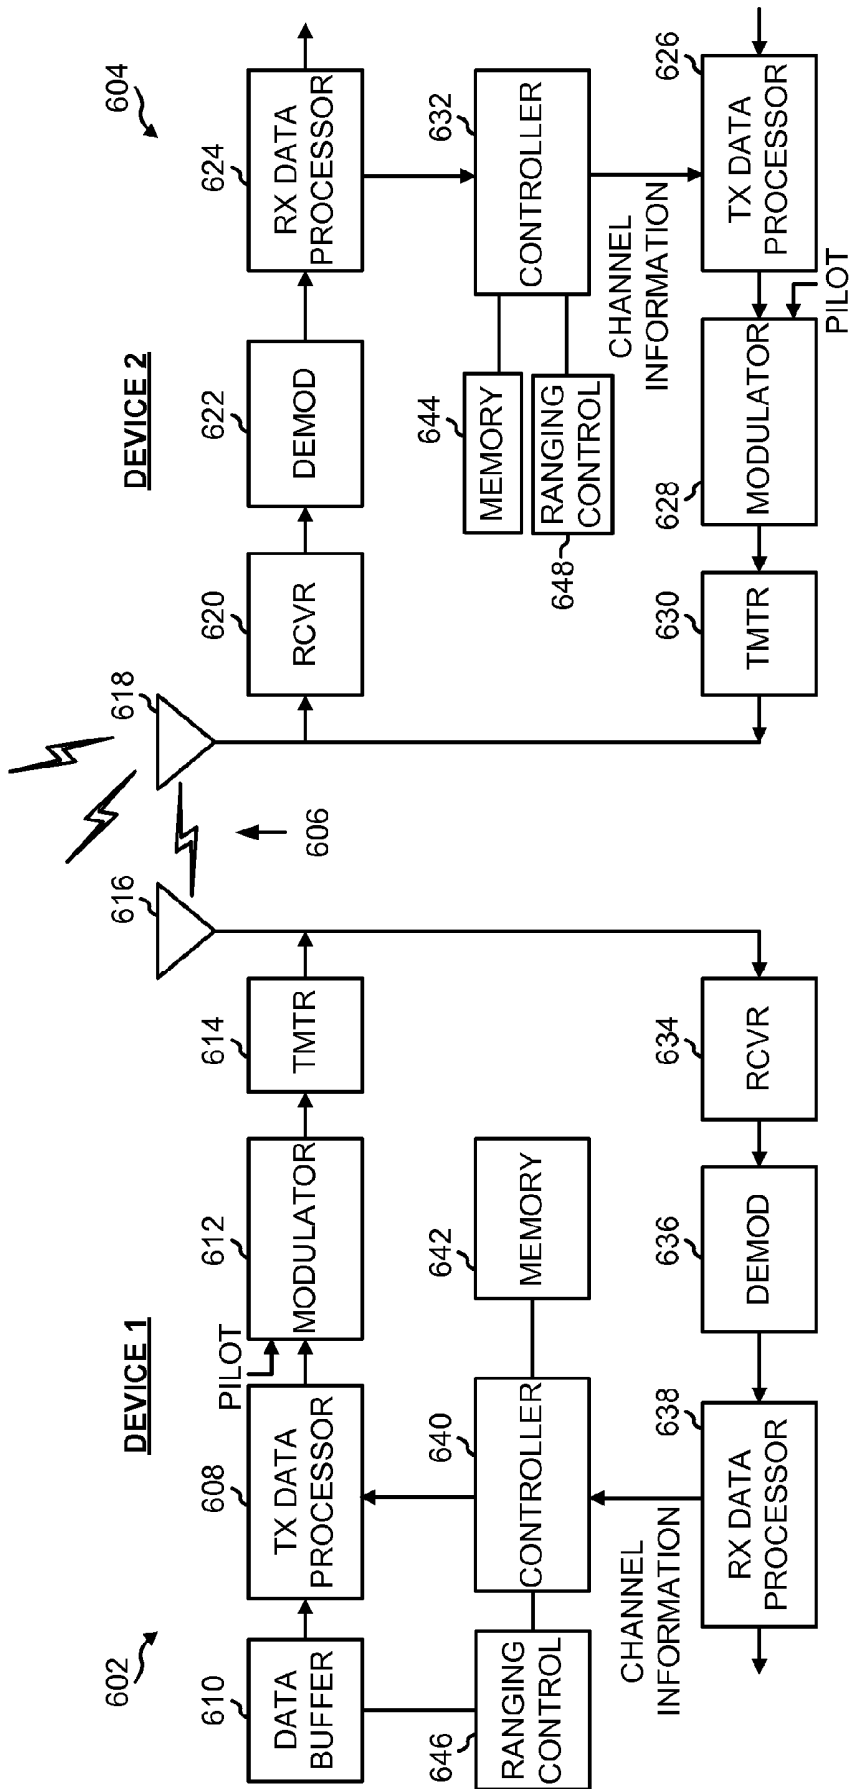


FIG. 6

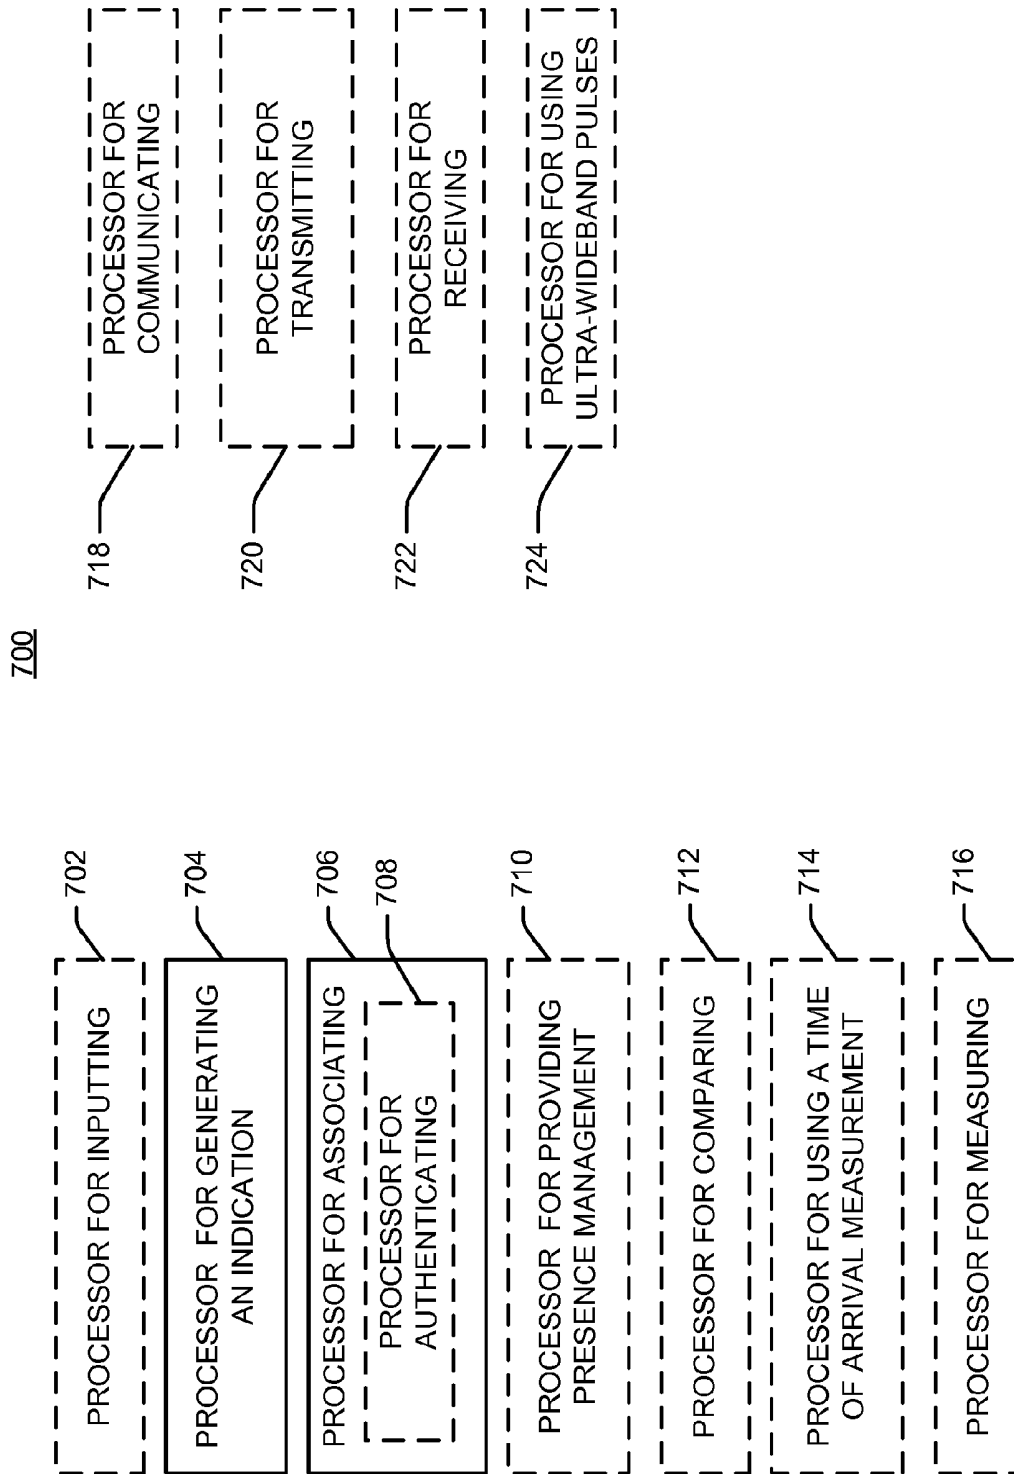


FIG. 7

**SYSTEM AND METHOD FOR ASSOCIATING  
DEVICES BASED ON BIOMETRIC  
INFORMATION**

CLAIM OF PRIORITY UNDER 35 U.S.C. §119

**[0001]** This application is a continuation of patent application Ser. No. 11/692,100, filed on Mar. 27, 2007, which, in turn, claims the benefit of and priority to U.S. Provisional Patent Application No. 60/792,035, filed Apr. 14, 2006, both disclosures of which are incorporated by reference herein.

**CROSS-REFERENCE TO RELATED  
APPLICATION**

**[0002]** This application is related to patent application filed concurrently herewith, entitled "SYSTEM AND METHOD OF ASSOCIATING DEVICES BASED ON ACTUATION OF INPUT DEVICES AND SIGNAL STRENGTH," with docket number 051012C1, the disclosure of which is incorporated by reference herein. This application is also related to patent application Ser. No. 11/692,097, entitled "DISTANCE-BASED PRESENCE MANAGEMENT," the disclosure of which is incorporated by reference herein.

**BACKGROUND**

**[0003]** 1. Field

**[0004]** This application relates generally to wireless communication, and more specifically, to distance-based functionality in a wireless communication system.

**[0005]** 2. Background

**[0006]** In a wireless communication system various provisions may be made to enable two or more wireless devices to communicate with one another and, in some applications, to enable one wireless device to access functionality provided by another wireless device. For example, when a wireless device enters a coverage area of another wireless device, the wireless devices may perform an association operation to enable the two devices to communicate with one another. In addition, other related operations such as presence management may be performed to enable a wireless device to affect the operation of another wireless device.

**[0007]** Examples of association include setting up a wireless laptop and an wireless access point to communicate or setting up communication between a wireless cell phone or entertainment device (e.g., an MP3 player) and a peripheral device such as a wireless headset (e.g., headphones, an ear piece, etc.) or watch. Briefly, association may involve exchanging messages that enable the wireless devices to determine whether they are capable of communicating with one another and whether they are authorized to do so. For example, the wireless devices may exchange messages that indicate their respective capabilities. In conjunction with this procedure, the wireless devices may negotiate or cooperate in some other manner to agree on a set of parameters to be used for communicating. Moreover, in some applications the wireless devices may utilize an authentication procedure of some type to verify the identity of each other. This identity information may be used by the wireless devices to, for example, determine whether they are authorized to communicate with one another.

**[0008]** Various operations may be performed to enable or otherwise facilitate association. For example, some applications may employ signal strength-based association where it

is assumed that the wireless devices are close enough to associate if a received signal strength exceeds a threshold. Other applications may employ RFID-related technology whereby wireless devices are allowed to associate with another if they are close enough so that one device induces RF energy in another device.

**[0009]** In some applications a wireless device may employ presence management to provide certain functionality based on the proximity of the wireless device to another device. For example, in some applications presence management may be employed to modify a user interface of a computer based on which user is sitting in front of the computer. Presence management also may be used to modify the characteristics of a room (e.g., lighting, temperature, music, etc) based on who is in the room.

**[0010]** In practice, an operation such as association or presence management may involve some user interaction with the wireless device to initiate or complete the operation. For example, during association a user may manually set each wireless device into an association or discovery mode, navigate through some software interfaces to a list of discovered wireless devices, select a wireless device, and potentially input some information about the wireless device. In a typical example, information to be entered by a user may include authentication codes or multiple access code information. Similarly, during presence management a user may press a configuration button (e.g., associated with a car seat, a home theater system, etc.), type in a username and password, insert a card, or invoke wireless detection of the presence of a device.

**[0011]** In practice, operations such as association and presence management may not provide a desired level of functionality or may be inconvenient for a user. For example, presence management may be relatively coarse in nature in that it simply involves determine whether a connection with another wireless device may be detected. In addition, the steps performed by a user to accomplish association, presence management, or other operations (e.g., as mentioned above) may be relatively complicated and confusing for the user. Consequently, a need exists for alternative methods for performing such operations.

**SUMMARY**

**[0012]** A summary of sample aspects of the disclosure follows. For convenience, one or more aspects of the disclosure may be referred to herein simply as "some aspects."

**[0013]** This application relates in some aspects to performing an act based on at least one distance between devices. For example, one of various techniques may be employed to determine a distance-related function such as distance or relative motion between two devices. A determination may then be made as to whether the determined distance function meets specified criteria. If so, a corresponding action may then be taken.

**[0014]** In some aspects association between two or more devices may be based on one or more determined distances. For example, an association procedure may be initiated or facilitated in some manner by determining whether the devices are within a given range of one another and/or are moved with respect to one another in a certain manner.

**[0015]** Distance-based association may be employed in a variety of use cases. For example, in a personal or body area network a large number of different piconets may be owned and managed by different entities (e.g., people or networked

devices). Moreover, these piconets may have different associated power level requirements and data rates that overlap. Through the use of distance-based association, a new device entering the network may be efficiently associated with a desired piconet or other device in the network. For example, devices may be associated with one another if they are within one foot of each other. Similarly, if several devices are close to one another, the closest devices (e.g., the two closest devices) of these devices may be associated with one another. In addition, distance-based association may be employed to provide secure communication, such as in a point-of-sale application where the relative proximity of two devices is used to ensure that the two devices are authorized to conduct a transaction.

[0016] In some aspects presence management may be based on one or more determined distances. Here, various presence management operations may be invoked if it is determined that two or more devices are within a given range of one another and/or are moved with respect to one another in a certain manner. As an example, distance-based presence management may enable a user in possession of a presence management-enabled device to be presented with different presence management responses as the user moves closer to or further away from another presence management-enabled device. Similarly, distance-based presence management may enable a user that is walking through a room to be presented with a different presence management response as opposed to when the same user stops in the room or when the user remain seated in the room.

[0017] A distance-related function as taught herein may take various forms. For example, such a function may relate to a distance between devices, two or more distances between devices if the devices are moved with respect to one another, a rate of change in the relative distance between devices, relative acceleration between devices, some other distance-related function, or some combination of two or more of the these distance-related functions.

[0018] A distance-related function as taught herein may be implemented in various ways. For example, a distance may be measured by determining the amount of time it takes for signals to travel from one device to another device and then back (e.g., a round-trip time). Such a round-trip time may be calculated, for example, using two-way ranging or by sending interrogation and response signals between the devices. A distance also may be determined using a time-of-arrival measurement or a received power measurement. A rate of change in relative distance may be determined through the use of, for example, a time-of-arrival measurement, a received power measurement, acceleration readings, imaging techniques, detection of changes in electrical and magnetic fields, or detection of Doppler shifts. Relative acceleration between devices may be determined from the rate of change in relative distance data.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0019] These and other features, aspects and advantages of the disclosure will be more fully understood when considered with respect to the following detailed description, appended claims and accompanying drawings, wherein:

[0020] FIG. 1 is a simplified block diagram of several sample aspects of a communication system adapted to perform distance-based operations;

[0021] FIG. 2 is a flowchart of several sample aspects of operations that may be performed by a device to perform distance-based operations;

[0022] FIG. 3 is a flowchart of several sample aspects of operations that may be performed by a device to perform distance-based operations;

[0023] FIG. 4 is a flowchart of several sample aspects of operations that may be performed by devices to determine at least one distance;

[0024] FIG. 5 is a simplified block diagram of several sample aspects of a wireless device adapted to perform distance-based operations;

[0025] FIG. 6 is a simplified block diagram of several sample aspects of communication components; and

[0026] FIG. 7 is a simplified block diagram of several sample aspects of a device adapted to perform distance-based operations.

[0027] In accordance with common practice the various features illustrated in the drawings may not be drawn to scale. Accordingly, the dimensions of the various features may be arbitrarily expanded or reduced for clarity. In addition, some of the drawings may be simplified for clarity. Thus, the drawings may not depict all of the components of a given apparatus (e.g., device) or method. Finally, like reference numerals may be used to denote like features throughout the specification and figures.

#### DETAILED DESCRIPTION

[0028] Various aspects of the disclosure are described below. It should be apparent that the teachings herein may be embodied in a wide variety of forms and that any specific structure, function, or both being disclosed herein is merely representative. Based on the teachings herein one skilled in the art should appreciate that an aspect disclosed herein may be implemented independently of any other aspects and that two or more of these aspects may be combined in various ways. For example, an apparatus may be implemented or a method may be practiced using any number of the aspects set forth herein. In addition, such an apparatus may be implemented or such a method may be practiced using other structure, functionality, or structure and functionality in addition to or other than one or more of the aspects set forth herein. As an example, in some aspects a distance-related function as taught herein may relate to a one distance, while in other aspects a distance-related function may relate to a distance and a rate of change of distance.

[0029] FIG. 1 illustrates certain aspects of a communication system 100 where a first device 102 may communicate with a second device 104 via a wireless communication link 106. As an example, the device 102 may enter a wireless coverage area of the device 104 and various provisions may then be taken as discussed below to enable the devices 102 and 104 to communicate. In particular, the devices 102 and 104 include functionality whereby operations such as association and presence management are initiated, terminated, or performed in accordance with one or more distance relationships between the devices 102 and 104.

[0030] The devices 102 and 104 in the example of FIG. 1 are depicted in a simplified manner to emphasize certain components that may provide functionality relating to distance determination and associated processing. Specifically, the device 102 is depicted to emphasize components that may be employed in a device that ultimately determines one or more distances between the devices 102 and 104 and

performs one or more operations based on that determination. Conversely, the device 104 is depicted to emphasize components that may be employed in a device that may perform operations in conjunction with the distance determining device. As will be discussed in more detail below, the device 104 may include functionality that facilitates the distance determination by the device 102 and may also perform one or more operations based on that determination. It should be appreciated that a given device may incorporate the functionality depicted for device 102, the functionality depicted for device 104, or some combination thereof.

[0031] The device 102 includes a distance function determiner component (hereafter, distance determiner 108) that is adapted to perform various functions relating to determining one or more distance-related parameters. For example, the distance determiner 108 may determine an absolute distance between the devices 102 and 104, two or more distances between the devices 102 and 104 (e.g., in the event the devices 102 and 104 are moved with respect to one another), a rate of change in the relative distance between the devices 102 and 104, relative acceleration between the devices 102 and 104, or some other distance-related function. As will be discussed in more detail below, the distance determiner 108 may thus include appropriate components or may cooperate with one or more other components (e.g., a radio 110) to repeatedly determine the distance between the devices 102 and 104.

[0032] The device 102 also includes an indication generator 112 that is adapted to generate an indication relating to the determined distance parameter(s). For example, the indication generator 112 may generate an indication of the determined absolute distance(s), rate of change in relative distance, relative acceleration, etc. In addition, the indication generator 112 may include a comparator 114 that compares a determined distance with a distance comparison parameter 116 (e.g., a threshold) that may be maintained in the device 102 (e.g., in a data memory). The indication generator 112 may then generate a comparison result indication in accordance with the comparison. As an example, the comparison result indication may indicate that a determined distance is less than a threshold.

[0033] The device 102 includes a processor component 118 that is adapted to perform various functions based on at least one determined distance. For example, the processor component 118 may invoke one or more operations depending on the value of the indication. In addition, or in the alternative, the operations performed by the processing component may utilize the indication in some manner.

[0034] In the example of FIG. 1 the processor component 118 provides functionality relating to association (e.g., including authentication) and presence management. For example, an association procedure, an authentication procedure, or both, may be invoked or may be dependent on a given distance-related relationship between the devices 102 and 104. Similarly, a presence management procedure may be invoked or may be dependent upon a given distance-related relationship between the devices 102 and 104. To provide such functionality, the processor component 118 may include an association processor component 120, an authentication processor component 122, and a presence management processor component 124.

[0035] The device 104 may include several components that operate in conjunction with corresponding components of device 102. For example, the device 104 may include a

radio 126 adapted to communicate via one or more wireless communication links (e.g., the link 106) with one or more wireless devices (e.g., the radio 110 of the device 102). The device 104 also may include a processor component 128 that provides functionality that is complementary to the functionality of the processor component 118. Accordingly, the processor component 128 may include an association processor 130, an authentication processor 132, and a presence management processor 134. The device 104 also may include a distance function component 136 for performing one or more distance-related functions in conjunction with the distance determiner 108. Also, the device 104 may include an indication generator 138 that may generate, for example, distance-related indications used by the device 104 or the device 102.

[0036] The devices 102 and 104 may take various forms. For example, in some aspects the devices 102 and 104 may comprise various combinations of a headset, a microphone, a medical device, a biometric sensor, a heart rate monitor, a pedometer, an EKG device, a user I/O device, a watch, a remote control, a switch, a tire pressure monitor, an entertainment device, a computer, a point-of-sale device, a hearing aid, a set-top box, a cell phone, or some other device with some form of wireless signaling capabilities. In some aspects the device 104 may comprise an access device (e.g., a Wi-Fi access point) for a communication system. For example, the device 104 may provide connectivity to another network (e.g., a wide area network such as the Internet) via a wired or wireless communication link. Accordingly, the device 104 may enable the device 102 (e.g., a Wi-Fi station) to access the other network. In addition, it should be appreciated that one or both of the devices 102 and 104 may be portable or, in some cases, relatively non-portable.

[0037] The devices 102 and 104 may include various components that perform functions based on signals transmitted or received via the wireless communication link. For example, a headset may include a transducer adapted to provide an audible output based on a signal received via the wireless communication link. A watch may include a display adapted to provide a visual output based on a signal received via the wireless communication link. A medical device may include a sensor adapted to generate sensed signals to be transmitted via the wireless communication link.

[0038] The devices 102 and 104 may support or otherwise use various wireless communication links and wireless network topologies. For example, in some aspects the devices 102 and 104 may comprise or form part of a body area network or a personal area network (e.g., an ultra-wideband network). In addition, in some aspects the devices 102 and 104 may comprise or form part of a local area network or a wide area network. The devices 102 and 104 also may support or otherwise use one or more of a variety of wireless communication protocols or standards including, for example, CDMA, TDMA, OFDM, OFDMA, WiMAX, Wi-Fi, and other wireless technologies. Accordingly, the devices 102 and 104 may include appropriate components to establish one or more communication links using various wireless technologies.

[0039] Sample operations of the system 100 will now be discussed in more detail in conjunction with the flowcharts of FIGS. 2, 3 and 4. FIG. 2 relates to operations that may be performed, for example, by the device 102. FIG. 3 relates to operations that may be performed, for example, by the

device 104. FIG. 4 relates to operations that may be performed to determine one or more distances between the devices 102 and 104. For convenience, the operations of FIGS. 2, 3, and 4 (or any other operations discussed herein) may be described as being performed by specific components (e.g., devices 102 and 104). It should be appreciated, however, that these operations may be performed in conjunction with and/or by other components and, in some cases, using a different number of components. It also should be appreciated that one or more of the operations described herein may not be employed in a given implementation.

[0040] Referring initially to FIG. 2, as represented by block 202 a first device such as device 102 commences distance-based operations (e.g., enables a ranging mode) in conjunction with establishing communication with a second device such as device 104. Here, the device 102 may determine whether it has entered a wireless coverage area associated with the device 104. These operations may be initiated automatically or may be initiated based an action by a user who wishes to associate the device 102 with the device 104. In the former case, a discovery mode may be continually enabled such that the device 102 may repeatedly scan to determine whether it has entered a coverage area of a wireless network (e.g., a body area network or personal area network) or a coverage area of some other wireless device. In the latter case, the user may utilize (e.g., actuate) an input device of the device 102 to initiate a discovery mode that causes the device 102 (e.g., the radio 110) to commence scanning for nearby wireless networks or wireless devices. In conjunction with the operations of block 202, the user may bring the device 102 within a certain range of the device 104.

[0041] Referring to FIG. 3, the device 104 also may perform operations that are similar and/or complementary to the operations of block 202. For convenience, the sample operations of FIG. 3 are depicted from the perspective of a first device. In other words, in the context of FIG. 3 the first device may comprise the device 104 and the second device may comprise the device 102 (in contrast with the corresponding relationships described above in conjunction with FIG. 2).

[0042] As represented by block 302, the device 104 also may commence distance-based operations by, for example, attempting to discover nearby wireless devices. As discussed above, this may be initiated automatically or in response to some action by the user (e.g., utilizing an input device of the device 104). In addition, or in the alternative, the device 104 may commence a discovery procedure in response to a signal received from the device 102. It should be appreciated that other techniques may be employed to commence discovery or some other similar procedure for initiating communication between devices such as devices 102 and 104.

[0043] Referring again to FIG. 2, as represented by block 204 the device 102 (e.g., the distance determiner 108) determines at least one distance between the devices 102 and 104. To this end, the device 102 may receive and process one or more signals from the device 104. In addition, the device 102 may generate various signals and transmit the signals to the device 104. As represented by blocks 206 and 208, the device 102 (e.g., the indication generator 112) may generate one or more indications corresponding to the one or more determined distances. The operations of blocks 204-208 may be invoked in conjunction with invoking the operations

of block 202. Thus, these operations may be invoked automatically or in response to some action on the part of a user of the device 102.

[0044] As represented by block 304 of FIG. 3, the device 104 may perform operations that are similar and/or complementary to the operations of blocks 204-208. For example, the device 104 (e.g., the indication generator 138) may generate an indication relating to the at least one distance between the device 104 and the device 102. To this end, the device 104 (e.g., the distance function component 136) may perform one or more operations relating to determining the distance between the devices 104 and 102. For example, the distance function component 136 may process one or more signals received from the device 102 relating to a distance determination operation. The component 136 may then generate one or more responsive signals and transmit the signals back to the device 102.

[0045] One or more of various techniques may be employed to determine a distance between the devices 102 and 104. For example, in some implementations distance may be measured using time-of-arrival measurements, round-trip time measurements, signal strength measurements, Doppler shift measurements, or some other suitable technique. Several examples of techniques for measuring distance will be discussed in conjunction with FIG. 4, commencing at block 402.

[0046] As represented by block 404, in some implementations a device such as the device 102 that initiates the distance measurement operations sends one or more signals to a responsive device such as device 104. For example, the initiating device may send a message to a responding device instructing the other device to send one or more signals back to the initiating device. Thus, in the example of FIG. 1 the distance determiner 108 of the device 102 may cooperate with a transmitter of the radio 110 to transmit appropriate signals to the device 104.

[0047] As represented by block 406, the responding device may process the received signals and generate responsive signals (e.g., forming a message). In FIG. 1 the distance function component 136 may cooperate with a receiver of the radio 126 to receive the signals from the device 102.

[0048] As represented by block 408, the responsive signals are then transmitted from the responding device to the initiating device. In FIG. 1 the distance function component 136 and the indication generator 138 may thus cooperate with the radio 126 (e.g., the transmitter) to transmit the signals to the device 102.

[0049] As represented by block 410, the initiating device processes the received responsive signals, as necessary, to determine a distance between the initiating and responding devices. In FIG. 1 the distance function component 108 may again cooperate with the radio 126 (e.g., the receiver) to receive the signals from the device 104.

[0050] Block 412 represents that the above operations may be repeated if there is another distance measure to be taken. Here, it should be appreciated that multiple distance determinations may be made concurrently, in a sequential manner, or in some other manner.

[0051] Sample operations of blocks 404 through 410 will now be discussed in more detail in conjunction with specific examples relating to time-of-arrival measurements, round-trip time measurements and signal strength measurements. It should be appreciated that these are but a few of the

measurement techniques that may be employed and that the teachings herein may be used in conjunction with other measurement techniques.

[0052] In some implementations utilizing time-of-arrival to determine distance the initiating device may measure the times-of-arrival of signals received from the responding device. For example, at block 404 the initiating device (e.g., the distance determiner 108) may request that the responding device transmit several signals to be used for time-of-arrival measurements. At blocks 406 and 408, the responding device may then generate appropriate signals and transmit them to the initiating device. For example, the distance function component 136 and the indication generator 138 may cause the radio 126 to transmit appropriate signals to the radio 110. Then, at block 410 the initiating device (e.g., the distance determiner 108) may perform time-of-arrival measurements and, based on these measurements, determine the distance between the initiating device and the responding device.

[0053] In some implementations the responding device may determine the distance between the devices by performing time-of-arrival measurement operations on signals received from the initiating device. In this case, at block 404 the initiating device (e.g., the distance determiner 108 in conjunction with a transmitter of the radio 110) may transmit signals to be used for the time-of-arrival measurements to the responding device. At block 406 the responding device (e.g., the distance function component 136) may perform time-of-arrival measurements and, in some cases, determine the distance between the responding device and the initiating device based on these measurements. In this case, the indication generator 138 may generate an indication relating to the derived distance-related information. At block 408 the responding device (e.g., the indication generator 138) may send the results of the time-of-arrival measurements or the determined distance to the initiating device. At block 410 the initiating device (e.g., the distance determiner 108) may process the received information to provide a determined distance between the devices 102 and 104 for subsequent operations.

[0054] In some implementations utilizing round-trip time measurements the initiating device (device 102) may transmit a message to the responding device at a given time (block 404). At block 406 the distance function component 136 may determine the amount of time between receipt of the request signal by the device 104 and the transmission of a responsive signal by the device 104 (i.e., a turnaround time). Alternatively, in cooperation with the radio 126, the distance function component 136 may ensure that a response signal is transmitted within a defined turnaround time. The device 104 may thus generate a responsive message (e.g., including an indication of the turnaround time as generated, in some cases, by the indication generator 138) and transmit the message to the device 102 (block 408). At block 410 the device 102 may process the received responsive signal to calculate the round-trip time and, in turn, a distance between the devices 102 and 104. To this end, the distance determiner 108 may determine (e.g., in cooperation with the radio 110) the point in time at which the responsive message was received at the device 102. The distance determiner 108 may then determine the round-trip time from the time elapsed between the transmission of the signal at block 404 to the

reception of the responsive signal at block 410, excluding the turnaround time of the device 104 supplied with the responsive message.

[0055] In some implementations utilizing received signal strength to determine distance the initiating device may measure the signal strength of signals received from the responding device. For example, at block 404 the initiating device (device 102) may transmit a message to the responding device requesting that the responding device transmit a signal at a known signal strength (e.g., a constant energy level). At block 406, in response to the received signal the responding device (e.g., the distance function component 136 in cooperation with indication generator 138) may cause the radio 126 to transmit an appropriate signal or signals to the device 102 (block 408). At block 410, the distance determiner 108 may then calculate the distance between the devices 102 and 104 based on the strength of the corresponding signal(s) received by the radio 110.

[0056] In some implementations utilizing received signal strength to determine distance the responding device may measure the signal strength of signals received from the initiating device. In the example of FIG. 1 the device 104 may receive one or more signals having a known signal strength from the device 102 at block 404. In this case, at block 406 the distance function component 136 may calculate the distance between the devices 104 and 102 based on the strength of the signal(s) received by the radio 126. At block 408, the indication generator 138 may send an indication relating to the derived distance information back to the device 102. At block 410 the initiating device (e.g., the distance determiner 108) may then process the received information to provide a determined distance between the devices 102 and 104 for subsequent operations.

[0057] Referring again to block 206 of FIG. 2, the device 102 (e.g., the indication generator 112) generates an indication relating to the at least one determined distance generated at block 204. As discussed above, the distance determination and indication generation operations may involve determining one or more distance-related parameters including, for example, a distance between the devices 102 and 104, two or more distances between the devices 102 and 104, a rate of change in the relative distance between the devices 102 and 104, and relative acceleration between the devices 102 and 104. Here, a rate of change in distance (e.g., relative velocity) between the devices 102 and 104 may be determined, for example, by determining a distance between the devices at one point in time, determining a distance between the devices at one or more other points in time, and calculating the change(s) in distance over the associated time period(s). Similar information may be utilized to determine relative acceleration between the devices 102 and 104 using known techniques such as taking a derivative of the rate of change information. It should be appreciated that an indication relating to at least one distance may take a form other than those explicitly mentioned herein.

[0058] In some aspects the indication may simply specify a single determined distance between the devices 102 and 104. As will be discussed in more detail below, this form of indication may be compared with one or more threshold distances to determine whether the devices 102 and 104 are separated by a distance that is deemed acceptable for performing some function.

[0059] An indication also may specify several determined distances between the devices 102 and 104. For example, the

distance between the devices **102** and **104** may be checked at various times. Such an operation may be performed in conjunction with different types of distance determination scenarios.

**[0060]** For example, in some aspects a distance between devices may be checked more than once to provide a more accurate distance reading. Here, clearly erroneous readings may be discarded. In addition, in some cases an average determined distance may be calculated or a mean determined distance and a standard deviation may be calculated. Accordingly, in this scenario the indication may comprise several similar determined distances, a determined distance along with a standard deviation of the determined distances, a range of the determined distances, or some other similar information.

**[0061]** In some aspects multiple distance readings may be employed in a scenario where performance of an operation is predicated on the devices **102** and **104** being moved in a defined pattern with respect to one another. For example, the devices **102** and **104** may initially be placed a first distance apart, then placed a second distance apart, and so forth. Accordingly, in this scenario the indication may comprise a pattern of several determined distances.

**[0062]** In some aspects multiple distance readings may be employed to determine a rate of change in relative distance between the devices **102** and **104**. For example, a first distance between the devices may be determined at a first point in time and a second distance between the devices determined at a second point in time. A rate of change in distance may then be determined, for example, by calculating the ratio of the change in distance (e.g., first distance minus second distance) to the elapsed time (e.g. second point in time minus first point in time). Thus, in this scenario the indication may comprise the determined rate of change in relative distance (e.g., an indication of relative velocity).

**[0063]** In some aspects multiple readings of the rate of change in relative distance may be employed. For example, performance of an operation may be predicated on the rate of change in distance (e.g., relative velocity) between the devices **102** and **104** being changed in a defined pattern. Here, the devices **102** and **104** may be moved with respect one another at different velocities over different time periods. In this scenario the indication may comprise a plurality of different rates of change in relative distance.

**[0064]** Similarly, multiple readings of the rate of change in relative distance may be utilized to obtain a profile of the relative acceleration between the devices **102** and **104**. For example, acceleration information may be obtained by taking the derivative of relative velocity information collected over a period of time. Thus, in this scenario the indication may comprise the determined relative acceleration at a given point in time.

**[0065]** In a similar manner as discussed above, multiple acceleration readings may be employed where the performance of an operation is predicated on the relative acceleration between the devices **102** and **104** being changed in a defined pattern. Thus, in this scenario the indication may comprise an acceleration profile defining a plurality of relative accelerations.

**[0066]** In some aspects a device may determine several types of distance-related parameters. For example, the device **102** may determine an absolute distance between the devices **102** and **104** and may determine a rate of change in relative distance between the devices **102** and **104**. Here, it

should be appreciated that in some aspects different distance measurement techniques may be employed to measure these different types of distance-related parameters. For example, a given measurement technique may determine a certain type of distance measurement more effectively than other measurement techniques.

**[0067]** As represented by block **208**, the indication generated at block **206** is compared with one or more distance comparison parameters **116** (FIG. 1). The nature of the comparison operation depends on the particular form of the indication.

**[0068]** For example, if an indication relating to a single distance was generated at block **206**, this form of indication may be compared with one or more distance thresholds **144** to determine whether the devices **102** and **104** are separated by a distance that is within a range of distances deemed acceptable for performing some function. For example, initiation of a function may be predicated on the devices being less than or more than a certain distance apart (e.g., 1 meter, 3 meters, etc.). Alternatively, initiation of a function may be predicated on the devices being separated by a distance that falls within a range defined by two distance thresholds **144**.

**[0069]** In some aspects more than one level of functionality may be defined whereby different levels of functionality are employed based on different distances between the devices **102** and **104**. Here, one type of functionality may be employed in the event the determined distance falls within one range (e.g., the devices **102** and **104** are relatively close to one another) while another type of functionality may be employed in the event the determined distance falls within another range (e.g., the devices **102** and **104** are further apart from one another). In this case, the determined distance may be compared to one, two, or more distance thresholds **144**.

**[0070]** As noted above, if several indications relating to several distances were generated at block **206**, these indications may be compared with one or more distance thresholds **144**. In some implementations the distance thresholds **144** may relate to a pattern of distances where the distance between devices is to be changed between various distances in a defined pattern **148**. In practice, a tolerance may be associated with each distance threshold of the pattern **148** to account for relatively minor deviations between the determined distances and the defined pattern **148**.

**[0071]** If an indication relating to a rate of change in relative distance was generated at block **206**, this indication may be compared with a defined rate of change **146**. The defined rate of change **146** may comprise, for example, an upper threshold for the rate of change, a lower threshold for the rate of change, a range of rates of change, or a defined pattern **148** of rates of change. As an example of the latter scenario, the ranging criteria may specify that the rate of change between devices is to be changed between various rates of change in a defined pattern **148**. Again, a tolerance may be associated with each defined rate of change in the defined a pattern **148** to account for relatively minor deviations between the determined rates of change and the defined pattern **148**.

**[0072]** If an indication relating to relative acceleration was generated at block **206**, this indication may be compared with a defined acceleration profile **150**. The defined acceleration profile **150** may comprise, for example, an upper threshold for acceleration, a lower threshold for the acceleration, a range of accelerations, or a pattern of accelera-

tions. As an example of the latter scenario, the ranging criteria may specify that the relative acceleration between devices is to be changed between accelerations according to a defined acceleration profile **150** (e.g., in a known pattern). Similar to the above scenarios, a range of tolerance may be associated with the accelerations of the defined acceleration profile **150** to account for relatively minor deviations between the determined accelerations and the defined acceleration profile **150**.

**[0073]** It should be appreciated that the comparisons of block **208** may be implemented in various ways. For example, the determined distance may simply be subtracted from a distance comparison parameter. In addition, in some implementations multiple comparisons may be made. Such an approach may be used, for example, when the distance is repeatedly checked for a period of time, when several measurements are made to reduce transient conditions, to perform operations relating to a rate of change in relative distance or to relative acceleration, or when a combination of two or more types of determined distances are employed. As an example of the latter scenario, as will be discussed in more detail below an operation may be invoked or modified based on the rate of change in relative distance between devices as well as the absolute distance between the devices.

**[0074]** In conjunction with the operations of block **208**, the indication generator **112** may generate a comparison result indication that is indicative of the results of the comparison or some other similar operation. For example, such an indication may indicate that a device did or did not meet the desired criteria for performing a distance-based operation.

**[0075]** As represented by block **209**, the device **102** may then take appropriate action based on the results of the comparison. For example, if the comparison result indication indicates that distance criteria have (or a distance criterion has) been met, the device **102** may invoke or terminate a given function or alter the operation of a function in some manner. If the comparison of block **208** is not successful, the operations of FIG. 2 may terminate, and then be invoked at some other point in time.

**[0076]** As represented by block **210**, in some implementations distance-based criteria may be used as a prerequisite for commencing association-related operations. For example, if the distance between the devices **102** and **104** is less than a threshold value and/or if the devices **102** and **104** are moved in a proper manner with respect to one another, the device **102** may commence an association procedure with device **104**. In addition, as represented by blocks **305** and **306** of FIG. 3, the device **104** may perform operations that are similar and/or complementary to the operations of blocks **209** and **210**. Thus, if an association operation is allowed (e.g., based on receipt of a message from the device **102** indicating a successful comparison at block **208**), the device **104** may commence association operations in cooperation with the device **102**. In some aspects association may be automatically invoked if the devices are within a given distance of one another and/or are moved in a certain manner with respect to one another.

**[0077]** Although block **210** follows blocks **204** through **208** in the example of FIG. 2, these operations are not necessarily performed in the illustrated order. For example, in some implementations the distance determining operations may be performed after the commencement of an association procedure. Thus, one or more distance-related

functions as taught herein may be invoked as part of an association procedure. In addition, in some implementations distance determining operations may serve as both a prerequisite to an association procedure and form a part of an association procedure.

**[0078]** In some aspects an association procedure may involve pairing the devices **102** and **104** to enable certain types of communication between the devices **102** and **104**. For example, the association procedure may involve establishing application-level communication among the devices **102** and **104**.

**[0079]** A variety of operations may be performed in conjunction with an association procedure or in conjunction with some other distance-based operation. For example, blocks **212** and **214** in FIG. 2 and blocks **308** and **310** in FIG. 3 illustrate several procedures that may optionally be invoked in conjunction with the association procedures of blocks **210** and **306**, respectively.

**[0080]** As represented by block **212**, in some applications an association procedure (e.g., a pairing process) may employ a human synchronization test. For example, such a test may be based on a human synchronization ability whereby a given person may easily actuate two switches substantially simultaneously, yet it may be very difficult for an onlooker to anticipate the right time to actuate a switch at substantially the same time as another person. Accordingly, the operations of block **212** may involve instructing the user (e.g., via a visual command on a display, via a specific configuration of lighting elements such as LEDs, or via an audio command) to simultaneously activate input devices (e.g., actuate switches) on the devices **102** and **104**. The association procedure may thus involve determining whether a switch on the device **102** is actuated (e.g., depressed and/or released) at substantially the same time as a switch on the device **104** is actuated. As represented by block **308** of FIG. 3, the device **104** may perform operations that are similar and/or complementary to the operations of block **212**. As will be discussed in more detail below, a variety of user input devices (e.g., other than switches) may be used for this operation.

**[0081]** The synchronization test may be implemented in a variety of ways. For example, in some implementations the device **102** may compare the times that the respective switches on the devices **102** and **104** are depressed, the times that the respective switches on the devices **102** and **104** are released, or both. In some implementations the synchronization test may involve multiple actuations of the switches. For example, the user may pick several random timings to simultaneously press and release the buttons on each device. In this case, each device will generate a sequence of times associated with the actuations of its switch. The device **102** may then compare the timings of the sequences in an attempt to determine whether the same person actuated the switches on the devices **102** and **104**. In either of the above implementations, if the actuation timings from the devices **102** and **104** are sufficiently similar, the devices **102** and **104** may be associated with one another.

**[0082]** In some implementations comparison of actuation times may involve comparison of a first indication representative of a time (or times) of actuation of a user input device of one device (e.g., device **102**) with a second indication representative of a time (or times) of actuation of a user input device of another device (e.g., device **104**). For example, the association processor **122** may acquire the first

indication via a user input device of device **102** and receive the second indication from the device **104**. The association processor **122** may then compare the two indications to determine whether the actuation of the user input device of the device **102** occurred substantially simultaneously with the actuation of the user input device of the device **104**.

**[0083]** Although block **212** follows block **210** in the example of FIG. **2**, these operations are not necessarily performed in the illustrated order. For example, in some implementations the synchronization test may be performed before the commencement of an association procedure (e.g., as a prerequisite to commencing the association procedure). In addition, in some implementations a synchronization test may serve as both a prerequisite to an association procedure and form a part of an association procedure.

**[0084]** As represented by block **214**, in some implementations the association procedure may involve authenticating the devices **102** and **104** with respect to one another. In general, authentication relates to verifying an identity of another device. Through the use of an authentication procedure, a device may verify that is authorized to communicate with the other device and verify that a given set of operations may be performed in conjunction with the other device. As an example of the latter scenario, a given device may allow a requesting device to access certain services provided by the device if the requesting device has appropriate authorization. Such services may include, for example, connection to a network, access to a pay-per-view service, access to protected media such as data, audio, video, or some combination thereof.

**[0085]** Authentication may be performed in a variety of ways. In some implementations an authentication procedure may involve sending security credentials (e.g., passwords) and/or user biometric information from one device to another. In a typical scenario, each device will authenticate the other device. For example, the device **102** may authenticate the device **104** and the device **104** may authenticate the device **102**. Thus, as represented by block **310** of FIG. **3**, the device **104** may perform operations that are similar and/or complementary to the operations of block **214**. In this way, each device may send security credentials or other suitable information to the other device and receive corresponding information from the other device.

**[0086]** In view of the above, it should be appreciated that association-related operations may be invoked, terminated, or affected by any suitable distance-related characteristics of two or more devices. For example, association operations may depend on an absolute distance between devices, a defined pattern of distances between devices, a rate of change in relative distance between devices, a relative acceleration between devices, or some combination thereof. Thus, association may depend (e.g., is invoked, terminated, affected, etc.) on whether a measured parameter (e.g., distance, rate of change, or acceleration) between devices is less than, greater than, or substantially similar to (e.g., equal to) a threshold value (e.g., a corresponding defined parameter), or is below, above, or within a range of such threshold values.

**[0087]** Consequently, a diverse range of association functionality may be provided in accordance with teachings herein. For example, an association procedure may be initiated once an incoming device is close enough to an existing device. Such an approach may prove advantageous

in the event the surrounding area includes a large number of devices associated with various networks.

**[0088]** In some aspects a user may press a button to activate association and may then use the motion of physically bringing a first device close to and then away from the second device to associate the two devices. This approach allows for an intuitive association method that may also provide a mechanism for readily differentiating the associating devices from other wireless devices in the same area.

**[0089]** In addition, if a user is using a device to wirelessly send a password to a computer, then the computer could “select” the correct device in the immediate vicinity based on which device is currently stationary, in addition to other factors such as distance. Similarly if the user walks up to a computer the computer may turn on or configure itself in an appropriate manner. Further, if multiple users are near the computer, the computer may configure itself based on the closest user, or based on the closest user with the highest priority. In contrast, if the user walks past the computer, the computer may more quickly go back to sleep.

**[0090]** The use of distance-based techniques as taught herein may be employed in conjunction with a variety of association-related operations (e.g., pairing, authentication, etc.). For example, a point-of-sale terminal may utilize a distance parameter and/or a rate of change in relative distance parameter to identify a device to be used for a sales transaction. Here, a rate of change in relative distance may be used to measure a swiping action at the point-of-sale as a user moves one device (e.g., a point-of-sale enabled cell phone) across a second device (the point-of-sale terminal) to initiate a transaction. This technique may provide an effective way to differentiate between other devices in the surrounding area, and may provide a relatively simple user interface for the transaction.

**[0091]** Association may be one-to-one, one-to-many, many-to-one, or many-to-many. For example, an audio device (e.g., an MP3 player) may associate with several nearby headsets to enable the users of those headsets to listen to the audio provided by the audio device. It should be appreciated that the above examples are merely illustrative of a few applications and that distance-based association may be employed in a wide variety of applications.

**[0092]** As represented by block **216**, presence management may be provided based on one or more distances between devices. In some aspects this form of presence management relates to the performance of certain operations based on a location of a device with respect to another device and/or motion of the device with respect to the other device. In some aspects presence management also may be based on an identity of a device (e.g., the other device). For example, certain actions may be taken for certain devices. Here a device may be identified by a unique address, an assigned identifier, or in some other manner.

**[0093]** Presence management operations may, in some aspects, relate to invoking presence management, determining whether certain operations are to be performed in conjunction with presence management, and terminating presence management. For example, a computer may present different user interfaces depending upon which user is sitting in front of the computer. To this end, the user may possess a device that enables the computer to uniquely identify the user. Similarly, a presence management-enabled device may be adapted to modify the characteristics of a room (e.g., the lighting, the temperature, music being

played, etc.) based on which person or persons are in the room. In another example, the user interface of a portable device (e.g., a cell phone) may be adapted to provide remote control functionality when the portable device is close to a stereo, a television, or some other device that may be controlled. These are but a few examples of presence management. It should be understood that presence management encompasses many other scenarios and operations.

**[0094]** In some implementations, presence management functionality may be employed independently of the association-related functionality discussed above. For example, distance-based presence management as taught herein may be employed in a device that utilizes an association procedure or in a device that does not utilize an association procedure. In the former case, distance-based presence management as taught herein may be employed in a device where the association is not distance-based. Also, a device employing distance-based association as taught herein may or may not provide presence management functionality.

**[0095]** Referring to the example of FIG. 2, operations similar to the operations of blocks 202, 204, 206, 208, and 212 may be performed in conjunction with presence management. For example, a decision as to whether to invoke or terminate presence management may be based on the result of (e.g., the indication generated from) the comparison operations of block 208 and/or the synchronization operations of block 212. Thus, presence management may be automatically invoked if the devices are within a given distance of one another (e.g., 3 meters) and/or are moved in a certain manner with respect to one another. Similarly, one or more of the operations performed during presence management may be based on the results of the comparison of block 208.

**[0096]** In a similar manner as discussed above for association, although block 216 follows blocks 204 through 208 in the example of FIG. 2, these operations are not necessarily performed in the illustrated order. For example, in some implementations the distance determining operations may be performed after the commencement of a presence management procedure. Thus, one or more distance-related functions as taught herein may be invoked as part of a presence management procedure. In addition, in some implementations distance determining operations may serve as both a prerequisite to a presence management procedure and form a part of a presence management procedure.

**[0097]** Presence management may involve operations performed by the device 102 as well as, in some circumstances, operations performed by the device 104. Accordingly, as represented by block 312 of FIG. 3, the device 104 may perform operations that are similar and/or complementary to the operations of blocks 216.

**[0098]** In some aspects a device (e.g., the device 102, the device 104, or both) may be configured based on a distance-related indication. Such configuration may include, in some aspects, one or more of configuring an output of a user interface, invoking a function, adapting operations, and providing access to functionality. In some aspects the configuration may be based on the identity of another device. For example, the device 102 may be configured based on the identity of the device 104, or vice versa. In some aspects a device may transmit information to or receive information from another device, wherein the information is based on the indication. As an example, such information may be generated, selected, or modified depending upon the indication.

**[0099]** In a typical implementation presence management may be employed in the device 102 to affect the operation of the device 102 if the device 102 is brought within a specified range of device 104 and/or is moved in an appropriate manner with respect to device 104. In one sample use case presence management may configure the device 102 to provide remote control functionality capable of controlling the device 104. In conjunction with this reconfiguration, the device 102 may present a different interface to the user by, for example, modifying a display of the display screen and modifying the functionality of one or more input devices (e.g., buttons or soft keys) of the device 102. In addition, the device 102 may be enabled to send uniquely configured information (e.g., remote control instructions, etc.) to the device 104.

**[0100]** As a device 102 is brought within a specified range of device 104 and/or is moved in an appropriate manner with respect to the device 104, presence management also may be employed in the device 104 to affect its operation. Continuing with the sample use case mentioned above, the device 104 may now enable the device 102 (e.g., and no other devices) to control selected functionality of the device 104 or of one or more other devices if distance-based conditions, and optionally device identity conditions, are met. For example, the device 104 may present a unique interface to the user of device 102 by modifying the display on the display screen of the device 104 or another device (e.g., a television or a television receiver). In some aspects the device 104 may provide presence management for the device 102 based on the indication by, for example, facilitating configuration of the device 102. To this end, the device 104 may send appropriate messages to the device 102 that facilitate configuration of the device 102 (e.g., as discussed above). In a typical example, configuration of the device 102 may include modifying the output of the user interface of the device 102.

**[0101]** In another sample use case, a given device such as device 104 may allow access to certain of its functionality depending on the identity of another device and depending on at least one distance between the devices. In the example of FIG. 1, if the identity and distance-based conditions are met, the device 104 may provide uniquely configured information to the device 102. For example, the presence management functionality enabled on the device 104 may provide access to a service such as network connectivity or pay-for-use media such as data, audio, and video. It should be appreciated that the presence management functionality enabled on the device 104 may take various other forms

**[0102]** Presence management operations may be invoked, terminated, or affected by any suitable distance-related characteristics of two or more devices. For example, presence management operations may depend on an absolute distance between devices, a defined pattern of distances between devices, a rate of change in relative distance between devices, a relative acceleration between devices, or some combination thereof. Thus, presence management may depend (e.g., is invoked, terminated, affected, etc.) on whether a measured parameter (e.g., distance, rate of change, or acceleration) between devices is less than, greater than, or substantially similar to (e.g., equal to) a threshold value (e.g., a corresponding defined parameter), or is below, above, or within a range of such threshold values.

**[0103]** Consequently, a diverse range of presence management functionality may be provided in accordance with

teachings herein. For example, if a user runs into a room with a presence-management enabled device then sits on the couch, a presence-management-enabled television may turn on to breaking news. Conversely, if the same user walks into the room and sits on the couch, the television may turn on and play a recent recording of the user's favorite program.

[0104] It should be appreciated that the components described herein may take a variety of forms. For example, FIG. 5 illustrates that a wireless device 500 (e.g., similar to the device 102 and/or the device 104) may include in broad terms functionality relating to a user input device 502, a communication device 504, a distance, motion, and acceleration measuring circuit 506, and a position/motion detector 508.

[0105] The user input device 502 may comprise one or more of a variety of components that enable a user to provide some form of input to the wireless device 500. For example, the user input device 502 may comprise one or more switches such as a pushbutton or a keypad. The user input device 502 also may comprise a touch-screen, a touchpad, or other similar input mechanism. The user input device 502 may comprise a pointing device such as a mouse, trackball, an electronic pen, a pointing stick, etc. The user input device 502 also may be adapted to receive non-mechanical forms of input such as an audio (e.g., voice) input, an optical-based input, an RF-based input, or some other suitable form of input. As discussed above, the user input device 502 may be utilized by the user to initiate some function in the wireless device such as facilitating authentication or presence management. As an example of the latter case, the user input device 502 may comprise the input device discussed above that is activated at substantially the same time on both of the devices 102 and 104.

[0106] The communication device 504 may comprise various components that facilitate communicating with another device. For example, as discussed herein the communication device 504 may comprise a radio (e.g., the radio 110 and/or the radio 126) with associated transmitter and receiver components 510 and 512, respectively, that include various components (e.g., signal generators and signal processors) that facilitate communication over a wireless medium.

[0107] The communication device 504 may employ a variety of wireless physical layer schemes. For example, the physical layer may utilize some form of CDMA, TDMA, OFDM, OFDMA, or other modulation and multiplexing schemes.

[0108] In some aspects the communication device 504 may communicate via a pulsed-based physical layer. In some aspects the physical layer may utilize ultra-wideband pulses that have a relatively short length (e.g., on the order of a few nanoseconds) and a relatively wide bandwidth. In some aspects an ultra-wide band system may be defined as a system having a fractional bandwidth on the order of approximately 20% or more and/or having a bandwidth on the order of approximately 500 MHz or more.

[0109] The circuit 506 may comprise one or more of a variety of components adapted to measure one or more of distance, motion, and acceleration. As discussed above, various techniques may be employed to measure distance including, for example, two-way ranging, interrogations/response signals, received power measurements, acceleration readings, digital or analog imaging, detecting changes in electrical and magnetic fields, and detecting a Doppler

shift in signals. Accordingly, the circuit 506 may employ corresponding circuitry (e.g., RF circuitry, optics, accelerometers, signal strength sensors, electrical and magnetic fields sensors, or Doppler shift sensors) to measure distance using one or more these techniques. In a specific example, an optical device such as a video device may employ video processing to compute the rate of change in relative distance based on frame differences and similarities. In another example, the rate of change in relative distance may be determined by identifying a rate of change in the relative orientation of electrical and magnetic fields. Also, in some applications an accelerometer may be used to obtain a measurement of distance, velocity, or acceleration.

[0110] In some implementations, one or more of the components of the circuit 506 may be implemented in the wireless communication device 504. For example, an implementation that determines distance by calculating the round-trip time of RF signals may utilize the transmitter and receiver components of a radio to transmit and receive ranging signals (e.g., ultra-wideband pulses) or other signals that are used to calculate a round-trip time.

[0111] In some implementations a position and/or motion detector 508 may be employed to determine one or more distance-related parameters associated with two or more devices. For example, through the use of an accelerometer in one or more of the devices, the rate of change in relative distance between two devices may be more easily obtained or determined with greater accuracy. In some implementations one or more of the components the position/motion detector 508 may be implemented in the circuit 506.

[0112] The teachings herein may be incorporated into (e.g., implemented within or performed by) a variety of devices. For example, one or more aspects taught herein may be incorporated into a phone (e.g., a cellular phone), a personal data assistant ("PDA"), an entertainment device (e.g., a music or video device), a headset (e.g., headphones, an earpiece, etc.), a microphone, a medical device (e.g., a biometric sensor, a heart rate monitor, a pedometer, an EKG device, etc.), a user I/O device (e.g., a watch, a remote control, a light switch, a keyboard, a mouse, etc.), a tire pressure monitor, a computer, a point-of-sale device, an entertainment device, a hearing aid, a set-top box, or any other suitable device. Moreover, these devices may have different power and data requirements. In some aspects, the teachings herein may be adapted for use in low power applications (e.g., through the use of a pulse-based signaling scheme and low duty cycle modes) and may support a variety of data rates including relatively high data rates (e.g., through the use of high-bandwidth pulses).

[0113] The teachings herein may be incorporated into a device employing various components for communicating with at least one other device. FIG. 6 depicts several sample components that may be employed to facilitate communication between devices. Here, a first device (e.g., an access terminal) 602 and a second device (e.g., an access point) 604 are adapted to communicate via a communication link 606 over a suitable medium.

[0114] Initially, components involved in sending information from the device 602 to the device 604 (e.g., a reverse link) will be treated. A transmit ("TX") data processor 608 receives traffic data (e.g., data packets) from a data buffer 610 or some other suitable component. The transmit data processor 608 processes (e.g., encodes, interleaves, and symbol maps) each data packet based on a selected coding

and modulation scheme, and provides data symbols. In general, a data symbol is a modulation symbol for data, and a pilot symbol is a modulation symbol for a pilot (which is known a priori). A modulator **612** receives the data symbols, pilot symbols, and possibly signaling for the reverse link, and performs modulation (e.g., OFDM or some other suitable modulation) and/or other processing as specified by the system, and provides a stream of output chips. A transmitter (“TMTR”) **614** processes (e.g., converts to analog, filters, amplifies, and frequency upconverts) the output chip stream and generates a modulated signal, which is then transmitted from an antenna **616**.

[0115] The modulated signals transmitted by the device **602** (along with signals from other devices in communication with the device **604**) are received by an antenna **618** of the device **604**. A receiver (“RCVR”) **620** processes (e.g., conditions and digitizes) the received signal from the antenna **618** and provides received samples. A demodulator (“DEMOT”) **622** processes (e.g., demodulates and detects) the received samples and provides detected data symbols, which may be a noisy estimate of the data symbols transmitted to the device **604** by the other device(s). A receive (“RX”) data processor **624** processes (e.g., symbol demaps, deinterleaves, and decodes) the detected data symbols and provides decoded data associated with each transmitting device (e.g., device **602**).

[0116] Components involved in sending information from the device **604** to the device **602** (e.g., a forward link) will be now be treated. At the device **604**, traffic data is processed by a transmit (“TX”) data processor **626** to generate data symbols. A modulator **628** receives the data symbols, pilot symbols, and signaling for the forward link, performs modulation (e.g., OFDM or some other suitable modulation) and/or other pertinent processing, and provides an output chip stream, which is further conditioned by a transmitter (“TMTR”) **630** and transmitted from the antenna **618**. In some implementations signaling for the forward link may include power control commands and other information (e.g., relating to a communication channel) generated by a controller **632** for all devices (e.g. terminals) transmitting on the reverse link to the device **604**.

[0117] At the device **602**, the modulated signal transmitted by the device **604** is received by the antenna **616**, conditioned and digitized by a receiver (“RCVR”) **634**, and processed by a demodulator (“DEMOT”) **636** to obtain detected data symbols. A receive (“RX”) data processor **638** processes the detected data symbols and provides decoded data for the device **602** and the forward link signaling. A controller **640** receives power control commands and other information to control data transmission and to control transmit power on the reverse link to the device **604**.

[0118] The controllers **640** and **632** direct various operations of the device **602** and the device **604**, respectively. For example, a controller may determine an appropriate filter, reporting information about the filter, and decode information using a filter. Data memories **642** and **644** may store program codes and data used by the controllers **640** and **632**, respectively.

[0119] FIG. 6 also illustrates that the communication components may include one or more components that perform ranging-related operations as taught herein. For example, a ranging control component **646** may cooperate with the controller **640** and/or other components of the device **602** to send and receive ranging-related signals and

information to another device (e.g., device **604**). Similarly, a ranging control component **648** may cooperate with the controller **632** and/or other components of the device **604** to send and receive ranging-related signals and information to another device (e.g., device **602**).

[0120] The components described herein may be implemented in a variety of ways. Referring to FIG. 7, an apparatus **700** is represented as a series of interrelated functional blocks that may represent functions implemented by, for example a processor, software, some combination thereof, or in some other manner as taught herein.

[0121] As shown in FIG. 7, the apparatus **700** may include one or more modules **702**, **704**, **706**, **708**, **710**, **712**, **714**, **716**, **718**, **720**, **722**, and **724** that may perform one or more of the functions described above with regard to various figures. For example, a processor for inputting **702** may facilitate user input and may correspond to, for example, component **502** discussed above. A processor for generating an indication **704** may generate one or more indications as taught herein and may correspond to, for example, component **112** and/or component **138** discussed above. A processor for associating **706** may provide various functionality relating to association as taught herein and may correspond to, for example, component **120** and/or component **130** discussed above. A processor for authenticating **708** may provide various functionality relating to authentication as taught herein and may correspond to, for example, component **122** and/or component **132** discussed above. A processor for providing presence management **710** may provide various functionality relating to presence management as taught herein and may correspond to, for example, component **124** and/or component **134** discussed above. A processor for comparing **712** may provide various functionality relating to comparing distance-based information as taught herein and may correspond to, for example, component **114** discussed above. A processor for using a time-of-arrival measurement **714** may provide various functionality relating to time-of-arrival measurements as taught herein and may correspond to, for example, component **108** and/or component **136** discussed above. A processor for measuring **716** may provide various functionality relating to measuring distance as taught herein and may correspond to, for example, component **108** and/or component **136** discussed above. A processor for communicating **718** may provide various functionality relating to communicating with another device as taught herein and may correspond to, for example, component **504** discussed above. A processor for transmitting **720** may provide various functionality relating to transmitting information to another device as taught herein and may correspond to, for example, component **510** discussed above. A processor for receiving **722** may provide various functionality relating to receiving information from another device as taught herein and may correspond to, for example, component **512** discussed above. A processor for using ultra-wideband pulses may provide various functionality relating to determining distance using ultra-wideband pulses as taught herein and may correspond to, for example, component **108** and/or component **110** discussed above.

[0122] As noted above, FIG. 7 illustrates that in some aspects these components may be implemented via appropriate processor components. These processor components may in some aspects be implemented, at least in part, using structure as taught herein. In some aspects a processor may be adapted to implement a portion or all of the functionality

of one or more of these components. In some aspects one or more of the components represented by dashed boxes are optional.

**[0123]** In some aspects the apparatus 700 may comprise an integrated circuit. Thus, the integrated circuit may comprise one or more processors that provide the functionality of the processor components illustrated in FIG. 7. For example, in some aspects a single processor may implement the functionality of the illustrated processor components, while in other aspects more than one processor may implement the functionality of the illustrated processor components. In addition, in some aspects the integrated circuit may comprise other types of components that implement some or all of the functionality of the illustrated processor components.

**[0124]** In addition, the components and functions represented by FIG. 7, as well as other components and functions described herein, may be implemented using any suitable means. Such means also may be implemented, at least in part, using corresponding structure as taught herein. For example, in some aspects means for inputting may comprise a user input device, means for generating an indication may comprise an indication generator, means for associating may comprise an association processor, means for authenticating may comprise an authentication processor, means for providing presence management may comprise a presence management processor, means for comparing may comprise a comparator, means for using a time-of-arrival measurement may comprise a distance determiner, means for measuring may comprise a distance determiner, means for communicating may comprise a radio, means for transmitting may comprise a transmitter, means for receiving may comprise a receiver, and means for using ultra-wideband pulses may comprise a radio. One or more of such means also may be implemented in accordance with one or more of the processor components of FIG. 7.

**[0125]** Those of skill in the art would understand that information and signals may be represented using any of a variety of different technologies and techniques. For example, data, instructions, commands, information, signals, bits, symbols, and chips that may be referenced throughout the above description may be represented by voltages, currents, electromagnetic waves, magnetic fields or particles, optical fields or particles, or any combination thereof.

**[0126]** Those of skill would further appreciate that any of the various illustrative logical blocks, modules, processors, means, circuits, and algorithm steps described in connection with the aspects disclosed herein may be implemented as electronic hardware (e.g., a digital implementation, an analog implementation, or a combination of the two, which may be designed using source coding or some other technique), various forms of program or design code incorporating instructions (which may be referred to herein, for convenience, as “software” or a “software module”), or combinations of both. To clearly illustrate this interchangeability of hardware and software, various illustrative components, blocks, modules, circuits, and steps have been described above generally in terms of their functionality. Whether such functionality is implemented as hardware or software depends upon the particular application and design constraints imposed on the overall system. Skilled artisans may implement the described functionality in varying ways for each particular application, but such implementation deci-

sions should not be interpreted as causing a departure from the scope of the present disclosure.

**[0127]** The various illustrative logical blocks, modules, and circuits described in connection with the aspects disclosed herein may be implemented within or performed by an integrated circuit (“IC”), an access terminal, or an access point. The IC may comprise a general purpose processor, a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field programmable gate array (FPGA) or other programmable logic device, discrete gate or transistor logic, discrete hardware components, electrical components, optical components, mechanical components, or any combination thereof designed to perform the functions described herein, and may execute codes or instructions that reside within the IC, outside of the IC, or both. A general purpose processor may be a microprocessor, but in the alternative, the processor may be any conventional processor, controller, microcontroller, or state machine. A processor may also be implemented as a combination of computing devices, e.g., a combination of a DSP and a microprocessor, a plurality of microprocessors, one or more microprocessors in conjunction with a DSP core, or any other such configuration.

**[0128]** It is understood that any specific order or hierarchy of steps in any disclosed process is an example of a sample approach. Based upon design preferences, it is understood that the specific order or hierarchy of steps in the processes may be rearranged while remaining within the scope of the present disclosure. The accompanying method claims present elements of the various steps in a sample order, and are not meant to be limited to the specific order or hierarchy presented.

**[0129]** The steps of a method or algorithm described in connection with the aspects disclosed herein may be embodied directly in hardware, in a software module executed by a processor, or in a combination of the two. A software module (e.g., including executable instructions and related data) and other data may reside in a data memory such as RAM memory, flash memory, ROM memory, EPROM memory, EEPROM memory, registers, a hard disk, a removable disk, a CD-ROM, or any other form of computer-readable storage medium known in the art. A sample storage medium may be coupled to a machine such as, for example, a computer/processor (which may be referred to herein, for convenience, as a “processor”) such the processor can read information (e.g., code) from and write information to the storage medium. A sample storage medium may be integral to the processor. The processor and the storage medium may reside in an ASIC. The ASIC may reside in user equipment. In the alternative, the processor and the storage medium may reside as discrete components in user equipment. Moreover, in some aspects any suitable computer-program product may comprise a computer-readable medium comprising codes (e.g., executable by at least one computer) relating to one or more of the aspects of the disclosure. In some aspects a computer program product may comprise packaging materials.

**[0130]** The previous description of the disclosed aspects is provided to enable any person skilled in the art to make or use the present disclosure. Various modifications to these aspects will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other aspects without departing from the scope of the disclosure. Thus, the present disclosure is not intended to be

limited to the aspects shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

What is claimed is:

1. A mobile device, comprising:
  - a receiver configured to receive at least one signal from a medical device, wherein the signal comprises biometric information;
  - an authentication processor configured to authenticate the medical device based on the biometric information; and
  - an association processor configured to perform an association procedure with the medical device in response to the authentication of the medical device by the authentication processor.
2. The mobile device of claim 1, wherein the biometric information comprises information related to a heart rate of a user.
3. The mobile device of claim 1, wherein the biometric information comprises information related to an electrocardiogram associated with a user.
4. The mobile device of claim 1, wherein the authentication processor is configured to authenticate the medical device by further receiving credential information from the medical device by way of the receiver.
5. The mobile device of claim 1, wherein the association processor is configured to establish application-level communication between the mobile device and the medical device.
6. The mobile device of claim 5, wherein the application-level communication comprises the biometric information.
7. The mobile device of claim 5, wherein the application-level communication comprises information related to a heart rate of a user.
8. The mobile device of claim 5, wherein the application-level communication comprises electrocardiogram (EKG) information associated with a user.
9. A method of associating a mobile device with a medical device, comprising:
  - receiving at least one signal from the medical device, wherein the signal comprises biometric information;
  - authenticating the medical device based on the biometric information; and
  - performing an association procedure with the medical device in response to the authentication of the medical device.
10. The method of claim 9, wherein the biometric information comprises information related to a heart rate of a user.
11. The method of claim 9, wherein the biometric information comprises information related to an electrocardiogram associated with a user.
12. The method of claim 9, wherein authenticating the medical device comprises receiving credential information from the medical device.
13. The method of claim 9, wherein authenticating the medical device comprises establishing application-level communication between the mobile device and the medical device.
14. The method of claim 13, wherein the application-level communication comprises the biometric information.
15. The method of claim 13, wherein the application-level communication comprises information related to a heart rate of a user.
16. The method of claim 13, wherein the application-level communication comprises electrocardiogram (EKG) information associated with a user.
17. A medical device, comprising:
  - a biometric sensor configured to generate biometric information associated with a user;
  - a transmitter configured to transmit at least one signal to a mobile device, wherein the at least one signal comprises the biometric information; and
  - an association processor configured to perform an association procedure to associate the medical device with the mobile device based on the biometric information.
18. The medical device of claim 17, wherein the biometric information comprises information related to a heart rate of the user.
19. The medical device of claim 17, wherein the biometric information comprises information related to an electrocardiogram associated with the user.
20. The medical device of claim 17, further comprising an authentication processor configured to generate credential information for associating the medical device with the mobile device.
21. The medical device of claim 17, wherein the association processor is configured to establish application-level communication between the mobile device and the medical device.
22. The medical device of claim 21, wherein the application-level communication comprises the biometric information.
23. The medical device of claim 21, wherein the application-level communication comprises information related to a heart rate of the user.
24. The medical device of claim 21, wherein the application-level communication comprises electrocardiogram (EKG) information associated with the user.
25. A method of associating a medical device with a mobile device, comprising:
  - generating biometric information associated with a user;
  - transmitting at least one signal to the mobile device, wherein the at least one signal comprises the biometric information; and
  - performing an association procedure to associate the medical device with the mobile device based on the biometric information.
26. The method of claim 25, wherein the biometric information comprises information related to a heart rate of the user.
27. The method of claim 25, wherein the biometric information comprises information related to an electrocardiogram associated with the user.
28. The method of claim 25, further comprising generating credential information for authenticating the medical device by the mobile device.
29. The method of claim 25, wherein performing the association procedure comprises establishing application-level communication between the mobile device and the medical device.
30. The method of claim 29, wherein the application-level communication comprises the biometric information.
31. The method of claim 29, wherein the application-level communication comprises information related to a heart rate of the user.
32. The method of claim 29, wherein the application-level communication comprises electrocardiogram (EKG) information associated with the user.

专利名称(译)	用于基于生物计量信息关联设备的系统和方法		
公开(公告)号	<a href="#">US20180139789A9</a>	公开(公告)日	2018-05-17
申请号	US14/504659	申请日	2014-10-02
[标]申请(专利权)人(译)	高通股份有限公司		
申请(专利权)人(译)	高通公司		
当前申请(专利权)人(译)	高通公司		
[标]发明人	AGRAWAL AVNEESH LEE CHONG UK MOALLEMI KAMRAN JULIAN DAVID JONATHAN JAIME MANUEL EDUARDO DOUGLAS ROBERT KEITH XIAO LU ROSE GREGORY GORDON		
发明人	AGRAWAL, AVNEESH LEE, CHONG UK MOALLEMI, KAMRAN JULIAN, DAVID JONATHAN JAIME, MANUEL EDUARDO DOUGLAS, ROBERT KEITH XIAO, LU ROSE, GREGORY GORDON		
IPC分类号	H04W76/02 H04B5/00 A61B5/0404 A61B5/00 H04W88/02 H04W88/08		
CPC分类号	A61B5/0015 A61B5/0404 H04B5/0031 H04W76/14 G01S13/0209 G01S13/284 G01S13/765 H04L63/0861 H04L67/24 H04W4/023 H04W4/027 H04W4/029 H04W4/50 H04W8/005 H04W12/003 H04W12/00503 H04W12/06		
优先权	60/792035 2006-04-14 US		
其他公开文献	US20150024689A1		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

基于与两个或更多设备相关联的距离相关功能可以执行各种操作。例如，用于两个或更多设备的关联过程可以基于一个或多个确定的距离。类似地，呈现管理可以基于一个或多个确定的距离。距离相关功能可以采取各种形式，包括例如设备之间的距离，设备之间的两个或更多个距离，设备之间的相对距离的变化率，设备之间的相对加速度，或者两个或更多个这些距离相关的功能。

