



US 20180116514A1

(19) **United States**(12) **Patent Application Publication**
Turner(10) **Pub. No.: US 2018/0116514 A1**(43) **Pub. Date: May 3, 2018**(54) **EARPIECE WITH IN-EAR ELECTRODES**(52) **U.S. CL.**(71) Applicant: **BRAGI GmbH**, Munchen (DE)CPC *A61B 5/0006* (2013.01); *A61B 5/6817*
(2013.01); *A61B 5/04012* (2013.01); *A61B*
5/0031 (2013.01); *A61B 5/0478* (2013.01)(72) Inventor: **Jake Berry Turner**, München (DE)(73) Assignee: **BRAGI GmbH**, München (DE)

(57)

ABSTRACT(21) Appl. No.: **15/796,370**(22) Filed: **Oct. 27, 2017****Related U.S. Application Data**

(60) Provisional application No. 62/416,537, filed on Nov. 2, 2016.


Publication Classification(51) **Int. Cl.***A61B 5/00*

(2006.01)

A61B 5/0478

(2006.01)

In some embodiments, an electronic device for monitoring EEG data, may include one or more of the following features: (a) a housing, (b) a processor disposed within the housing, (c) at least one sensor operatively connected to the processor, (d) at least two EEG electrodes operatively connected to the processor and positioned on the housing for receiving EEG signals from an ear surface, and (e) a plurality of EEG electrodes, wherein the processor measures the impedance of the plurality of EEG electrodes.

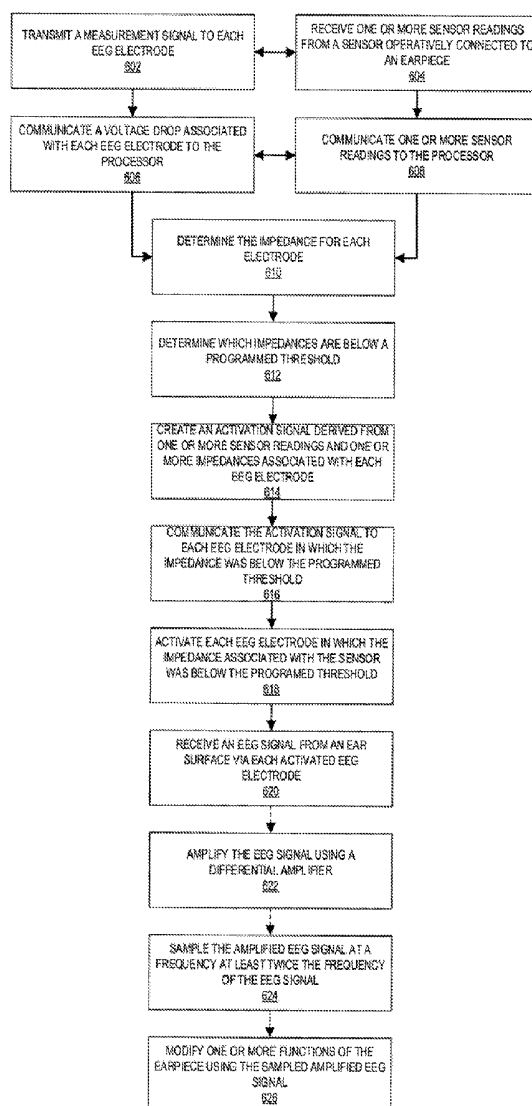

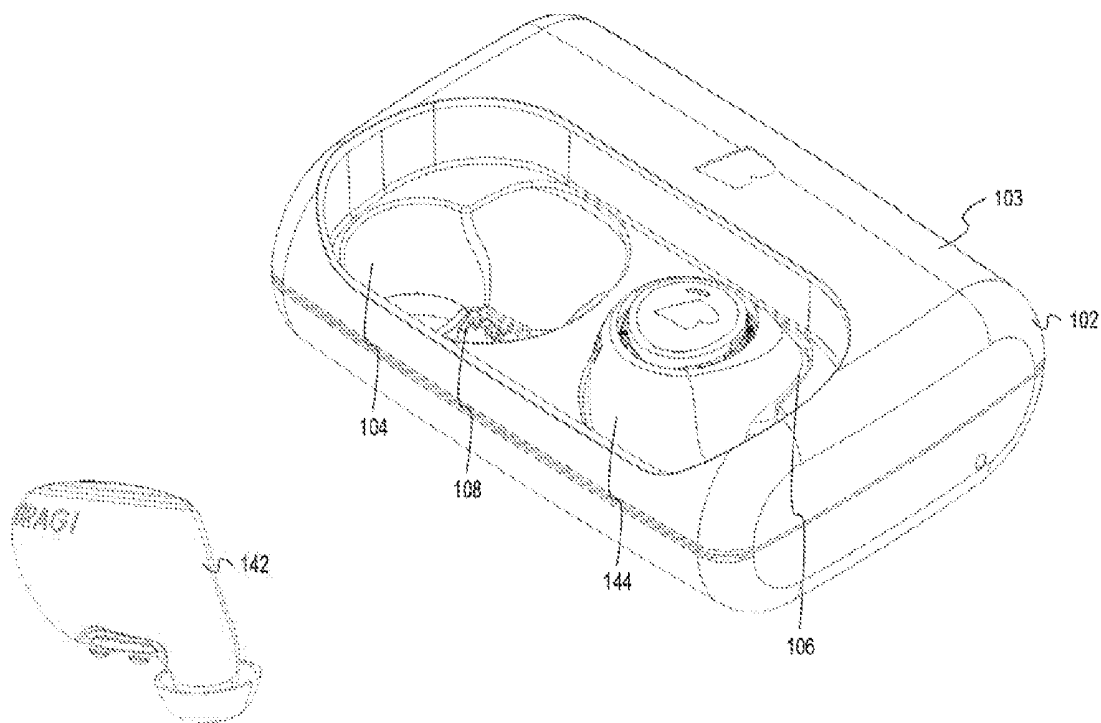


FIG. 1

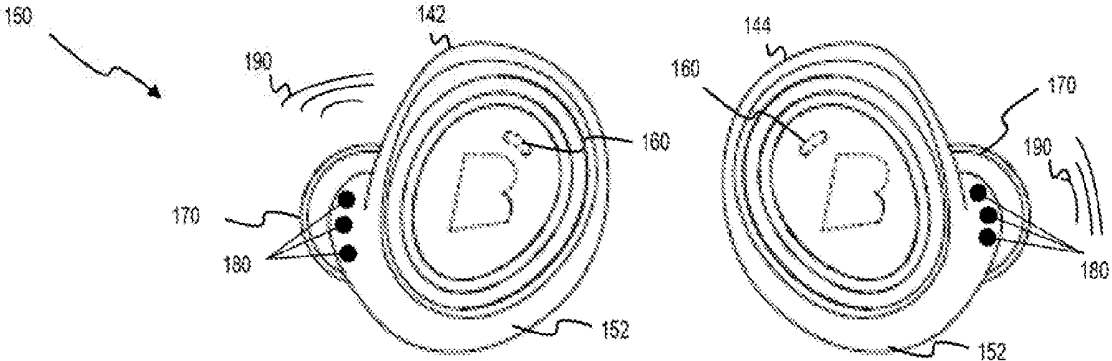


FIG. 2

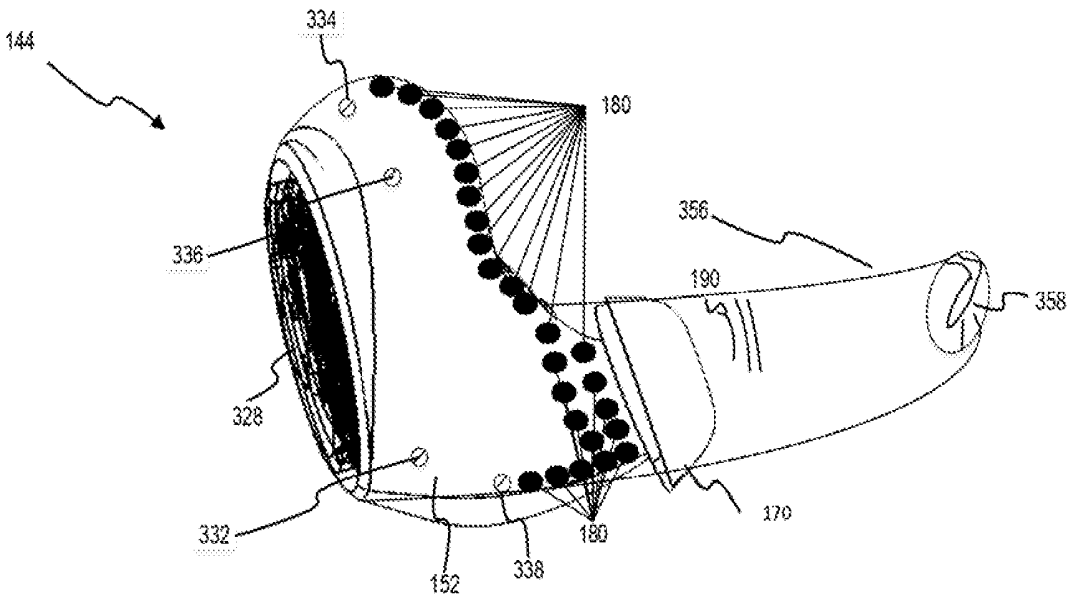


FIG. 3

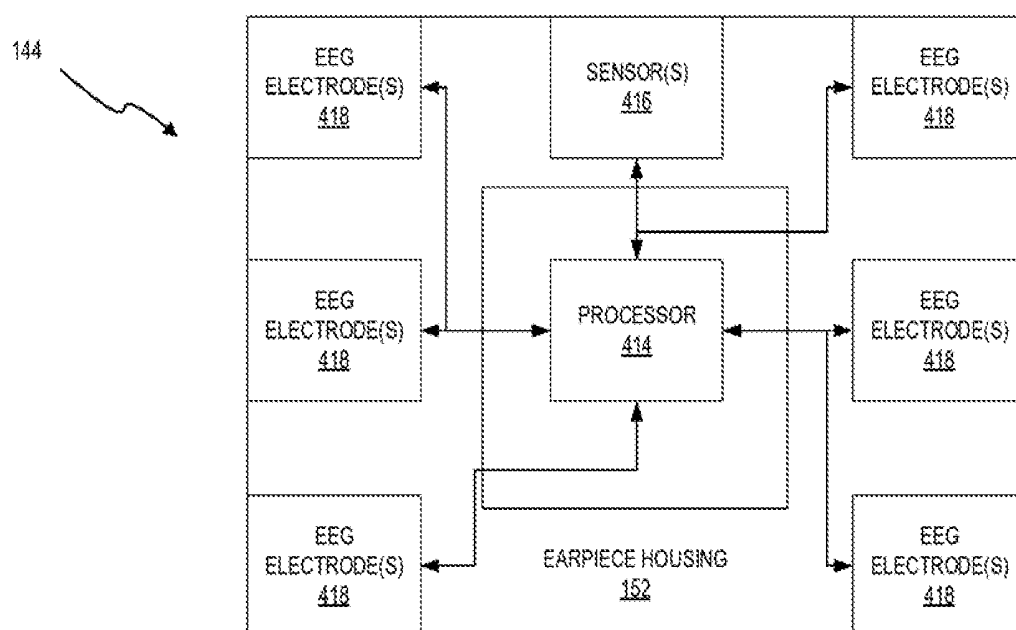


FIG. 4

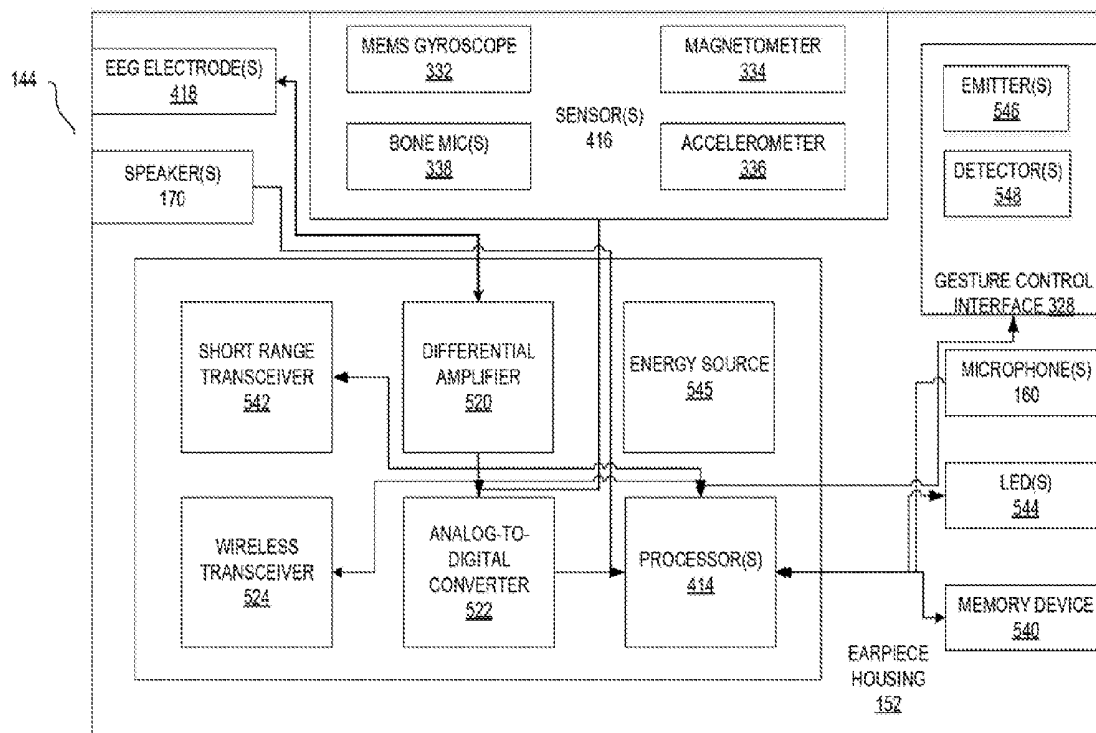


FIG. 5

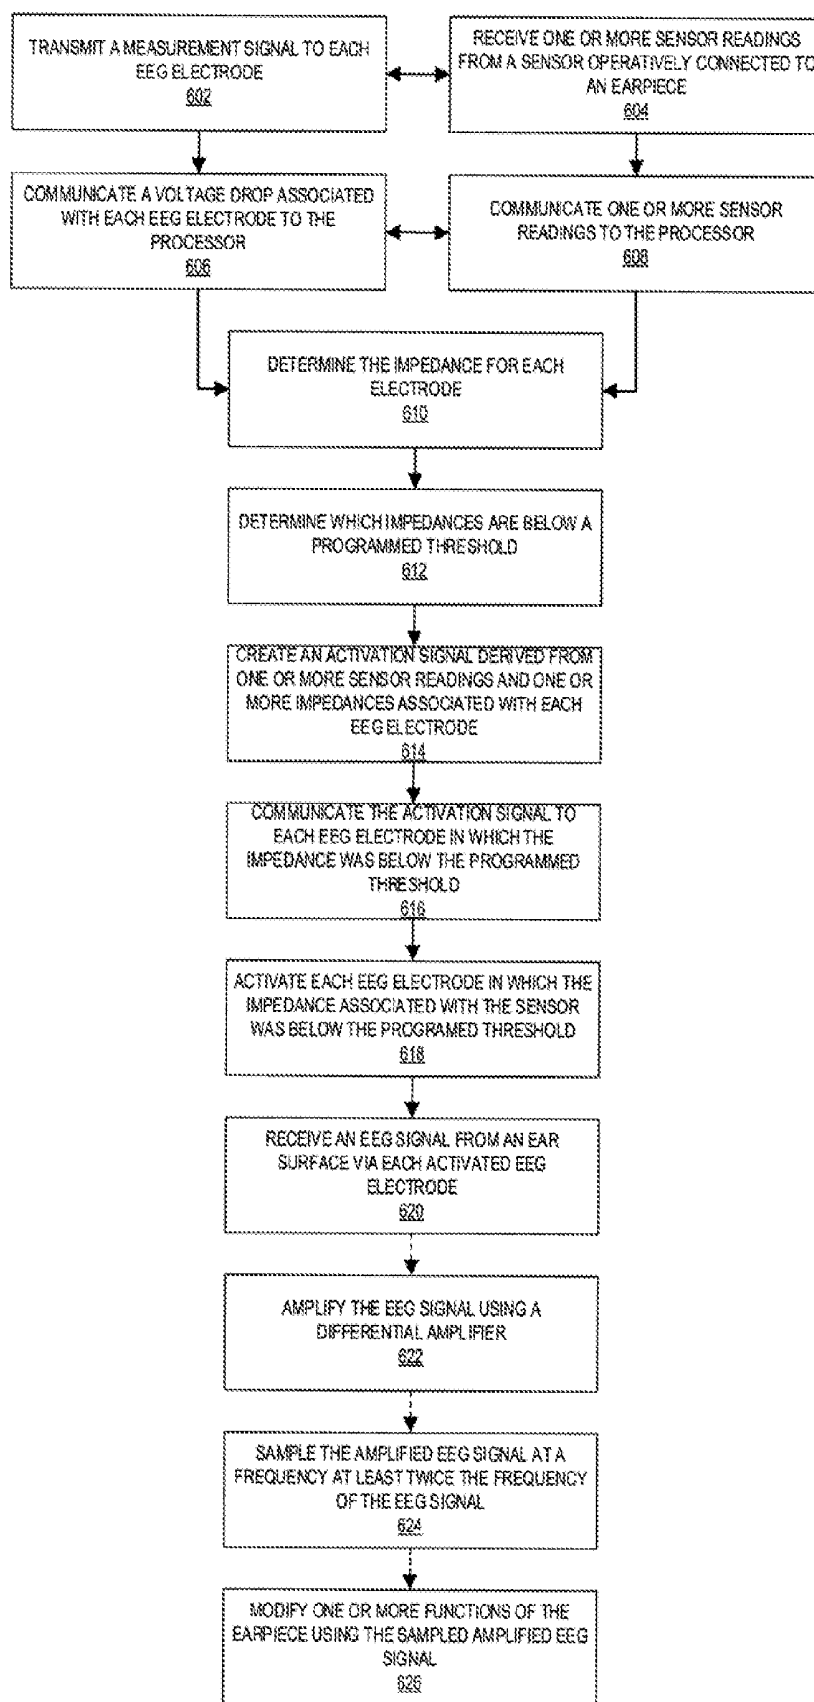


FIG. 6

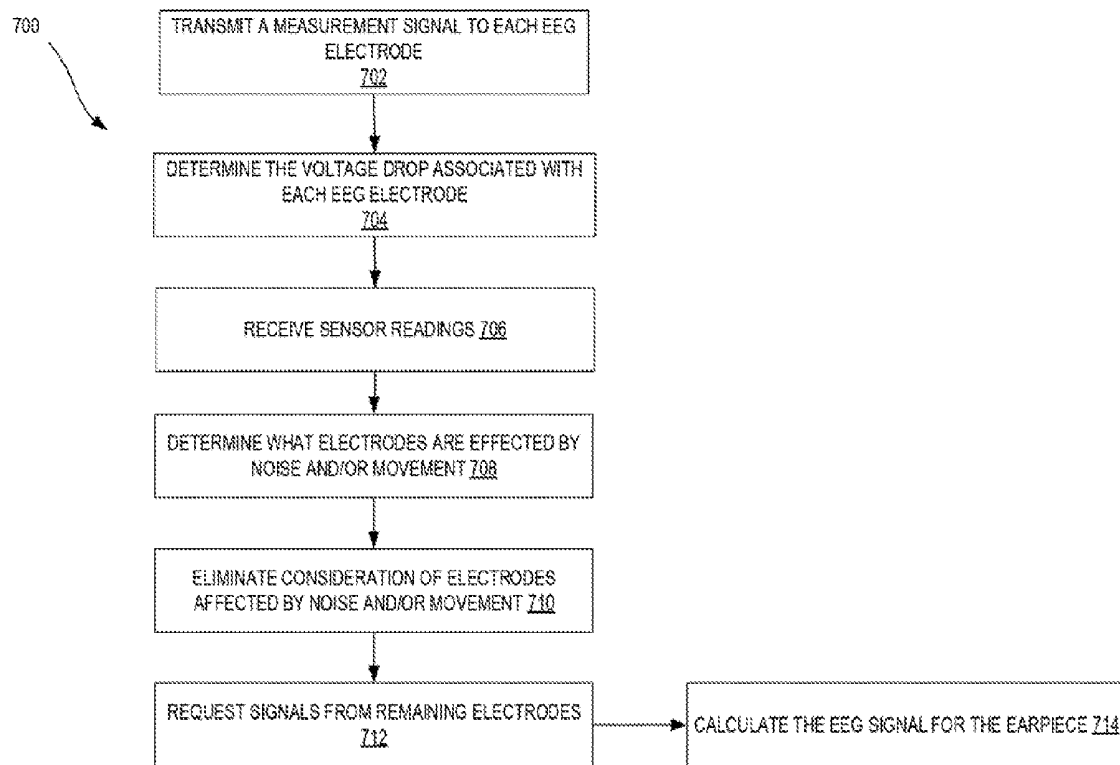


FIG. 7

EARPIECE WITH IN-EAR ELECTRODES**PRIORITY STATEMENT**

[0001] This application claims priority to U.S. Provisional Patent Application No. 62/416,537 titled Earpiece with In-Ear Electrodes, filed Nov. 2, 2016, hereby incorporated by reference in its entirety.

FIELD OF THE INVENTION

[0002] The present invention relates to wearable devices. Particularly, the present invention relates to wireless earpieces. More particularly, but not exclusively, the present invention relates to wireless earpieces having electrodes.

BACKGROUND

[0003] There is growing market demand for personal health monitors, for example, for gauging overall health and metabolism of persons during exercise, athletic training, dieting, and physical therapy. Various physiological information, such as electrocardiogram (ECG) information, electroencephalogram (EEG) information, electrooculography (EOG) information, and other forms of physiological electrical activity, may be useful to monitor during physical activity. However, traditional monitors for measuring this type of information may be bulky, rigid, non-portable, and uncomfortable—generally not suitable for use during physical activity.

[0004] Current methods of receiving EEG signals are very cumbersome and indiscreet. In order to get an accurate reading of a user's brain waves, a medical professional or a person trained in electrode placement must place electrodes at certain spots on a user's head in order to obtain a usable reading. Problems with this method include the need for trained personnel to accurately place an electrode, attenuation of the EEG signals due to the skull, and possible infection from the electrode placement. Current research suggests, however, EEG signals may be received using an earpiece with electrodes attached at certain points make contact with an ear surface of the user. Using this method trained personnel are no longer needed and the EEG signal is less attenuated due to electrode placement within the ear canal. However, since the electrodes are so close together, it is difficult to get a good signal due to reduced spatial resolution and high impedances between the EEG electrodes and the skin.

[0005] Therefore, what is needed is a system and method of obtaining a usable EEG signal from a user using an earpiece.

SUMMARY

[0006] Therefore, it is a primary object, feature, or advantage of the present invention to improve over the state of the art.

[0007] In some embodiments, an electronic device for monitoring EEG data, may include one or more of the following features: (a) a housing, (b) a processor disposed within the housing, (c) at least one sensor operatively connected to the processor, (d) at least two EEG electrodes operatively connected to the processor and positioned on the housing for receiving EEG signals from an ear surface, and (e) a plurality of EEG electrodes, wherein the processor measures the impedance of the plurality of EEG electrodes.

[0008] In some embodiments a method of receiving an EEG signal from an ear surface may include one or more of the following steps: (a) transmitting a current to a plurality of EEG electrodes, (b) receiving at least one sensor reading from a sensor operatively connected to the processor, (c) communicating, a voltage drop associated with of the plurality of EEG electrodes to the processor, (d) determining an impedance of each of the plurality of EEG electrodes, (e) determining which of the impedances are below a programmed threshold for each of the plurality of EEG electrodes, (f) transmitting an activation signal to the plurality of EEG electrodes which have an impedance below the programmed threshold, (g) receiving an EEG signal from the plurality of EEG electrodes which have an impedance below the programmed threshold, (h) determining which of the plurality of electrodes do not have a reliable EEG signal based upon the at least one sensor reading, (i) receiving a sensor reading from a plurality of sensors, and (j) providing a reliable EEG signal based upon the EEG signal taken from the plurality of EEG electrodes which have an impedance below the programmed threshold and have the reliable EEG signal based upon the at least one sensor reading.

[0009] In some embodiments a system may include one or more of the following features: (a) a first earpiece having a housing, (b) a processor disposed within the housing, (c) at least one sensor disposed within the housing and operatively connected to the processor, wherein the at least one sensor is configured to sense user data and communicate the user data to the processor, and (d) a plurality of EEG electrodes operatively connected to the processor and positioned on the housing for receiving EEG signals from an ear surface, wherein the processor transmits a current to each of the plurality of EEG electrodes to determine an impedance from each of the plurality of EEG electrodes and subsequently communicates an activation signal to selected EEG electrodes if the impedance associated with the EEG electrode is below a programmed threshold.

[0010] One or more of these and/or other objects, features, or advantages of the present invention will become apparent from the specification and claims follow. No single embodiment need provide each and every object, feature, or advantage. Different embodiments may have different objects, features, or advantages. Therefore, the present invention is not to be limited to or by an objects, features, or advantages stated herein.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] Illustrated embodiments of the disclosure are described in detail below with reference to the attached drawing figures, which are incorporated by reference herein.

[0012] FIG. 1 is a pictorial representation of a smart case and wireless earpieces in accordance with an illustrative embodiment;

[0013] FIG. 2 is a pictorial representation of wireless earpieces having electrodes in accordance with an illustrative embodiment;

[0014] FIG. 3 is a pictorial representation of an earpiece with a plurality of EEG electrodes placed within a user's ear in accordance with an illustrative embodiment;

[0015] FIG. 4 is a block diagram of a wireless earpiece in accordance with an illustrative embodiment;

[0016] FIG. 5 is a block diagram of a wireless earpiece in accordance with an illustrative embodiment;

[0017] FIG. 6 is a block diagram for modifying a function of an earpiece using an EEG signal in accordance with an illustrative embodiment; and

[0018] FIG. 7 is a block diagram for providing a large electrode in accordance with an illustrative embodiment.

DETAILED DESCRIPTION

[0019] The following discussion is presented to enable a person skilled in the art to make and use the present teachings. Various modifications to the illustrated embodiments will be readily apparent to those skilled in the art, and the generic principles herein may be applied to other embodiments and applications without departing from the present teachings. Thus, the present teachings are not intended to be limited to embodiments shown, but are to be accorded the widest scope consistent with the principles and features disclosed herein. The following detailed description is to be read with reference to the figures, in which like elements in different figures have like reference numerals. The figures, which are not necessarily to scale, depict selected embodiments and are not intended to limit the scope of the present teachings. Skilled artisans will recognize the examples provided herein have many useful alternatives and fall within the scope of the present teachings. While embodiments of the present invention are discussed in terms of wearable devices and obtaining a useful signal from an onboard electrode, it is fully contemplated embodiments of the present invention could be used in most any electronic communications device without departing from the spirit of the invention.

[0020] While the present invention will be discussed, shown and illustrated as embodiments for a smart case and wireless earpieces, the inventor(s) fully contemplate embodiments of the present invention can be extended to all electronics and particularly to all mobile electronic devices and more particularly to all mobile electronic devices having or needing a connection to another electronic device in order to charge and/or communicate data. Examples of these devices include mobile phones, fitness monitoring devices, such as watches, eyewear, belts, etc. and implantable devices. Embodiments of the present invention can also be extended to electronic medical device applications as well including any devices which monitor and/or record physiological data and then download or report this data to a host device. The present invention could also be extended to other form of earpieces such as custom mold earpieces and/or viscoelastic earplugs or earpieces. The inventor(s) further acknowledge there are many more electronic devices the present invention could be applied towards, which have not been named in the paragraph above. Therefore, the illustrative embodiments listed below in no way should be interpreted to limit the scope of embodiments of the present invention.

[0021] Embodiments of the present invention, discussed in great detail below, show many aspects of the current invention. An embodiment of the present invention details determining ideal locations and/or specific electrode(s) from which to receive an EEG signal. Another embodiment of the present invention details, being able to continuously determine ideal locations and or specific electrode(s) to receive an EEG signal. Another embodiment of the present invention details using sensor readings to ascertain ideal locations and/or electrode(s) to receive an EEG signal. Another embodiment of the present invention details using a differ-

ential amplifier in order to reduce common mode noise (when transmitting data, wires can act as antennas pick up a signal “noise” and this is undesirable). Another embodiment of the present invention details modifying one or more functions of a wireless earpiece based upon interpreted brain wave input.

[0022] In another embodiment, a wireless earpiece has a housing, a processor disposed within the housing, one or more sensor(s) operatively connected to the housing and the processor, and one or more EEG electrode(s) operatively connected to the processor and positioned on the housing for receiving EEG signals from an ear surface. Two or more of the EEG electrode(s) are positioned to contact an outer surface of an ear and to contact an inner surface of an ear canal.

[0023] One or more of the following features may be included in embodiments of the present invention. One or more of the sensor(s) may comprise an MEMS gyroscope (vibrating structure microelectromechanical systems), an electronic magnetometer (an instrument measuring magnetism—either the magnetization of a magnetic material like a ferromagnet, or the direction, strength, or relative change of a magnetic field at a particular location), or an electronic accelerometer (a device measuring acceleration). A differential amplifier (a device which amplifies the difference between two or more signals) may be disposed within the housing and operatively connected to each EEG electrode and the processor. The differential amplifier may further comprise at least one analog filter. An analog-to-digital converter may be disposed within the housing and operatively connected to the processor and the differential amplifier.

[0024] In another embodiment, a method of receiving an EEG signal from an ear surface using an earpiece is discussed in great detail below. The method includes transmitting, via a processor, a current to each EEG electrode and the processor receiving one or more sensor readings from a sensor operatively connected to the earpiece. Based upon this received sensor data, certain EEG electrodes may not be used to obtain data based upon a certain activity the user is performing which may make certain EEG electrodes unreliable or the data from them faulty. A voltage drop occurs at each EEG electrode based upon the current sent to the EEG electrode by the processor, and the processor obtains and records this voltage drop. From this voltage drop, the processor can calculate an impedance of each EEG electrode and determine which impedances are below a programmed threshold. The programmed threshold being an impedance below a certain level in which reliable data can be obtained from the EEG electrode. The processor sends an activation signal to the EEG electrodes based upon both the sensor readings and the impedances for each EEG electrode. The processor then receiving back a reliable EEG signal

[0025] One or more of the following features may be included in embodiments of the present invention. One or more EEG electrodes may be positioned on a surface within an ear canal. Specifically, the EEG electrodes may be positioned on a concha, fossa, antihelix, antihelical fold or the scapha. The EEG signal may be further amplified by a differential amplifier to create an amplified EEG signal. The amplified EEG signal may be further filtered by the differential amplifier to create a filter amplified EEG signal. The filter amplified EEG signal may be sampled with an analog-to-digital converter to create a sampled filtered amplified

EEG signal. The sampled filtered amplified EEG signal may be used to modify one or more functions of the earpiece.

[0026] One or more of the following features may be included to the embodiments listed below. User data may comprise motion data, which would be detected by sensors. The differential amplifier amplifies the difference between the voltages of two separate EEG signals to reduce common mode noise in the two separate EEG signals to create an amplified EEG signal. The differential amplifier may have a high pass filter and a low pass filter. An analog-to-digital converter may be disposed within the housing operatively connected to the processor and the differential amplifier, and the analog-to-digital converter samples the amplified EEG signal and communicates a sampled amplified EEG signal to the processor. The amplified EEG signal may be sampled at a rate at the Nyquist rate.

[0027] With reference to FIGS. 1 & 2, these figures show a pictorial representation of a smart case 102 and wireless earpieces 142, 144 in accordance with an illustrative embodiment. Throughout the invention disclosure reference will be sometimes made to only one of wireless earpieces 142, 144; however, it is to be understood any discussion of one wireless earpiece 142 can be applied to the other wireless earpiece 144 unless clearly pointed out in an embodiment of the present invention. The smart case 102 may be an open or enclosed case for securing, charging and managing the wireless earpieces 142, 144. The wireless earpieces 142, 144 may be referred to as a pair (wireless earpieces) or singularly (wireless earpiece). The description may also refer to components and functionality of each of the wireless earpieces 142, 144 collectively or individually. In one embodiment, the wireless earpieces 142, 144 include a set of left and right ear pieces configured to fit into a user's ears. The wireless earpieces 142, 144 may be configured to play music or audio, receive and make phone calls or other communications, determine ambient environmental readings (e.g., temperature, altitude, location, speed, heading, etc.), read user biometrics and actions (e.g., heart rate, motion, sleeping, etc.).

[0028] In another embodiment, the wireless earpieces 142, 144 may represent wireless devices, which may be ingested or implanted into a user. For example, the smart case 102 may be configured to work with endoscopic pills, pacemakers, tracking devices, contact lenses, oral implants, bone implants, artificial organs or so forth. The smart case 102 may act as a logging tool for receiving information, data, or measurements made by the wireless devices. For example, the smart case 102 may be attached to a belt (e.g., belt clip, strap, etc.) or worn by the user to download data from the wireless device(s) in real-time. As a result, the smart case 102 may be utilized to store, charge, and synchronize data for the wireless earpieces 142, 144 in any number of embodiments.

[0029] The smart case 102 encloses a battery, and various other circuitry. The battery of the smart case 102 may be utilized to charge the wireless earpieces 142, 144 through direct contact or wirelessly. As a result, the smart case 102 may act as a custom charger for ensuring the proper power management and functionality of the wireless earpieces 142, 144. For example, the battery of the smart case 102 may be utilized to charge the wireless earpieces 142, 144 any number of times before the smart case 102 and corresponding battery may require charging. In one embodiment, the smart case 102 may include one or more solar panels, or

surfaces configured to charge the smart case 102 utilizing ambient or direct sunlight. The smart case 102 ensures the duty cycle of the wireless earpieces 142, 144 are maximized by properly maintaining power levels. For example, the smart case 102 may keep the wireless earpieces 142, 144 fully charged during a time period of inactivity, such as before being purchased (e.g., on a shelf or as part of inventory) or one purchased.

[0030] In one embodiment, the smart case 102 include a housing 103. The housing 103 is a support structure for the components of the smart case 102 and may be formed of a rigid plastic, polymer, or other similar material. However, any number of other suitable materials, such as composites, rubber, wood, metal, or so forth, may be utilized. The housing 103 defines receptacles 104, 106 are configured to receive the wireless earpieces 142, 144, respectively. In one embodiment, the receptacles 104, 106 are shaped to fit the external size, shape, and configuration of the wireless earpieces 142, 144.

[0031] As a result, an interface fit may secure the wireless earpieces 142, 144 within the housing 103 while the smart case 102 is being moved or otherwise utilized. In one embodiment, the smart case 102 may include a hinged, magnetic, sleeve, or snap on lid or cover may cover the wireless earpieces 142, 144 when positioned within the receptacles 104, 106 of the smart case 102. For example, the cover may make the smart case 102 waterproof and further secure the wireless earpieces 142, 144. In another embodiment, the smart case 102 may also include a removable cover (e.g., neoprene, zip up, snapping, etc.). In yet another embodiment, the cover encases a screen, such as a touch screen. The screen may roll, bend or adapt to the shape and configuration of the smart case 102. The touch screen may also be transparent. In one embodiment, the smart case 102 may be hermetically sealed and waterproof when the cover is secured. The smart case 102 may also include one or more speakers for playing music, indicating a status of the wireless earpieces 142, 144 or otherwise communicating information to the user. Likewise, actuators may be utilized to provide tactile feedback to the user. The case may have at least one button or other manual input. The button may be touch sensitive, lighted, or mechanical. There also may be a light such as a LED in location.

[0032] The smart case includes interfaces 108, 110 within the receptacles 104, 106. The interfaces 108, 110 are hardware interfaces for electrically connecting the wireless earpieces 142, 144 to the smart case 102. The interfaces 108, 110 may include any number of contact points, busses, wires, or other physical connectors for interfacing the wireless earpieces 142, 144, with the smart case 102. The interfaces 108, 110 may alternatively include inductive chargers for charging the wireless earpieces 142, 144. In another embodiment, the interfaces 108, 110 may represent male or alternatively female) connectors for interfacing with the wireless earpieces 142, 144, such as micro-USB, or other developing miniature external connectors. The interfaces 108, 110 may be utilized to charge the wireless earpieces 142, 144. The interfaces 108, 110 may also be utilized to synchronize data between the wireless earpieces 142, 144. As previously noted, wireless charging is also contemplated utilizing an inductive charger integrated in the smart case 102 or other charging devices compatible with the wireless earpieces 142, 144.

[0033] In another embodiment, the wireless earpieces 142, 144 and the smart case 102 may interact to control a device reset function. For example, the wireless earpieces 142, 144 may synchronize captured data with the smart case 102 before moving to a low power mode in anticipation of being charged. A switch may be activated mechanically, magnetically, inductively, electrically, or wirelessly in anticipation of being charged. For example, the smart case 102 may lower the power mode of the wireless earpieces 142, 144 in response to contacts of the wireless earpieces 142, 144 coming in contact with the interfaces 108, 110. For example, the smart case 102 may detect a change in resistance when the wireless earpieces 142, 144 are electrically connected to the interfaces 108, 110 to perform the processes herein described. In another embodiment, each of the interfaces 108, 110 may include a switch activated when one of the wireless earpieces 142, 144 is positioned within the receptacles. The interfaces 108, 110 may also include a pin when depressed or contacted by one of the wireless earpieces 142, 144 turns off the wireless earpieces 142, 144. Control of the wireless earpieces 142, 144 may be controlled by the smart case 102, the wireless earpieces 142, 144 themselves, or may be shared between devices.

[0034] In one embodiment, the interfaces, 108, 110 or another portion of the smart case 102 as well as the wireless earpieces 142, 144 may include a near field communication (NFC) chip for communications. For example, NFCs may determine the wireless earpieces 142, 144 are proximate the smart case 102 for performing power management. NFC may also be utilized to identify the wireless earpieces 142, 144 associated with a particular smart case 102. In other embodiments, different communications protocols (e.g., Bluetooth, Wi-Fi, etc.), standards, or passive readers radio frequency identification tags, etc.) may be utilized for the wireless earpieces 142, 144 to communicate with the smart case 102. For example, the smart case 102 may power off the wireless earpieces 142, 144 in response to being placed in or near the smart case 102. The smart case 102 may be programmed with a threshold distance (e.g., 10 cm, 1 foot, etc.) to determine when the wireless earpieces 142, 144 are proximate the smart case 102 or may rely on the inherent maximum communications distances of the wireless standard or protocol being utilized (e.g., NFC, RFID, etc.).

[0035] With reference to FIG. 2, a pair of earpieces 150 which includes a left earpiece 142 and a right earpiece 144. The wireless earpieces 142, 144 have a housing 152. The left earpiece 142 and the right earpiece 144 may be configured to substantially encompass an outer opening of a user's ear canal (see FIG. 3) and/or fit within the user's ear canal in order to maximize the amount of space available to place an EEG electrode 180. The housing 152 may be composed of metallic material, plastic material, or any material with substantial resistance to shear and tensile forces and may also be configured to be soundproof or waterproof. EEG electrodes 180 may be located anywhere on housing 152 conducive to obtaining a EEG signal from an ear surface and more EEG electrodes than the three shown on each earpiece may be found on housing 152. A microphone 160 is shown and may be located anywhere on the wireless earpieces 142, 144 and each microphone 160 may be configured to receive one or more voice commands. Speaker 170 may be configured to communicate audio sound 190. The audio sound 190 may be communicated to the user or a third party and speaker 170 may also be configured too short out if the

sound intensity of the audio sound 190 is too high or otherwise surpasses a given threshold, which may be pre-programmed into a processor 414 (FIG. 4), a memory device 540 (FIG. 5), or set by the user or a third party.

[0036] FIG. 3 illustrates a side view of the earpiece 144 and its relationship to a user's ear. The earpiece 144 may be configured to minimize the amount of external sound reaching the user's ear canal 356 and/or to facilitate the transmission of the audio sound 190 from the speaker 170 to a user's tympanic membrane 358. The earpiece 144 may also have a plurality of EEG electrodes 180 positioned throughout the outside of the earpiece 144. The EEG electrodes 180 may be of any size or shape capable of receiving an EEG signal and may be positioned anywhere along the housing 152 conducive to receiving an EEG signal. A gesture control interface 328 is shown on the exterior of the earpiece 144. The gesture control interface 328 may provide for gesture control by the user or a third party such as by tapping or swiping across the gesture control interface 328, tapping or swiping across another portion of the earpiece 144, providing a gesture not involving the touching of the gesture control interface 328 or another part of the earpiece 144, or through the use of an instrument configured to interact with the gesture control interface 328. A MEMS gyroscope 332, an electronic magnetometer 334, an electronic accelerometer 336 and a bone conduction microphone 338 are also shown on the exterior of the housing 152. The MEMS gyroscope 332 may be configured to sense rotational movement of the user's head and communicate the data to a processor, wherein the data may be used in removing any artifacts found in an EEG signal. The electronic magnetometer 334 may be configured to sense a direction the user is facing and communicate the data to the processor, which, like the MEMS gyroscope 332, may be used in removing artifacts from one or more EEG signals. The electronic accelerometer 336 may be configured to sense the force of the user's head when receiving EEG signals, which may be used by the processor in removing sound artifacts related to head movement. The bone conduction microphone 338 may be configured to receive body sounds from the user, which may be used by the processor or the differential amplifier 520 (FIG. 5) in filtering out unwanted sounds or noise from an EEG signal. The speaker 170 is also shown and may communicate the audio sound 190 in any manner conducive to facilitating the audio sound 190 to the user's tympanic membrane 358.

[0037] FIG. 4 shows a wireless earpiece 144 having an housing 152, a processor 414 disposed within the housing 152, at least one sensor 416 operatively connected to the earpiece housing 152 and the processor 414, and a plurality of EEG electrodes 418 operatively connected to the housing 152 and the processor 414, wherein at least one EEG electrode 418 is positioned to contact an outer surface of an ear canal and at least one EEG electrode 418 is positioned to contact an inner surface of an ear canal 356. The housing 152 may be made of any material suitable to hold each component of the earpiece 142, 144 together, which may include metallic, plastic, one or more polymers, or a combination thereof, and the housing 152 may be able to withstand a drop of more than three meters without breaking or having a component become loose or broken. The processor 414 may be positioned at any location within the housing 152 which is conducive to receiving or processing EEG signals and sensor readings and may have one or more

additional electrical components operatively connected to processor 414 at any given time. One or more sensors 416 are operatively connected to the housing 152 and the processor 414 and positioned to sense user data from the user. One or more sensors 416 may comprise a MEMS gyroscope 332, an electric accelerometer 336, a bone conduction microphone 338, or any type of sensor conducive to helping the processor 414 read an EEG signal. As discussed briefly, the processor 414 can use the data from the sensors 416 in several ways. The processor 414 can receive data from the sensors 416, which would cause processor 414 to reject any input from certain electrodes 418 (i.e., certain movement or noise). The processor can also use the data from the sensors 416 to perform filtering of the electrode signal to eliminate any distortion or noise on the electrode signal, thus providing a better electrode signal. This decision process could be programmed into the processor based upon set limits or tolerances based on signals coming from each of the sensors or for the totality of the sensors.

[0038] For example, a MEMS gyroscope 332 may produce one or more currents due to one or more vibrating masses in response to a user head movement (which causes noise to appear on a EEG signal) in two or three axes via the Coriolis effect, which may be communicated to the processor 414 for determination of a head position. An electronic accelerometer 336 may produce a voltage in response to a user head movement (which causes noise to appear on a EEG signal) which causes a capacitance differential between two charged microstructures due to the user's head movement, which may be communicated to the processor 414 for determination of a head acceleration. Or a bone conduction microphone 338 may measure sounds from the body and communicate them to the processor 414, which may be used to improve the signal quality of one or more EEG signals.

[0039] A plurality of EEG electrodes 418 are operatively connected to the housing 152 and the processor 414, wherein at least one EEG electrode 418 is positioned to contact an outer surface of an ear surface and at least one EEG electrode 418 is positioned to contact an ear canal surface. The EEG electrodes 418 may have an outer surface composed of silver chloride to reduce the impedance between the electrode and the skin, and a conductive gel may be applied to the EEG electrodes 418 if necessary. An EEG electrode 418 positioned on either the outer or inner surface of the ear may act as a reference point to measure one or more EEG signals, and in some preferred embodiments a voltage of a single EEG signal is measured at two different electrodes relative to a reference electrode in order to improve signal quality by allowing a differential amplifier to remove any common mode gain present in both signals. An electronic filter may also be present to filter out any noise, usually in the 50-60 Hertz range, caused by consumer electrical appliances or gadgets or poor connections between the EEG electrodes 418 and one or more ear surfaces.

[0040] FIG. 5 is a block diagram of a system of an earpiece 144 comprising an housing 152, a processor 414 operatively connected to the housing 152, one or more sensors 416, which may comprise a MEMS gyroscope 332, an electronic magnetometer 334, an electric accelerometer 336 or a bone conduction microphone 338, operatively connected to the housing 152 and the processor 414, a plurality of EEG electrodes 418 operatively connected to the housing 152, a differential amplifier 520 operatively connected to the housing 152 and each EEG electrode 418, an analog-to-digital

converter 522 operatively connected to the housing 152, processor 414, and differential amplifier 520, a wireless transceiver 524 operatively connected to the housing 152 and the processor 414, a microphone 160 operatively connected to the housing 152 and the processor 414, a gesture control interface 328 having an emitter 546 and a detector 548 operatively connected to the housing 152 and the processor 414, a speaker 170 operatively connected to the housing 152 and the processor 414, a memory device 540 operatively connected to the housing 152 and the processor 414, a short range transceiver 542 operatively connected to the housing 152 and the processor 414, and LEDs 544 operatively connected to the housing 152 and the processor 414.

[0041] The processor 414 is disposed within the housing 152 and operatively connected to one or more sensors 416, each EEG electrode 418, the analog-to-digital converter 522, the wireless transceiver 524, the gesture control interface 328, the speaker 160, the memory device 540, the transceiver 542, LEDs 544, and an energy source 545. The processor 414 may transmit a measurement signal of a known current to each EEG electrode in order to ascertain an impedance associated with each EEG electrode 418 via a voltage drop across each EEG electrode 418. The processor 414 may perform this continuously or intermittently at a synchronous or asynchronous rate, keeping in mind the measurement signal may interfere with any EEG signal measurements by an EEG electrode 418. Thus these measurement signals will need to be properly timed so as to not add to the problem the present invention aims to solve, namely bad or corrupted EEG data from electrodes 418. The processor 414 may receive digital signals from an EEG electrode 418, which have been sampled by an analog-to-digital converter 522 and amplified and filtered by the differential amplifier 520, in which the digital signals may be used to control the earpiece 144. For example, the EEG electrode 418 may measure changes in a user's mu waves (mu waves, also known as mu rhythms, comb or wicket rhythms, arciform rhythms, or sensorimotor rhythms, are synchronized patterns of electrical activity involving large numbers of neurons, and are most prominent when the body is physically at rest) during the performance of a certain action, such as tapping the tips of their right index finger and thumb together, which may be communicated to the processor 414 and used to turn the earpiece 144 on or off. The processor 414 may process the waves using, for example, a Fourier transform to decompose the EEG signal into its frequency components from an algorithm stored on the memory device 540 or within the processor 414 itself in order to obtain a usable signal. In addition, the processor 414 may receive one or more signals from a wireless transceiver 524, a gestural control interface 328, a memory device 540, LEDs 544, or a short range transceiver 542, which may be used to communicate information from the processor 414 or communicate information to the processor 414 to be used to control, change or otherwise modify one or more functions of the earpiece 144, such as modality.

[0042] One or more sensors 416 may be operatively connected to the housing 152, the processor 414, and the analog-to-digital converter 522 and may sense one or more pieces of user data from the user or a third party. The sensors 416 may sense motion data, biological data, or environmental data which may be used to assist the earpiece 144 in determining whether data from an EEG electrode 418 should

be used or is usable. For example, a MEMS gyroscope 332 installed within the earpiece 144 may produce one or more currents in response to one or more head movements from the user. This gyroscope current or signal could be used by the processor 414 to determine a head position, which may be used in conjunction with the EEG signal to ascertain a user gesture to control one or more functions of the earpiece 10. For example, gyroscope may send a signal indicative of a head nod, which is confirmed by the EEG signal and thus a phone call coming in on earpiece 144 could be answered based upon the head nod. Further, an electronic magnetometer 34 installed within the earpiece 10 may be used to measure the direction the user is facing through one or more voltages proportional to the strength and polarity of the Earth's magnetic field which may be used by the processor 414 in ascertaining a head movement relative to a fixed direction or to refine one or more measurements from other sensors 316. An electronic accelerometer 336 may produce a voltage in response to a user head movement may be used by the processor 414 to determine one or more accelerations related to the user and/or refine one or more EEG signals. And/or a bone conduction microphone 338 may measure sounds from the body and communicate them to the processor 414, which may be used to improve the signal quality of one or more EEG signals. However, the measurements taken by one or more of the aforementioned sensors 316 need not be related to the measurement of an EEG signal at all and can be used independently of the EEG signals as well.

[0043] One or more EEG electrodes 418 may be operatively connected to the housing 152, the processor 414 and the differential amplifier 20 and may be positioned anywhere on the surface of the earpiece 144 conducive for sensing an EEG signal from an ear surface. In at least one embodiment, at least one EEG electrode 418 should be positioned to receive an EEG signal from an outer ear surface and at least one EEG electrode 418 should be positioned to receive an EEG signal from an inner ear surface. One or more EEG electrodes 418 positioned on the outer ear surface may be used as a reference electrode in ascertaining an EEG signal, as more than one reading of an EEG signal should be obtained as the signal-to-noise ratio of an EEG signal is typically quite low. The EEG electrodes 418 will receive a current from the processor 414 in order to ascertain the impedances from a voltage drop associated with each EEG electrode 418 in order to determine which EEG electrodes 418 are good candidates to read an EEG signal from. EEG electrodes 418 having lower impedances obtain better quality signals than EEG electrodes 418 having higher impedances. EEG electrodes 418 having a sufficiently low impedance will receive an activation signal from the processor 414 to receive one or more EEG signals from the user. More than one EEG electrode 418 may receive the activation signal from the processor 414, and the activated EEG electrodes 418 may receive more than one EEG signal and may receive one or more EEG signals continuously or discretely. If the impedance of one of the activated EEG electrodes 418 becomes too high after receiving another activation signal from the processor 414 then processor 414 will stop using this electrode 418 for any further processing until the impedance drops below the predetermined acceptable level.

[0044] A differential amplifier 520 may be operatively connected to the housing 152, the processor 414, and each EEG electrode 418 and may be configured to improve the

signal quality of each EEG signal received from the EEG electrodes 418. The differential amplifier 520 may remove any common mode noise present in the EEG signals received from the EEG electrodes and may also filter out noise received from outside electrical sources such as consumer electronic devices or appliances. For example, the differential amplifier 520 may remove common mode noise by subtracting the sum of all voltages received by the amplifier divided by the number of signals from each signal and subsequently amplifying the difference. The amplification may be anywhere from ten times to over ten thousand times, but too high an amplification may risk damaging one or more components of the earpiece 144. The differential amplifier 520 may remove other noise, such as noise received from consumer electronics in the 50-60 Hertz range and artifacts due to sweating or other user movement through one or more filters within the differential amplifier 520 itself. The filters may be passive high-pass filters, passive low-pass filters, quartz filters, or any other type of filter conducive to removing noise with frequencies.

[0045] An analog-to-digital converter 522 may be operatively connected to the housing 152, the processor 414, and the differential amplifier 520 and may receive EEG signals amplified and/or filtered by the differential amplifier 520, signals amplified and filtered from other components of the earpiece or signals directly from other parts of the earpiece 144. The analog-to-digital converter 522 may be an 8-bit, 12-bit, or higher bit converter, and may sample each signal it receives at a rate twice as high or more than the frequency of the signal in order to preserve the informational quality of the signal. The sampling frequency may be preset or inferred from the received signal. For example, the analog-to-digital converter 522 may receive an EEG signal with a higher than normal frequency due to amplification which may be higher than one-half the sampling rate, in which case the analog-to-digital converter 522 may readjust the sampling frequency upward in order to maintain the informational quality of the signal.

[0046] A wireless transceiver 524 may be operatively connected to the housing 152 and the processor 414 and may be configured to receive one or more signals from and transmit one or more signals to one or more external electronic devices. Any signals received by the wireless transceiver 524 may be transmitted to the processor 414 for further processing. The external electronic devices the wireless transceiver 524 may be configured to receive signals from include Bluetooth devices, mobile devices, desktops, laptops, tablets, modems, routers, communications towers, cameras, watches, third-party earpieces, earpieces, or other electronic devices capable of transmitting or receiving wireless signals. The signals received or communicated by the wireless transceiver 524 may encode for sound, instructions, or information which may be used in conjunction with the operation of the EEG electrodes 418. For example, a researcher performing tests on brain function may wish to have the EEG signals transmitted to a laptop or desktop computer for further study, or a user of the earpiece 144 may wish to download one or more applications related to using brain waves to control the earpiece 144. The wireless transceiver 524 may receive or transmit more than one signal simultaneously.

[0047] One or more microphones 160 may be operatively connected to the housing 152 and the processor 414 and may be configured to receive one or more voice commands which

may be used to control one or more aspects of how the earpiece 144 handles one or more EEG signals. For example, the user may issue a voice command to cease receiving EEG signals, such as, "Stop receiving EEG signals" or something similar which is understood by the earpiece 144. In addition, the user may issue a voice command setting a sampling rate of the analog-to-digital converter 522 or how much a signal should be amplified to the differential amplifier 520. Other voice commands related to earpiece 144 functions but unrelated to EEG signal processing may be issued as well.

[0048] A gesture control interface 328 having at least one emitter 546 and a detector 548 may be operatively connected to the housing 152 and the processor 414 and may be configured to allow the user or a third party to control one or more functions of the earpiece 144. For example, a menu may be prompted through the use of a gesture with the gestural control interface 328, which may allow the user or a third party to set the sampling rate of the analog-to-digital converter 522, adjust the amplification ratio of any signals received by the differential amplifier 520, turn the earpiece on or off, or other functions unrelated to EEG signals such as listen to a song, playlist, newscast, podcast, or a weather report received through the wireless transceiver 524 or stored on the memory device 540, obtain information on the user's current surroundings, or anything else may be of interest to the user or a third party, and the aforementioned list is non-exclusive. The selections may be chosen through the use of one or more additional gestures or through the use of one or more voice commands from the user and/or a third party. The types of gestures may be used with the gesture control interface 328 to control the earpiece 144 include, without limitation, touching, tapping, swiping, use of an instrument, or any combination of the aforementioned gestures. Touching gestures used to control the earpiece 144 may be of any duration and may include the touching of areas not part of the gesture control interface 328. Tapping gestures used to control the earpiece 144 may include one or more taps and need not be brief. Swiping gestures used to control the earpiece 144 may include a single swipe, a swipe changes direction at least once, a swipe with a time delay, a plurality of swipes, or any combination of the aforementioned. An instrument used to control the earpiece 144 may be electronic, biochemical or mechanical, and may interface with the gesture control interface 328 either physically or electromagnetically.

[0049] A speaker 170 may be operatively connected the housing 152 and the processor 414 and may be configured to produce audio output derived from one or more signals from the wireless transceiver 524, the memory device 540, or the short range transceiver 542. The audio output conveyed by the speaker 170 may concern EEG functions or may relate to media or information the user desires to hear. Also, the speaker 170 may short out if the audio output exceeds a certain decibel level, which may be preset or programmed by the user or a third party.

[0050] A memory device 540 may be operatively connected to the housing 152 and the processor 414 and may be configured to store data, files, programs, or other information. The memory device 540 may store programs related to creating a measurement signal to measure an EEG electrode impedance, processing an EEG signal, amplifying an EEG signal, filtering an EEG signal, sampling an EEG signal, modifying an EEG signal, or programs unrelated to the

reception and processing of an EEG signal. The memory device 540 may also contain programs related to storing information encoded in signals received by the wireless transceiver 524, transmitting files and/or communicating information via either the wireless transceiver 524 or the speaker 170 or instructions related to the operation of the earpiece 144. Information encoded in signals received by the wireless transceiver 524 may relate to algorithms for processing, amplifying, or filtering EEG signals or topics unrelated to EEG signal processing such as music, sounds, instrumentals, words, soundtracks, newscasts, podcasts, entertainment shows, commentary, advertisements, instructions, information, or anything else media or information related may be communicated by the speaker 170. Preloaded files may consist of programs required by the earpiece 144 to operate basic functions or troubleshoot one or more components of the earpiece 144 or another program.

[0051] A short range transceiver 542 may be disposed within the housing 152 and may be configured to receive signals from and to transmit signals to another transceiver disposed within another electronic device or even another earpiece. The short range transceiver 542 may receive or transmit more than one signal simultaneously. The short range transceiver 542 may be of any number of types including a near field magnetic induction (NFMI) transceiver as discussed in detail above.

[0052] One or more LEDs 544 may be operatively connected to the housing 152 and the processor 414 and may be configured to emit light in order to convey information to a user concerning the earpiece 144. The LEDs 544 may be located at any position on the earpiece 144 suitable for viewing by the user or a third party and may consist of as few as one diode which may be provided in combination with a light guide. In addition, the LEDs 544 may be discernable by a human eye or an electronic device and need not have a minimum luminescence.

[0053] An energy source 545 may be operatively connected to all of the components within the earpiece 144 and may be configured to store and release charge. The charge may come preinstalled with the earpiece 144, as may be the case with a battery, or the charge may derive from one or more signals from a wearable device, an external electronic device, such as smart case 102, or a combination of the aforementioned, as may be the case with a capacitor receiving one or more signals from a transceiver. The charge stored within the energy source 545 may be used to power one or more components of the earpiece 10. In addition, alternative battery-less power sources, such as thermal harvesting elements which create energy from a voltage generated by temperature differentials between a user's skin and the ambient environment (all of which are operatively connected to one or more earpiece 144), may be used to power the earpiece 144 as well.

[0054] FIG. 5 illustrates a flowchart of one embodiment of receiving an EEG signal from an ear surface using an earpiece 144. First, in step 602, a processor transmits a current to each EEG electrode 148. The current is a known quantity so an impedance may be calculated from the voltage drop across each EEG electrode 148.

[0055] In step 604, one or more sensors 416 receives at least one sensor reading. The sensor readings may be related to environmental data affecting EEG electrode readings or may be related to motion data picked up by a MEMS

gyroscope 332, an electronic magnetometer 334, an electronic accelerometer 336 or a bone conduction microphone 338.

[0056] In step 606, the voltage drop associated with each EEG electrode 148 is communicated to the processor 414. The signal may be converted into a digital form by the analog-to-digital converter 522 before being sent to the processor 414.

[0057] In step 608, the sensor readings from at least one sensor 416 are communicated to the processor 414. The sensor readings may originate from an environmental sensor or a motion sensor such as a MEMS gyroscope 332, an electronic magnetometer 334 or an electronic accelerometer 336 and the sensor readings may be used by the processor 414 or differential amplifier 520 in removing artifacts present in one or more EEG signals.

[0058] In step 610, the processor determines an impedance associated with the voltage drop across each EEG electrode 418. The processor 414 may use an algorithm programmed within the processor or a memory device 540 operatively connected to the processor 414 to determine the impedances, and the processor 414 may perform the determination continuously or discretely as the situation arises.

[0059] In step 612, the processor 414 determines which impedances are below a programmed threshold. Lower impedances allow EEG electrodes to obtain EEG signals with better signal-to-noise ratios. The programmed threshold may be preprogrammed into the processor 414 or programmed by the user or a third party. The programming may be performed by the user or a third party using an external electronic device to transmit the instructions to the earpiece 144, through voice commands or gestures read by the earpiece, or the processor 414 may modify the threshold in response to one or more stimuli such as a sensor reading following instructions in an algorithm stored within the processor 414 or an external memory device operatively connected to the processor 414.

[0060] In step 614, the processor 414 creates an activation signal derived from the sensor readings and the impedances for each sensor 416, wherein the activation signal is only sent to EEG electrodes 418 which have an impedance below the programmed threshold. The processor 414 may use the sensor readings to modify which EEG signals receive the activation signal in order to reduce the level of noise in the received EEG signals and the processor 414 may create other signals as well which may or may not be related to the reception of an EEG signal.

[0061] In step 616, the processor 414 communicates the activation signal to each EEG electrode 418 which had an impedance below the programmed threshold. A few electrodes 418 may receive the activation signal even if none of the EEG electrodes have impedances below the programmed threshold. In this embodiment, the processor 414 communicates the activation signal to the two electrodes which have the smallest impedances.

[0062] In step 618, the activation signal activates the EEG electrodes 418 having impedances below the programmed threshold. Again, the activation signal may be sent to two or more EEG electrodes 418 if none of the electrodes 418 fall below the programmed threshold in order to obtain at least one EEG signal.

[0063] In step 620, the activated EEG electrodes 148 receive an EEG signal. At least two electrodes 148 are

needed in order for the differential amplifier 520 to remove common mode noise (which should have different voltages) between the two signals.

[0064] As a further embodiment, after the EEG electrodes 148 receive one or more EEG signals, the signals, in step 622, are communicated to a differential amplifier 520 for amplification. At least two signals are required in order for the differential amplifier 520 to remove common mode gain, and additional signals may be used. The differential amplifier 520 may amplify the signal from ten to over ten thousand times depending on the voltage of the EEG signal after common mode noise removal or other requirements of the earpiece 144. In addition, one or more filters may be used to remove noise related to consumer electronics or artifacts related to sweating, body secretions, or body movement affecting the EEG signal.

[0065] In step 624, the amplified EEG signal is communicated to an analog-to-digital converter 522 for sampling. The sample rate of the analog-to-digital converter 522 should be at least twice the frequency of the amplified signal frequency in order to maintain the information content of the amplified signal, and the analog-to-digital converter may sample at 8-bits, 12-bits, 16-bits, or higher if desired.

[0066] In step 626, the sampled, amplified EEG signal (modified EEG signal) is communicated to the processor 414. The processor 414 may process the modified EEG signal using one or more algorithms stored within the processor 414 or a memory device 540 operatively connected to the processor 414 in order to determine a command, which may relate to controlling one or more functions of the earpiece 144. For example, the processor 414 may use a Fourier transform on an EEG signal to determine a command from a change in mu wave brain patterns from the user, such as turning the earpiece 144 on or off, selecting the next or last choice present in a listing communicated by the earpiece 144, or another function. The Fourier transform may break the EEG signals down into their frequency components, which are less affected by noise than the time domain EEG signals, making it easier for the processor to ascertain a command from a brain pattern.

[0067] The inventor(s) would like to reemphasize no longer would it be needed to place large and bulky electrodes on a user as is currently performed. The present invention provides for a distributed network of small electrodes 148 (FIG. 3) where the sum of the EEG signals could be summed to for a "virtual" large electrode. This distributed network of electrodes 148 overcomes the need for a trained expert to place the electrodes properly. An algorithm within processor 414 is capable of determining which combinations of electrodes 418 to use based upon the electrical impedance of each electrode 148 (discussed in great detail above). Further, the EEG signals from earpieces 142 and 144 can be compared, contrasted, summated or subtracted to form data input segments from both earpieces 142 and 144.

[0068] With reference to FIGS. 3 and 7, an example and discussion of how to create a "virtual" large EEG electrode will be discussed. In FIG. 3 earpiece 144 is shown with 26 small EEG electrodes 148. In process 700, at step 702 a measurement voltage signal is sent to each EEG electrode 1 through 26. Processor 414 then calculates the voltage drop associated with each EEG electrode 148 at step 704. For purposes of this embodiment, we will say out of electrodes 1-26 only electrodes 1-9, 15-17 and 24-26 had an impedance below an accepted tolerance predetermined level (i.e.,

Z<predetermined threshold). Therefore, electrodes 148 10-14, 18-23 will be ignored and no signal will be requested from these electrodes 148. At step 706, processor 414 receives input from the sensors 416. Next, at step 708, processor 414 makes a determination as to what electrodes can still be used to collect data based upon potential signal noise caused by the environment or the user's movement. For purposes of the current example, we can propose the following:

[0069] Electrodes 1-9 were in an X-plane orientation

[0070] Electrodes 15-17 were in a Y-plane orientation; and

[0071] Electrodes 24-26 were in a Z-plane orientation.

[0072] This information, of course, could be provided by the magnetometer 334 (FIG. 5) discussed in great detail above. If processor 414 also has an input from accelerometer 336 which states at time T, there was motion in the X-plane, then processor 414 would then eliminate electrodes 1-9 from consideration for a representative EEG signal as the possibility for a noisy or bad signal would be too great (step 710). Other examples could include no pulsatile component from a heart rate sensor and no unusual magnetic field which may disqualify a EEG electrode as being sampled. Thus, at step 712, processor 414 would request a signal from electrodes 15-17 and 24-26. The EEG signals from electrodes 15-17 and 24-26 could then be pulled together by an algorithm on processor 414 to provide a compound EEG signal.

[0073] The invention is not to be limited to the particular embodiments described herein. In particular, the invention contemplates numerous variations in earpieces with in-ear electrodes. The foregoing description has been presented for purposes of illustration and description. It is not intended to be an exhaustive list or limit any of the invention to the precise forms disclosed. It is contemplated other alternatives or exemplary aspects are considered included in the invention. The description is merely examples of embodiments, processes or methods of the invention. It is understood any other modifications, substitutions, and/or additions can be made, which are within the intended spirit and scope of the invention.

What is claimed is:

1. A wireless earpiece for monitoring EEG data comprising:

a housing;

a processor disposed within the housing;

at least one sensor operatively connected to the processor;

at least two EEG electrodes operatively connected to the processor and positioned on the housing for receiving EEG signals from an ear surface; and

a plurality of EEG electrodes, wherein the processor measures the impedance of the plurality of EEG electrodes.

2. The wireless earpiece for monitoring EEG data of claim 1, wherein a first EEG electrode is positioned to contact an outer surface of an ear and a second EEG electrode is positioned to contact an inner surface of an ear canal.

3. The wireless earpiece for monitoring EEG data of claim 1, wherein the processor will not accept any inputs from the plurality of EEG electrodes if their impedance is above a predetermined amount.

4. The wireless earpiece for monitoring EEG data of claim 3, wherein the processor accepts an input from the at least one sensor and refuses input from any of the plurality of EEG electrodes if the EEG data is compromised by noise detected by the at least one sensor.

5. The wireless earpiece for monitoring EEG data of claim 4, wherein the processor accepts inputs from the plurality of EEG electrodes, which have not been rejected due to impedance or sensor data and processes the EEG electrode inputs to create a reliable EEG signal.

6. A method of receiving an EEG signal from an ear surface comprising the steps of:

transmitting a current to a plurality of EEG electrodes;

receiving at least one sensor reading from a sensor operatively connected to the processor;

communicating a voltage drop associated with the plurality of EEG electrodes to the processor;

determining an impedance of each of the plurality of EEG electrodes;

determining which of the impedances are below a programmed threshold for each of the plurality of EEG electrodes;

transmitting an activation signal to the plurality of EEG electrodes which have an impedance below the programmed threshold;

receiving an EEG signal from the plurality of EEG electrodes which have an impedance below the programmed threshold.

7. The method of claim 6, further comprising the step of determining which of the plurality of electrodes do not have a reliable EEG signal based upon the at least one sensor reading.

8. The method of claim 7, further comprising the step of receiving a sensor reading from a plurality of sensors.

9. The method of claim 8, wherein the processor is housed within a wireless earpiece.

10. The method of claim 7, further comprising the step of providing a reliable EEG signal based upon the EEG signal taken from the plurality of EEG electrodes which have an impedance below the programmed threshold and have the reliable EEG signal based upon the at least one sensor reading.

11. A system comprising:

a first earpiece having a housing;

a processor disposed within the housing;

at least one sensor disposed within the housing and operatively connected to the processor, wherein the at least one sensor is configured to sense user data and communicate the user data to the processor; and

a plurality of EEG electrodes operatively connected to the processor and positioned on the housing for receiving EEG signals from an ear surface;

wherein the processor transmits a current to each of the plurality of EEG electrodes to determine an impedance from each of the plurality of EEG electrodes and subsequently communicates an activation signal to selected EEG electrodes if the impedance associated with the EEG electrode is below a programmed threshold.

12. The system of claim 11, wherein the processor communicates an activation signal to the selected EEG electrodes if the impedance associated with the EEG electrode is below a programmed threshold and the sensed user data does not indicate the electrode is unreliable.

13. The system of claim 12, wherein the selected EEG electrodes provide an EEG signal to the processor

14. The system of claim 13, wherein the processor processes the EEG signal from the selected EEG electrodes and creates a combined EEG signal.

15. The system of claim **14**, wherein the combined EEG signal is shared with a second earpiece via a transmitter within the first earpiece.

16. The system of claim **15**, wherein a modality of the first or the second earpiece is changed based upon the combined EEG signal.

17. The system of claim **16**, wherein the modality of the first and second earpiece is changed based upon the combined EEG signal and the sensed user data.

* * * * *

专利名称(译)	带耳内电极的耳机		
公开(公告)号	US20180116514A1	公开(公告)日	2018-05-03
申请号	US15/796370	申请日	2017-10-27
申请(专利权)人(译)	BRAGI GMBH		
当前申请(专利权)人(译)	BRAGI GMBH		
[标]发明人	TURNER JAKE BERRY		
发明人	TURNER, JAKE BERRY		
IPC分类号	A61B5/00 A61B5/0478		
CPC分类号	A61B5/0006 A61B5/6817 A61B5/0478 A61B5/0031 A61B5/04012 A61B5/7203 A61B5/0482 G06F19/3418 A61B5/04845 A61B5/048 A61B5/04004 A61B5/0424 G16H40/63		
优先权	62/416537 2016-11-02 US		
其他公开文献	US10617297		
外部链接	Espacenet USPTO		

摘要(译)

在一些实施例中，用于监测EEG数据的电子设备可以包括以下特征中的一个或多个：(a) 外壳，(b) 设置在外壳内的处理器，(c) 至少一个传感器，可操作地连接到处理器，(d) 至少两个EEG电极，可操作地地连接到处理器并位于外壳上用于接收来自耳朵表面的EEG信号，以及(e) 多个EEG电极，其中处理器测量多个EEG电极的阻抗。

