



US 20130289431A1

(19) **United States**

(12) **Patent Application Publication**
Gavish et al.

(10) **Pub. No.: US 2013/0289431 A1**

(43) **Pub. Date: Oct. 31, 2013**

(54) **APPARATUS AND METHOD FOR BREATHING PATTERN DETERMINATION USING A NON-CONTACT MICROPHONE**

Publication Classification

(71) Applicants: **Benjamin Gavish**, Mevaseret Zion (IL);
Yoram Doron, Gedera (IL)

(51) **Int. Cl.**
A61B 5/08 (2006.01)
A61B 7/00 (2006.01)
A61B 5/00 (2006.01)

(72) Inventors: **Benjamin Gavish**, Mevaseret Zion (IL);
Yoram Doron, Gedera (IL)

(52) **U.S. Cl.**
CPC ... *A61B 5/08* (2013.01); *A61B 5/74* (2013.01);
A61B 7/003 (2013.01)

(21) Appl. No.: **13/926,840**

USPC **600/529**

(22) Filed: **Jun. 25, 2013**

(57) **ABSTRACT**

Related U.S. Application Data

(60) Continuation of application No. 11/958,083, filed on Dec. 17, 2007, now Pat. No. 8,485,982, which is a division of application No. 11/572,483, filed on May 31, 2007, now Pat. No. 7,850,619, filed as application No. PCT/IL2005/000778 on Jul. 21, 2005.

A method is provided for analyzing respiration of a subject (20). Using a non-contact microphone (22), a raw signal indicative of air-flow sounds of the respiration is generated. The raw signal is analyzed to determine a first set of one or more parameters of the respiration. An algorithm is applied to the first set of one or more parameters of the respiration. An algorithm is applied to the first set of parameters to derive a second set of one or more estimated parameters of the respiration that are not generally directly measurable in the raw signal. Other embodiments are also described.

(60) Provisional application No. 60/590,508, filed on Jul. 23, 2004.



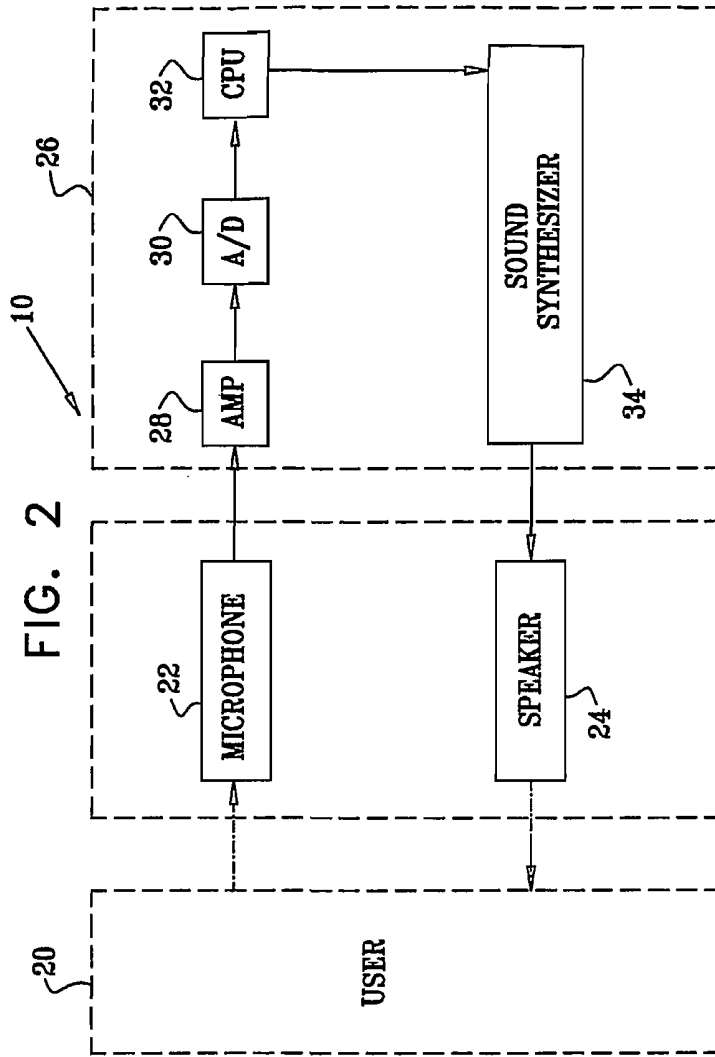
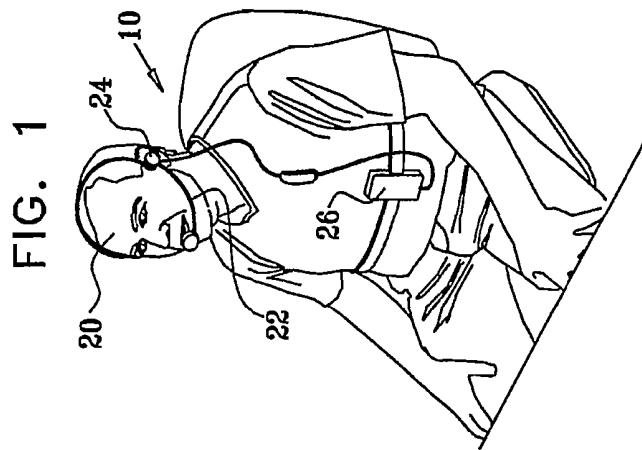


FIG. 3

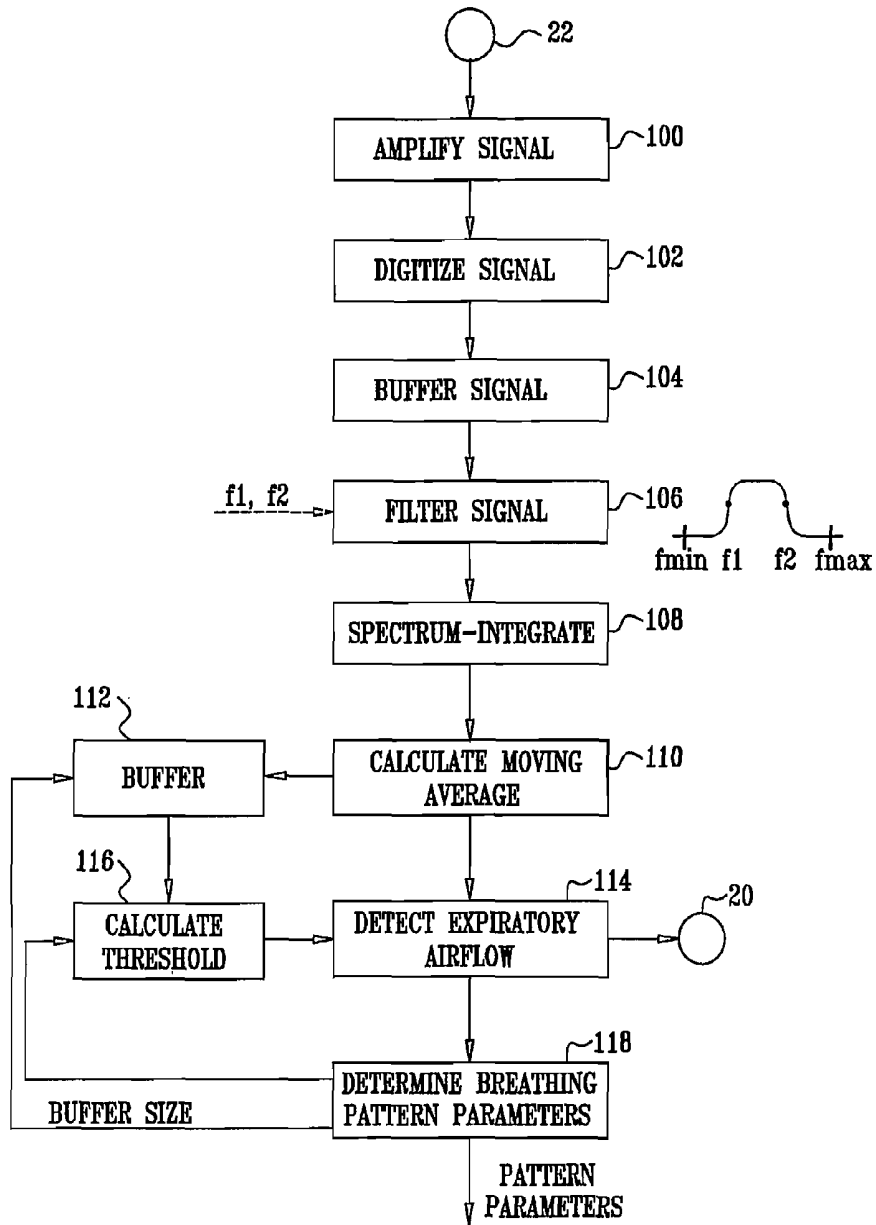


FIG. 4B

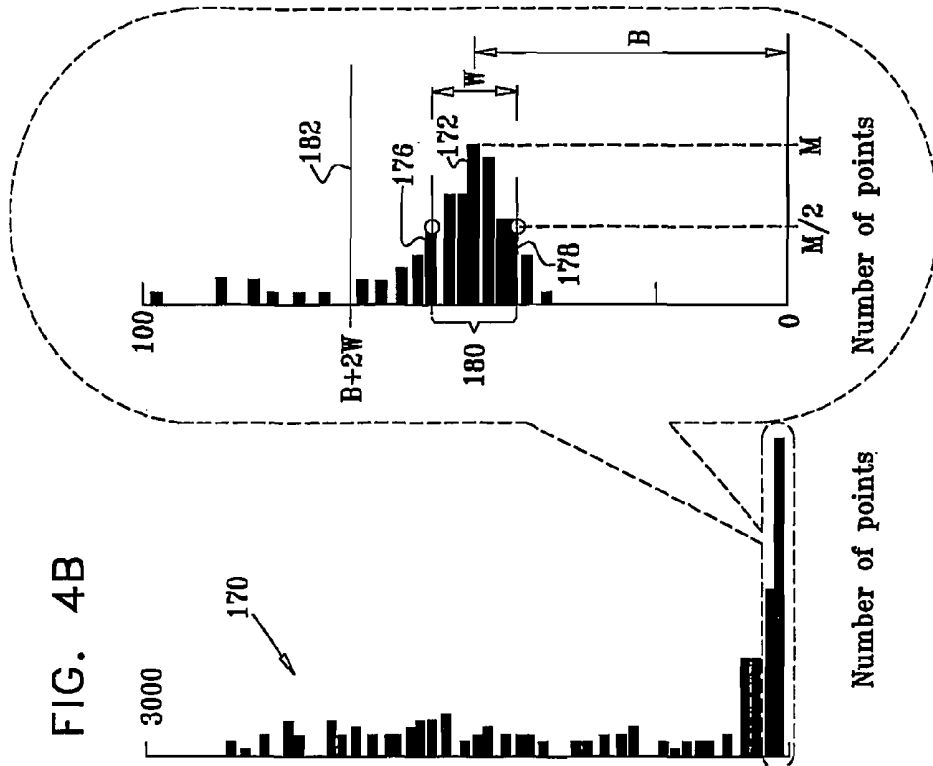
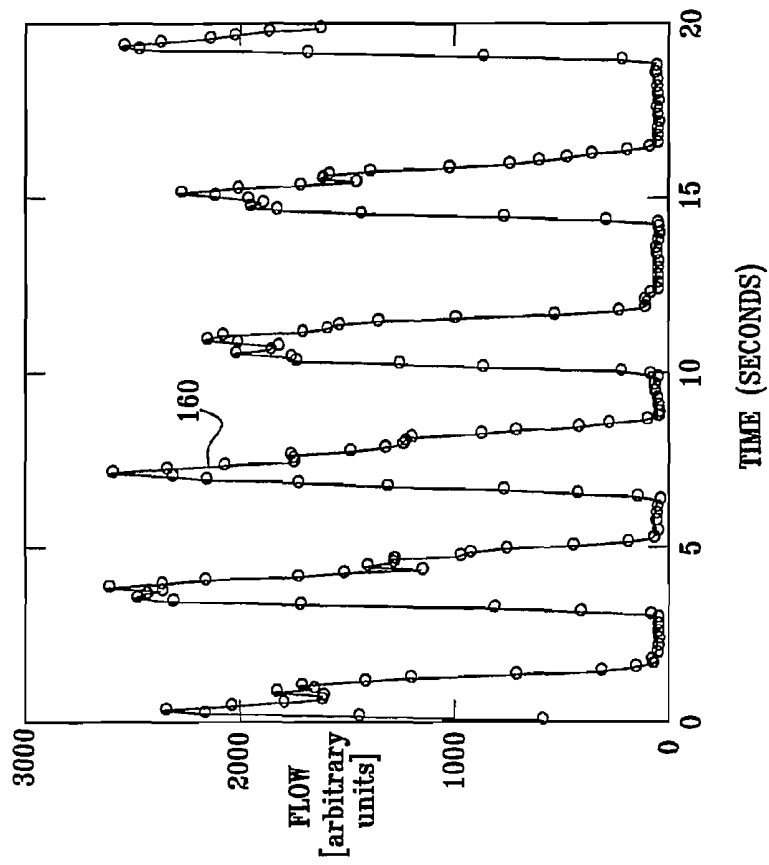


FIG. 4A



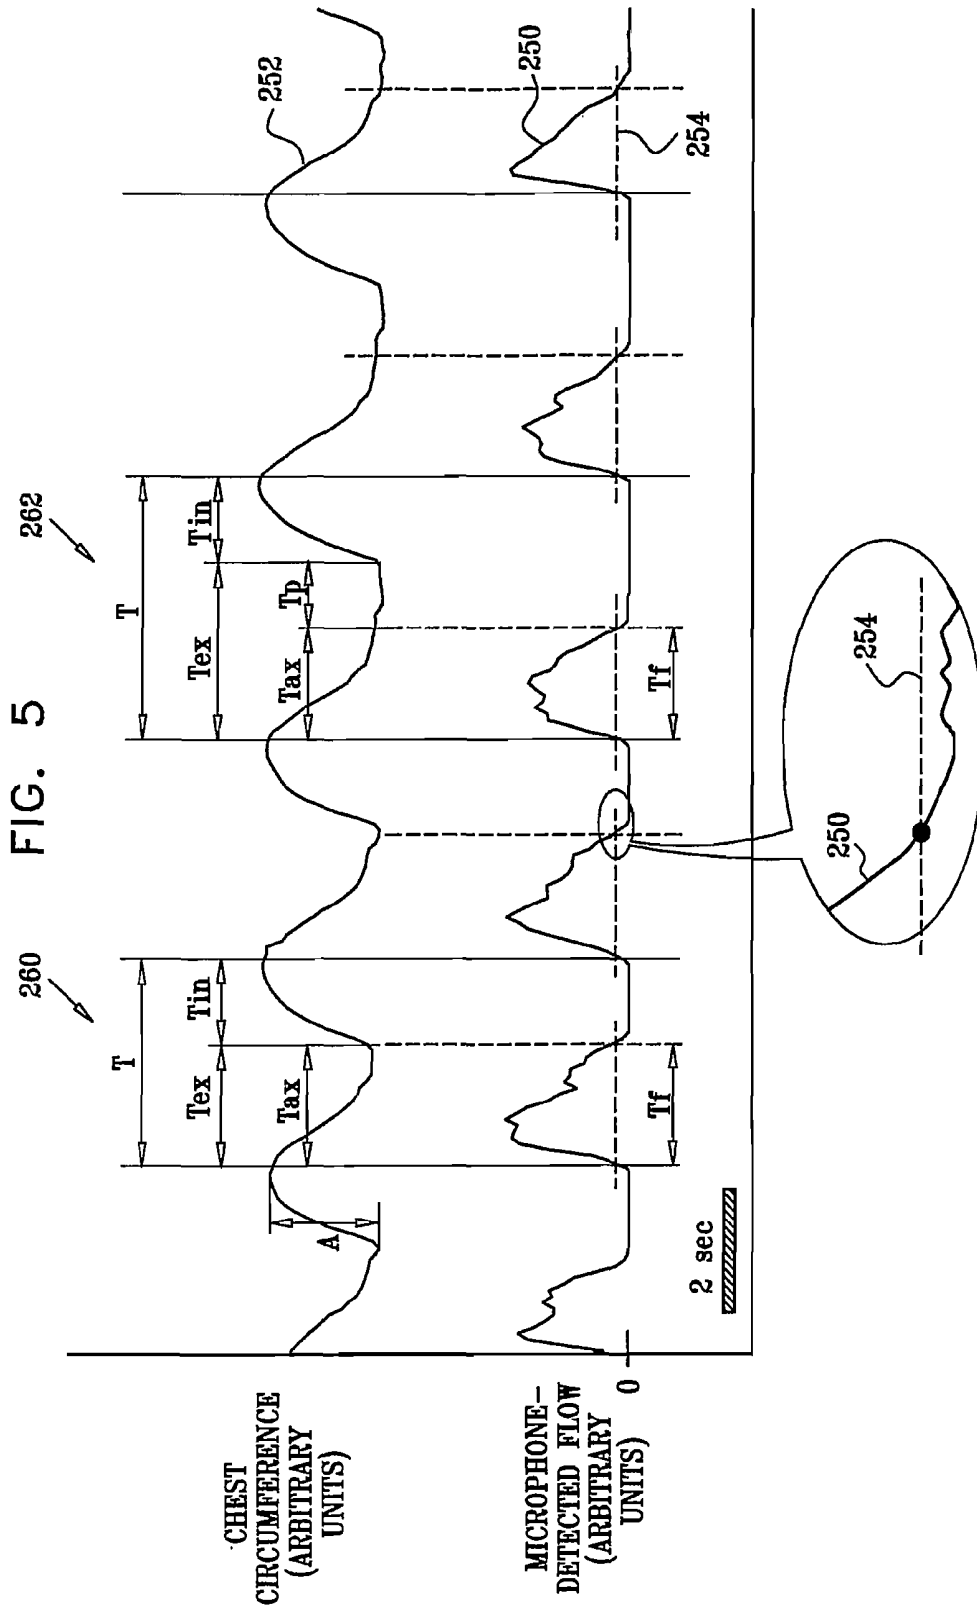


FIG. 6

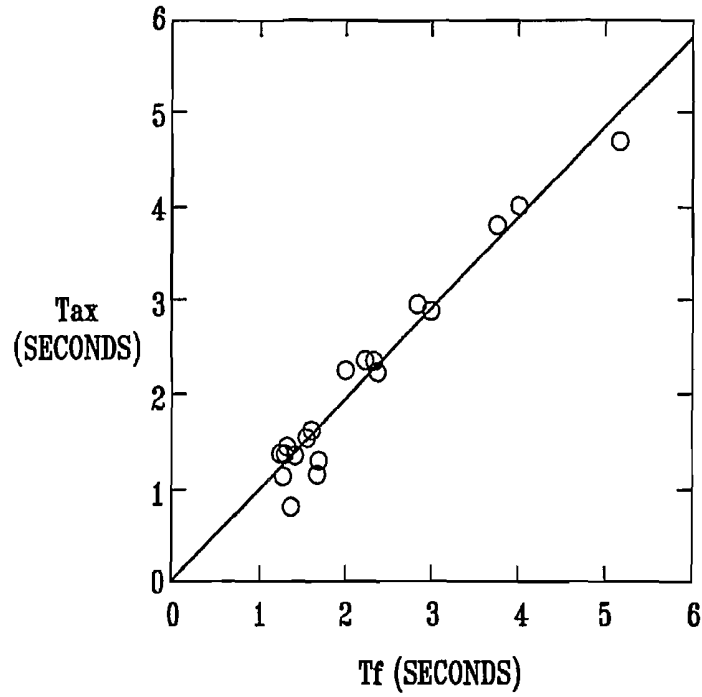


FIG. 7

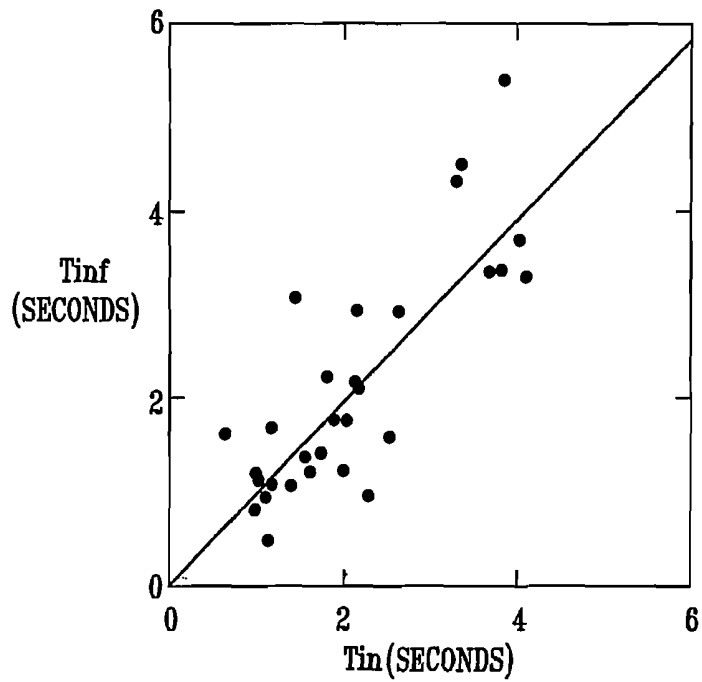


FIG. 8

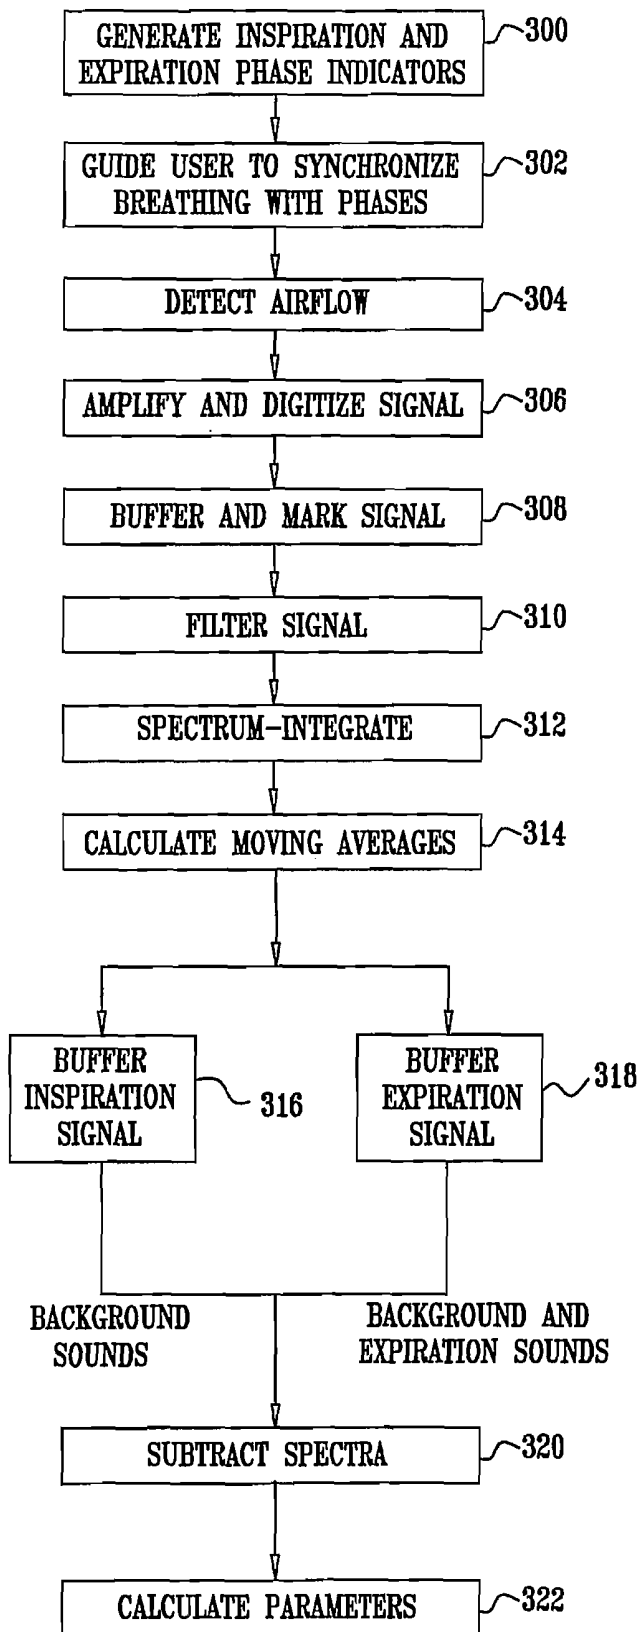


FIG. 9A





FIG. 9B



**APPARATUS AND METHOD FOR
BREATHING PATTERN DETERMINATION
USING A NON-CONTACT MICROPHONE**

FIELD OF THE INVENTION

[0001] The present invention relates generally to medical devices, and specifically to devices that monitor and/or modify biorhythmic activity of a user.

BACKGROUND OF THE INVENTION

[0002] Physical exercise often involves modifying a multi-phase biorhythmic activity, such as breathing. Breathing patterns display irregularities in a number of cardiovascular diseases, including congestive heart failure (CHF), and pulmonary diseases, including chronic obstructive pulmonary disease (COPD). These irregularities are known markers for disease-related mortality and morbidity. Typical irregularities include Cheyne-Stokes breathing (recurrent episodes of central apnea alternating with hyperpnea), amplitude-modulated breathing (periodic breathing) at a rate of about one modulation per minute, repeated sighs, and breathing at random amplitudes and periods. A reduction in breathing pattern irregularity indicates an improvement in health. The impairment of cardiovascular reflexes, which control blood pressure and volume in an attempt to minimize fluctuations in blood supply to organs, is also clinically significant in cardiovascular and psychosomatic diseases.

[0003] U.S. Pat. Nos. 5,076,281, 5,800,337, and 6,090,037 to Gavish, which are incorporated herein by reference, describe methods and devices for modifying biorhythmic activity by measuring one or more variables of a user. The patents describe the generation of a stimulus, which is provided to the user, so as to change the biorhythmic activity of a user in a way that relates in a predetermined way to the monitored biorhythmic activity. The '037 additionally describes a respiration sensor.

[0004] U.S. Pat. No. 5,423,328 to Gavish, which is incorporated herein by reference, describes a stress-detecting device for monitoring respiration, and, in particular, a method for detecting and monitoring circumferential changes in the chest or abdomen of a user resulting from breathing.

[0005] U.S. Pat. No. 6,662,032 to Gavish et al., which is incorporated herein by reference, describes techniques for facilitating improving health of a user, including a first sensor, adapted to measure a first physiological variable, which is indicative of a voluntary action of the user; a second sensor, adapted to measure a second physiological variable, which is not entirely under the direct voluntary control of the user; and circuitry, adapted to receive respective first and second sensor signals from the first and second sensors, and responsive thereto, to generate an output signal which directs the user to modify a parameter of the voluntary action.

[0006] US Patent Application Publication 2004/0116784 to Gavish, which is incorporated herein by reference, describes apparatus including a sensor, adapted to generate a sensor signal indicative of biorhythmic activity of a user of the apparatus, the sensor signal having a first characteristic, indicative of a voluntary action of the user, and a second characteristic, indicative of a benefit-related variable of the user.

[0007] PCT Publication WO 04/014226 to Gavish, which is incorporated herein by reference, describes apparatus including a memory for storing a set of computer instructions, the

memory adapted to have stored therein an initial form of a multi-phase biorhythmic activity pattern and an indication of a desired form of the multi-phase biorhythmic activity pattern, wherein a ratio of durations of two phases in the desired form is different from a ratio of durations of the respective phases in the initial form, and wherein at least one phase of the multi-phase biorhythmic activity pattern corresponds to a respective phase of a multi-phase biorhythmic activity of the subject.

[0008] Intercure, Inc. (Fort Lee, N.J., USA and Lod, Israel) markets RESPeRATE™, a device that utilizes some of the techniques described in the above-referenced patents and patent application publications. This device for modifying biorhythmic activity includes an input for the respiration signal, a central processing unit, memory, a sound synthesizing chip, and output to earphones.

[0009] U.S. Pat. No. 5,734,090 to Koppel et al., which is incorporated herein by reference, describes a method and apparatus for verifying an expiratory breath flow (e.g., for determining a degree of alcohol in the breath), utilizing the sonic characteristics of a standardized breath as a reference.

[0010] U.S. Pat. No. 6,726,636 to Der Ghazarian et al., which is incorporated herein by reference, describes a voice recognition breathalyzer comprising a microphone for transducing spoken expression into electronic signals and a breathalyzer sensor for transducing a given breath content into electronic signals.

[0011] U.S. Pat. No. 5,509,414 to Hok, which is incorporated herein by reference, describes techniques for detecting air flow at the mouth and nose of a subject, including a transducer for converting electrical signals into ultrasound waves and vice versa, means for directing the ultrasound waves toward the mouth and nose of the subject and receiving return waves, and a detector to analyze electrical signals converted by the transducer from the return ultrasound waves.

[0012] U.S. Pat. No. 5,195,528 to Hok, which is incorporated herein by reference, describes an acoustic respiration detector including at least two tubular air transmission lines having ends which are connected to microphone elements. Close to the other ends of the lines are openings at which turbulence, and hence acoustic signals, are created by the incidence of airflow caused by respiration. A holding element secures the openings relative to the mouth or nose of a patient whose respiratory function is to be monitored, and a flow-directing element, for example formed like a face mask, directs the airflow to the openings. The microphone elements are connected in a bridge circuit with two voltage supplying leads and at least one signal lead. This arrangement is described as suppressing sensitivity to mechanical and acoustic disturbances.

[0013] U.S. Pat. No. 5,797,852 to Karakasoglu et al., which is incorporated herein by reference, describes sleep apnea screening and/or detection apparatus for use by a patient breathing through the nose and/or mouth and producing an air flow into and out of the lungs of the patient and creating audible sounds.

[0014] U.S. Pat. No. 6,150,941 to Geiger et al., which is incorporated herein by reference, describes a stand-off, non-invasive acoustic detector for monitoring physical activity and/or breathing activity of children and infants.

[0015] U.S. Pat. No. 6,261,238 to Gavriely, which is incorporated herein by reference, describes a method for analyzing breath sounds produced by a respiratory system, the method comprising: measuring breath sounds produced by the respi-

ratory system; tentatively identifying a signal as being caused by a breath sound of a given type if it meets a first criteria characteristic of the breath sound of the given type; and confirming said identification if a tentatively identified signal meets a second criteria characteristic of the breath sound of the given type.

[0016] The following patents, all of which are incorporated herein by reference, may be of interest:

[0017] U.S. Pat. No. 4,195,626 to Schweizer

[0018] U.S. Pat. No. 5,678,571 to Brown

[0019] U.S. Pat. No. 5,596,994 to Bro

[0020] U.S. Pat. No. 4,883,067 to Knispel et al.

[0021] U.S. Pat. No. 4,798,538 to Yagi

[0022] U.S. Pat. No. 5,827,179 to Lichter et al.

[0023] U.S. Pat. No. 6,001,065 to DeVito

[0024] U.S. Pat. No. 5,921,890 to Miley

[0025] U.S. Pat. No. 5,027,686 to Ishikawa

[0026] U.S. Pat. No. 6,212,135 to Schreiber

[0027] U.S. Pat. No. 4,711,585 to Fresquez et al.

[0028] The following articles, all of which are incorporated herein by reference, may be of interest:

[0029] Cooke et al., "Controlled breathing protocols probe human autonomic cardiovascular rhythms," *American Journal of Physiology* 274:H709-H718 (1998)

[0030] Pitzalis et al., "Effect of respiratory rate on the relationship between RR interval and systolic blood pressure fluctuations: a frequency-dependent phenomenon," *Cardiovascular Research* 38:332-339 (1998)

[0031] Bernardi et al., "Effect of breathing rate on oxygen saturation and exercise performance in chronic heart failure," *The Lancet* 351:1308-1311 (1998)

[0032] Mortara et al., "Abnormal awake respiratory patterns are common in chronic heart failure and may prevent evaluation of autonomic tone by measures of heart rate variability," *Circulation* 96:246-252 (1997)

[0033] La Rovere et al., "Baroreflex sensitivity and heart-rate variability in prediction of total cardiac mortality after myocardial infarction," *The Lancet* 351:478-484 (1998)

SUMMARY OF THE INVENTION

[0034] In some embodiments of the present invention, a method is provided for determining a set of parameters of a breathing pattern of a user using a standard non-contact microphone. The method comprises using the microphone to measure a first subset of one or more parameters of respiration by the user, and applying an algorithm to the first subset of parameters in order to derive a second subset of one or more estimated parameters of the respiration that are not generally directly measurable using the microphone. The second subset of parameters is typically not directly measurable using the microphone because sounds associated with the second subset, if any, cannot be detected by the microphone and/or distinguished from background noise. For some applications, the algorithm is applied by setting the second subset of estimated parameters equal to a phenomenological function of the first set of parameters.

[0035] Typically, the first subset of parameters includes active expiration time (i.e., duration of active expiration) and breathing period (i.e., time between successive breaths), and the second subset of parameters includes inspiration time. Active expiration time is typically measured by detecting low-frequency sounds generated by expiratory airflow. The method enables the determination of inspiration time, which generally cannot be directly measured using a standard non-

contact microphone, at least in part because inspiratory airflow is too quiet to be detected under normal background noise conditions.

[0036] In some embodiments of the present invention, a method is provided for improving biorhythmic signal detection in the presence of potentially variable background signal noise. The method comprises calibrating one or more signal detection parameters by guiding a user through a plurality of biorhythmic activity phases, and measuring the biorhythmic signal during the plurality of phases. The signal detection parameters typically include a signal-to-noise ratio and/or filtering characteristics. The signal detection parameters are used for filtering background noise from detected biorhythmic signals.

[0037] In some embodiments, the biorhythmic activity includes respiration, which is detected using a standard non-contact microphone. The user is guided to inhale for a certain period of time, exhale for a certain period of time, and, optionally, to hold his breath for a certain period of time. The signal detection parameters are typically calibrated by (a) determining signal characteristics of the background noise plus the sounds of inhalation, and the background noise plus the sounds of exhalation, and (b) using these signal characteristics to determine net background noise, and/or signal characteristics of the sounds of exhalation. Such signal characteristics of the sounds of exhalation are typically used to determine one or more of the signal detection parameters. For some applications, this method is used in conjunction with techniques for breathing pattern modification, such as those described in the above-mentioned patents and patent application publications to Gavish and Gavish et al.

[0038] These techniques for improving respiration signal detection enable the determination of specific signal detection parameters for each user under specific conditions of use. Such parameters typically vary from user to user based on the user's individual breathing habits (such as whether the user inspires and expires from the nose or from the mouth, and whether the user closes his lips during inspiration and expiration). These techniques enable dynamic determination of signal detection parameters during daily life in noisy environments.

[0039] For some applications, an algorithm is implemented for evaluating one or more parameters of a non-expiratory portion of the signal substantially continuously. For example, such parameters may include a duration or an amplitude of the non-expiratory portion. In an embodiment, these parameters are determined responsively to a physiological constraint to which most people typically adhere. One such constraint reflects the body's natural tendency to keep ventilation generally constant while minimizing energy expended. A practical example of this constraint is that following a relatively deep breath (which transiently increases ventilation), a subsequent breath is typically delayed.

[0040] In some embodiments of the present invention, the techniques described herein are implemented using the standard non-contact microphone of a conventional consumer electronics device, such as a telephone, cellular telephone, personal digital assistant (PDA), or portable digital audio player, which a user may have already purchased for other purposes. For a cellular telephone, for example, the user may speak directly into the microphone incorporated into the body of the phone, or, alternatively, the user may speak into an external microphone which plugs into the body of the phone. In general, a microphone may be used which is incorporated

into the body of the consumer electronics device, or which is attached to the body of the consumer electronics device (e.g., by wire or wirelessly). Typically, the techniques described herein are implemented in software that is installed in such a device, and/or in a central location that is accessed by the device over a conventional wireless or wired network.

[0041] In some embodiments of the present invention, the techniques described herein are implemented using a non-contact microphone that is integrated into a medical device in fluid communication (e.g., via air or another gas) with respiration-related airflow of the subject. For example, the medical device may comprise a breathing mask or a tube, such as a tracheotomy tube.

[0042] For some applications, the breathing mask or tube are components of a ventilator that applies positive pressure to the lungs of the subject. The techniques described herein are used to detect proper performance of the ventilator, typically by detecting active expiration by the subject. Active expiration is typically measured by detecting low-frequency sounds indicative of expiratory airflow, rather than by detecting sounds of breathing. (In such subject, sounds of breathing often do not correlate with expiration, because the sounds of breathing are often affected by various constrictions in the subject's airways. However, low-frequency sounds indicative of expiratory airflow are not generally affected by such constrictions.) For some applications, the techniques described herein are used for non-contact monitoring of breathing during weaning from ventilation.

[0043] In an embodiment of the present invention, the techniques described herein are used for non-contact monitoring of breathing during use of a drug inhaler by the subject. For some applications, such non-contact monitoring of breathing is combined with techniques for modifying breathing activity of the subject, such as those described in the above-mentioned patent and patent application publications to Gavish and Gavish et al.

[0044] In an embodiment of the present invention, the techniques described herein and/or in the above-mentioned patent and patent application publications to Gavish and Gavish et al. are used to treat a subject suffering from insomnia. Insomnia is sometimes caused by disordered breathing, such as fast and shallow breathing. For some applications, insomnia is treated using techniques described herein for detecting and monitoring breathing, in combination with techniques for modifying respiration-related biorhythmic activity of the subject described in the above-mentioned patent and patent application publications to Gavish and Gavish et al.

[0045] In an embodiment of the present invention, the breathing monitoring techniques described herein are used for detecting sleep-disordered breathing, such as sleep-disordered breathing associated with sleep apnea or sudden infant death syndrome (SIDS). Typically, breath-by-breath airflow during exhalation is monitored. For some applications, such non-contact monitoring of breathing is combined with techniques for modifying breathing activity of the subject, such as those described in the above-mentioned patent and patent application publications to Gavish and Gavish et al.

[0046] There is therefore provided, in accordance with an embodiment of the present invention, a method for analyzing respiration of a subject, the method including:

[0047] using a non-contact microphone, detecting airflow sounds of the respiration, and converting the sounds into a signal;

[0048] analyzing the signal to determine a first set of one or more parameters of the respiration; and

[0049] applying an algorithm to the first set of parameters to derive a second set of one or more estimated parameters of the respiration that are not generally directly measurable in the signal.

[0050] In an embodiment:

[0051] the first set of parameters includes an active expiration time and a breathing period of the respiration,

[0052] the second set of parameters includes an inspiration time of the respiration,

[0053] analyzing the signal includes analyzing the signal to determine the active expiration time and the breathing period, and

[0054] applying the algorithm includes applying the algorithm to derive the inspiration time.

[0055] There is further provided, in accordance with an embodiment of the present invention, a method for analyzing respiration of a subject, the method including:

[0056] detecting airflow sounds of the respiration, and converting the sounds into a signal;

[0057] guiding the user through a plurality of respiration phases;

[0058] analyzing the signal during the guided respiration phases, and defining one or more parameters of a filter responsively to the analysis; and

[0059] filtering background noise from the signal using the filter having the defined parameters.

[0060] In an embodiment, guiding the user includes guiding the user through inspiratory and expiratory respiration phases.

[0061] There is also provided, in accordance with an embodiment of the present invention, a method for modifying naturally-occurring multi-phase biorhythmic activity of a subject, the method including:

[0062] detecting a signal indicative of the multi-phase biorhythmic activity;

[0063] analyzing the signal to determine one or more parameters of a filter;

[0064] filtering background noise from the signal using the filter having the parameters;

[0065] at least in part responsively to the filtered signal, determining a stimulus input which is operative to change at least one aspect of the biorhythmic activity of the subject; and

[0066] providing the stimulus input to the subject.

[0067] For some applications, filtering the background noise includes frequency filtering the signal. Alternatively or additionally, filtering the background noise includes performing non-frequency spectral analysis on the signal in order to classify the signal according to one or more variables.

[0068] In an embodiment, the background noise is indicative of secondary biorhythmic activity different from the multi-phase biorhythmic activity, and filtering the background noise from the signal includes filtering the secondary biorhythmic activity-related background noise from the signal.

[0069] In an embodiment, the multi-phase biorhythmic activity includes respiration of the subject, and detecting the signal includes detecting the signal indicative of the respiration. For some applications, the background noise includes a heartbeat-related component of the signal, and filtering the background noise from the signal includes filtering the heartbeat-related component from the signal.

[0070] In an embodiment, filtering the background noise includes performing spectral analysis on the signal to produce a frequency spectrum. For some applications, performing the spectral analysis includes frequency filtering the frequency spectrum.

[0071] For some applications, filtering the background noise includes removing non-frequency-related noise from the signal. For some applications, the non-frequency-related noise includes a heartbeat-related component of the signal, and removing the non-frequency-related noise includes removing the heartbeat-related component of the signal from the signal.

[0072] There is further provided, in accordance with an embodiment of the present invention, a method for analyzing respiration of a subject, the method including:

[0073] using a non-contact microphone, generating a raw signal indicative of airflow sounds of the respiration;

[0074] analyzing the raw signal to determine a first set of one or more parameters of the respiration; and

[0075] applying an algorithm to the first set of parameters to derive a second set of one or more estimated parameters of the respiration that are not generally directly measurable in the raw signal.

[0076] In an embodiment, applying the algorithm includes setting the second set of one or more estimated parameters equal to a phenomenological function of the first set of one or more parameters.

[0077] In an embodiment, the first set of parameters includes a measure of breathing amplitude of the respiration, and analyzing the raw signal includes integrating the airflow sounds for a breath of the respiration to determine the measure of breathing amplitude. For some applications, the first set of parameters includes a measure of breathing amplitude of the respiration, the second set of parameters is selected from the list consisting of: a measure of ventilation of the subject, and a measure of breathing irregularity of the subject, and applying the algorithm includes applying the algorithm to the measure of breathing amplitude to derive the selected second set of parameters.

[0078] For some applications, the method includes analyzing at least one of the first and second sets of parameters to derive at least one additional breathing-related parameter of the subject selected from the list consisting of: breathing amplitude, a geometrical property of airflow of the subject, a characteristic of the airflow indicative of pursed lips breathing, a characteristic of the breathing indicative of relaxed breathing, a characteristic of the breathing indicative of passive elastic recoil of lungs of the subject, a characteristic of breathing with effort, and a characteristic of breathing during which the lungs of the subject undergo a functional change.

[0079] In an embodiment, the method includes guiding the subject to perform breathing in a plurality of respiration phases determined at least in part responsively to the second set of parameters. For some applications, guiding the subject to perform the breathing includes treating insomnia of the subject by guiding the subject to perform the breathing in the plurality of respiration phases.

[0080] In an embodiment, the non-contact microphone includes a non-contact microphone of a consumer electronics device capable of performing at least one function that does not facilitate analyzing respiration of the subject, and generating the raw signal includes using the non-contact microphone. In an alternative embodiment, the non-contact microphone is integrated into a medical device in fluid

communication with respiration-related airflow of the subject, and generating the raw signal includes using the integrated non-contact microphone. For example, the medical device may include a drug inhaler, and generating the raw signal includes using the non-contact microphone integrated into the drug inhaler.

[0081] In an embodiment, analyzing the raw signal includes deriving an expiratory airflow sound signal from the raw signal, and analyzing the expiratory airflow sound signal to determine the first set of parameters. For some applications, the method includes generating a real-time indication for the subject that indicates whether expiration has been detected.

[0082] In an embodiment, the first set of parameters includes an active expiration time and a breathing period of the subject, and analyzing the expiratory airflow sound signal includes analyzing the expiratory airflow sound signal to determine the active expiration time and the breathing period. For some applications, the second set of parameters includes an amplitude of a non-expiratory portion of the respiration, and applying the algorithm includes applying the algorithm to derive the amplitude of the non-expiratory portion of the respiration.

[0083] In an embodiment, the second set of parameters includes an inspiration time of the subject, and applying the algorithm includes applying the algorithm to derive the inspiration time.

[0084] In an embodiment, applying the algorithm to derive the inspiration time includes determining whether a difference between the breathing period and the active expiration time is greater than or equal to a first function of the active expiration time, responsively to a positive determination, setting the inspiration time equal to a second function of the difference, and responsively to a negative determination, setting the inspiration time equal to a third function of the active expiration time.

[0085] For some applications, determining includes determining whether the difference between the breathing period and the active expiration time is greater than or equal to the active expiration time.

[0086] For some applications, setting responsively to the positive determination includes setting the inspiration time equal to a value within plus or minus 20% of the difference, such as within plus or minus 10% of the difference. For some applications, the second function includes a function of the difference and a phenomenological constant, and setting responsively to the positive determination includes setting the inspiration time equal to the second function of the difference and the phenomenological constant. For some applications, setting responsively to the positive determination includes determining the phenomenological constant at least in part responsively to at least one parameter of the first set of one or more parameters.

[0087] For some applications, setting responsively to the negative determination includes setting the inspiration time equal to a value within plus or minus 20% of the active expiration time, such as within plus or minus 10% of the active expiration time. For some applications, the third function includes a function of the active expiration time and a phenomenological constant, and setting responsively to the negative determination includes setting the inspiration time equal to the third function of the active inspiration time and the phenomenological constant. For some applications, setting responsively to the negative determination includes

determining the phenomenological constant at least in part responsively to at least one parameter of the first set of one or more parameters.

[0088] For some applications, applying the algorithm to derive the inspiration time includes setting the inspiration time equal to a function of a difference between the breathing period and the active expiration time. For some applications, setting the inspiration time includes setting the inspiration time equal to a value within plus or minus 20% of the difference, such as within plus or minus 10% of the difference. For some applications, the function includes a function of the difference and a phenomenological constant, and setting the inspiration time includes setting the inspiration time equal to the function of the difference and the phenomenological constant. For some applications, setting the inspiration time includes determining the phenomenological constant at least in part responsively to at least one parameter of the first set of one or more parameters.

[0089] For some applications, applying the algorithm to derive the inspiration time includes setting the inspiration time equal to a function of the active expiration time. For some applications, setting the inspiration time includes setting the inspiration time equal to a value within plus or minus 20% of the active expiration time, such as plus or minus 10% of the active expiration time. For some applications, the function includes a function of the active expiration time and a phenomenological constant, and setting the inspiration time includes setting the inspiration time equal to the function of the active expiration time and the phenomenological constant. For some applications, setting the inspiration time includes determining the phenomenological constant at least in part responsively to at least one parameter of the first set of one or more parameters.

[0090] For some applications, the method includes analyzing the derived inspiration time to determine an amplitude of breathing during the inspiration time.

[0091] In an embodiment, deriving the expiratory airflow signal includes:

[0092] digitizing the raw signal to generate a digital signal;

[0093] performing spectral analysis on the digital signal to produce a frequency spectrum; and

[0094] filtering the frequency spectrum to eliminate frequencies outside of a range of frequencies associated with expiratory airflow sounds.

[0095] For some applications, filtering the frequency spectrum includes setting the range to be between a first frequency and a second frequency, the first frequency between 30 and 50 Hz, and the second frequency between 100 and 200 Hz.

[0096] For some applications, filtering the frequency spectrum includes:

[0097] guiding the subject to perform breathing in a plurality of alternating inspiratory and expiratory respiration phases;

[0098] using the non-contact microphone, generating a raw calibration signal indicative of airflow sounds of the respiration during the respiration phases;

[0099] digitizing the raw calibration signal to generate a digital calibration signal, and performing spectral analysis on the digital calibration signal to produce an inspiration frequency spectrum and an expiration frequency spectrum;

[0100] subtracting the inspiration spectrum from the expiration spectrum to obtain a net frequency spectrum;

[0101] determining a first frequency and a second frequency by analyzing the net frequency spectrum; and

[0102] setting the range to be between the first and second frequencies.

[0103] For some applications, determining the first and second frequencies includes:

[0104] setting the first frequency such that an area under a first portion of the net spectrum having a frequency less than the first frequency is less than a first percentage of a total area under the net spectrum; and

[0105] setting the second frequency such that an area under a second portion of the net spectrum having a frequency greater than the second frequency is less than a second percentage of the total area under the net spectrum.

[0106] In an embodiment, deriving the expiratory airflow sound signal from the raw signal includes filtering the raw signal to eliminate frequencies outside of a range of frequencies associated with expiratory airflow sounds. For some applications, filtering the raw signal includes setting the range to be between a first frequency and a second frequency, the first frequency between 30 and 50 Hz, and the second frequency between 100 and 200 Hz.

[0107] In an embodiment, analyzing the raw signal includes setting a detection threshold, and deriving the expiratory airflow sound signal includes interpreting portions of the raw signal having a signal strength greater than the detection threshold as the expiratory airflow sound signal. For some applications, setting the detection threshold includes setting the detection threshold at a level sufficient to reduce erratic peaks in the raw signal that are not associated with functional breathing. For some applications, setting the detection threshold includes:

[0108] digitizing the raw signal to generate a digital signal having flow values at respective points in time, and buffering the flow values of the digital signal over a period of time;

[0109] transforming the buffered flow values into a histogram having a plurality of bins;

[0110] designating one of the bins having a greatest number of points as a maximum bin;

[0111] selecting two of the bins on opposite sides of the maximum bin;

[0112] setting a width of a noise band equal to a flow interval between the two bins; and

[0113] setting the detection threshold responsively to a flow value of the maximum bin and the width of the noise band.

[0114] For some applications, setting the detection threshold includes setting the detection threshold equal to the flow value of the maximum bin plus a product of a constant and the width of the noise band.

[0115] In an embodiment, the method includes detecting sleep-disordered breathing by analyzing at least one parameter selected from: the first set of parameters, and the second set of estimated parameters. For some applications, the sleep-disordered breathing includes breathing associated with apnea, and detecting the sleep-disordered breathing includes detecting the apnea. For other applications, the sleep-disordered breathing includes breathing associated with sudden infant death syndrome (SIDS), and detecting the sleep-disordered breathing includes detecting the SIDS.

[0116] There is still further provided, in accordance with an embodiment of the present invention, a method for analyzing respiration of a subject, the method including:

[0117] generating a signal indicative of airflow sounds of the respiration;

[0118] guiding the subject to perform breathing in a plurality of respiration phases;

[0119] analyzing the signal during the guided respiration phases, and defining one or more parameters of a filter responsively to the analysis; and

[0120] filtering background noise from the signal using the filter having the defined parameters.

[0121] In an embodiment, generating the signal includes generating the signal using a non-contact microphone.

[0122] for some applications, the one or more parameters of the filter include a signal-to-noise ratio, and defining the one or more parameters includes defining the signal-to-noise ratio.

[0123] In an embodiment, guiding the subject includes guiding the subject to perform breathing in a plurality of inspiratory and expiratory respiration phases. For some applications, guiding the subject includes guiding the subject to perform breathing in inspiratory, expiratory, and breath-holding respiration phases.

[0124] For some applications, defining the one or more parameters of the filter includes:

[0125] determining signal characteristics of background noise plus airflow sounds of inhalation, and of the background noise plus airflow sounds of exhalation;

[0126] determining net background noise responsively to the signal characteristics; and

[0127] defining the one or more parameters of the filter responsively to the net background noise.

[0128] For some applications, the one or more parameters of the filter include a first frequency and a second frequency, analyzing the signal includes:

[0129] digitizing the signal to generate a digital signal, and performing spectral analysis on the digital signal to produce an inspiration frequency spectrum and an expiration frequency spectrum;

[0130] subtracting the inspiration spectrum from the expiration spectrum to obtain a net frequency spectrum; and

[0131] determining the first and second frequencies by analyzing the net frequency spectrum, and

[0132] filtering the background noise includes eliminating frequencies outside of a range of frequencies defined by the first and second frequencies.

[0133] For some applications, determining the first and second frequencies includes:

[0134] setting the first frequency such that an area under a first portion of the net spectrum having a frequency less than the first frequency is less than a first percentage of a total area under the net spectrum; and

[0135] setting the second frequency such that an area under a second portion of the net spectrum having a frequency greater than the second frequency is less than a second percentage of the total area under the net spectrum.

[0136] There is yet further provided, in accordance with an embodiment of the present invention, a method for analyzing respiration of a subject, the method including:

[0137] determining an active expiration time and a breathing period of the subject;

[0138] determining whether a difference between the breathing period and the active expiration time is greater than or equal to a first function of the active expiration time;

[0139] responsively to a positive determination, estimating that an inspiration time of the subject is equal to a second function of the difference; and

[0140] responsively to a negative determination, estimating that the inspiration time is equal to a third function of the active expiration time.

[0141] In an embodiment, determining the active expiration time and the breathing period includes:

[0142] generating a raw signal indicative of airflow sounds of the respiration;

[0143] analyzing the raw signal to derive an expiratory airflow sound signal from the raw signal; and

[0144] analyzing the expiratory airflow sound signal to determine the active expiration time and the breathing period.

[0145] For some applications, determining includes determining whether the difference between the breathing period and the active expiration time is greater than or equal to the active expiration time.

[0146] For some applications, setting responsively to the positive determination includes setting the inspiration time equal to a value within plus or minus 20% of the difference, such as within plus or minus 10% of the difference. For some applications, the second function includes a function of the difference and a phenomenological constant, and setting responsively to the positive determination includes setting the inspiration time equal to the second function of the difference and the phenomenological constant. For some applications, setting responsively to the positive determination includes determining the phenomenological constant at least in part responsively to at least one parameter of the respiration.

[0147] For some applications, setting responsively to the negative determination includes setting the inspiration time equal to a value within plus or minus 20% of the active expiration time, such as within plus or minus 10% of the active expiration time. For some applications, the third function includes a function of the active expiration time and a phenomenological constant, and setting responsively to the negative determination includes setting the inspiration time equal to the third function of the active inspiration time and the phenomenological constant. For some applications, setting responsively to the negative determination includes determining the phenomenological constant at least in part responsively to at least one parameter of the respiration.

[0148] There is also provided, in accordance with an embodiment of the present invention, a method for analyzing respiration of a subject, the method including:

[0149] generating a raw signal indicative of airflow sounds of the respiration;

[0150] defining a detection threshold by:

[0151] digitizing the raw signal to generate a digital signal having flow values at respective points in time, and buffering the flow values of the digital signal over a period of time,

[0152] transforming the buffered flow values into a histogram having a plurality of bins,

[0153] designating one of the bins having a greatest number of points as a maximum bin,

[0154] selecting two of the bins on opposite sides of the maximum bin,

[0155] setting a width of a noise band equal to a flow interval between the two bins, and

[0156] setting the detection threshold responsively to a flow value of the maximum bin and the width of the noise band; and

[0157] deriving an expiratory airflow sound signal from the raw signal by interpreting portions of the raw signal having a

signal strength greater than the detection threshold as the expiratory airflow sound signal.

[0158] For some applications, setting the detection threshold includes setting the detection threshold equal to the flow value of the maximum bin plus a product of a constant and the width of the noise band.

[0159] There is yet additionally provided, in accordance with an embodiment of the present invention, a method including:

[0160] using a non-contact microphone integrated into a ventilator, generating a signal indicative of airflow sounds of respiration of a subject; and

[0161] analyzing the signal to detect active expiration of the subject.

[0162] For some applications, the method includes analyzing the active expiration to determine whether the ventilator is functioning properly.

[0163] For some applications, analyzing the signal includes analyzing a low-frequency component of the signal to detect the active respiration.

[0164] For some applications, generating the signal includes generating the signal during weaning of the subject from ventilation.

[0165] There is still additionally provided, in accordance with an embodiment of the present invention, a method including:

[0166] using a non-contact microphone integrated into a drug inhaler, generating a signal indicative of airflow sounds of respiration of a subject; and

[0167] analyzing the signal to detect active expiration of the subject.

[0168] For some applications, the method includes guiding the subject to perform breathing in a plurality of respiration phases determined at least in part responsively to the detected active expiration.

[0169] For some applications, analyzing the signal includes analyzing a low-frequency component of the signal to detect the active respiration.

[0170] There is yet additionally provided, in accordance with an embodiment of the present invention, a method including:

[0171] selecting a subject suffering from insomnia;

[0172] using a non-contact microphone, generating a signal indicative of airflow sounds of respiration of the subject;

[0173] analyzing the signal to detect active expiration of the subject; and

[0174] treating the insomnia by guiding the subject to perform breathing in a plurality of respiration phases determined at least in part responsively to the detected active expiration.

[0175] There is still additionally provided, in accordance with an embodiment of the present invention, apparatus for analyzing respiration of a subject, including:

[0176] a non-contact microphone, adapted to generate a raw signal representing airflow sounds of the respiration; and

[0177] a control unit, adapted to:

[0178] analyze the raw signal to determine a first set of one or more parameters of the respiration, and

[0179] apply an algorithm to the first set of parameters to derive a second set of one or more estimated parameters of the respiration that are not generally directly measurable in the raw signal.

[0180] There is yet additionally provided, in accordance with an embodiment of the present invention, apparatus for analyzing respiration of a subject, including:

[0181] a microphone, adapted to generate a signal representing airflow sounds of the respiration;

[0182] an output generator; and

[0183] a control unit, adapted to:

[0184] drive the output generator to guide the subject to perform breathing in a plurality of respiration phases,

[0185] analyze the signal during the guided respiration phases, and define one or more parameters of a filter responsively to the analysis, and

[0186] filter background noise from the signal using the filter having the defined parameters.

[0187] There is also provided, in accordance with an embodiment of the present invention, apparatus for modifying naturally-occurring multi-phase biorhythmic activity of a subject, the apparatus including:

[0188] a sensor, adapted to detect a signal indicative of the multi-phase biorhythmic activity;

[0189] a control unit, adapted to:

[0190] analyze the signal to determine one or more parameters of a filter,

[0191] filter background noise from the signal using the filter having the parameters, and

[0192] at least in part responsively to the filtered signal, determine a stimulus input which is operative to change at least one aspect of the biorhythmic activity of the subject; and

[0193] a stimulator, adapted to provide the stimulus input to the subject.

[0194] There is further provided, in accordance with an embodiment of the present invention, apparatus for analyzing respiration of a subject, the apparatus including a control unit, adapted to:

[0195] determine an active expiration time and a breathing period of the subject,

[0196] determine whether a difference between the breathing period and the active expiration time is greater than or equal to a first function of the active expiration time,

[0197] responsively to a positive determination, estimate that an inspiration time of the subject is equal to a second function of the difference, and

[0198] responsively to a negative determination, estimate that the inspiration time is equal to a third function of the active expiration time.

[0199] There is still further provided, in accordance with an embodiment of the present invention, apparatus for analyzing respiration of a subject, the apparatus including:

[0200] a sensor, adapted to generate a raw signal indicative of airflow sounds of the respiration; and

[0201] a control unit, adapted to:

[0202] define a detection threshold by:

[0203] digitizing the raw signal to generate a digital signal having flow values at respective points in time, and buffering the flow values of the digital signal over a period of time,

[0204] transforming the buffered flow values into a histogram having a plurality of bins,

[0205] designating one of the bins having a greatest number of points as a maximum bin,

[0206] selecting two of the bins on opposite sides of the maximum bin,

[0207] setting a width of a noise band equal to a flow interval between the two bins, and

[0208] setting the detection threshold responsively to a flow value of the maximum bin and the width of the noise band, and

[0209] derive an expiratory airflow sound signal from the raw signal by interpreting portions of the raw signal having a signal strength greater than the detection threshold as the expiratory airflow sound signal.

[0210] There is additionally provided, in accordance with an embodiment of the present invention, apparatus for use with a ventilator, the apparatus including:

[0211] a non-contact microphone, adapted to be integrated into the ventilator, and to generate a signal indicative of airflow sounds of respiration of a subject; and

[0212] a control unit, adapted to analyze the signal to detect active expiration of the subject.

[0213] There is yet additionally provided, in accordance with an embodiment of the present invention, apparatus for use with a drug inhaler, the apparatus including:

[0214] a non-contact microphone, adapted to be integrated into the drug inhaler, and to generate a signal indicative of airflow sounds of respiration of a subject; and

[0215] a control unit, adapted to analyze the signal to detect active expiration of the subject.

[0216] The present invention will be more fully understood from the following detailed description of embodiments thereof, taken together with the drawings, in which:

BRIEF DESCRIPTION OF THE DRAWINGS

[0217] FIG. 1 is a schematic pictorial illustration of a microphone-based breathing pattern modification system applied to a user, in accordance with an embodiment of the present invention;

[0218] FIG. 2 is a schematic block diagram of the system of FIG. 1, in accordance with an embodiment of the present invention;

[0219] FIG. 3 is a flow chart illustrating a method for determining a breathing pattern from a raw analog signal, in accordance with an embodiment of the present invention;

[0220] FIGS. 4A and 4B are schematic illustrations of signals analyzed at a threshold calculation step of the method of FIG. 3, in accordance with an embodiment of the present invention;

[0221] FIG. 5 is a schematic illustration of a recording of microphone-detected airflow, recorded using the techniques described herein, and a corresponding recording of chest circumference, recorded using techniques known in the art, in accordance with an embodiment of the present invention;

[0222] FIG. 6 shows an exemplary correlation between a microphone-detected expiration time and a belt-determined active expiration time, based on experimentally-obtained data like (but different from) the data shown in FIG. 5, in accordance with an embodiment of the present invention;

[0223] FIG. 7 is a graph showing experimental results measured in accordance with an embodiment of the present invention;

[0224] FIG. 8 is a flow chart illustrating a method for adaptively determining filtering frequencies, in accordance with an embodiment of the present invention; and

[0225] FIGS. 9A and 9B are schematic illustrations of several exemplary spectra, in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS

[0226] FIG. 1 is a schematic pictorial illustration of a microphone-based breathing pattern modification system 10 applied to a user 20, in accordance with an embodiment of the present invention. System 10 comprises a microphone 22 and a speaker 24, which typically are standard components of a standard headset or telephone. System 10 further comprises a control unit 26, which is coupled to microphone 22 and speaker 24 via a cable or wirelessly.

[0227] FIG. 2 is a schematic block diagram of system 10, in accordance with an embodiment of the present invention. Control unit 26 comprises an amplifier 28, an A/D converter 30, a CPU 32, and a sound synthesizer 34. Sound synthesizer 34 is typically adapted to generate tones, music, and/or synthesized or recorded oral messages.

[0228] For some applications, control unit 26 comprises a standard consumer electronics device, programmed in software to carry out the functions described herein. For example, control unit 26 may comprise a standard or pocket computer, a personal digital assistant (PDA), a "smart" phone, a telephone, or a cellular phone. Alternatively, at least a portion of the functions of control unit 26 are executed on a remote system that is accessed by a local device over a conventional wireless or wired network. Further alternatively, control unit 26 comprises a custom control unit produced to carry out the techniques described herein.

[0229] In general, a non-contact standard microphone in a headset designed for a human user can detect the sound of effortless breathing from two sources: (a) sound waves, typically at the frequency range of 500 to 5000 Hz, generated inside the body and propagated in the environment, such as speech, and (b) lower-frequency sound waves, which reflect turbulences generated by the airflow in the vicinity of the microphone during expiration and sometimes under windy conditions. Standard microphones are designed to detect speech, which is categorized in the first source (a). Speech is specific to the user's specific anatomy, typically can be detected anywhere in the vicinity of the user, and may be generated during inspiration and/or expiration. Sound of the second source (b) is usually considered to be noise that should be minimized (see, for example, U.S. Pat. No. 4,887,693 to Nice, which is incorporated herein by reference). Such sound is unrelated to the user's specific anatomy, is usually restricted to expiration only, and generally can be detected only if the microphone is placed in the path of the airflow.

[0230] FIG. 3 is a flow chart illustrating a method for determining a breathing pattern from a raw analog signal, in accordance with an embodiment of the present invention. Amplifier 28 amplifies a raw analog signal generated by microphone 22, at an amplification step 100, and A/D converter 30 digitizes the amplified signal, at a digitization step 102. Control unit 26 buffers the digital signal, at a buffer step 104. The size of the buffer is determined responsive to the requirements of the detection process. For example, if it is desired to perform spectral analysis as described hereinbelow every t seconds, and if data are sampled at a sampling rate f , then the buffer should typically be large enough to hold at least $t \cdot f$ data points.

[0231] At a filtering step 106, control unit 26 periodically performs spectral analysis on the buffered data, e.g., every 0.05-1 second (such as every 0.1 seconds). Control unit 26 typically performs the spectral analysis using a discrete Fourier transform (DFT), operating within a range of frequencies between a minimum frequency (f_{min}) and a maximum fre-

quency (f_{max}). The minimum and maximum frequencies are typically determined based on characteristics of microphone **22** and the specific application. In general, the maximum frequency is set such that the spectral power at frequencies higher than the maximum frequency is dominated by sounds not associated with the airflow of expiration. The minimum frequency is generally set such that the spectral power at frequencies lower than the minimum frequency is dominated by environmental airflows, e.g., wind. Typically, at filtering step **106**, control unit **26** eliminates frequencies that are less than a frequency f_1 and greater than a frequency f_2 , where f_1 is greater than minimum frequency f_{min} , and f_2 is less than maximum frequency f_{max} . For some applications, control unit **26** determines f_1 and f_2 using adaptive optimization techniques described hereinbelow with reference to FIGS. **8**, **9A**, and **9B**. Alternatively, f_1 and f_2 are pre-selected (in which case the filtering is not adaptive). Typically, f_1 is between about 30 and about 50 Hz, and f_2 is between about 100 and about 200 Hz.

[0232] At a spectrum integration step **108**, control unit **26** integrates the power of the spectrum, and, typically, smoothes the signal using a moving-average calculation, at a moving average calculation step **110**. The resulting temporal (i.e., non-spectral) signal is indicative of the microphone-detected expiratory airflow. The control unit (a) buffers this signal at a buffer step **112**, and (b) analyzes this signal at an expiratory airflow detection step **114**, both of which are described hereinbelow.

[0233] At buffer step **112**, control unit **26** buffers the temporal signals detected during the N most recent breathing periods. N is determined by the pattern parameters to assure that the data distribution is sufficient for threshold determination. For example, N may be selected to include at least five detected breathing periods, as shown hereinbelow in FIG. **4A**.

[0234] At a threshold calculation step **116**, using data stored at buffer step **112**, control unit **26** calculates a detection threshold at selected time intervals, typically using the techniques described hereinbelow with reference to FIGS. **4A** and **4B**. For some applications, the detection threshold is set equal to the greater of (a) the threshold determined using the techniques described hereinbelow with reference to FIGS. **4A** and **4B**, and (b) a secondary threshold determined at step **118**, as described hereinbelow. At expiratory airflow detection step **114**, control unit **26** detects the onset and cessation of expiratory-related airflow by analyzing the microphone-detected airflow with respect to the detection threshold. The control unit interprets airflow having a signal strength greater than the detection threshold as expiration, and airflow having a signal strength less than the detection threshold as background noise.

[0235] For some applications, at expiratory airflow detection step **114**, control unit **26** generates a real-time indication for user **20**, indicating that expiration has been detected. For some applications, this indication helps user **20** optimize the positioning of microphone **22**. Alternatively or additionally, if no respiration signal has been detected over a certain period of time, control unit **26** notifies user **20** that microphone **22** should be repositioned.

[0236] At a pattern determination step **118**, control unit **26** determines breathing pattern parameters, such as described hereinbelow with reference to FIGS. **5**, **6**, and **7**. In order to determine these parameters, it is desirable to have a sufficiently large number of recent breathing data points to process, and these are stored at buffer step **112**. For example, if it

is desired to have breathing data representative of five breaths, and if the most recent five breaths occurred over a 45 second period and were sampled at 10 Hz, then the buffer should typically contain at least 450 points. (Data processing techniques as are known in the art may be applied to reduce this number.)

[0237] In an embodiment, use of a secondary threshold at threshold calculation step **116**, described hereinabove, reduces or eliminates erratic peaks that cannot be associated with functional breathing according to predetermined rules. For example, the secondary threshold may be used to identify erratic peaks in certain recorded signals that are associated with the user: (a) talking (rather than breathing), or (b) exhaling due to a change in posture, thereby forcing air out of his lungs (not as part of a functional breathing cycle).

[0238] As appropriate, control unit **26** may define and utilize one or more secondary thresholds by: (a) defining secondary thresholds responsive to one or more values associated with the previous 1-5 breaths (e.g., setting a secondary threshold to be n times larger than the average respiration volume associated with the breaths), (b) comparing the corresponding parameters for the currently-recorded breathing data with the secondary thresholds, and (c) accepting the currently-recorded breathing data as being indicative of actual functional breathing if the corresponding parameters do not pass the secondary thresholds. For some applications, control unit **26** determines a secondary threshold value at pattern determination step **118** (for example by taking a percentage, e.g., 20%, of the most recent average flow amplitude, as reflected in the breathing pattern and/or a series of breaths).

[0239] Reference is now made to FIGS. **4A** and **4B**, which are schematic illustrations of signals analyzed at threshold calculation step **116** (FIG. **3**), in accordance with an embodiment of the present invention. FIG. **4A** shows a trace **160** of the digitized microphone signal stored at buffer step **112** over a 20-second period. Trace **160** is transformed into a histogram **170**, shown in FIG. **4B**. Typically, this transformation is performed by setting the bin width of histogram **170** equal to the smallest value that results in at least one bin having at least a threshold number of points n , e.g., about 20 data points. Typically, the bin width is set such that a minimum or near-minimum number of the bins have at least the threshold number of points.

[0240] According to a first method for setting the bin width, control unit **26** sets an initial, transitional bin width to a low value, typically 1. The control unit counts the number of points in each resulting bin. If all the bins have fewer than n points, the control unit increments the transitional bin width, typically by 1, and the method loops back to the previous counting step. On the other hand, if any of the bins has at least n points, the control unit designates the bin having the greatest number of points M as a maximum bin **172**.

[0241] According to a second method for setting the bin width, control unit **26** applies a successive-approximation procedure to the data of trace **160**. The control unit creates an initial, transitional histogram, having a single bin having a flow data range between 0 and F , where F is the maximum flow value of trace **160**. The control unit divides the flow data range into two equal flow intervals: (1) from 0 to $F/2$ and (2) from $F/2$ to F . The control unit selects the flow interval containing the larger number of points, and compares the number of points in the selected flow interval to n . If the number of points in the selected flow interval is greater than or equal to n , the method returns to the division step above, at which the

selected flow interval is divided into two flow intervals. On the other hand, if the number of points in the selected flow interval is less than n , the control unit typically reverses the most recent division, resulting in a flow interval having M points, where M is greater than or equal to n . The control unit uses the resulting flow interval as the bin width of histogram 170. The control unit designates the bin of histogram 170 having the greatest number of points M as maximum bin 172.

[0242] Maximum bin 172 has a flow value (y-axis) of B . Flow value B typically corresponds to the average flow of the background noise of the signal. Typically, control unit 26 selects two bins 176 and 178 on opposite sides of maximum bin 172 having numbers of points closest to $M/2$, and sets a width W of a noise band 180 equal to the flow interval between bins 176 and 178. (Instead of using $M/2$, as described, for some applications a value of M/k is used, where k is typically between 1.5 and 4.) The control unit typically sets a detection threshold 182 equal to (a) B plus (b) the product of W and a constant, for example, equal to B plus an integer multiple of W , e.g., $B+2W$. Typically, control unit 26 determines detection threshold 182 substantially continuously, resulting in an adaptive detection process.

[0243] Reference is now made to FIG. 5, which is a schematic illustration of a recording 250 of microphone-detected airflow, recorded using the techniques described herein, and a corresponding recording 252 of chest circumference, recorded using techniques known in the art, in accordance with an embodiment of the present invention. Microphone-detected recording 250 and chest circumference recording 252 were recorded simultaneously in the same user. Microphone-detected recording 250 was filtered using frequencies f_1 and f_2 of 30 Hz and 150 Hz, respectively, at filtering step 106, described hereinabove with reference to FIG. 3. Chest circumference recording 252 was recorded using a belt-type sensor similar to the belt-type sensor described in the above-mentioned U.S. Pat. Nos. 5,423,328 and 6,090,037 to Gavish. Because such belt-type sensors produce highly accurate measurements of breathing phases, chest circumference recording 252 serves as a control for determining the accuracy of microphone-based breathing phase determinations using the techniques described herein.

[0244] Chest circumference recording 252 clearly shows all phases of normal breathing: inspiration and expiration, including active expiration and a post-expiratory pause. Chest circumference recording 252 is analyzed using min-max analysis to derive inspiration time T_{in} , breathing period T , expiration time $T_{ex}=T-T_{in}$, the active expiration time T_{ax} , and breathing amplitude A , for example as described in the above-mentioned U.S. Pat. No. 5,800,337.

[0245] In contrast, microphone-detected recording 250 shows only the active expiration phase of breathing. At least an estimation of inspiration time is necessary for certain applications (including breathing pattern modification by generating inspiration- and expiration-related guiding tones, as described, for example, in the above-referenced patents and patent application publications to Gavish and Gavish et al.).

[0246] Reference is made to FIG. 6, which shows an exemplary correlation between microphone-detected expiration time T_f and belt-determined active expiration time T_{ax} , using the data shown in FIG. 5, in accordance with an embodiment of the present invention. The correlation between T_f and T_{ax} as determined using linear regression, is $r=0.98$ with slope 0.97 ± 0.05 (expected 1) and an intercept of nearly zero (ex-

pected 0). The accuracy in time is 0.22 seconds, where 0.14 seconds is the statistical error in measuring the time interval under a 10 Hz sampling rate. A similar correlation was found between the microphone-detected and belt-determined breathing periods (data not shown). These data indicate that the microphone-detected parameters are comparable to those detected by a belt-type sensor.

[0247] Reference is again made to FIG. 5. In an embodiment of the present invention, a method is provided for estimating inspiration time T_{inf} using microphone-detected active expiration time T_f and breathing period T (time between successive breaths). This method is typically used for carrying out pattern determination step 118, described hereinabove with reference to FIG. 3. The airflow signal reflected in recording 250 generally corresponds to the time derivative (with inverted sign) of the chest-circumference recording 252 during expiration, because airflow is the time derivative of lung volume as indicated by chest circumference.

[0248] The inventors have observed that effortless breathing generally can be characterized by one of two patterns:

[0249] a first pattern 260, in which the end of active expiration T_{ax} occurs generally at the same time as the beginning of the subsequent inspiration T_{in} . For this pattern, T_{inf} is estimated using the following formula:

$$T_{inf}=T-T_f \quad (1)$$

For some applications, T_{inf} is set to a function of $T-T_f$. For example, T_{inf} may be set to the product of $T-T_f$ and a constant between about 0.8 and about 1.2, such as between about 0.95 and about 1.05. Alternatively, T_{inf} may be set to the sum of $T-T_f$ and the value, wherein the value is positive or negative. For some applications, T_{inf} is set to be equal to $T-T_f$ within plus or minus 20%, such as within plus or minus 10%. For some applications, T_{inf} is set to a phenomenological function of $T-T_f$ or of other respiration-related parameters measured using techniques described herein. For some applications, one or more constants of the phenomenological function is determined at least in part responsively to at least one parameter of the respiration.

[0250] a second pattern 262, in which the end of active expiration T_{ax} is followed by a phase T_p with no chest movement, which is followed by the beginning of the subsequent inspiration T_{in} . For this pattern, T_{inf} is typically estimated using the following formula:

$$T_{inf}=T_f \quad (2)$$

For some applications, T_{inf} is set to a function of T_f . For example, T_{inf} may be set to the product of T_f and a constant between about 0.8 and about 1.2, such as between about 0.95 and about 1.05. Alternatively, T_{inf} may be set to the sum of T_f and the value, wherein the value is positive or negative. For some applications, T_{inf} is set to be equal to T_f within plus or minus 20%, such as within plus or minus 10%. For some applications, T_{inf} is set to a phenomenological function of T_f or of other respiration-related parameters measured using techniques described herein. For some applications, one or more constants of the phenomenological function is determined at least in part responsively to at least one parameter of the respiration.

[0251] The inventors have observed that in first pattern 260, active expiration time T_{ax} generally has a duration greater than the duration of inspiration time T_{in} , sometimes up to 5

times greater. In contrast, in second pattern **262**, T_{ax} generally has a similar duration to that of T_{im} . The inventors have observed that first pattern **260** is usually obtained when a user is performing an action such as pursed lips breathing, i.e., artificially prolonging expiration by narrowing the gap between the lips, which is a known natural therapeutic maneuver. Second pattern **262** reflects a general natural tendency to match the flow at the beginning of inspiration and expiration.

[0252] Formulas (1) and (2) can be combined and represented by the following algorithm:

$$\begin{array}{l} \text{If } T - T_f \geq T_f \\ \quad \text{then } T_{inf} = T - T_f \\ \text{else } T_{inf} = T_f \end{array} \quad (3)$$

As mentioned above, for some applications, T_{inf} is set to a function of $T - T_f$ or T_f , depending on the evaluation of the condition. Alternatively or additionally, the condition evaluated by the algorithm is: If $T - T_f \geq a$ function of T_f .

[0253] FIG. 7 is a graph showing experimental results measured in accordance with an embodiment of the present invention. The graph shows microphone-detected T_{inf} calculated using algorithm (3) (y-axis) vs. T_{im} measured with a belt-type sensor (x-axis), with the data points randomly selected from data of 10 different users (3 breaths for each user). The correlation between T_{inf} and T_{im} , as determined using linear regression, is $r=0.82$ with slope 0.97 ± 0.13 (expected 1) and an intercept of nearly zero (expected 0). The accuracy in time is 0.54 seconds, where 0.14 seconds is the statistical error in measuring the time interval under a 10 Hz sampling rate. This error represents about 25% of the average inspiration time T_{im} of 2.1 seconds, and 7.8% of the average breathing period T of 6.9 seconds. These results are generally sufficiently accurate for the purpose of modifying breathing patterns by generating guiding tones. The nearly-unity slope between the parameters found using algorithm (3) and the belt-type sensor suggests that the differences are attributable to random data scattering. In an embodiment (typically during a breathing pattern modification procedure), the scattering is reduced to an acceptable level by averaging the value of T measured during multiple breathing cycles, and/or by averaging the value of T_{inf} measured during multiple breathing cycles.

[0254] In an embodiment of the present invention, additional breathing parameters are derived from the microphone-detected airflow. The airflow can be expressed as $Y(i,t)$, where Y is the magnitude of airflow, i is breath number, and t is the time extending from the beginning of breath i until the end of breath i . The additional breathing parameters include:

[0255] breathing amplitude, which is represented by the integrated airflow for a single breath, which is given by:

$$Af(i) = \sum_t Y(i,t) \quad (4)$$

The integrated airflow represents the depth of breathing for the i^{th} breath. (Alternatively, breathing amplitude is represented by the maximum value of $Y(i,t)$ over a suitable interval.)

[0256] the geometrical properties of the airflow pattern by means of moments, which is given by:

$$\sum_t (Y(i,t) \cdot (t - \langle it \rangle)^n) \quad (5)$$

[0257] where:

$$\langle a \rangle \langle it \rangle = \frac{\sum_t (Y(i,t) \cdot t)}{\sum_t Y(i,t)},$$

[0258] and

[0259] (b) n is the order of the moment.

[0260] For example, if $n=0, 1, 2, \text{ or } 3$, the sum corresponds, respectively, to (a) integrated area, (b) zero by definition, (c) variance of the airflow pattern, and (d) asymmetry of the airflow pattern.

[0261] For some applications, breathing amplitude is determined, such as described above, and at least one additional parameter is derived from the breathing amplitude. For example, the additional parameter may be: (a) a measure of ventilation (amount of air per unit time), such as a product of the breathing amplitude and the respiration period, or (b) a measure of breathing irregularity, such as relative fluctuations in breathing amplitude (e.g., the standard deviation of the n last breathing amplitude values, divided by the mean of the breathing amplitude). Breathing irregularity generally increases during stress and some diseases. For some applications, other characteristics of the airflow are detected, such as by fitting mathematical models having a physiological rationale, such as:

[0262] a square pulse that corresponds to uniform expiration, which characterizes pursed lips breathing;

[0263] a fast-rising but gradually decreasing flow followed by a post-expiratory pause, which characterizes relaxed breathing; or

[0264] an exponential-decay that characterizes passive elastic recoil of the lungs against airways resistance.

[0265] For some applications, the airflow is analyzed to detect a characteristic of breathing with effort. For some applications, the airflow is analyzed to detect a characteristic of breathing during which the lungs undergo a functional change, such as when the subject suffers from asthma, emphysema, or another condition in which small airways collapse during expiration (which cannot be characterized as a simple elastic recoil).

[0266] FIG. 8 is a flow chart illustrating a method for adaptively determining filtering frequencies, in accordance with an embodiment of the present invention. For some applications, control unit **26** uses this method to determine filtering frequencies $f1$ and $f2$, described hereinabove with reference to filtering step **106** of FIG. 3, when system **10** is used for breathing pattern modification. Typically, when system **10** is turned on, or when airflow is undetected for a predetermined amount of time, control unit **26** automatically enters a metronome mode of operation. In this mode of operation, CPU **32** alternately generates inspiration and expiration phase indicators, at a phase indicators generation step **300**. For example, CPU **32** may generate each inspiration phase indicator for between about 1 and about 5 seconds, e.g., about 2 seconds,

and each expiration phase indicator for between about 2 and about 10 seconds, e.g., about 4 seconds. CPU 32 typically generates each of the phases between about 5 and about 10 times.

[0267] Responsively to the phase indicators, sound synthesizer 34 generates tones and/or oral messages that instruct user 20 to synchronize breathing with the inspiration and expiration phases, at a guide user step 302. Microphone 22 detects the resulting user-generated airflow, at an airflow detection step 304. Amplifier 28 amplifies the signal, and A/D converter 30 digitizes the amplified signal, at an amplification and digitization step 306. At a buffer and mark step 308, control unit 26 buffers the digital signal, and marks the buffered signal with the phase indicator generated when the signal was recorded.

[0268] At a filtering step 310, control unit 26 periodically performs spectral analysis on the buffered data, e.g., every 0.1 seconds. Control unit 26 typically performs the spectral analysis using a DFT, operating within a range of frequencies between f_{min} and f_{max} , as described hereinabove with reference to filtering step 106 of FIG. 3. Control unit 26 eliminates frequencies that are less than f_{min} and greater than f_{max} . At a spectrum integration step 312, control unit 26 integrates the power of separate spectrums for the signals stored during the inspiration phase and the expiration phase, respectively, and typically smoothes the signals using a moving-average calculation, at a moving average calculation step 314. The resulting inspiration and expiration spectra are separately buffered at an inspiration buffer step 316 and an expiration buffer step 318, respectively.

[0269] Reference is made to FIGS. 9A and 9B, which are schematic illustrations of several exemplary spectra, in accordance with an embodiment of the present invention. FIG. 9A shows an exemplary inspiration spectrum 350, and an exemplary expiration spectrum 352. At a spectra subtraction step 320 (FIG. 8), control unit 26 subtracts inspiration spectrum 350 from expiration spectrum 352 to obtain a net spectrum 354, shown in FIG. 9B, which is associated with expiratory airflow sounds. Control unit 26 typically averages net spectrum 352 over a selected number of guided breaths. At a parameter calculation step 322, control unit 26 calculates parameters of net spectrum 352, including f_1 and f_2 , described hereinabove with reference to filtering step 106 of FIG. 3. The resulting parameters are used at filtering step 106, as described hereinabove with reference to FIG. 3. For some applications, f_1 is set to a value such that the area under net spectrum 354 to the left of f_1 is r_1 % (e.g., 10%) of the total area under net spectrum 354, and f_2 is set to a value such that the area under net spectrum 354 to the right of f_2 is r_2 % (e.g., 10%) of the total area under net spectrum 354. As appropriate, r_1 may be equal or not equal to r_2 . Alternatively or additionally, control unit 26 derives other parameters of net spectrum 354 that are used for filtering at filtering step 106 of FIG. 3.

[0270] Reference is again made to FIG. 1. In an embodiment of the present invention, microphone 22 is integrated into a medical device in fluid communication (e.g., via air or another gas) with respiration-related airflow of user 20. For example, the medical device may comprise a breathing mask or a tube, such as a tracheotomy tube. For some applications, the breathing mask or tube are components of a ventilator that applies positive pressure to the lungs of user 20. The techniques described herein are used to detect proper performance of the ventilator, typically by detecting active expiration by the user. Active expiration is typically measured by

detecting low-frequency sounds indicative of expiratory airflow, rather than by detecting sounds of breathing. (In such subject, sounds of breathing often do not correlate with expiration, because the sounds of breathing are often affected by various constrictions in the subject's airways. However, low-frequency sounds indicative of expiratory airflow are not generally affected by such constrictions.) For some applications, the techniques described herein are used for non-contact monitoring of breathing during weaning from ventilation.

[0271] In an embodiment of the present invention, the techniques described herein are used for non-contact monitoring of breathing during use of a drug inhaler by the subject. Typically, microphone 22, and, optionally, other components of system 10, are integrated into the drug inhaler. For some applications, such non-contact monitoring of breathing is combined with techniques for modifying breathing activity of the subject, such as those described in the above-mentioned patent and patent application publications to Gavish and Gavish et al.

[0272] In an embodiment of the present invention, the techniques described herein and/or in the above-mentioned patent and patent application publications to Gavish and Gavish et al. are used to treat a subject suffering from insomnia. Insomnia is sometimes caused by disordered breathing, such as fast and shallow breathing. For some applications, insomnia is treated using techniques described herein for detecting and monitoring breathing, in combination with techniques for modifying respiration-related biorhythmic activity of the subject described in the above-mentioned patent and patent application publications to Gavish and Gavish et al.

[0273] In an embodiment of the present invention, the breathing monitoring techniques described herein are used for detecting sleep-disordered breathing, such as sleep-disordered breathing associated with sleep apnea or sudden infant death syndrome (SIDS). Typically, breath-by-breath airflow during exhalation is monitored. For some applications, such non-contact monitoring of breathing is combined with techniques for modifying breathing activity of the subject, such as those described in the above-mentioned patent and patent application publications to Gavish and Gavish et al.

[0274] In an embodiment of the present invention, techniques described herein are used in combination with techniques for modifying biorhythmic activity of user 20. Typically, the biorhythmic activity includes respiration. The user is guided to inhale for a certain period of time, exhale for a certain period of time, and, optionally, to hold his breath for a certain period of time.

[0275] In an embodiment of the present invention, a method is provided for modifying naturally-occurring multi-phase biorhythmic activity of a subject, such as respiration of the subject. The method comprises detecting a signal indicative of the multi-phase biorhythmic activity, and analyzing the signal to determine one or more parameters of a filter. Background noise is filtered from the signal using the filter. At least in part responsively to the filtered signal, a stimulus input, such as an audio and/or visual stimulus input, is determined which is operative to change at least one aspect of the biorhythmic activity of the subject, and the stimulus input is provided to the subject. For some applications, the background noise is indicative of secondary biorhythmic activity different from the multi-phase biorhythmic activity, and the secondary biorhythmic activity-related background noise is filtered from the signal.

[0276] For some applications, the background noise is filtered from the signal by frequency filtering the signal. Alternatively or additionally, the signal is filtered by performing spectral analysis on the signal to produce a frequency spectrum. For example, the frequency spectrum may be frequency filtered. Further alternatively, non-frequency spectral analysis is performed on the signal in order to classify the signal according to one or more variables.

[0277] For some applications, the background noise is filtered to remove non-frequency-related noise from the signal, typically to eliminate a portion of the signal that is not relevant to determining to the stimulus input. For example, a breathing-related signal (e.g., monitored using a belt-type sensor) may include a heartbeat-related component which is noise with respect to the respiration-related component of the signal. This heartbeat-related component is eliminated from the signal, typically using non-frequency-related filtering, such as by identifying small peaks characteristic of the heartbeats and removing them from the signal.

[0278] As appropriate, techniques described herein are practiced in conjunction with techniques described in the above-mentioned patents and patent application publications to Gavish and Gavish et al.

[0279] Although metronome stimuli and/or other instructions have generally been described herein as including audio tones and/or oral messages, such stimuli and instructions may also take additional forms, such as visual display images, e.g., text messages (e.g., “inhale” and “exhale”), and/or dynamically changing graphical features, e.g., color and form. In such cases, sound synthesizer 34 and speaker 24 are replaced with an appropriate output generator. Alternatively, sound synthesizer 34 generates oral guiding messages only, rather than tones.

[0280] It will be appreciated by persons skilled in the art that the present invention is not limited to what has been particularly shown and described hereinabove. Rather, the scope of the present invention includes both combinations and subcombinations of the various features described hereinabove, as well as variations and modifications thereof that are not in the prior art, which would occur to persons skilled in the art upon reading the foregoing description.

1. A method for analyzing respiration of a subject, the method comprising:

using a non-contact microphone, generating a raw signal indicative of airflow sounds of the respiration;
analyzing the raw signal to determine a first set of one or more parameters of the respiration; and
applying an algorithm to the first set of parameters to derive a second set of one or more estimated parameters of the respiration that are not generally directly measurable in the raw signal.

2. The method according to claim 1, wherein applying the algorithm comprises setting the second set of one or more estimated parameters equal to a phenomenological function of the first set of one or more parameters.

3. The method according to claim 1, wherein the first set of parameters includes a measure of breathing amplitude of the respiration, and wherein analyzing the raw signal comprises integrating the airflow sounds for a breath of the respiration to determine the measure of breathing amplitude.

4. The method according to claim 1,

wherein the first set of parameters includes a measure of breathing amplitude of the respiration,

wherein the second set of parameters is selected from the list consisting of: a measure of ventilation of the subject, and a measure of breathing irregularity of the subject, and

wherein applying the algorithm comprises applying the algorithm to the measure of breathing amplitude to derive the selected second set of parameters.

5. The method according to claim 1, comprising analyzing at least one of the first and second sets of parameters to derive at least one additional breathing-related parameter of the subject selected from the list consisting of: breathing amplitude, a geometrical property of airflow of the subject, a characteristic of the airflow indicative of pursed lips breathing, a characteristic of the breathing indicative of relaxed breathing, a characteristic of the breathing indicative of passive elastic recoil of lungs of the subject, a characteristic of breathing with effort, and a characteristic of breathing during which the lungs of the subject undergo a functional change.

6. The method according to claim 1, comprising guiding the subject to perform breathing in a plurality of respiration phases determined at least in part responsively to the second set of parameters.

7. The method according to claim 6, wherein guiding the subject to perform the breathing comprises treating insomnia of the subject by guiding the subject to perform the breathing in the plurality of respiration phases.

8. The method according to claim 1, wherein the non-contact microphone includes a non-contact microphone of a consumer electronics device capable of performing at least one function that does not facilitate analyzing respiration of the subject, and wherein generating the raw signal comprises using the non-contact microphone.

9. The method according to claim 1, wherein the non-contact microphone is integrated into a medical device in fluid communication with respiration-related airflow of the subject, and wherein generating the raw signal comprises using the integrated non-contact microphone.

10. The method according to claim 9, wherein the medical device includes a drug inhaler, and wherein generating the raw signal comprises using the non-contact microphone integrated into the drug inhaler.

11. The method according to claim 1, wherein analyzing the raw signal comprises deriving an expiratory airflow sound signal from the raw signal, and analyzing the expiratory airflow sound signal to determine the first set of parameters.

12. The method according to claim 11, comprising generating a real-time indication for the subject that indicates whether expiration has been detected.

13. The method according to claim 11, wherein the first set of parameters includes an active expiration time and a breathing period of the subject, and wherein analyzing the expiratory airflow sound signal comprises analyzing the expiratory airflow sound signal to determine the active expiration time and the breathing period.

14. The method according to claim 13, wherein the second set of parameters includes an amplitude of a non-expiratory portion of the respiration, and wherein applying the algorithm comprises applying the algorithm to derive the amplitude of the non-expiratory portion of the respiration.

15. The method according to claim 13, wherein the second set of parameters includes an inspiration time of the subject, and wherein applying the algorithm comprises applying the algorithm to derive the inspiration time.

16. The method according to claim **15**, wherein applying the algorithm to derive the inspiration time comprises:

determining whether a difference between the breathing period and the active expiration time is greater than or equal to a first function of the active expiration time;
responsively to a positive determination, setting the inspiration time equal to a second function of the difference;
and

responsively to a negative determination, setting the inspiration time equal to a third function of the active expiration time.

17. The method according to claim **16**, wherein determining comprises determining whether the difference between the breathing period and the active expiration time is greater than or equal to the active expiration time.

18. The method according to claim **16**, wherein setting responsively to the positive determination comprises setting the inspiration time equal to a value within plus or minus 20% of the difference.

19. The method according to claim **18**, wherein setting responsively to the positive determination comprises setting the inspiration time equal to a value within plus or minus 10% of the difference.

20. The method according to claim **16**, wherein the second function includes a function of the difference and a phenomenological constant, and wherein setting responsively to the positive determination comprises setting the inspiration time equal to the second function of the difference and the phenomenological constant.

* * * * *

专利名称(译)	使用非接触式麦克风进行呼吸模式确定的装置和方法		
公开(公告)号	US20130289431A1	公开(公告)日	2013-10-31
申请号	US13/926840	申请日	2013-06-25
[标]申请(专利权)人(译)	GAVISH BENJAMIN 多伦约拉姆		
申请(专利权)人(译)	GAVISH, BENJAMIN 多伦, 约拉姆		
当前申请(专利权)人(译)	2BREATHE TECHNOLOGIES LTD.		
[标]发明人	GAVISH BENJAMIN DORON YORAM		
发明人	GAVISH, BENJAMIN DORON, YORAM		
IPC分类号	A61B5/08 A61B7/00 A61B5/00		
CPC分类号	A61B5/08 A61B5/74 A61B7/003 A61B5/0816 A61M15/00		
优先权	60/590508 2004-07-23 US PCT/IL2005/000778 2005-07-21 WO		
其他公开文献	US9642557		
外部链接	Espacenet USPTO		

摘要(译)

提供了一种用于分析受试者的呼吸的方法 (20)。使用非接触式麦克风 (22)，产生指示呼吸的气流声音的原始信号。分析原始信号以确定呼吸的一个或多个参数的第一组。将算法应用于呼吸的第一组一个或多个参数。将算法应用于第一组参数以导出呼吸的一个或多个估计参数的第二组，其通常在原始信号中不可直接测量。还描述了其他实施例。

