




US 20180188114A1

(19) **United States**(12) **Patent Application Publication**
Ou Yang et al.(10) **Pub. No.: US 2018/0188114 A1**(43) **Pub. Date: Jul. 5, 2018**(54) **WEARABLE BODY TEMPERATURE
MONITORING DEVICE AND METHOD
THEREOF**(71) Applicant: **AVITA CORPORATION**, New Taipei
City (TW)(72) Inventors: **Hsing Ou Yang**, New Taipei City
(TW); **Hsuan Hao Shih**, New Taipei
City (TW); **TA CHIEH YANG**, New
Taipei City (TW)(21) Appl. No.: **15/859,704**(22) Filed: **Jan. 1, 2018**(30) **Foreign Application Priority Data**

Dec. 30, 2016 (TW) 105144038

Publication Classification(51) **Int. Cl.**
G01J 5/00 (2006.01)
G01J 5/08 (2006.01)
G01J 5/04 (2006.01)
G01J 5/02 (2006.01)**A61B 5/00** (2006.01)**A61B 5/01** (2006.01)(52) **U.S. Cl.**CPC **G01J 5/0025** (2013.01); **G01J 5/0818**
(2013.01); **G01J 5/041** (2013.01); **G01J 5/025**
(2013.01); **A61B 2562/0271** (2013.01); **A61B**
5/0075 (2013.01); **A61B 5/01** (2013.01); **A61B**
5/6838 (2013.01); **A61B 5/0008** (2013.01)(57) **ABSTRACT**

The present disclosure illustrates a wearable body temperature monitoring device and a method thereof. The wearable body temperature monitoring device includes a hollow shell member and a circuit board. The hollow shell member includes a sensing surface and an outer surface opposite to each other, and the sensing surface is provided with hole. The circuit board is accommodated in the hollow shell member and includes a first side surface corresponding to the sensing surface and a second side surface corresponding to the outer surface. The circuit board is provided with a non-contact temperature sensor, a wireless transmission module, a processing unit, and a battery, and the non-contact temperature sensor is disposed at the first side surface and aligned with the hole of the sensing surface. The wearable body temperature monitoring device can respond the variation of the body temperature in real time when being attached on clothes.

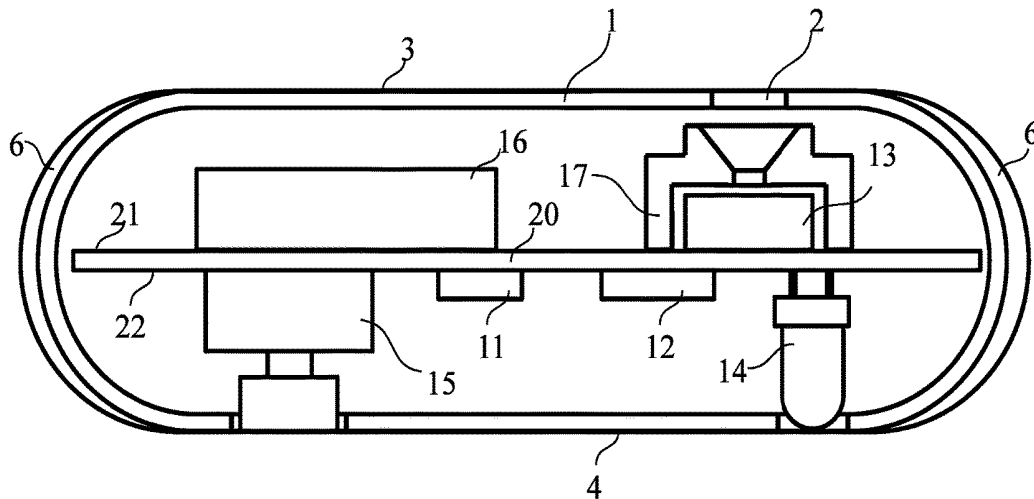

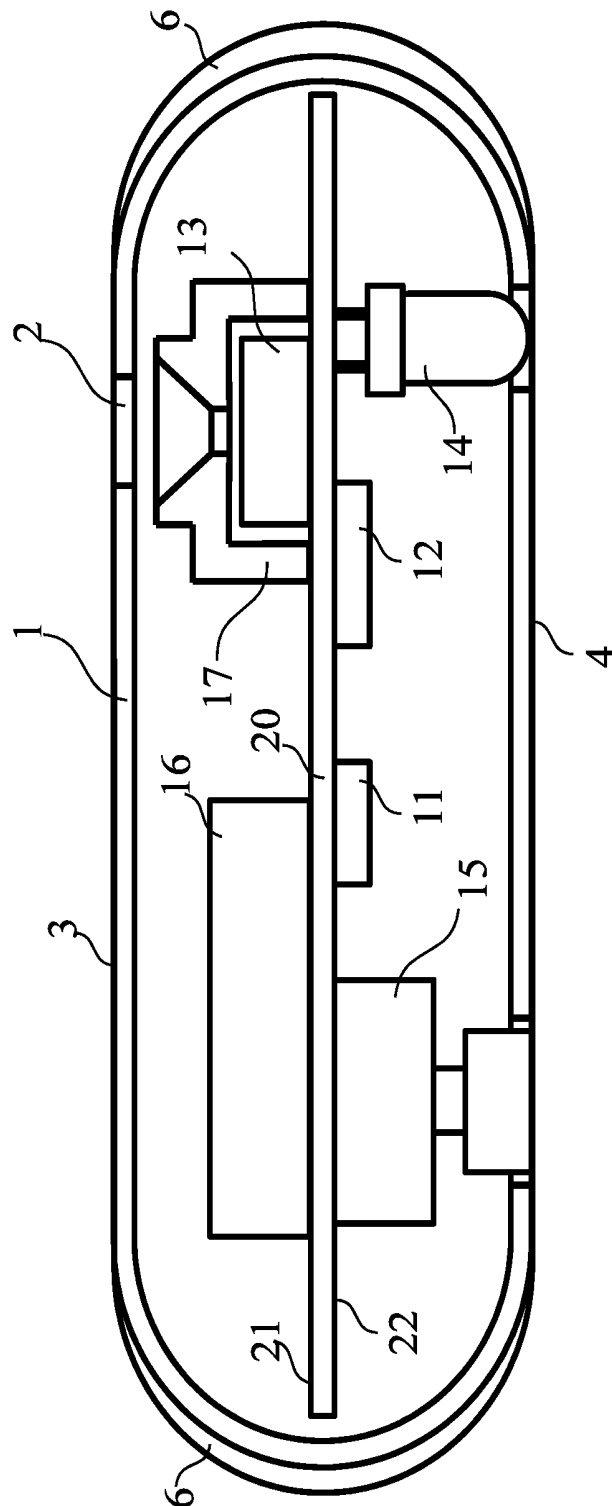


FIG.1

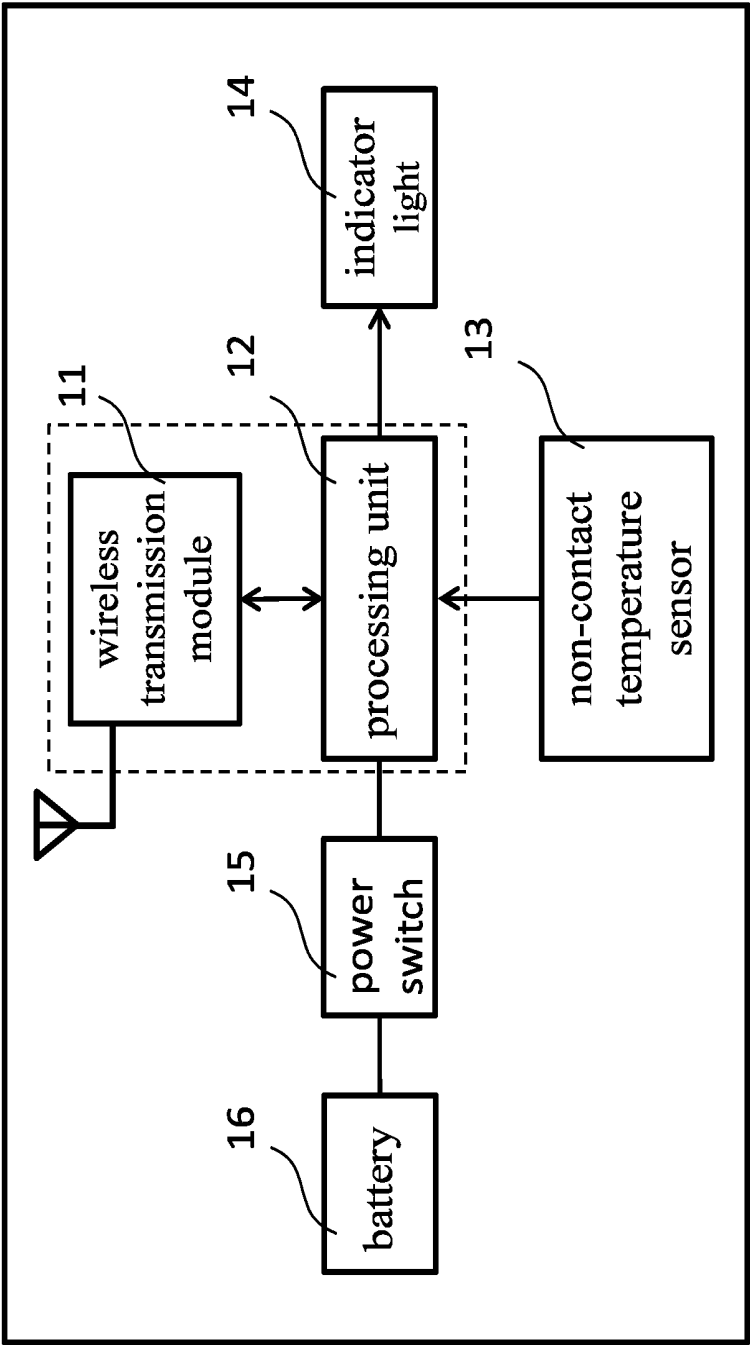


FIG.2

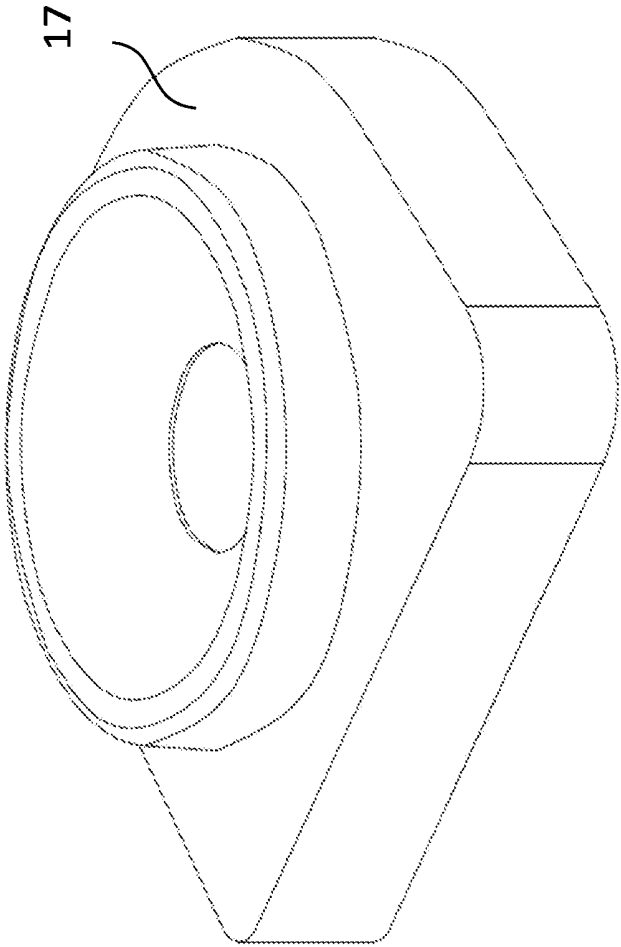


FIG.3

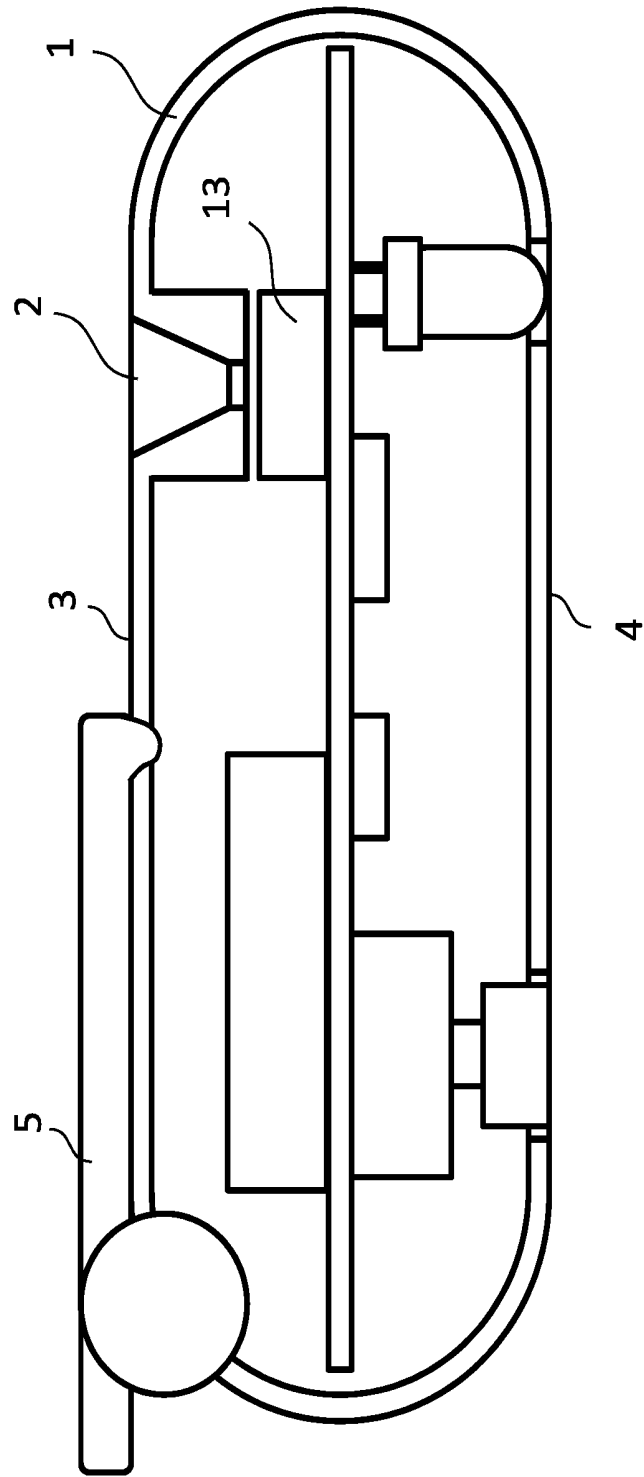


FIG.4

WEARABLE BODY TEMPERATURE MONITORING DEVICE AND METHOD THEREOF

NOTICE OF COPYRIGHT

[0001] A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to any reproduction by anyone of the patent disclosure, as it appears in the United States Patent and Trademark Office patent files or records, but otherwise reserves all copyright rights whatsoever.

BACKGROUND OF THE PRESENT INVENTION

Field of Invention

[0002] The present disclosure relates to a body temperature monitoring device and method. More particularly, the present disclosure relates to a non-contact wearable body temperature monitoring device and method thereof.

Description of Related Arts

[0003] The electronic thermometer is able to quickly and accurately measure temperature of human body, so the conventional mercury thermometers are replaced by the electronic thermometers in general family. The conventional electronic thermometers can be classified into a contact-type sensing thermometer and non-contact-type sensing thermometer. For example, a handheld forehead temperature sensing device is a non-contact-type electronic thermometer. The handheld forehead temperature sensing device is able to sense the temperature of forehead when the handheld forehead temperature sensing device is spaced apart from the forehead by a short distance. However, the user must press button of the handheld forehead temperature sensing device to sense the temperature, so the handheld forehead temperature sensing device is unsuitable to continuously monitor the body temperatures of infants and young children to check whether the body temperatures of infants and young children are too high.

[0004] There is a contact-type electronic thermometer suitable to continuously monitor the body temperature of the infants and young children. The sensor of the contact-type electronic thermometer must be in direct contact with the skin or directly attached on the skin surface, so the user must open the infant's outer clothes to attach the contact-type body temperature sensor on the skin of the body of infant or young child, in order to use the contact-type electronic thermometer to monitor the body temperature of the infant or young child. However, the infant or young child may be easy to catch cold during the process of using the contact body temperature sensor.

[0005] Therefore, the present disclosure is to provide a non-contact-type wearable body temperature monitoring device and a method thereof, so that the operation of continuously monitoring the body temperature of infant or young child can be more convenient, and the infant or young child can be cared better.

SUMMARY OF THE PRESENT INVENTION

[0006] An objective of the present disclosure is to provide a body temperature monitoring device which is able to

provide non-contact body temperature sensing function and wearable convenience, and a method thereof.

[0007] An objective of the present disclosure is to provide a wearable body temperature monitoring device and a method, in which use an infrared light temperature sensor in cooperation with a wave collector, to continuously monitor the body temperature.

[0008] In order to achieve the objective of the present disclosure, the present disclosure provides a wearable body temperature monitoring device. The wearable body temperature monitoring device includes a hollow shell member and a circuit board. The hollow shell member includes a sensing surface and an outer surface which both are two side surfaces opposite to each other. The sensing surface is provided with a hole. The circuit board is accommodated in the hollow shell member and includes a first side surface corresponding in position to the sensing surface and a second side surface corresponding in position to the outer surface. The circuit board also includes a non-contact temperature sensor, a wireless transmission module, a processing unit, and a battery. The non-contact temperature sensor is disposed at the first side surface and aligned with the hole of the sensing surface.

[0009] Preferably, the wearable body temperature monitoring device of the present disclosure further includes a wave collector comprising a trumpet-shaped opening, and the wave collector is covered on the infrared light temperature sensor, to align with the hole of the sensing surface.

[0010] Preferably, the wearable body temperature monitoring device of the present disclosure further includes an indicator light disposed at the second side surface and exposed out of the outer surface of the hollow shell member.

[0011] In order to achieve the objective of the present disclosure, the present disclosure further provides a wearable body temperature monitoring method including steps of: providing a hollow shell member which includes a sensing surface and an outer surface which both are two side surfaces opposite to each other, wherein the sensing surface is provided with a hole; and, providing a circuit board accommodated in the hollow shell member, wherein the circuit board comprises a first side surface corresponding in position to the sensing surface and a second side surface corresponding in position to the outer surface, and the circuit board comprises a non-contact temperature sensor, a wireless transmission module, a processing unit, and a battery, and the non-contact temperature sensor is located at the first side surface and aligned with the hole.

[0012] Preferably, the method further includes a step of providing a wave collector including a trumpet-shaped opening, wherein the wave collector is covered on the infrared light temperature sensor to align with the hole of the sensing surface.

[0013] Preferably, the method further includes a step of: providing an indicator light disposed at the second side surface and exposed out of the outer surface of the hollow shell member.

[0014] According to the wearable body temperature monitoring device and the method of the present disclosure, the user can continuously monitor the body temperature of infant or young child without attaching the temperature sensor on the skin of the infant or young child, thereby improving the convenience in operation and usage of the temperature sensor.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The structure, operating principle and effects of the present disclosure will be described in detail by way of various embodiments which are illustrated in the accompanying drawings.

[0016] FIG. 1 is a sectional view of a wearable body temperature monitoring device of the present disclosure.

[0017] FIG. 2 is a block diagram of a wearable body temperature monitoring device of the present disclosure.

[0018] FIG. 3 is a perspective view of a wave collector of the present disclosure.

[0019] FIG. 4 is a sectional view of a wearable body temperature monitoring device provided with a clip, in accordance with the present disclosure.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0020] The following embodiments of the present disclosure are herein described in detail with reference to the accompanying drawings. These drawings show specific examples of the embodiments of the present disclosure. It is to be understood that these embodiments are exemplary implementations and are not to be construed as limiting the scope of the present disclosure in any way. Further modifications to the disclosed embodiments, as well as other embodiments, are also included within the scope of the appended claims. These embodiments are provided so that this disclosure is thorough and complete, and fully conveys the inventive concept to those skilled in the art. Regarding the drawings, the relative proportions and ratios of elements in the drawings may be exaggerated or diminished in size for the sake of clarity and convenience. Such arbitrary proportions are only illustrative and not limiting in any way. The same reference numbers are used in the drawings and description to refer to the same or like parts.

[0021] It is to be understood that, although the terms 'first', 'second', 'third', and so on, may be used herein to describe various elements, these elements should not be limited by these terms. These terms are used only for the purpose of distinguishing one component from another component. Thus, a first element discussed herein could be termed a second element without altering the description of the present disclosure. As used herein, the term "or" includes any and all combinations of one or more of the associated listed items.

[0022] Please refer to FIG. 1. FIG. 1 shows a sectional view of a wearable body temperature monitoring device of the present disclosure. The wearable body temperature monitoring device includes a hollow shell member 1 and a circuit board 20. Preferably, the hollow shell member 1 is in a flat elliptic shape and includes a sensing surface 3 and an outer surface 4 formed on two opposite sides thereof. The sensing surface 3 includes an hole 2. The sensing surface 3 is not limited to be a plane, the elliptic shape of the shell member 1 is able to appear aesthetically appealing and fashionable; alternatively, the sensing surface 3 can be designed to have a slightly-concave radian, so that the shape of the shell member 1 can match a curve of the user's chest, thereby improving the user's comfort. Furthermore, a soft member 6 can be disposed on an elliptic perimeter between the sensing surface 3 and the outer surface 4 of the shell member 1 and served as an outer periphery part of the shell member 1, so as to increase the comfortability for the user

to take and use the wearable body temperature monitoring device of the present disclosure. Alternatively, the soft member 6 can be extended to the sensing surface 3 to increase the comfortability of the sensing surface 3 in contact with the skin, but the soft member 6 must avoid the hole 2 of the sensing surface 3 from affecting the body temperature monitoring effect of the device.

[0023] In an embodiment of the present disclosure, the circuit board 20 is accommodated inside the hollow shell member 1, and includes a first side surface 21 disposed correspondingly in position to the sensing surface 3 and a second side surface 22 disposed correspondingly in position to the outer surface 4. The circuit board 20 is provided with a non-contact temperature sensor 13, a wireless transmission module 11, a processing unit 12, an indicator light 14, a power switch 15, and a battery 16 disposed on two side surfaces 21 and 22, respectively. Preferably, the non-contact temperature sensor 13 is disposed on the first side surface 21 of the circuit board 20 and aligned with the hole 2 of the sensing surface 3. Preferably, the non-contact temperature sensor 13 is an infrared light temperature sensor. The infrared light temperature sensor is covered by the wave collector 17 first, and then aligned with the hole 2 of the sensing surface 3. Preferably, the wireless transmission module 11 and the indicator light 14 are disposed on the second side surface 22 of the circuit board 20, so that, through the indicator light 14 on the outer surface 4 of the shell member 1, the user can easily observe variation of light color of the indicator light 14 which responds the monitored body temperature. The power switch 15 can be disposed on the first side surface 21 or the second side surface 22 of the circuit board 20, so as to facilitate the user to press the power switch 15 through the sensing surface 3 or the outer surface press of the shell member 1. In different embodiment of the present disclosure, the power switch 15 and the indicator light 14 both can be implemented by a switch device having the indicator light, so that the switch device can be served as the power switch of the wearable body temperature monitoring device of the present disclosure and show the variation of the light color corresponding to the monitored body temperature. In order to use the wearable body temperature monitoring device of the present disclosure, the user can power on the wearable body temperature monitoring device first, and place the wearable body temperature monitoring device in the pocket of clothes on the to-sensed-body or mount the wearable body temperature monitoring device on a necklace which is worn on the chest, and make the sensing surface 3 face toward the to-be-sensed body, thereby continuously monitoring the variation of the body temperature of the user's body.

[0024] FIG. 2 shows a block diagram of the circuit board 20 of the wearable body temperature monitoring device of the present disclosure. The detail of the circuit board 20 will be described in following content.

[0025] According to the embodiment of the present disclosure, the battery 16 supplies power to the wearable body temperature monitoring device of the present disclosure. The switch 15 is disposed in an electric loop between the processing unit 12 and the battery 16, and configured to control the power supply of the battery 16 to the processing unit 12, and the battery 16 then provides power to the wireless transmission module 11, the non-contact temperature sensor 13 and the indicator light 14 through the processing unit 12. When the switch 15 controls the battery 16

to supply power to the processing unit 12, the processing unit 12 controls the indicator light 14 to light, so as to indicate that the wearable body temperature monitoring device of the present disclosure is powered on and starts to supply power to the non-contact temperature sensor 13. The indicator light 14 can emit light with various colors, and the processing unit 12 controls the variation in color of the light emitted from the indicator light 14, so as to respond the monitored body temperature. When the processing unit 12 is supplied with power, the processing unit 12 enters a temperature monitoring mode to receive a sensing signal from the non-contact temperature sensor 13 and calculate a temperature sensing value, and then determine the light color of the indicator light 14 according to the temperature sensing value. In detail, the processing unit 12 converts the sensing signal into a physical temperature first, and then converts the physical temperature into a human body's temperature according to a conversion formula established based on clinical experiment data. Furthermore, the processing unit 12 recalculates the temperature sensing value every time interval, so that the user can know the variation of the body temperature of the to-be-sensed body according to the variation of the light color of the indicator light 14 continuously corresponding to the variation of the temperature sensing value. The time interval can be a preset fixed time period.

[0026] In another embodiment of the present disclosure, the switch 15 can be a three-stage device having a power off stage, a power on stage and a wireless transmission stage. When the switch 15 is switched to the power on stage, the processing unit 12 is supplied power to execute the temperature monitoring mode, and the light color of the indicator light 14 can indicate the variation of the body temperature of the to-be-sensed body. When the switch 15 is switched to the wireless transmission stage, the processing unit 12 enables the wireless transmission module 11 to establish wireless communication with a mobile communication device (not shown in figures) through the wireless transmission module 11, so as to transmit the calculated temperature sensing value to the mobile communication device. Furthermore, the mobile communication device can execute an application program to wirelessly communicate with the device of the present disclosure.

[0027] In this embodiment of the present disclosure, the processing unit 12 and the wireless transmission module 11 can be implemented by integrated-circuit components, respectively. Preferably, the wireless transmission module 11 can be a Bluetooth wireless communication module, so that the wearable body temperature monitoring device of the present disclosure can wirelessly communicate with a smartphone or a tablet computer having Bluetooth wireless communication function, and the smartphone or the tablet computer can display the variation of the body temperature of the to-be-sensed body or output a warning message indicative of high temperature. Preferably, the processing unit 12 can be a microcontroller (MCU) including a memory configured to store a program instruction set. The microcontroller can execute the program instruction set to implement the functions of monitoring the temperature, controlling variation of light color of the indicator light 14, and controlling the wireless communication between the wireless transmission module 11 and the mobile communication device (not shown in figures). Furthermore, the mobile communication device can execute the application program to set the data

stored in the wearable body temperature monitoring device of the present disclosure; for example, the mobile communication device can set the time interval by which the processing unit 12 recalculates the temperature sensing value, so as to change the response frequency of the mobile communication device or the indicator light 14 for the variation of the to-be-sensed body's temperature; alternatively, the mobile communication device can remotely set the switching operation of the device of the present disclosure. In different embodiment of the present disclosure, the processing unit 12 and the wireless transmission module 11 can be packaged integrally as a single integrated-circuit component, such as the dashed line block shown in FIG. 2; for example, the dashed line block can indicate a CPU having the wireless transmission function.

[0028] Please refer to FIG. 3. FIG. 3 shows the perspective view of the wave collector used in the device of the present disclosure. The wave collector 17 includes a trumpet-shaped opening. According to an embodiment of the present disclosure, preferably, the non-contact temperature sensor 13 is an infrared light temperature sensor, and the infrared light temperature sensor can be disposed on the first side surface 21 of the circuit board 20 and covered by the wave collector 17, and the trumpet-shaped opening of the wave collector 17 is aligned with the hole 2 of the sensing surface 3. The trumpet-shaped opening of the wave collector 17 is useful to improve sensing efficiency of the infrared light temperature sensor, so that the infrared light temperature sensor of the present disclosure is able to accurately measure temperature when the wearable body temperature monitoring device of the present disclosure is spaced apart from the to-be-sensed body's skin by 2 centimeters. Preferably, the wave collector 17 is black.

[0029] Please refer to FIG. 4. FIG. 4 is a sectional view of a wearable body temperature monitoring device including a clip, in accordance with the present disclosure. The wearable body temperature monitoring device of the present disclosure can be placed in pocket of clothes on the to-be-sensed body, or mounted on the necklace which is worn on the chest, and the sensing surface 3 of the shell member 1 faces towards the to-be-sensed body. In another embodiment of the present disclosure, a clip 5 can be disposed on the sensing surface 3 of the shell member 1 and configured to clip the wearable body temperature monitoring device of the present disclosure on the clothes worn on the to-be-sensed body, and make the sensing surface 3 of the shell member 1 face towards the to-be-sensed body. Furthermore, in an embodiment of the present disclosure, the hole 2 of the sensing surface 3 of the shell member 1 can be extended inwardly by a depth to form a trumpet-shaped opening aligned with the non-contact temperature sensor 13. The trumpet-shaped opening of the hole 2 can improve the sensing efficiency of the infrared light temperature sensor.

[0030] The present disclosure disclosed herein has been described by means of specific embodiments. However, numerous modifications, variations and enhancements can be made thereto by those skilled in the art without departing from the spirit and scope of the disclosure set forth in the claims.

What is claimed is:

1. A wearable body temperature monitoring device, comprising:
a hollow shell member comprising a sensing surface and an outer surface, wherein the sensing surface and the

outer surface are two side surfaces opposite to each other, and the sensing surface is provided with a hole; and

a circuit board accommodated in the hollow shell member and comprising a first side surface corresponding in position to the sensing surface and a second side surface corresponding in position to the outer surface, wherein the circuit board is provided with a non-contact temperature sensor, a wireless transmission module, a processing unit, and a battery, and the non-contact temperature sensor is disposed at the first side surface and aligned with the hole of the sensing surface.

2. The wearable body temperature monitoring device according to claim 1, wherein the wireless transmission module is disposed at the second side surface.

3. The wearable body temperature monitoring device according to claim 1, wherein the circuit board comprises a power switch disposed at the sensing surface or the outer surface of the hollow shell member.

4. The wearable body temperature monitoring device according to claim 1, wherein the circuit board comprises an indicator light located at the second side surface and exposed out of the outer surface of the hollow shell member, and the processing unit is electrically connected to the indicator light and the non-contact temperature sensor, and configured to receive a sensing signal of the non-contact temperature sensor to calculate a temperature sensing value, and control the indicator light to emit light with different color to indicate a variation of the temperature sensing value.

5. The wearable body temperature monitoring device according to claim 1, further comprising a clip disposed at the sensing surface of the hollow shell member and configured to make the hole of the sensing surface face towards a to-be-sensed body.

6. The wearable body temperature monitoring device according to claim 1, wherein the processing unit is electrically connected to the wireless transmission module and the non-contact temperature sensor and configured to receive a sensing signal of the non-contact temperature sensor to calculate a temperature sensing value, and control the wireless transmission module to transmit the temperature sensing value to the mobile communication device.

7. The wearable body temperature monitoring device according to claim 6, wherein the processing unit recalculates the temperature sensing value every time interval, and the time interval is set in the processing unit by the mobile communication device through the wireless transmission module.

8. The wearable body temperature monitoring device according to claim 1, wherein the non-contact temperature sensor is an infrared light temperature sensor.

9. The wearable body temperature monitoring device according to claim 8, further comprising a wave collector covered on the non-contact temperature sensor and aligned with the hole of the sensing surface.

10. The wearable body temperature monitoring device according to claim 9, wherein the wave collector is black.

11. A wearable body temperature monitoring method, comprising:

providing a hollow shell member comprising a sensing surface and an outer surface, wherein the sensing surface and the outer surface are two side surfaces opposite to each other, and the sensing surface is provided with a hole; and

providing a circuit board accommodated in the hollow shell member and comprising a first side surface corresponding in position to the sensing surface and a second side surface corresponding in position to the outer surface, wherein the circuit board is provided with a non-contact temperature sensor, a wireless transmission module, a processing unit, and a battery, and the non-contact temperature sensor is located at the first side surface and aligned with the hole.

12. The wearable body temperature monitoring method according to claim 11, further comprising:

providing a wave collector to cover the non-contact temperature sensor and align with the hole of the sensing surface.

13. The wearable body temperature monitoring method according to claim 12, wherein the non-contact temperature sensor is an infrared light temperature sensor.

14. The wearable body temperature monitoring method according to claim 12, wherein the wave collector is black.

15. The wearable body temperature monitoring method according to claim 11, further comprising:

providing a clip disposed at the sensing surface of the hollow shell member and configured to make the hole of the sensing surface face towards a to-be-sensed body.

16. The wearable body temperature monitoring method according to claim 11, further comprising:

providing an indicator light and a power switch, wherein the indicator light is disposed at the second side surface and exposed out of the outer surface of the hollow shell member, and the power switch is disposed at the sensing surface or the outer surface of the hollow shell member.

17. The wearable body temperature monitoring method according to claim 11, further comprising:

using the processing unit to receive a sensing signal of the non-contact temperature sensor to calculate a temperature sensing value, and control the indicator light to emit light with different color to indicate a variation of the temperature sensing value.

18. The wearable body temperature monitoring method according to claim 11, further comprising:

using the processing unit to receive a sensing signal of the non-contact temperature sensor to calculate a temperature sensing value, and control the wireless transmission module to transmit the temperature sensing value to the mobile communication device.

19. The wearable body temperature monitoring method according to claim 18, further comprising:

using the processing unit to recalculate the temperature sensing value every time interval.

20. The wearable body temperature monitoring method according to claim 19, further comprising:

using the mobile communication device to set the time interval in the processing unit through the wireless transmission module.

* * * * *

专利名称(译)	可穿戴体温监测装置及其方法		
公开(公告)号	US20180188114A1	公开(公告)日	2018-07-05
申请号	US15/859704	申请日	2018-01-01
申请(专利权)人(译)	AVITA CORPORATION		
当前申请(专利权)人(译)	AVITA CORPORATION		
[标]发明人	OU YANG HSING SHIH HSUAN HAO YANG TA CHIEH		
发明人	OU YANG, HSING SHIH, HSUAN HAO YANG, TA CHIEH		
IPC分类号	G01J5/00 G01J5/08 G01J5/04 G01J5/02 A61B5/00 A61B5/01		
CPC分类号	G01J5/0025 G01J5/0818 G01J5/041 G01J5/025 A61B5/0008 A61B5/0075 A61B5/01 A61B5/6838 A61B2562/0271 A61B5/6802 A61B2503/04 A61B2503/06		
优先权	105144038 2016-12-30 TW		
外部链接	Espacenet USPTO		

摘要(译)

本公开示出了可穿戴体温监测装置及其方法。可穿戴体温监测装置包括中空壳体构件和电路板。中空壳构件包括感测表面和彼此相对的外表面，并且感测表面设置有孔。电路板容纳在中空壳构件中并包括对应于感测表面的第一侧表面和对应于外表面的第二侧表面。电路板设置有非接触式温度传感器，无线传输模块，处理单元和电池，非接触式温度传感器设置在第一侧表面并与传感表面的孔对齐。可穿戴体温监测装置可以在附着在衣服上时实时响应体温的变化。

