



US 20160199002A1

(19) **United States**

(12) **Patent Application Publication**

**LEE et al.**

(10) **Pub. No.: US 2016/0199002 A1**

(43) **Pub. Date: Jul. 14, 2016**

(54) **WEARABLE DEVICE AND METHOD FOR CONTROLLING THE SAME**

(52) **U.S. Cl.**  
CPC ..... *A61B 5/6844* (2013.01); *A61B 5/0008* (2013.01); *A61B 5/681* (2013.01); *A61B 5/0059* (2013.01); *A61B 5/742* (2013.01); *A61B 5/01* (2013.01); *A61B 5/7246* (2013.01)

(71) Applicant: **Samsung Electronics Co., Ltd.**,  
Suwon-si (KR)

(72) Inventors: **Jea-Hyuck LEE**, Anyang-si (KR);  
**Jin-Hong MIN**, Suwon-si (KR);  
**In-Geol BAEK**, Icheon-si (KR);  
**Min-Hyoung LEE**, Seongnam-si (KR);  
**Jae-Geol CHO**, Yongin-si (KR)

(57) **ABSTRACT**

Provided are a wearable device and a method for controlling the same. The wearable device may include a distance sensor unit configured to output a first signal for determining a distance between a user and the wearable device and to receive the first signal reflected from the user. The wearable device may also include a biometric sensor unit configured to output a second signal for determining biometric information of the user and to receive the second signal reflected from the user, and a controller configured to determine the distance based on the received first signal and to obtain the biometric information of the user based on a change in an attribute of the received second signal. The controller may control the biometric sensor unit to output the second signal if the determined distance is equal to or less than a reference distance.

(21) Appl. No.: **14/991,867**

(22) Filed: **Jan. 8, 2016**

(30) **Foreign Application Priority Data**

Jan. 9, 2015 (KR) ..... 10-2015-0003365

**Publication Classification**

(51) **Int. Cl.**  
*A61B 5/00* (2006.01)  
*A61B 5/01* (2006.01)

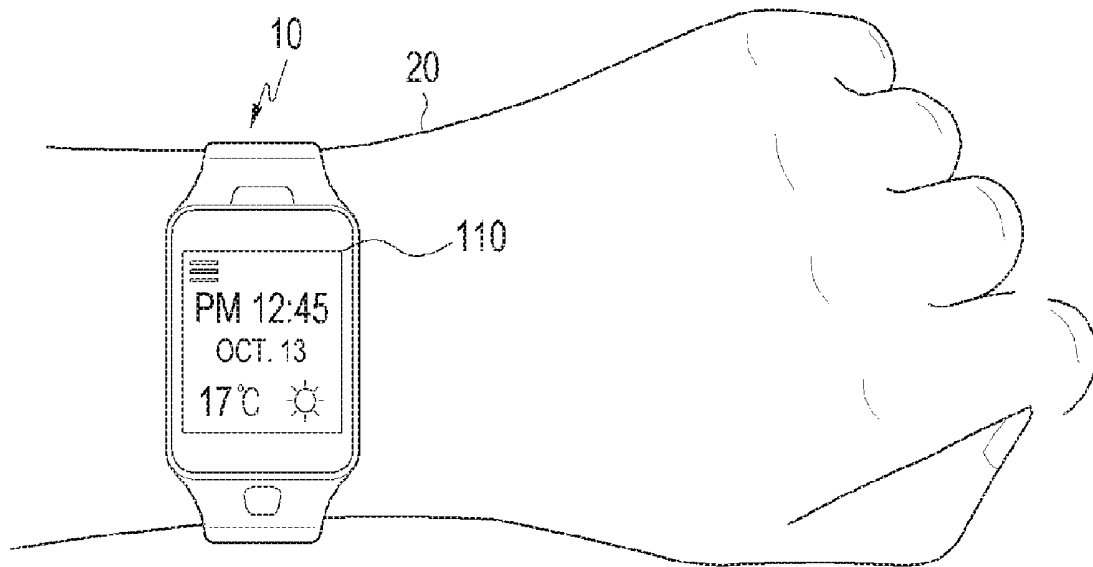




FIG. 1A

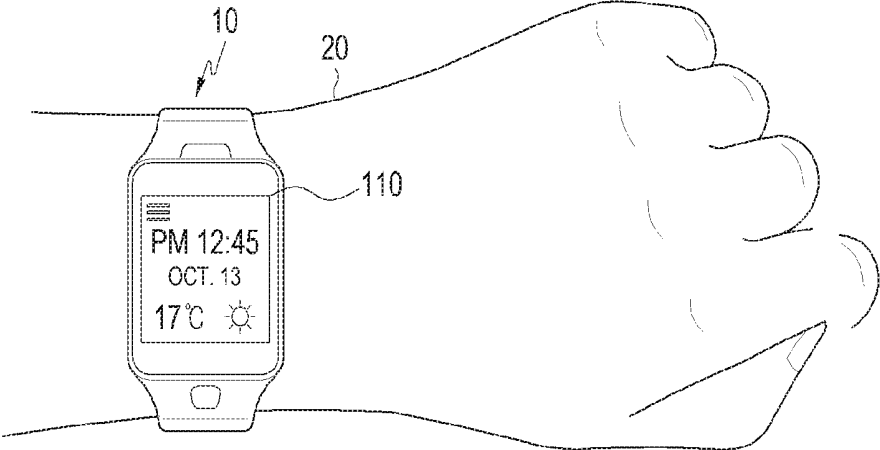


FIG.1B

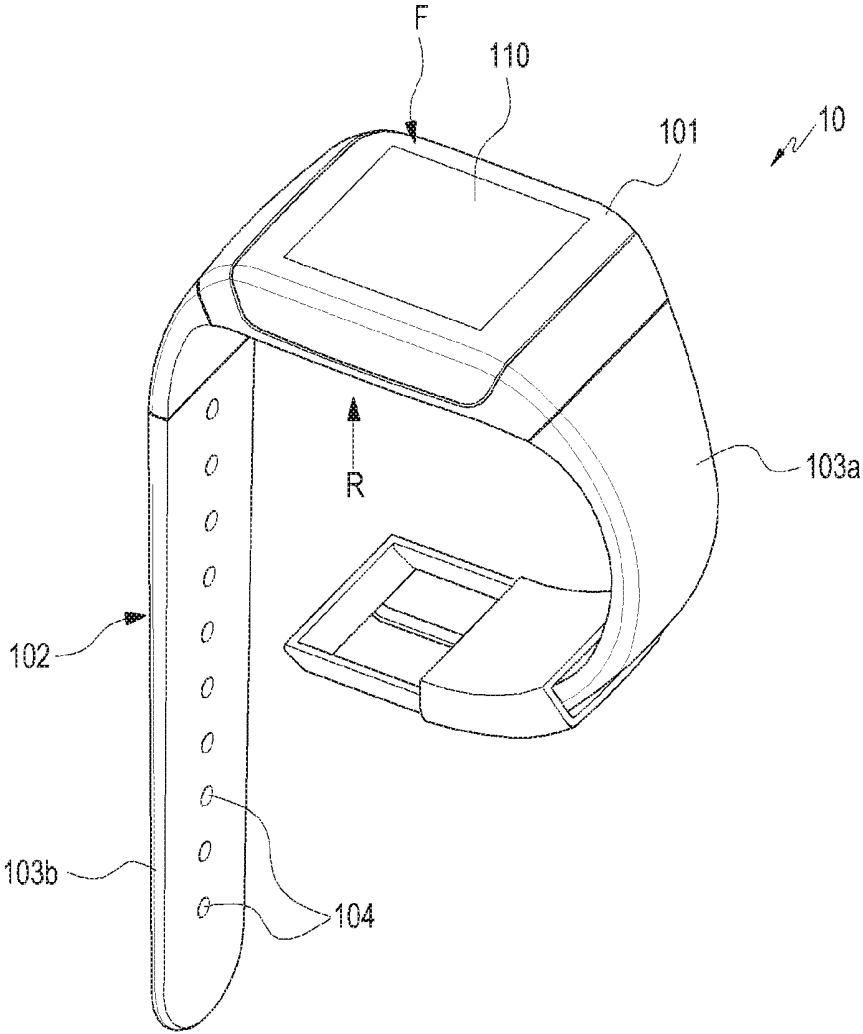


FIG. 2A

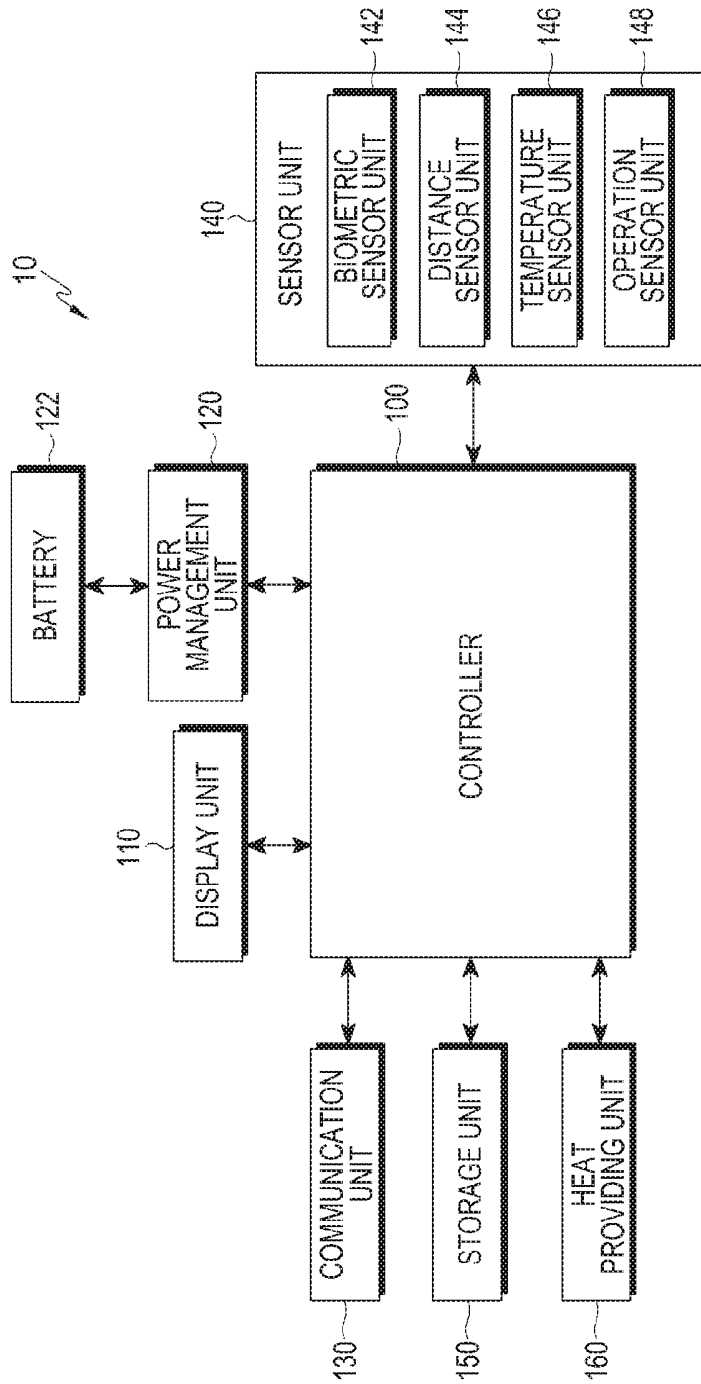


FIG.2B

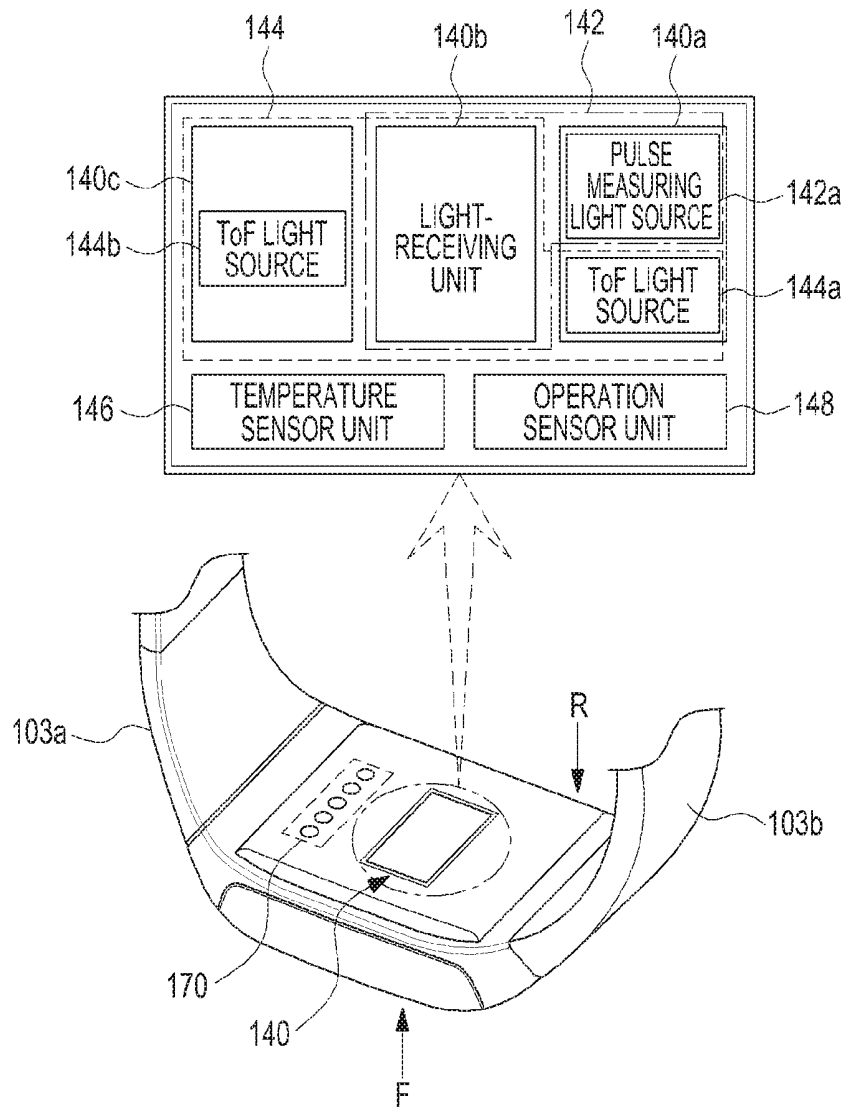


FIG.2C

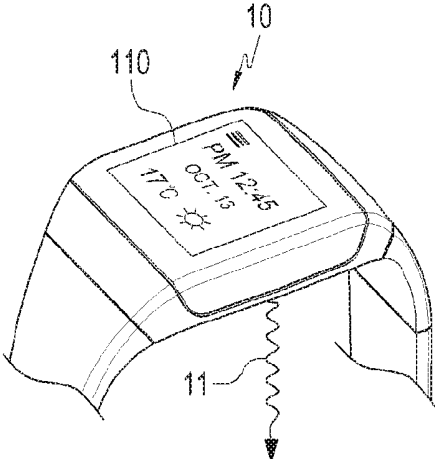


FIG. 3A

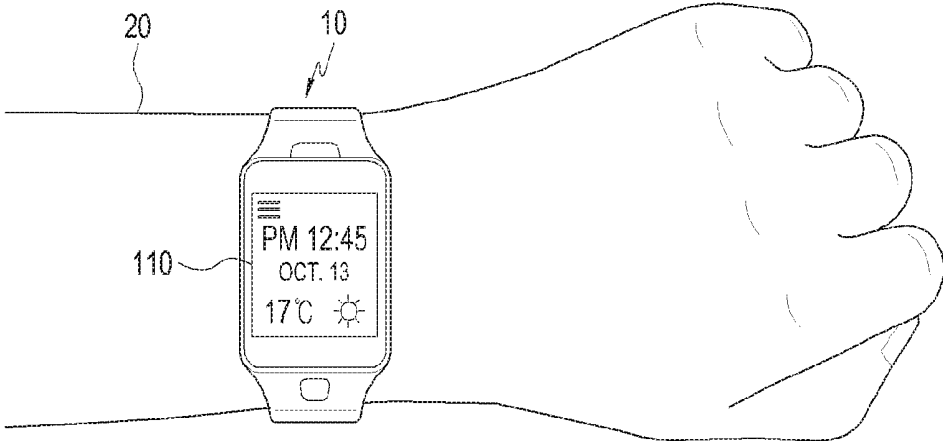


FIG. 3B

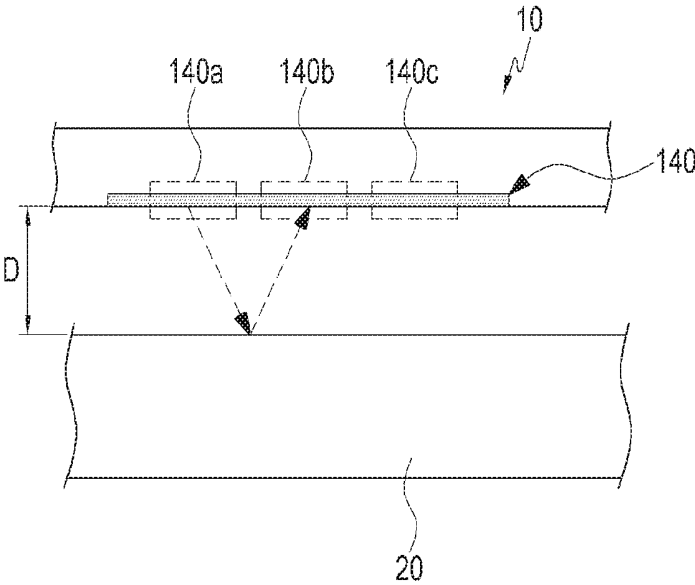


FIG.3C

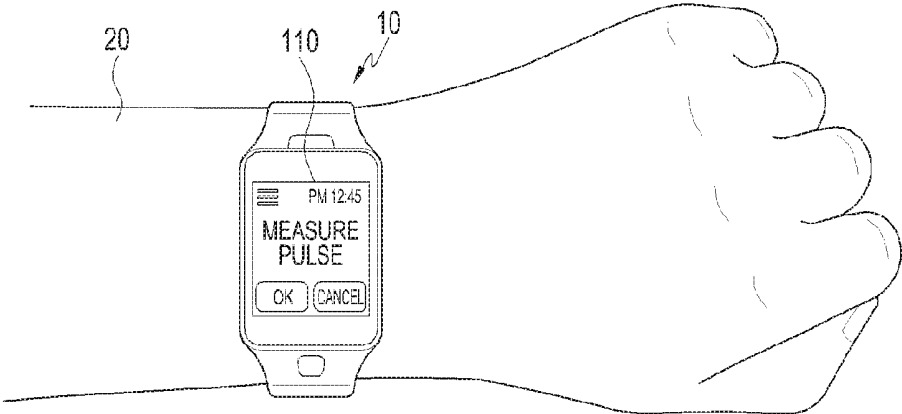


FIG.3D

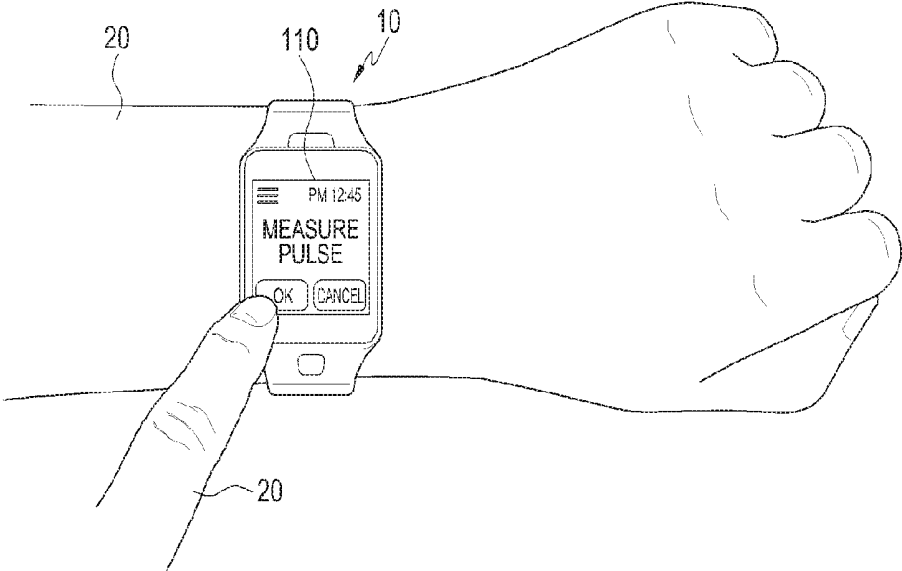


FIG.3E

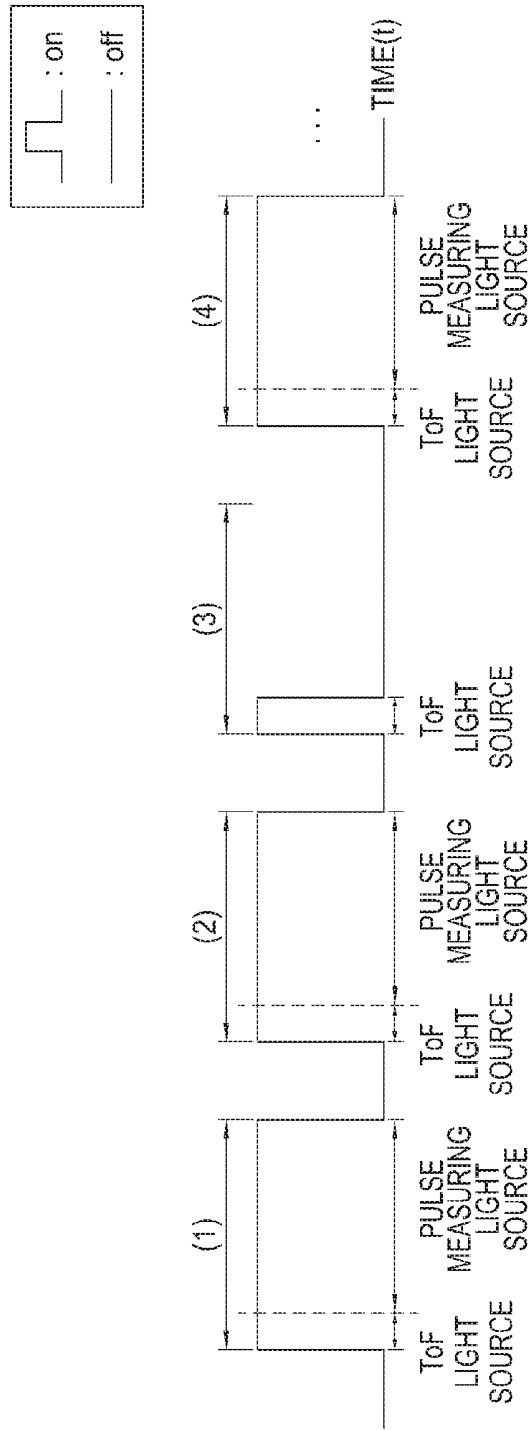


FIG.4A

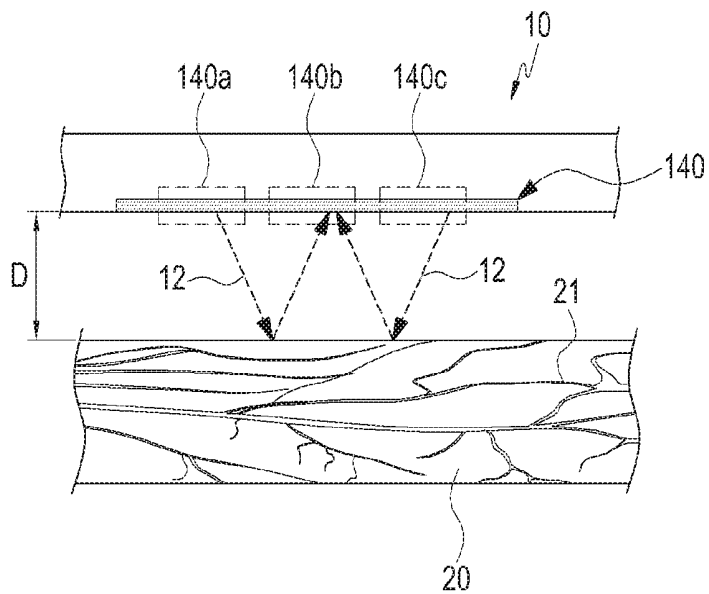


FIG. 4B

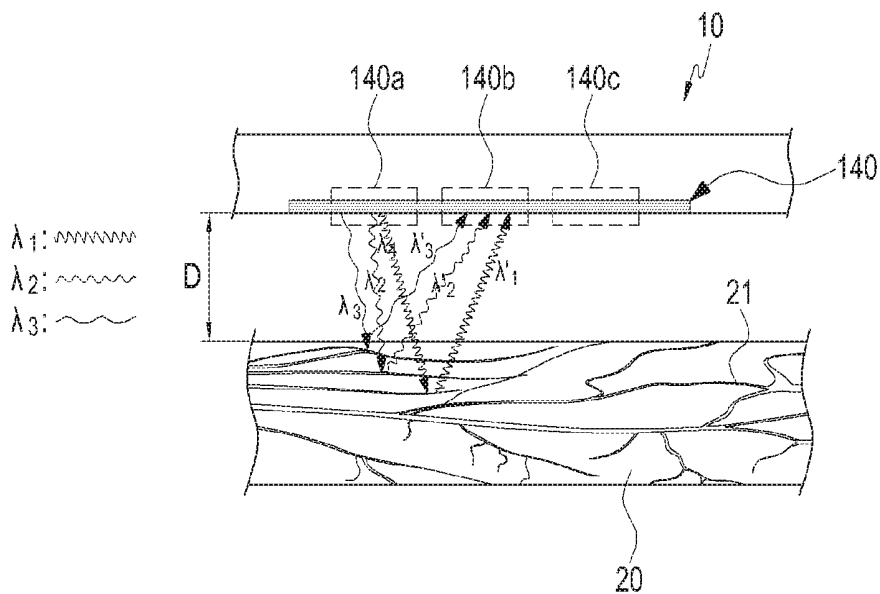


FIG. 4C



FIG.4D

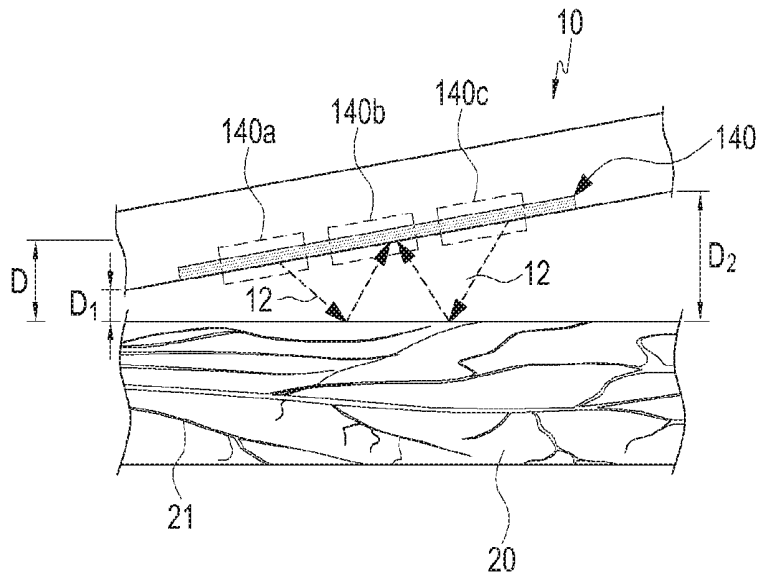


FIG. 4E

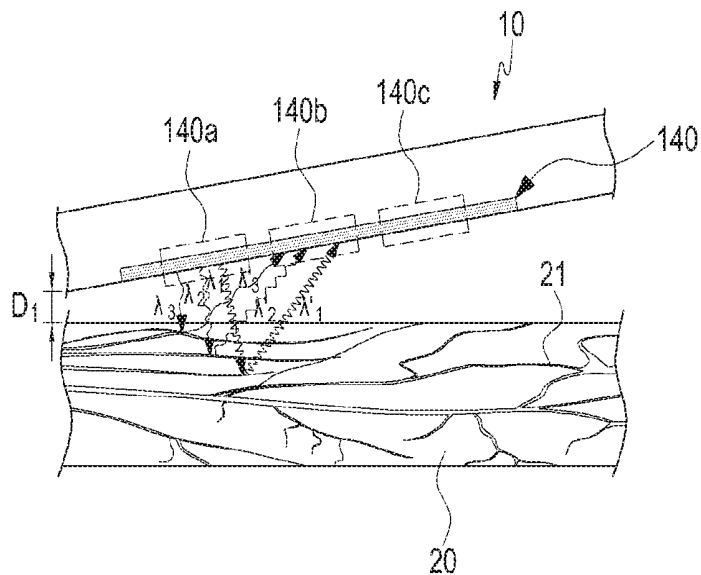


FIG. 4F

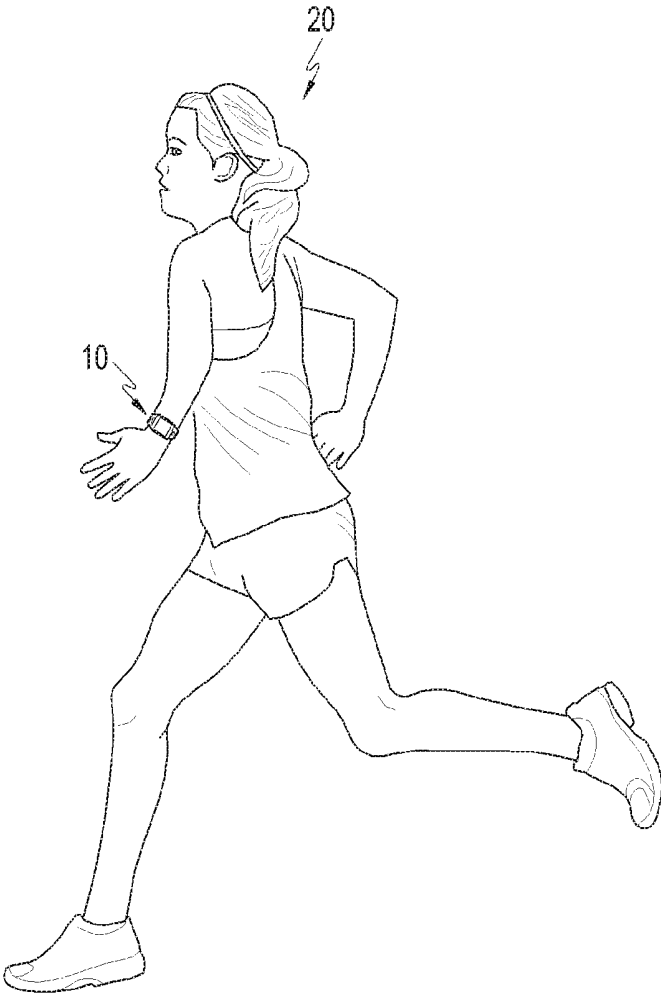


FIG.4G

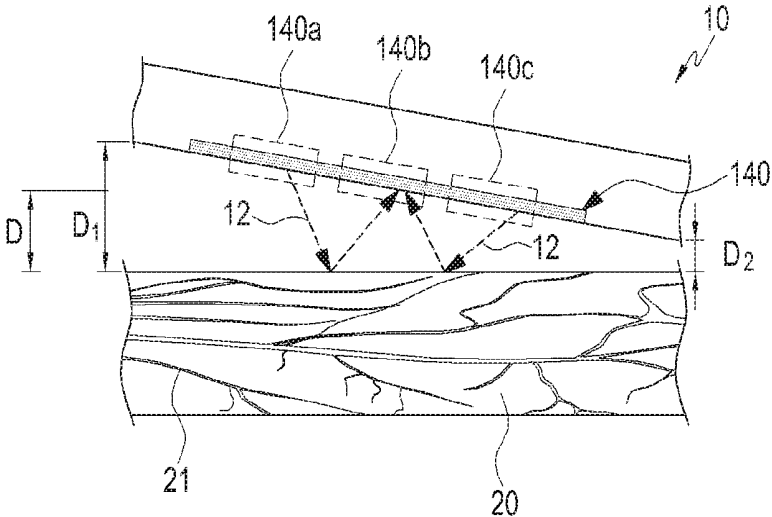


FIG.4H

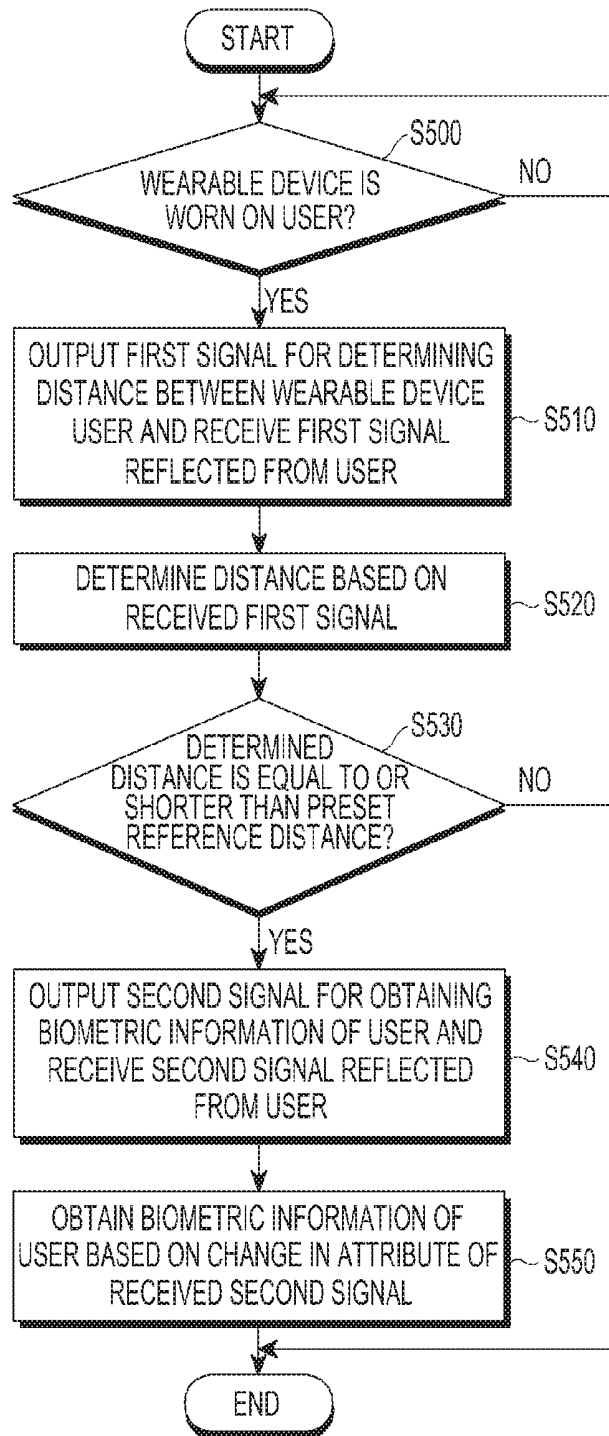


FIG.5

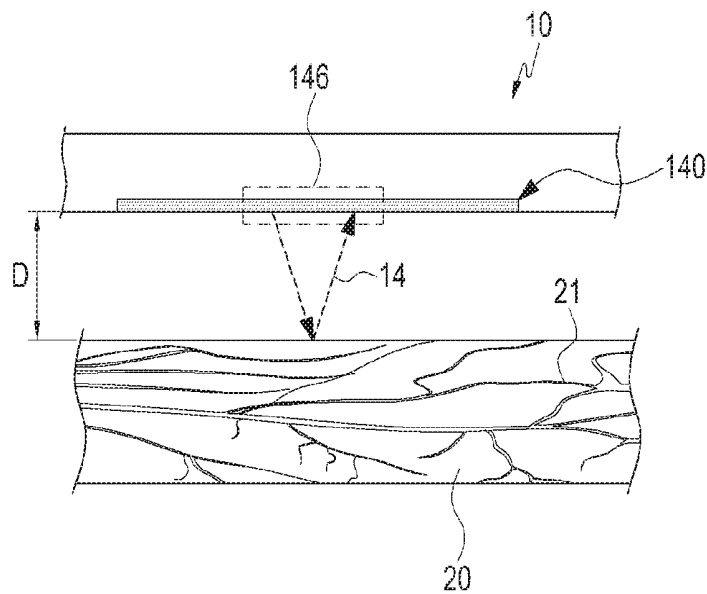


FIG. 6A

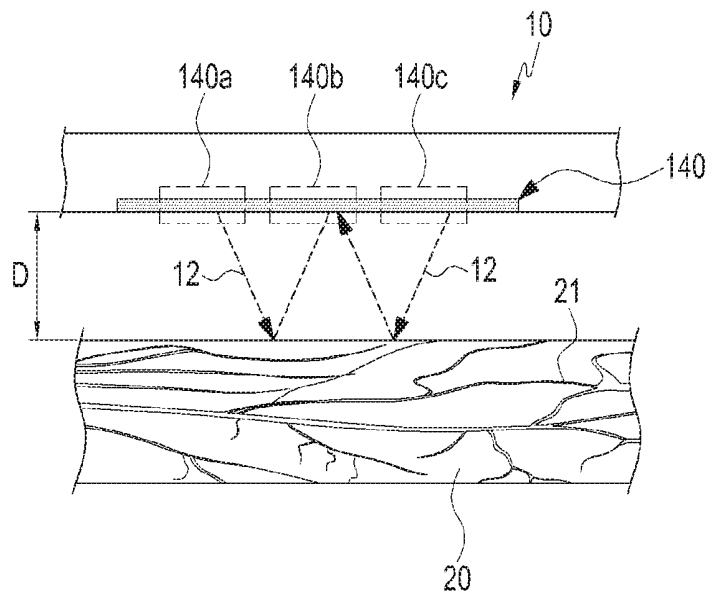


FIG. 6B

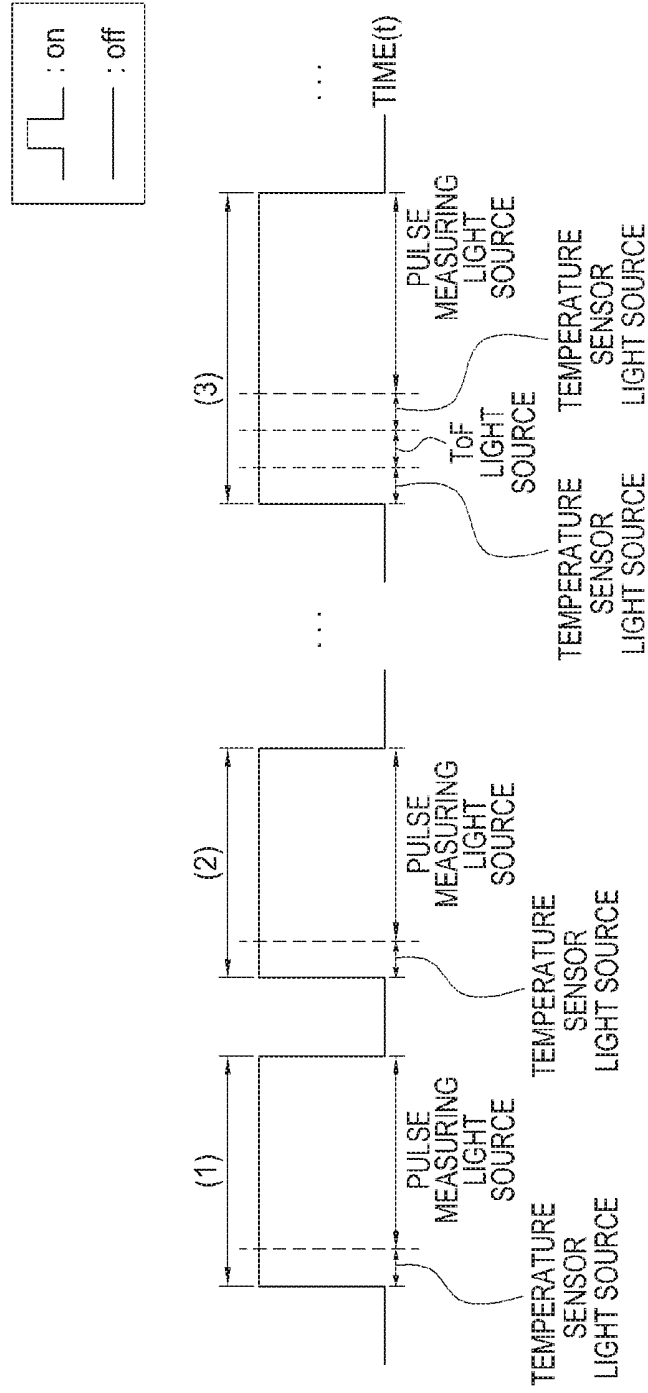


FIG.6C

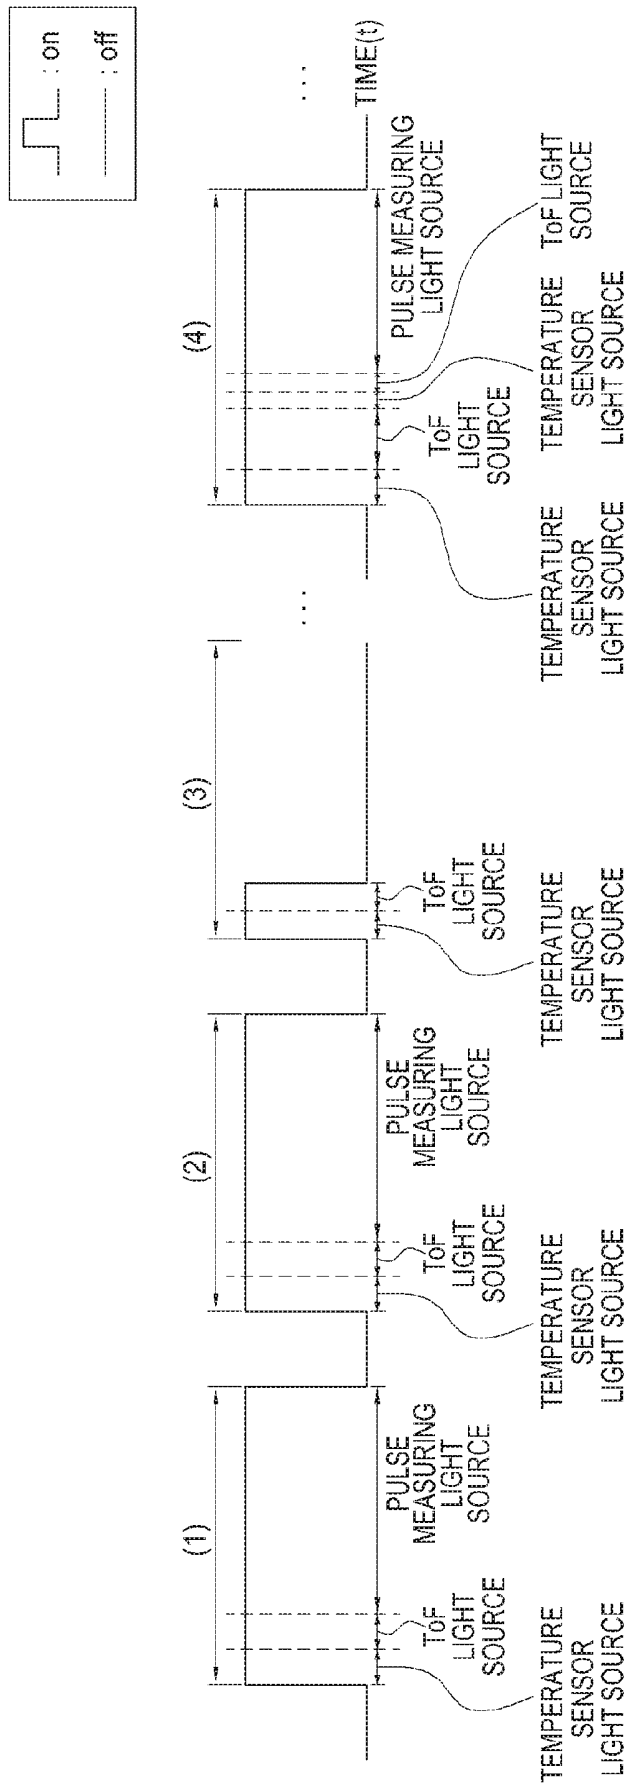


FIG.6D

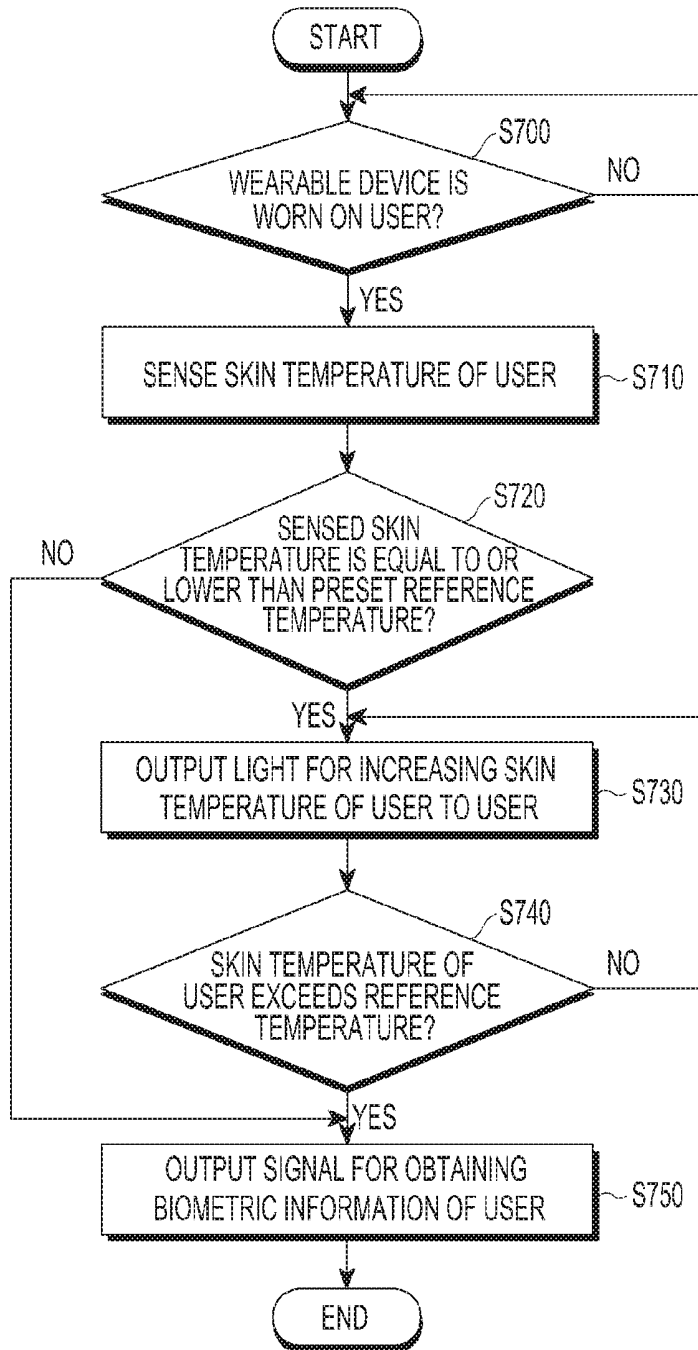


FIG. 7

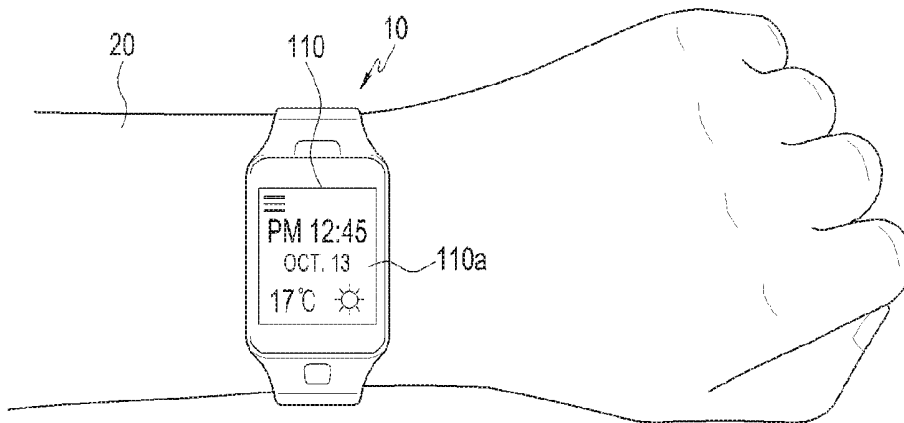


FIG. 8A

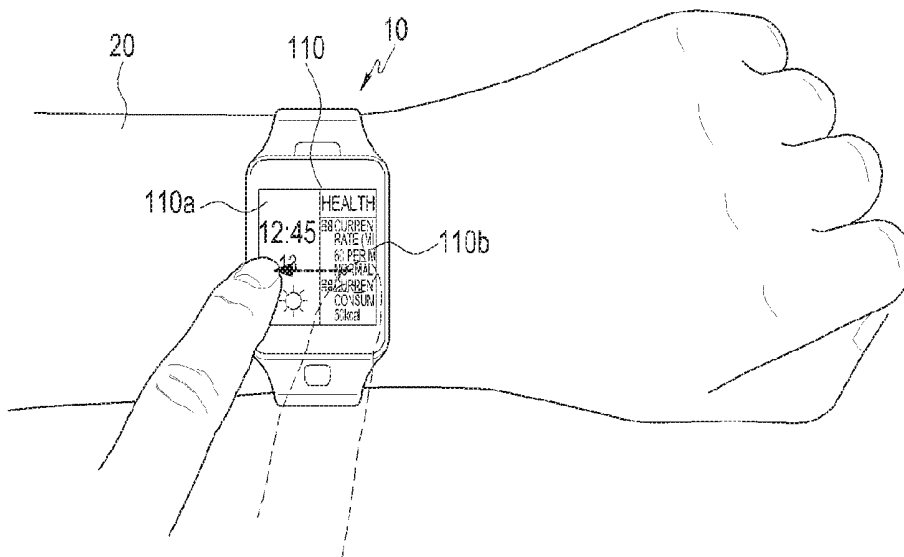


FIG. 8B

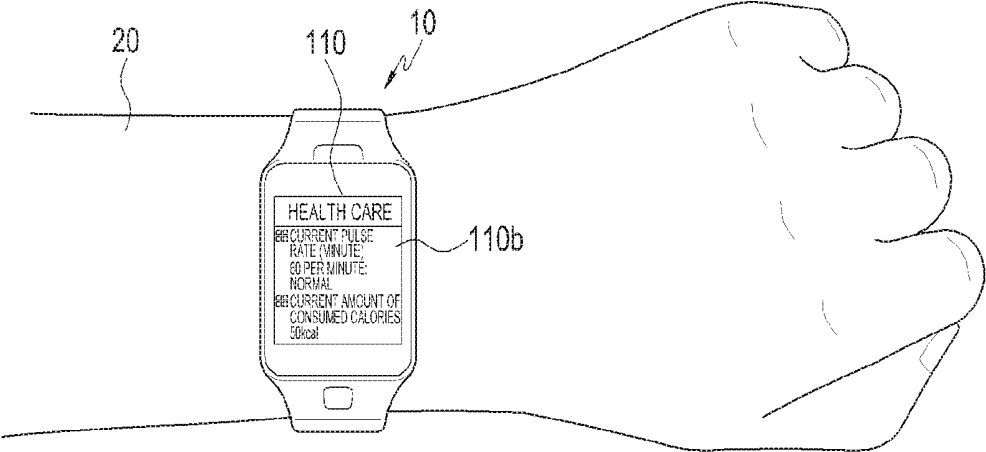


FIG.8C

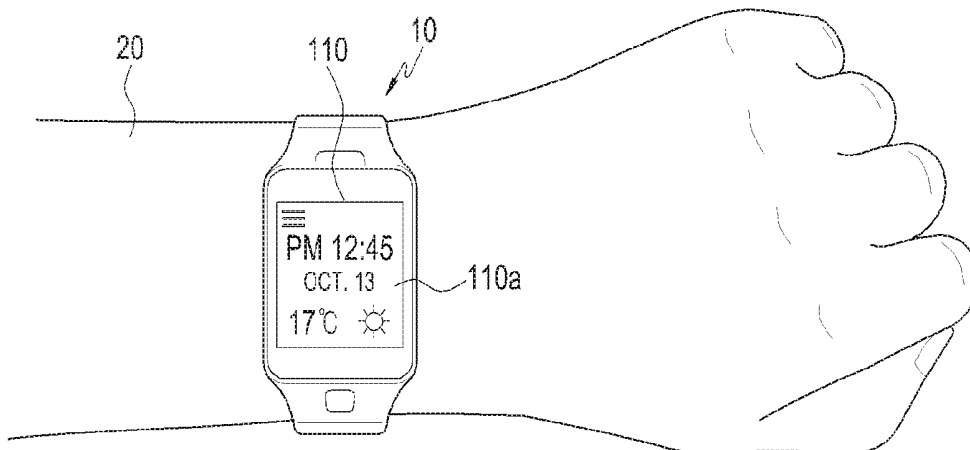


FIG. 9A

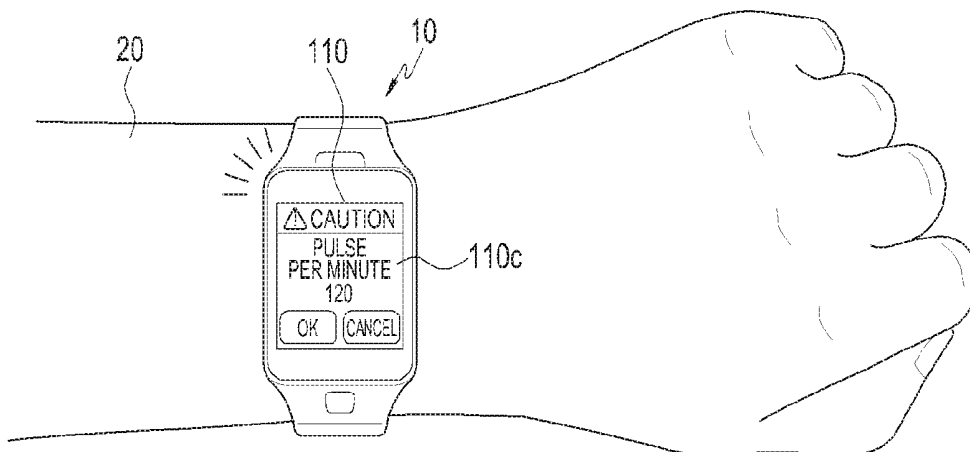


FIG. 9B

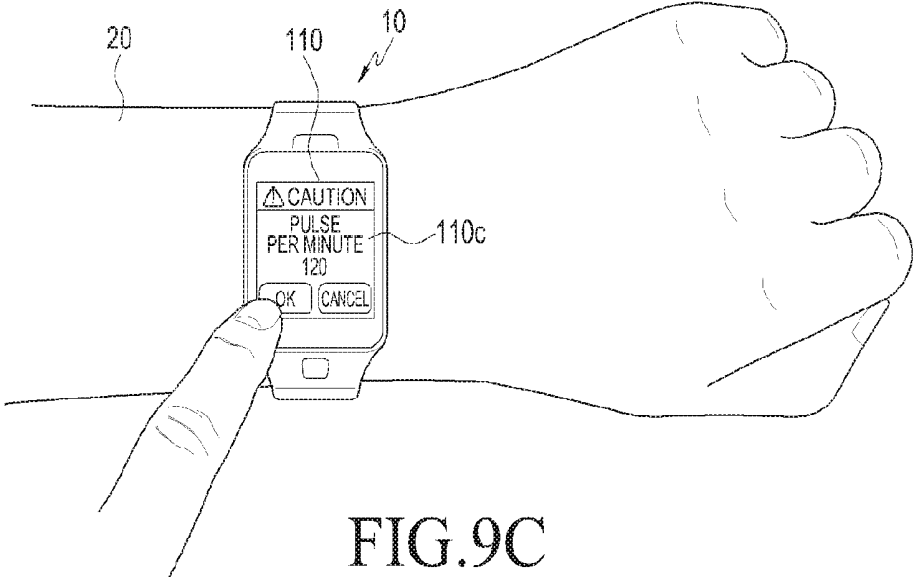


FIG.9C

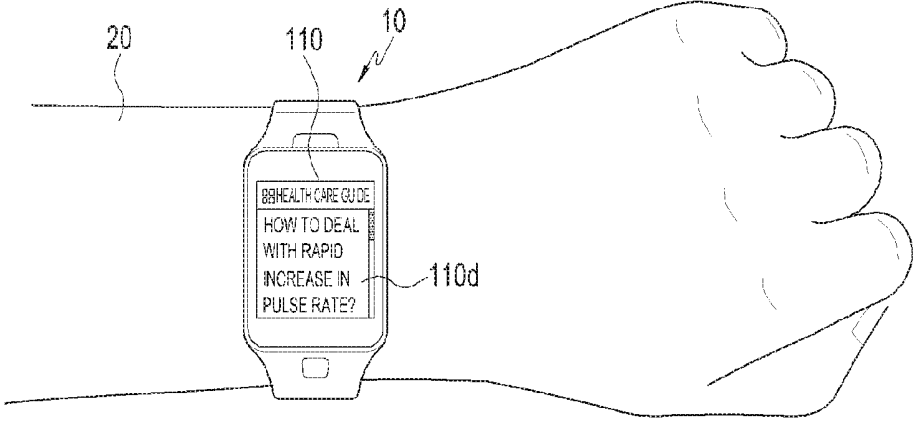


FIG.9D

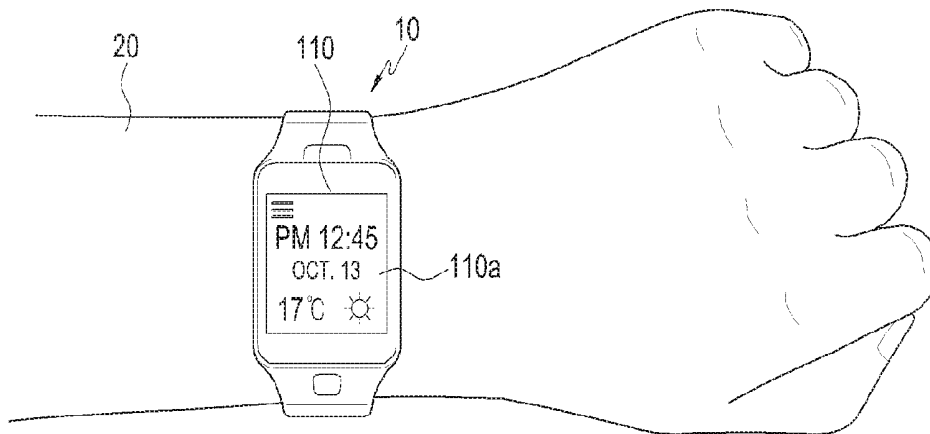


FIG. 10A

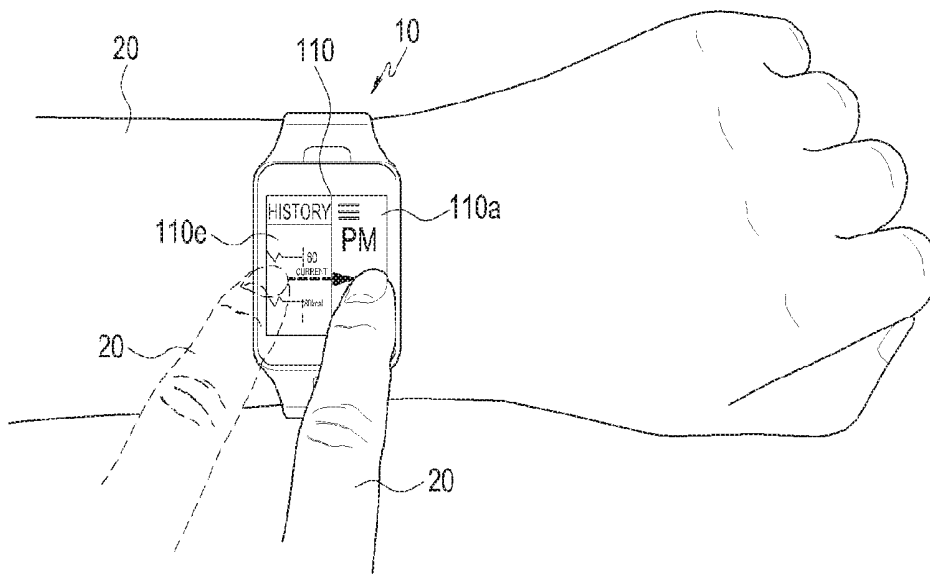


FIG. 10B

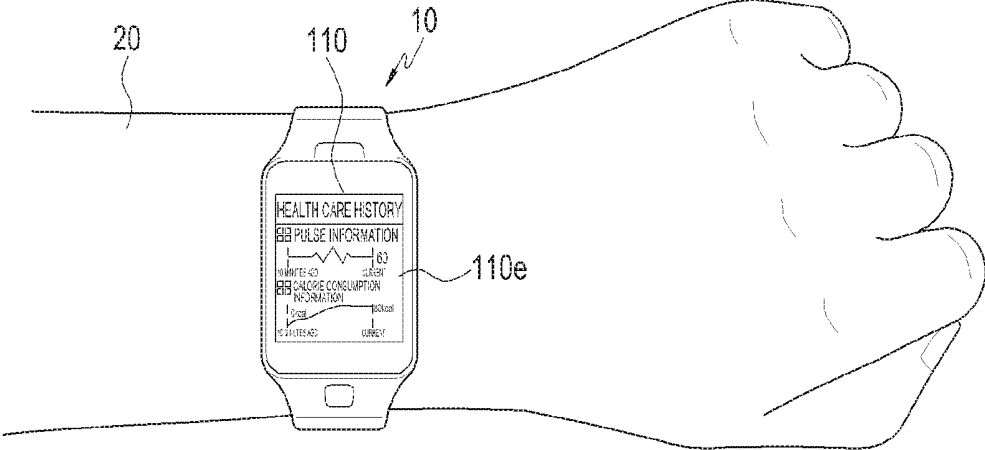


FIG. 10C

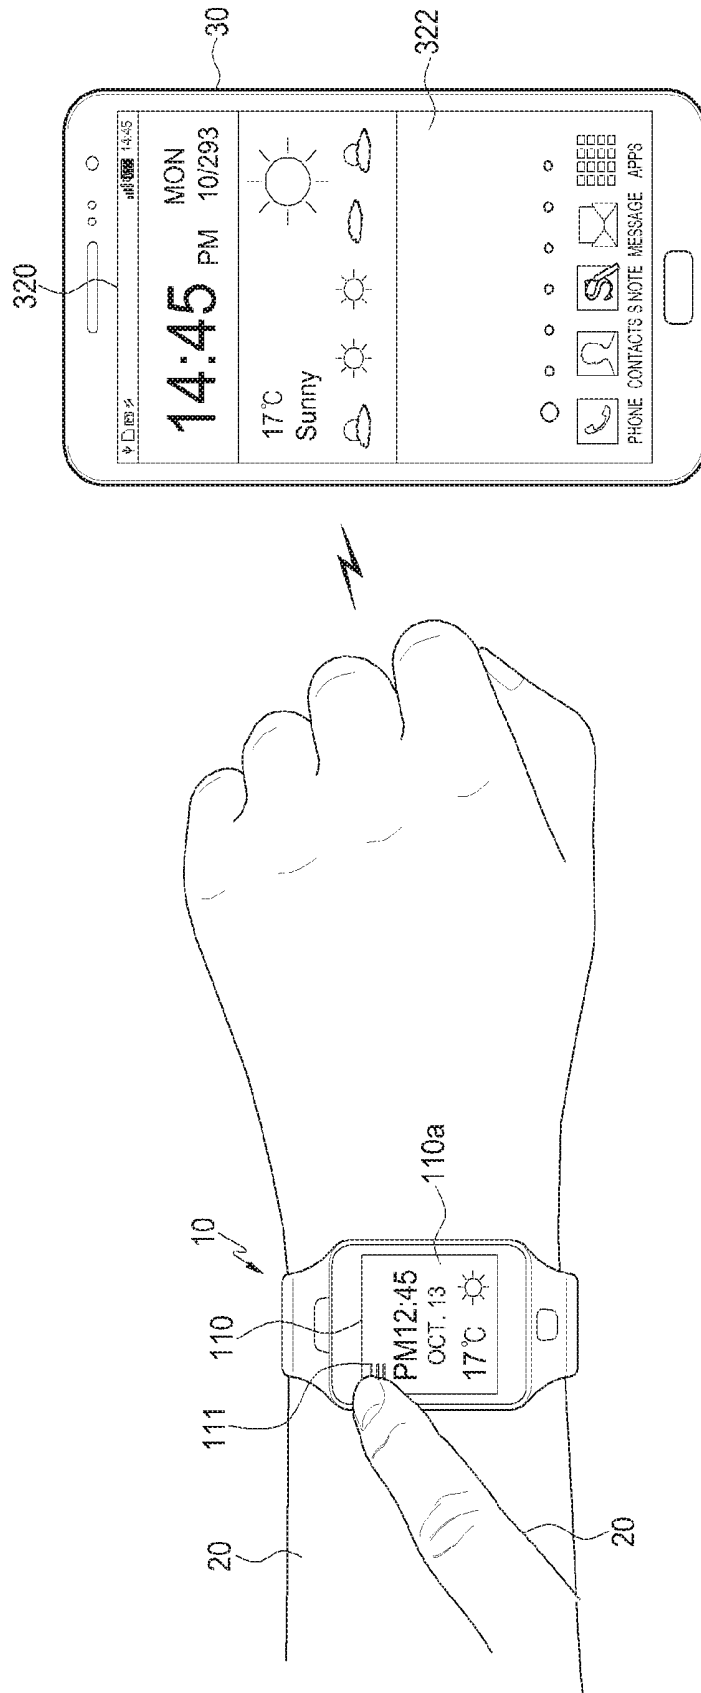


FIG. 11A

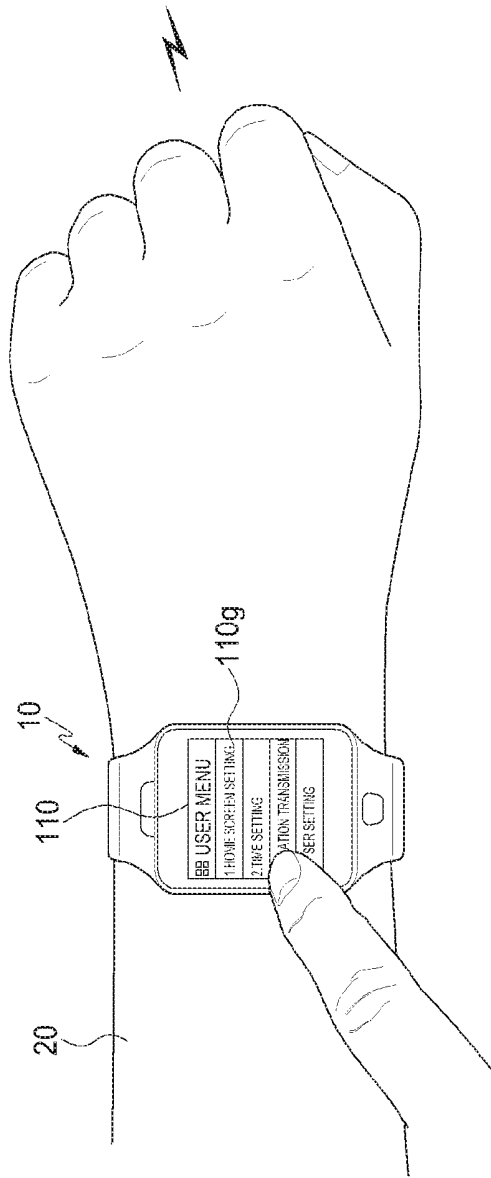
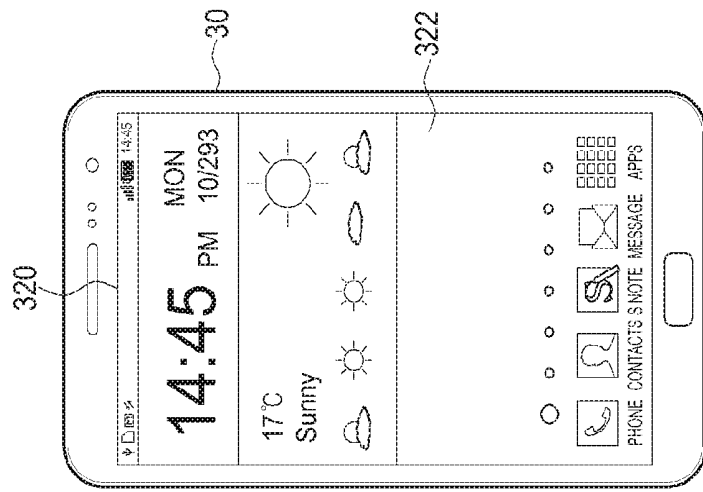


FIG. 11B

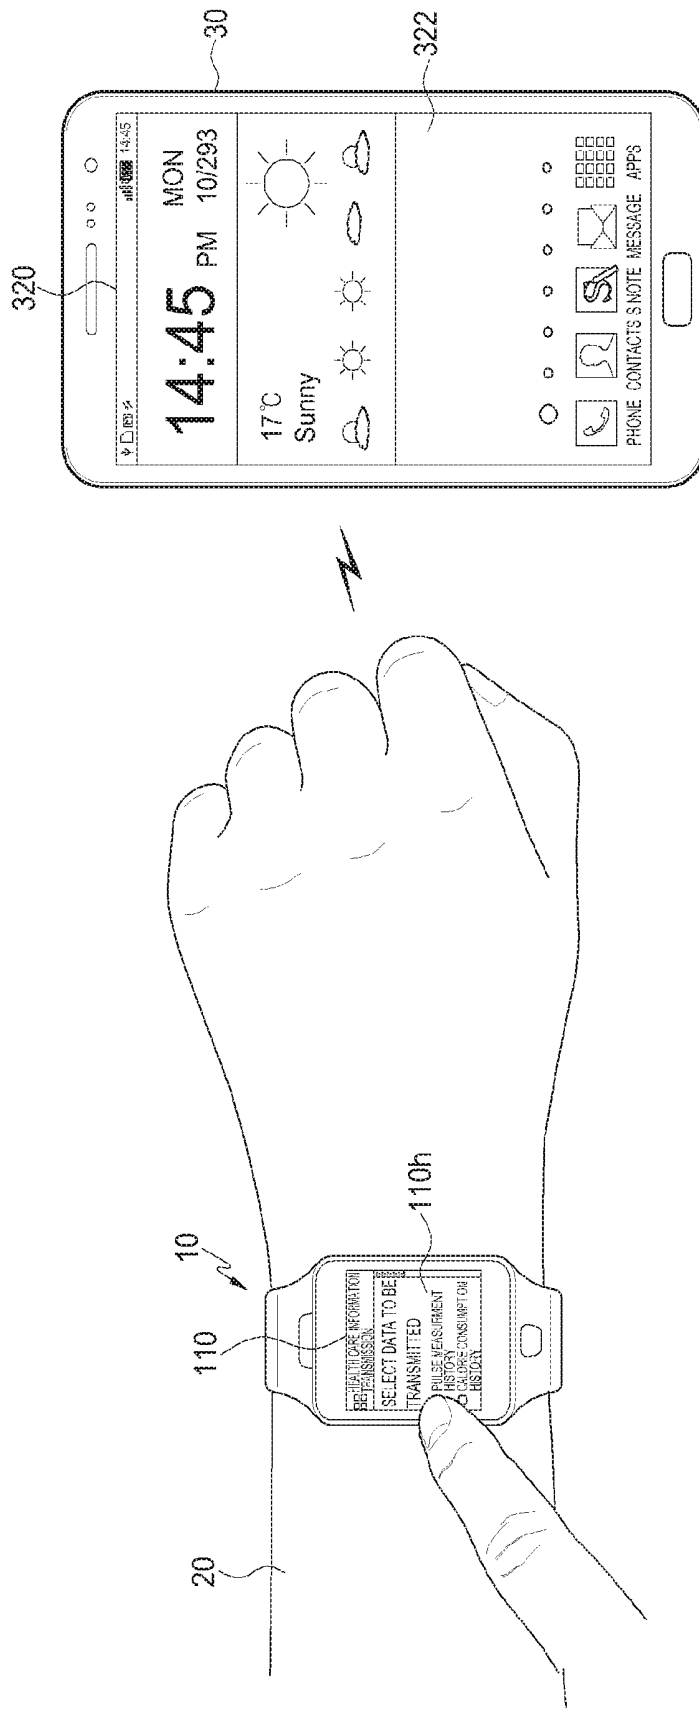


FIG. 11C

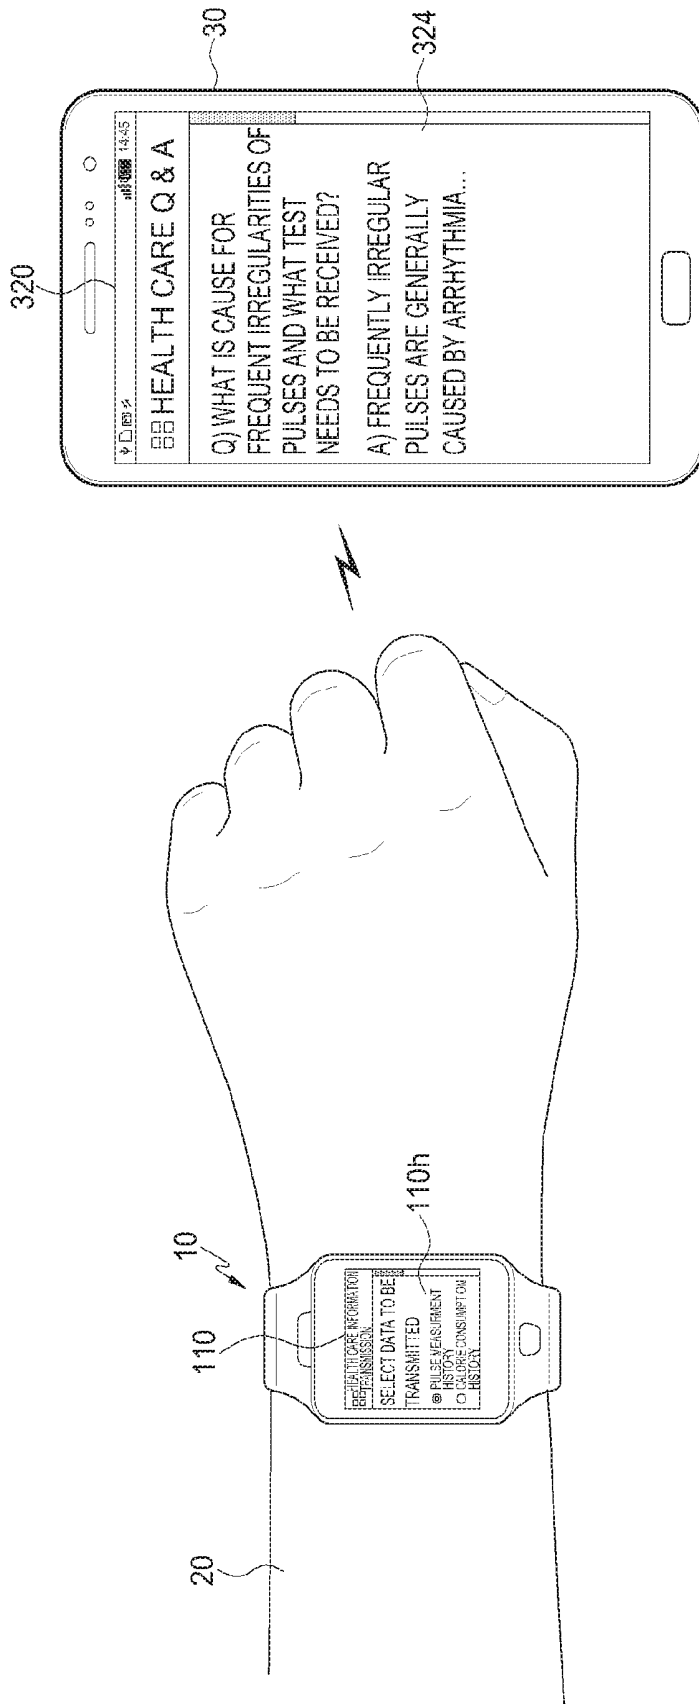


FIG. 11D

## WEARABLE DEVICE AND METHOD FOR CONTROLLING THE SAME

### CROSS-REFERENCE TO RELATED APPLICATION(S)

[0001] This application claims the benefit under 35 U.S.C. §119(a) of a Korean patent application filed in the Korean Intellectual Property Office on Jan. 9, 2015 and assigned Serial No. 10-2015-0003365, the entire disclosure of which is incorporated herein by reference.

### BACKGROUND

[0002] Various embodiments of the present disclosure relate to a wearable device and a method for controlling the same.

[0003] With the rapid spread of electronic devices such as smartphones, most of the world has already witnessed one electronic device per person. This means that the electronic devices have become a part of people's daily lives, and in practice, people have recognized that the electronic devices make their lives easier.

[0004] The popularization of the electronic devices is leading to the spread of wearable devices performing various functions in association with the electronic devices. The wearable device may include such devices as, for example, a smart watch (Samsung Galaxy Gear™), a smart band, and so forth. The wearable device is generally worn on a user's wrist, and obtains the user's biometric information (e.g., a heart rate) to provide to the user.

[0005] The user may move while wearing the wearable device and this may provide an unwanted input to the wearable device with respect to the biometric information. Moreover, the conventional wearable device is configured to obtain the user's biometric information, ignoring, for example, the user's body condition such as, for example, skin temperature. As a result, the user's biometric information may be skewed due to the user's body condition. In addition, the conventional wearable device is configured to simply provide the recently obtained biometric information to the user, failing to intuitively provide various information associated with a user's change history of the biometric information.

[0006] The above information is presented as background information only to assist with an understanding of the present disclosure. No determination has been made, and no assertion is made, as to whether any of the above might be applicable as prior art with regard to the present disclosure.

### SUMMARY

[0007] Various aspects of the present disclosure are to provide a wearable device capable of providing accurate biometric information to a user by considering the effects of the user's motion on the wearable device when obtaining the user's biometric information.

[0008] Various aspects of the present disclosure are to provide a method for controlling a wearable device so that accurate biometric information may be provided to a user by considering the effects of the user's motion on the wearable device when obtaining the user's biometric information.

[0009] Various aspects of the present disclosure are to provide a wearable device capable of providing accurate biometric information to a user by considering a body condition of the user when obtaining the user's biometric information.

[0010] Various aspects of the present disclosure are to provide a method for controlling a wearable device so that accurate biometric information may be provided to a user by considering the user's body condition when obtaining the user's biometric information.

[0011] Various aspects of the present disclosure are to provide a wearable device capable of intuitively providing to a user various information associated with a change history of biometric information.

[0012] Various aspects of the present disclosure are to provide a method for controlling a wearable device so that various information associated with a change history of biometric information may be intuitively provided to a user.

[0013] According to various embodiments of the present disclosure, there is provided a distance sensor unit configured to output a first signal for determining a distance between a user and the wearable device and to receive the first signal reflected from the user when the wearable device is worn by the user. The wearable device may include a biometric sensor unit configured to output a second signal for determining biometric information of the user and to receive the second signal reflected from the user. A controller in the wearable device may be configured to determine the distance based on the reflected first signal and to obtain the biometric information of the user based on changes in an attribute of the reflected second signal, wherein the controller controls the biometric sensor unit to output the second signal if the determined distance is equal to or less than a reference distance.

[0014] According to various embodiments of the present disclosure, there is provided a wearable device including a heat providing unit, a temperature sensor unit configured to receive biometric information of a user to sense a skin temperature of the user when the wearable device is worn by the user, and a controller configured to determine the skin temperature of the user based on the biometric information received by the temperature sensor unit and to determine whether the determined skin temperature is less than a reference temperature. The controller may control the heat providing unit to output light for increasing the skin temperature of the user to a skin of the user, if the skin temperature is less than the reference temperature.

[0015] According to various embodiments of the present disclosure, there is provided a method for controlling a wearable device, the method including outputting a first signal for determining a distance between a user and the wearable device and receiving the first signal reflected from the user, when the wearable device is worn by the user, determining the distance based on the reflected first signal, outputting a second signal for determining biometric information of the user and receiving the second signal reflected from the user, if the determined distance is equal to or less than a reference distance, and obtaining the biometric information of the user based on a change in an attribute of the reflected second signal.

[0016] According to various embodiments of the present disclosure, there is provided a method for controlling a wearable device, the method including receiving biometric information of a user to sense a skin temperature of the user when the wearable device is worn on the user, determining the skin temperature of the user based on the biometric information received by the temperature sensor unit and determining whether the determined skin temperature is equal to or less than a reference temperature, and outputting light for increas-

ing the skin temperature of the user to a skin of the user, if the skin temperature is equal to or less than the reference temperature.

[0017] According to various embodiments of the present disclosure, there is provided a wearable device including a first time of flight (ToF) light source configured to output a first signal for determining a distance between a user and the wearable device when the wearable device is worn by the user, a second light source unit comprising a second ToF light source configured to output the first signal and a light source configured to output a second signal for sensing a pulse of the user, a light-receiving unit configured to receive the first signal and the second signal reflected from the user, and a controller configured to determine the distance based on the reflected first signal and to obtain the biometric information of the user based on a change in an attribute of the reflected second signal. The controller controls the light source to output the second signal if the determined distance is equal to or less than a reference distance.

[0018] According to various embodiments of the present disclosure, there is provided a wearable device including a controller; a temperature sensor unit configured to sense a skin temperature of a user wearing the wearable device, a first light source unit comprising a first time of flight (ToF) light source configured to output a first signal for increasing the skin temperature, and a second light source unit comprising a second ToF light source configured to output the first signal and a light source configured to output a second signal for obtaining biometric information of the user. The controller controls the ToF light source to output the first signal if the determined skin temperature is equal to or less than a reference temperature.

[0019] Other aspects, advantages, and salient features of the disclosure will become apparent to those skilled in the art from the following detailed description, which, taken in conjunction with the annexed drawings, discloses exemplary embodiments of the disclosure.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0020] Throughout the drawings, it should be noted that like reference numbers are used to depict the same or similar elements, features, and structures, wherein:

[0021] FIGS. 1A and 1B are exemplary diagrams for describing a wearable device worn by a user according to various embodiments of the present disclosure;

[0022] FIGS. 2A through 2C are exemplary diagrams for describing a structure of a wearable device according to various embodiments of the present disclosure;

[0023] FIGS. 3A through 3E are exemplary diagrams for describing a function/operation of determining whether a wearable device is worn by a user according to various embodiments of the present disclosure;

[0024] FIGS. 4A through 4H are exemplary diagrams for describing a function/operation of obtaining biometric information (e.g., a heart rate) of a user at a wearable device by considering the user's motions according to various embodiments of the present disclosure;

[0025] FIG. 5 is a diagram for describing a method for controlling a wearable device according to various embodiments of the present disclosure;

[0026] FIGS. 6A through 6D are exemplary diagrams for describing a function/operation of obtaining biometric information of a user by a wearable device by considering the

user's current body condition according to various embodiments of the present disclosure;

[0027] FIG. 7 is an exemplary diagram for describing a method for controlling a wearable device according to various embodiments of the present disclosure;

[0028] FIGS. 8A through 8C are exemplary diagrams for describing a function/operation of displaying on a wearable device the user's biometric information (e.g., a pulse rate and the amount of calories consumed) according to various embodiments of the present disclosure;

[0029] FIGS. 9A through 9D are exemplary diagrams for describing a function/operation of providing related information to a user if obtained biometric information of the user exceeds a preset threshold value according to various embodiments of the present disclosure;

[0030] FIGS. 10A through 10C are exemplary diagrams for describing a function/operation of providing a user's history of biometric information to the user according to various embodiments of the present disclosure; and

[0031] FIGS. 11A through 11D are exemplary diagrams for describing a function/operation of providing a user with various information via an external electronic device (e.g., a smart phone) connected with a wearable device based on changes in the user's biometric information according to various embodiments of the present disclosure.

[0032] Throughout the drawings, like reference numerals will be understood to refer to like parts, components, and structures.

#### DETAILED DESCRIPTION

[0033] Hereinafter, various embodiments of the present disclosure will be disclosed with reference to the accompanying drawings. However, the present disclosure is not intended to limit the present disclosure to particular embodiments, and it should be construed as including various modifications, equivalents, and/or alternatives according to the embodiments of the present disclosure. In regard to the description of the drawings, like reference numerals refer to like elements.

[0034] Although ordinal numbers such as "first," "second," and so forth will be used to describe various components of the present disclosure, those components are not limited by the terms. The terms are used only for distinguishing one component from another component. For example, a first component may be referred to as a second component and, likewise, a second component may be referred to as a first component without departing from the teachings of the disclosure. The term "and/or" used herein includes any and all combinations of one or more of the associated listed items. The term "or" indicates one item or the other. For example, "A or B" indicates just A or just B.

[0035] The terminology used herein is for the purpose of describing various embodiments only and is not intended to be limiting on any embodiment. As used herein, the singular forms are intended to include the plural forms, as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises", "includes", and/or "has" in this specification specify the presence of a stated feature, number, step, operation, component, element, or a combination thereof but do not preclude the presence or addition of one or more other features, numbers, steps, operations, components, elements, or combinations thereof.

[0036] Any term in this disclosure should first be used as defined or explained in context in this disclosure. Any unde-

defined term used herein, including technical and scientific terms, have the same meanings as terms that are generally understood by those skilled in the art unless otherwise indicated. The next step to clarifying a term would be its definition in a technical dictionary related to the field of this disclosure. The next step would be the definition of the term in a general purpose dictionary.

[0037] FIGS. 1A and 1B are exemplary diagrams for describing a wearable device worn by a user according to various embodiments of the present disclosure.

[0038] Referring to FIGS. 1A and 1B, a wearable device 10 according to various embodiments of the present disclosure may be worn on a wrist of a user 20. Although not shown in FIG. 1A, the wearable device 10 may be worn on another body part (e.g., an ankle) of the user 20. The wearable device 10 according to various embodiments of the present disclosure may be worn by the user 20 to obtain biometric information when the user 20 is involved in an activity such as, for example, jogging or exercising. The wearable device 10 may be able to provide various information associated with the biometric information to the user 20 through a display unit 110.

[0039] FIGS. 2A through 2C are exemplary diagrams for describing a structure of a wearable device according to various embodiments of the present disclosure.

[0040] Referring to FIG. 2A, the wearable device 10 according to various embodiments of the present disclosure may be, for example, an electronic device that is wearable on a wrist such as a watch or a bracelet. However, a shape of the wearable device 10 is not limited to that shown in FIG. 2A, and may also be manufactured as a communication device or medical equipment. The wearable device 10 according to various embodiments of the present disclosure may be worn on a body part such as, for example, a wrist or an ankle.

[0041] The wearable device 10 according to various embodiments of the present disclosure may include a main body portion 101 and a wearing portion 102. The main body portion 101 may include a front surface F, and a rear surface R that contacts the body of the user 20 wearing it. The display unit 110 is disposed on the front surface F of the main body portion 101. As will be described below, a sensor unit 140 according to various embodiments of the present disclosure is disposed on the rear surface R of the main body portion 101. The main body portion 101 may be formed to generally fit the body of a user 20.

[0042] The wearing portion 102 may include a first wearing member 103a and a second wearing member 103b. The second wearing member 103b may include multiple binding holes 104. The multiple binding holes 104 may be arranged so that the first wearing member 103a and the second wearing member 103b can be adjusted to fit a body part of the user 20.

[0043] Referring to FIG. 2B, the wearable device 10 according to various embodiments of the present disclosure may include a controller 100, the display unit 110, a power management unit 120, a battery 122, a communication unit 130, the sensor unit 140, a storage unit 150, and a heat providing unit 160.

[0044] The controller 100 may include one or more of a central processing unit (CPU), an application processor (AP), a communication processor (CP), and/or a micro controller unit (MCU). The controller 100 may perform, for example, operations or data processing associated with control and/or communication of at least one other element of the wearable device 10.

[0045] The display unit 110 may include a panel, a hologram device, or a projector. The panel may include, for example, a liquid crystal display (LCD) or an active matrix organic light-emitting diode (AM-OLED). The panel may be flexible, transparent, and/or wearable. The panel may be integrally formed with a touch panel as one unit. The touch panel may recognize a touch input of at least one of a capacitive type, a resistive type, an infrared type, and an ultrasonic wave type. The touch panel may further include a control circuit. For the capacitive type, a physical contact or proximity may be recognized. The touch panel may further include a tactile layer. In this case, the touch panel may provide a tactile reaction to the user. The hologram device shows a stereoscopic image over the air by using interference of light. The projector displays an image by projecting light onto a screen. The screen may be disposed, for example, on or outside the wearable device 10. According to various embodiments of the present disclosure, the display unit 110 may further include a control circuit for controlling the panel, the hologram device, and/or the projector.

[0046] The power management unit 120 manages power of the wearable device 10. Although not shown, the power management unit 120 may include, for example, a power management integrated circuit (PMIC), a charger IC, or a battery gauge. The PMIC is mounted, for example, in the IC or a system on chip (SoC) semiconductor. The charging scheme may be classified into a wired type and a wireless type. The charger IC charges the battery 122 and prevents introduction of over-voltage or over-current from a charging device. According to an embodiment, the charger IC may include a charger IC for at least one of the wired charging type and the wireless charging type. The wireless charging type may include, for example, a magnetic resonance type, a magnetic induction type, and an electromagnetic type, and an additional circuit for wireless charging, e.g., a coil loop, a resonance circuit, or a rectifier may be used by the wireless charging type.

[0047] The battery gauge measures, for example, the remaining capacity, a voltage, current, and/or temperature of the battery 122. The battery 122 stores electricity and supplies power to the wearable device 10 by using the stored electricity. The battery 122 may include, for example, a rechargeable battery or a solar battery. The solar battery may comprise solar cells to generate electricity to charge itself and/or supply electricity to the device it is in.

[0048] The communication unit 130 performs data transmission and reception between the wearable device 10 and another external electronic device (e.g., a smartphone) connected with the wearable device 10 through wired/wireless communication. According to various embodiments of the present disclosure, the communication unit 130 may include a universal serial bus (USB) unit, a WiFi unit, a Bluetooth (BT) unit, a near field communication (NFC) unit, a global positioning system (GPS) unit, and so forth. According to various embodiments of the present disclosure, at least three of the USB unit, the WiFi unit, the BT unit, the NFC unit, and the GPS unit may be included in one IC or IC package.

[0049] The sensor unit 140 measures a physical amount or senses an operation state of the wearable device 10 to convert the measured or sensed information into an electric signal. The sensor unit 140 may include at least one of a biometric sensor unit 142, a distance sensor unit 144, a temperature sensor unit 146, and an operation sensor unit 148.

**[0050]** The biometric sensor unit **142** may be configured to perform a function/operation of sensing (or obtaining) various biometric information (e.g., a pulse rate, an oxygen saturation, and so forth) of the user **20**. Herein, pulse rate, oxygen saturation, and/or the amount of calories consumed have been mentioned as examples of the biometric information of the user **20**, but they are used for convenience and embodiments of the biometric information are not limited by these examples. That is, the biometric information according to various embodiments of the present disclosure may further include various biometric information such as pulse, temperature, electrocardiogram, body fat percentage, activity level, and pressure.

**[0051]** The distance sensor unit **144** is configured to perform a function/operation of sensing a distance between a body part (e.g., a wrist) of the user **20** and the wearable device **10** (or obtaining information about the distance) if the wearable device **10** worn on the user **20** moves (or is shaken) due to motion of the user **20**.

**[0052]** The temperature sensor unit **146** is configured to perform a function/operation of sensing a skin temperature of a body part of the user **20** (e.g., the wrist of the user **20** on which the wearable device **10** is worn) (or obtaining information about the skin temperature of the user **20**). The term “pulse rate” may be interchangeably used with various terms such as a “pulse cycle” or a “heart rate” according to embodiments.

**[0053]** The operation sensor unit **148** is configured to perform a function/operation of sensing motion of the user **20**. The operation sensor unit **148** may include, for example, an acceleration sensor. The sensor unit **140** additionally or alternatively may include an e-noise sensor, an electromyography (EMG) sensor, an electroencephalogram (EEG) sensor, an electrocardiogram (ECG) sensor, an infrared (IR) sensor, an iris sensor, or a fingerprint sensor. The sensor unit **140** may further include a control circuit for controlling at least one sensor included therein.

**[0054]** The storage unit **150** may include volatile and/or nonvolatile memory. The storage unit **150** stores commands or data associated with at least one other elements of the wearable device **10**. According to various embodiments of the present disclosure, the storage unit **150** may store software and/or various programs.

**[0055]** The heat providing unit **160** is configured to perform a function/operation of providing heat to increase skin temperature of the user **20** if the skin temperature sensed by the temperature sensor unit **146** is equal to or less than a threshold temperature. With such a function/operation, noise generated by the skin temperature (that is, an error generated due to a low skin temperature) may be reduced when the temperature sensor unit **146** obtains a biometric measurement (e.g., the pulse rate) of the user **20**. As will be described below, the heat providing unit **160** may include time of flight (ToF) light sources **144a** and **144b**, and the skin temperature of the body part of the user **20** (e.g., the wrist of the user **20** on which the wearable device **10** is worn) may be increased using a signal (e.g., infrared light) output from the ToF light sources **144a** and **144b**.

**[0056]** Referring to FIG. 2C, the sensor unit **140** and a charging terminal unit **170** are disposed on the rear surface R of the wearable device **10**. The sensor unit **140** disposed on the rear surface R of the wearable device **10** may be interchangeably used with a term such as a “sensor interface” according to various embodiments of the present disclosure.

**[0057]** The biometric sensor unit **142** according to various embodiments of the present disclosure may include a light-receiving unit **140b** and a pulse measuring light source **142a**. The pulse measuring light source **142a** outputs a signal (e.g., red light or IR light) for obtaining biometric information (e.g., the pulse rate or the oxygen saturation of arterial blood) of the user **20**. However, the type of output signal is not limited to the above example, and the type of the signal output by the pulse measuring light source **142a** may include various types of signals that may be sensed by the light-receiving unit **140b**. The pulse measuring light source **142a** may include a light-emitting diode (LED). The controller **100** determines the amount of consumed calories of the user **20** based on information about the obtained oxygen saturation. A way to determine the amount of consumed calories based on the oxygen saturation may use various conventional methods.

**[0058]** The light-receiving unit **140b** senses the light (e.g., IR light) output from a light source and reflected from the body part of the user. The controller **100** determines a pulse rate and/or an oxygen saturation of the user **20** based on a change in the attribute of light sensed by the light-receiving unit **140b**. A way to determine the pulse rate and/or the oxygen saturation based on the light sensed by the light receiving unit **140b** may use various conventional methods.

**[0059]** The distance sensor unit **144** according to various embodiments of the present disclosure may include the ToF light sources **144a**, **144b** and the light-receiving unit **140b**. The ToF light sources **144a** and **144b** are configured to output red light or IR light to sense a distance between the body part (e.g., the wrist) of the user **20** and the wearable device **10**. However, the type of output light is not limited to the above example, and the type of light output from the ToF light sources **144a** and **144b** may include various types of light that may be sensed by the light-receiving unit **140b**.

**[0060]** The temperature sensor unit **146** according to various embodiments of the present disclosure is configured to sense a skin temperature of the body part of the user **20** adjacent to the wearable device **10** when the wearable device **10** is worn by the user **20**. The skin temperature may be measured in a non-contact manner using, for example, IR light.

**[0061]** The operation sensor unit **148** according to various embodiments of the present disclosure is configured to determine whether the user **20** moves. As mentioned above, the operation sensor unit **148** may include an acceleration sensor.

**[0062]** Viewed from another aspect, the sensor unit **140** according to various embodiments of the present disclosure may include the first light source unit **140a**, the light-receiving unit **140b**, and a second light source unit **140c**. The first light source unit **140a** may include the pulse measuring light source **142a** and the ToF light source **144a**. The second light source unit **140c** may include the second ToF light source **144b**. However, according to various embodiments of the present disclosure, one of the ToF light source **144a** and the ToF light source **144b** may be omitted. That is, the wearable device **10** according to various embodiments of the present disclosure may include at least one ToF light sources.

**[0063]** FIGS. 3A through 3E are exemplary diagrams for describing a function/operation of determining whether a wearable device is worn on a user according to various embodiments of the present disclosure.

**[0064]** Referring to FIG. 3A, the controller **100** controls the ToF light source **144a** or the ToF light source **144b** to output

a wearing sensing signal **11** (e.g., IR light) to determine whether the user **20** wears the wearable device **10** as illustrated in FIG. 3B.

[0065] Referring to FIG. 3C, the controller **100** may determine that the wearable device **10** is worn on the user **20** if the wearing sensing signal **11** output from the first light source unit **140a** is sensed by the light-receiving unit **140b**. Once the controller **100** determines that the wearable device **10** is being worn by the user **20**, the controller **100** controls the pulse measuring light source **142a** of the first light source unit **140a** to output a signal for obtaining biometric information of the user **20**.

[0066] Referring to FIGS. 3D and 3E, according to a different embodiment than illustrated in FIGS. 3A through 3C, an input from the user **20** as illustrated in FIG. 3E initiates the controller **100** to control the pulse measuring light source **142a** of the first light source unit **140a** to output a signal for obtaining the biometric information of the user **20**.

[0067] FIGS. 4A through 4H are exemplary diagrams for describing a function/operation of obtaining biometric information (e.g., a heart rate) of a user at a wearable device by considering motion of the user according to various embodiments of the present disclosure.

[0068] Referring to FIG. 4A, upon sensing the user **20** wearing the wearable device **10**, the controller **100** controls the ToF light sources **144a** and **144b** in the first light source unit **140a** and the second light source unit **140c**, respectively, to output a signal to determine a distance between a body part of the user **20** and the wearable device **10**. The controller **100** determines as a reference distance **D** the distance between the wearable device **10** and the user **20** when wearing of the wearable device **10** is initially sensed (section (1) of FIG. 4A). That is, the controller **100** determines an initial distance between the wearable device **10** and the user **20**, which is determined in the section (1) of FIG. 4A, as the reference distance **D**. This reference distance **D** may be used in the process of obtaining the biometric information of the user **20**.

[0069] In section (2) of FIG. 4A, if the wearable device **10** moves due to motion of the user **20** (e.g., as illustrated in FIG. 4D), there may be a new distance **D1** measured between the wearable device **10** and the user **20** that is equal to or less than the reference distance **D**. In section (2) of FIG. 4A, since the distance **D1** between the wearable device **10** and the user **20** is equal to or less than the reference distance **D**, the controller **100** may control the pulse measuring light source **142a** to output a signal to measure a pulse of the user **20**.

[0070] While the distance (e.g., **D1**) between the wearable device **10** and the user **20** may be determined using the ToF light source **144a**, this is merely an example for describing the present disclosure. The distance between the wearable device **10** and the user **20** may also be determined by using the second ToF light source **144b**. Accordingly, any appropriate light source may be controlled to output a signal to determine the distance between the wearable device **10** and the user **20**, thereby accurately determining motion of the user **20**. According to various embodiments of the present disclosure, the operation sensor unit **148** may also be used to sense whether the user **20** may be moving.

[0071] In section (3) of FIG. 4A, if the wearable device **10** moves due to motion of the user **20** (e.g., as illustrated in FIG. 4G), the distance **D1** between the wearable device **10** and the user **20** may exceed the reference distance **D**. Accordingly, the controller **100** may control the pulse measuring light source **142a** to not output a signal to measure the pulse of the

user **20**. That is, the controller **100** controls the pulse measuring light source **142a** to output the signal if determining that the first light source unit **140a** including the pulse measuring light source **142a** is in proximity with a body part of the user **20**, and reduces noise caused by motion of the user **20** and also power consumption in measurement of the biometric information.

[0072] In section (4) of FIG. 4A, as in section (2) of FIG. 4A, the distance **D1** between the wearable device **10** and the user **20** returns to being equal to or less than the reference distance **D** due to motion of the user **20**, such that the function/operation of obtaining the biometric information of the user **20** is performed.

[0073] Referring to FIG. 4B, upon sensing that the wearable device **10** is on the user **20**, the controller **100** controls the ToF light sources **144a** and **144b** of the first light source unit **140a** and the second light source unit **140c**, respectively, to output a signal **12** to determine the distance **D** between the wearable device **10** and the user **20**. The controller **100** sets the determined distance **D** as a reference distance. FIG. 4B further illustrates section (1) of FIG. 4A in which the signal **12** is output by the ToF light sources **144a** and **144b**. The controller **100** controls the ToF light sources **144a** and **144b** to output the signal **12** to determine the distance at preset time intervals (or preset periods).

[0074] Referring to FIG. 4C, when the distance between the wearable device **10** and the user **20** maintains the reference distance **D**, the controller **100** controls the pulse measuring light source **142a** to output various signals  $\lambda_1$ ,  $\lambda_2$ , and  $\lambda_3$  to obtain the biometric information of the user **20**. Signals  $\lambda'_1$ ,  $\lambda'_2$ , and  $\lambda'_3$ , which are the signals  $\lambda_1$ ,  $\lambda_2$ , and  $\lambda_3$  reflected from a blood vessel **21** of the user **20**, are received by the light-receiving unit **140b**. The controller **100** may obtain various biometric information such as, for example, pulse rate and/or oxygen saturation of the user **20**, based on a change in attribute (e.g., wavelength) of the signals  $\lambda_1$ ,  $\lambda_2$ , and  $\lambda_3$  compared to the signals  $\lambda_1$ ,  $\lambda_2$ , and  $\lambda_3$ . A way to obtain the pulse rate and/or the oxygen saturation of the user **20** based on the change in attribute of the received signals  $\lambda'_1$ ,  $\lambda'_2$ , and  $\lambda'_3$  may use various conventional methods. Each of the signals  $\lambda_1$ ,  $\lambda_2$ , and  $\lambda_3$  may have different wavelengths. Although three signals  $\lambda_1$ ,  $\lambda_2$ , and  $\lambda_3$  having different wavelengths are illustrated in FIG. 4C, various embodiments need not be limited so. Other embodiments may have different number of signals with their respective wavelengths.

[0075] Referring to FIG. 4D, the wearable device **10** worn by the user **20** may move due to motions of the user **20**. In FIG. 4E, due to motions of the user **20** as illustrated in FIG. 4D, the distance between the wearable device **10** and the user **20** is changed to **D1** that is less than the reference distance **D**. As mentioned above, the distance may be determined based on the first light source unit **140a**. If the distance between the wearable device **10** and the user **20** is equal to or less than the reference distance **D** as illustrated in FIG. 4E, the controller **100** controls the signals  $\lambda_1$ ,  $\lambda_2$ , and  $\lambda_3$  to be output as illustrated in FIG. 4F to obtain the biometric information of the user **20**. The description regarding FIGS. 4E and 4F may correspond to the description of section (2) of FIG. 4A.

[0076] Referring to FIGS. 4G and 4H, the distance **D1** between the wearable device **10** and the user **20** now exceeds the reference distance **D** due to motion of the user **20**. Accordingly, the controller **100** controls the signals  $\lambda_1$ ,  $\lambda_2$ , and  $\lambda_3$  to not be output, and, therefore, no biometric information will be

collected at this time. The description regarding FIGS. 4G and 4H may correspond to the description of the section (3) of FIG. 4A.

[0077] FIG. 5 is a diagram for describing a method for controlling a wearable device according to various embodiments of the present disclosure.

[0078] Referring to FIG. 5, a method for controlling the wearable device 10 according to various embodiments of the present disclosure may include an operation S500 of determining whether the wearable device 10 is worn by the user 20. If the wearable device 10 is on the user 20, a first signal for determining a distance between the wearable device 10 and the user 20 is output and the first signal reflected from the user 20 is received in operation S510. The wearable device 10 determines the distance based on the received first signal in operation S520, and determines whether the determined distance is equal to or less than the reference distance in operation S530. If the determined distance is equal to or less than the reference distance, the wearable device 10 outputs a second signal to obtain biometric information of the user 20 and receives the second signal reflected from the user 20 in operation S540. The wearable device 10 obtains the biometric information of the user 20 based on a change in attribute of the received second signal in operation S550.

[0079] This method for controlling the wearable device 10 may be applied to various embodiments of the disclosure. However, an embodiment need not be limited to this method. Various other methods may be used to control the wearable device 10.

[0080] FIGS. 6A through 6D are exemplary diagrams for describing a function/operation of obtaining biometric information of a user by a wearable device by considering the current body condition of the user according to various embodiments of the present disclosure.

[0081] Referring to FIG. 6A, the controller 100 senses a current body condition (e.g., the current skin temperature) of the user 20 using the temperature sensor unit 146. For example, for the skin temperature as the current body condition, the temperature sensor unit 146 receives IR light reflected from the skin of the user 20 and senses the current skin temperature of the user 20. To output the IR light, the temperature sensor unit 146 may include a temperature sensor light source (not shown). The current skin temperature of the user 20 may be measured in a contact and/or non-contact manner using various conventional methods.

[0082] Referring to FIG. 6B, if the sensed skin temperature of the user 20 is equal to or less than a preset skin temperature (referred to as a "reference temperature"), the controller 100 controls the heat providing unit 160 to output light (e.g., red light or IR light) to increase the skin temperature. A position at which the skin temperature is sensed and a position to which the light for increasing the skin temperature is output may globally coincide with a position to which the second signal (FIG. 5) is output to obtain the biometric information.

[0083] The heat providing unit 160 (FIG. 2B) may include at least one of the ToF light sources 144a and 144b. Accordingly, the light output by the ToF light sources 144a and 144b may be used to increase the skin temperature at certain times as well as to determine distance at other times. By warming the skin to be sensed for biometric information, it is possible to reduce inaccurate sensing when the skin temperature was too low to sense for proper biometric information. The refer-

ence temperature may be in a pre-determined temperature range that is suitable for obtaining the biometric information with the second signal.

[0084] Referring to FIG. 6C, the controller 100 controls the temperature sensor unit 146 to sense the skin temperature of the user 20 as described in relation to FIG. 6A. The controller 100 controls the temperature sensor light source to output the IR light to sense the skin temperature at preset time intervals. If the skin temperature exceeds the reference temperature, the controller 100 controls the biometric sensor unit 142 to output light to obtain biometric information (e.g., the pulse rate of the user 20) (in sections (1) and (2) of FIG. 6C). However, if the skin temperature is equal to or less than the reference temperature, the controller 100 controls the heat providing unit 160 to output light to increase the skin temperature. In FIG. 6C, as an embodiment of the heat providing unit 160, the ToF light sources 144a and 144b are controlled to output the light (in section (3) of FIG. 6C). After warming the skin, the controller 100 controls the temperature sensor light source to output the IR light to sense the skin temperature. If the skin temperature exceeds the reference temperature, the controller 100 controls the biometric sensor unit 142 to output light to obtain biometric information.

[0085] FIG. 6D shows an embodiment in which the embodiment described with reference to FIG. 4A and the embodiment described with reference to FIG. 6C are combined.

[0086] In a section (1) of FIG. 6D, the skin temperature is equal to or greater than the reference temperature and the distance D1 is equal to the reference distance D. In this case, the controller 100 may control, for example, the pulse measuring light source 142a to output light to obtain the user's biometric information.

[0087] In a section (2) of FIG. 6D, the skin temperature is equal to or greater than the reference temperature and the distance D1 is equal to or less than the reference distance D. In this case, the controller 100 may control, for example, the pulse measuring light source 142a to output light to obtain the user's biometric information.

[0088] In a section (3) of FIG. 6D, the skin temperature is equal to or greater than the reference temperature and the distance D1 exceeds the reference distance D. In this case, the controller 100 may control, for example, the pulse measuring light source 142a to not output light.

[0089] In a section (4) of FIG. 6D, the skin temperature is equal to or less than the reference temperature and the distance D1 is less than the reference distance D. In this case, the controller 100 may control the ToF light sources 144a and 144b to output light to increase the skin temperature of the user 20 to the reference temperature or higher. After the light is output for a preset time, the controller 100 controls the temperature sensor unit 146 to sense the skin temperature again. In this case, if the re-sensed skin temperature is equal to or greater than the reference temperature, the controller 100 controls the biometric information to be obtained as shown in the section (4) of FIG. 6D.

[0090] FIG. 7 is an exemplary diagram for describing a method for controlling a wearable device according to various embodiments of the present disclosure.

[0091] Referring to FIG. 7, a method for controlling a wearable device according to various embodiments of the present disclosure may include an operation S700 of determining whether the wearable device 10 is worn by the user 20. If the wearable device 10 is worn by the user 20, the wearable

device **10** senses the skin temperature of the user **20** in operation **S710**. The wearable device **10** determines whether the sensed skin temperature is equal to or less than a preset temperature in operation **S720**, and if the sensed skin temperature is equal to or less than the preset temperature, light for increasing the skin temperature of the user **20** is output to the user **20** in operation **S730**. Once the light is output for the preset time, the wearable device **10** re-senses the skin temperature of the user **20** to determine whether the skin temperature of the user **20** exceeds the reference temperature in operation **S740**. If the re-sensed skin temperature of the user **20** is greater than the reference temperature, the wearable device **10** outputs a signal (e.g., the second signal) to obtain the user's biometric information in operation **S750**.

[0092] This method for controlling the wearable device **10** may be applied to various embodiments of the disclosure. However, an embodiment need not be limited to this method. Various other methods may be used to control the wearable device **10**.

[0093] FIGS. **8A** through **8C** are exemplary diagrams for describing a function/operation of providing biometric information (e.g., a pulse rate and the amount of calories consumed) of the user to the user at a wearable device according to various embodiments of the present disclosure.

[0094] Referring to FIG. **8A**, when the wearable device **10** is worn on a body part of the user **20**, a home screen **110a** is displayed on the display unit **110**.

[0095] Referring to FIG. **8B**, when the home screen **110a** is displayed on the display unit **110**, the wearable device **10** receives a drag input with respect to the home screen **110a** as a screen switchover request to display a biometric information providing screen **110b** for the user **20**. The drag input is an example for a description of the present disclosure, and various other input gestures may be used for screen switchover.

[0096] Referring to FIG. **8C**, in response to the screen switchover request, the controller **100** controls the biometric information providing screen **110b** to be displayed on the display unit **110**. In FIG. **8C**, a current pulse rate and a current amount of consumed calories are shown as examples of the biometric information.

[0097] FIGS. **9A** through **9D** are exemplary diagrams for describing a function/operation of providing related information to a user if obtained biometric information of the user exceeds a preset threshold value according to various embodiments of the present disclosure.

[0098] Referring to FIG. **9A**, when the wearable device **10** is worn on a body part of the user **20**, the home screen **110a** is displayed on the display unit **110**.

[0099] Referring to FIG. **9B**, if a current pulse rate exceeds a preset threshold value (e.g., 115 pulses per minute), perhaps due to a rapid change in the biometric information, then the controller **100** notifies the user **20** that the current pulse rate exceeds the preset threshold value. The notification may be provided to the user **20** using at least one of a visual method (e.g., a color change of the screen), an audible method (e.g., a preset sound), and a tactile method (e.g., vibration).

[0100] Referring to FIG. **9C**, the wearable device **10** receives a request from the user **20** to check for information related to the abnormality of the biometric information (e.g., a sharp change in the pulse rate per minute). The controller **100** provides the information to the user **20** in response to the request, as illustrated in FIG. **9D**. The information related to the abnormality of the biometric information may have been

stored in the storage unit **150** or may be provided from another electronic device through the communication unit **130** on a real time basis.

[0101] FIGS. **10A** through **10C** are exemplary diagrams for describing a function/operation of providing history information of biometric information of a user to the user according to various embodiments of the present disclosure.

[0102] Referring to FIG. **10A**, when the wearable device **10** is worn by the user **20**, the home screen **110a** is displayed on the display unit **110**.

[0103] Referring to FIG. **10B**, with the home screen **110a** is displayed on the display unit **110**, the wearable device **10** may receive a drag input with respect to the home screen **110a** as a screen switchover request for displaying a biometric information history screen **110e** for the user **20**. The drag input is an example for a description of the present disclosure, and various other input gestures may be used for screen switchover.

[0104] Referring to FIG. **10C**, the controller **100** controls the biometric information history screen **110e** to provide a history of biometric information of the user **20** obtained in a preset time range. The biometric information may be displayed on the display unit **110** in response to the screen switchover request. In FIG. **10C**, a pulse rate and the amount of consumed calories are shown as examples of the biometric information.

[0105] FIGS. **11A** through **11D** are exemplary diagrams for describing a function/operation of providing a user with various information via an external electronic device (e.g., a smart phone) connected with a wearable device based on changes in the user's biometric information according to various embodiments of the present disclosure.

[0106] Referring to FIG. **11A**, the wearable device **10** is connected with another electronic device **30** through wired or wireless communication. The electronic device **30** may include a display unit **320** on which a screen **322** may be displayed. The wearable device **10** may receive an input for selecting a menu icon **111** when the home screen **110a** is displayed on the display unit **110**.

[0107] Referring to FIG. **11B**, in response to the input for selecting the menu icon **111**, the controller **100** controls a menu screen **110g** to be displayed. The wearable device **10** receives a request for transmitting the biometric information of the user **20** stored in the storage unit **150** to the electronic device **30** from the user **20** as illustrated in FIG. **11B**.

[0108] Referring to FIG. **11C**, the wearable device **10** receives an input for selecting information to be transmitted to the electronic device **30** from the user **20**. In FIG. **11C**, as an example of the information to be transmitted to the electronic device **30**, information about a pulse rate is selected.

[0109] Referring to FIG. **11D**, once the wearable device **10** transmits the selected biometric information to the electronic device **30**, the electronic device **30** provides information related to a history of biometric information transmitted from the wearable device **10** to the user **20** through the electronic device **30**. FIG. **11D** shows an example of receiving information about the user **20** whose pulse rate frequently changes where a screen **324** displays information related to the frequent change of the pulse rate.

[0110] The term "unit" used in various embodiments of the present disclosure may include hardware, software, firmware, or a combination of one or more of them. The "unit" may be interchangeably used with a logic block, a component, a circuit, or the like. The "unit" may be mechanically or elec-

tronically implemented. For example, the “unit” according to various embodiments of the present disclosure may include at least one of an application-specific integrated circuit (ASIC) chip, field-programmable gate arrays (FPGAs), or programmable logic devices that perform certain operations, and other devices that may be developed.

[0111] As is apparent from the foregoing description, according to various embodiments of the present disclosure, when the user’s biometric information is obtained, a movement of the wearable device due to user’s motion is taken into account, thereby providing accurate biometric information to the user.

[0112] Moreover, according to various embodiments of the present disclosure, when the user’s biometric information is obtained, the user’s body condition is also considered to provide accurate biometric information to the user.

[0113] The effects described in the various embodiments of the present disclosure are not limited to the mentioned effects, and it will be obvious to those of ordinary skill in the art that various effects are implied herein.

[0114] The embodiments disclosed herein have been provided for description and understanding of disclosed technical matters, and are not intended to limit the scope of the present disclosure. Therefore, it should be construed that the scope of the present disclosure includes any change or other various embodiments based on the technical spirit of the present disclosure.

What is claimed is:

1. A wearable device comprising:
  - a distance sensor unit configured to output a first signal for determining a distance between a user and the wearable device and to receive the first signal reflected from the user, when the wearable device is worn by the user;
  - a biometric sensor unit configured to output a second signal for determining biometric information of the user and to receive the second signal reflected from the user; and
  - a controller configured to determine the distance based on the reflected first signal and to obtain the biometric information of the user based on a change in an attribute of the reflected second signal,
 wherein the controller controls the biometric sensor unit to output the second signal if the determined distance is equal to or less than a reference distance.
2. The wearable device of claim 1, wherein the distance sensor unit comprises a time of flight (ToF) light source configured to output the first signal and a light-receiving unit configured to receive the reflected first signal.
3. The wearable device of claim 2, wherein the controller is configured to control the ToF light source to output a wearing sensing signal for determining whether the wearable device is worn by the user at preset time intervals.
4. The wearable device of claim 1, wherein the biometric sensor unit comprises a pulse measuring light source configured to output the second signal and a light-receiving unit configured to receive the reflected second signal.
5. The wearable device of claim 1, wherein the reference distance comprises the determined distance between the user and the wearable device at an initial point in time when the wearable device is worn by the user.
6. The wearable device of claim 1, wherein the biometric information comprises at least one of pulse rate, oxygen saturation, and amount of consumed calories, and

wherein the controller is configured to control storing of the biometric information obtained during a preset time in a storage unit.

7. The wearable device of claim 6, further comprising a communication unit configured to transmit the biometric information stored in the storage unit to an electronic device connected with the wearable device through wired or wireless communication.

8. The wearable device of claim 1, wherein the controller is configured to display additional information regarding changes to specific biometric information, if the specific biometric information is above a high threshold when a normal reading of the specific biometric information is below the high threshold, or if the specific biometric information is below a low threshold when a normal reading of the specific biometric information is below the low threshold.

9. The wearable device of claim 1, further comprising a temperature sensor unit configured to sense a skin temperature of the user when the wearable device is worn by the user.

10. The wearable device of claim 9, wherein the controller controls the distance sensor unit to output the first signal during a preset time to increase the skin temperature, if the sensed skin temperature is equal to or less than a reference temperature.

11. A wearable device comprising:

- a heat providing unit;
  - a temperature sensor unit configured to receive biometric information of a user to sense a skin temperature of the user when the wearable device is worn by the user; and
  - a controller configured to determine the skin temperature of the user based on the biometric information received by the temperature sensor unit and to determine whether the determined skin temperature is less than a reference temperature,
- wherein the controller controls the heat providing unit to output light for increasing the skin temperature of the user to a skin of the user, if the skin temperature is less than the reference temperature.

12. The wearable device of claim 11, wherein the heat providing unit comprises a time of flight (ToF) light source configured to output infrared (IR) light.

13. A method for controlling a wearable device, the method comprising:

- outputting a first signal for determining a distance between a user and the wearable device and receiving the first signal reflected from the user, when the wearable device is worn by the user;
- determining the distance based on the reflected first signal;
- outputting a second signal for determining biometric information of the user and receiving the second signal reflected from the user, if the determined distance is equal to or less than a reference distance; and
- obtaining the biometric information of the user based on a change in an attribute of the reflected second signal.

14. The method of claim 13, wherein the first signal is output from a time of flight (ToF) light source, and the reflected first signal is received through a light-receiving unit.

15. The method of claim 14, further comprising outputting, by the ToF light source, a wearing sensing signal for determining whether the wearable device is worn by the user, at preset time intervals.

16. The method of claim 13, wherein the second signal is output from a pulse measuring light source, and the reflected second signal is received through a light-receiving unit.

17. The method of claim 13, wherein the reference distance comprises the distance between the user and the wearable device at an initial point in time when the wearable device is worn by the user.

18. The method of claim 13, wherein the biometric information comprises at least one of pulse rate, oxygen saturation, and amount of consumed calories, and the method further comprise storing the biometric information obtained during a preset time in a storage unit.

19. The method of claim 18, further comprising providing additional information regarding changes to specific biometric information, if the specific biometric information is above a high threshold when a normal reading of the specific biometric information is below the high threshold, or if the specific biometric information is below a low threshold when a normal reading of the specific biometric information is below the low threshold.

20. The method of claim 19, further comprising transmitting the biometric information stored in the storage unit to an electronic device connected with the wearable device through wired or wireless communication.

21. The method of claim 13, further comprising sensing a skin temperature of the user when the wearable device is worn by the user.

22. The method of claim 21, further comprising outputting the first signal during a preset time to increase the skin temperature, if the sensed skin temperature is equal to or less than the reference temperature.

23. A method for controlling a wearable device, the method comprising:

receiving by a temperature sensor unit biometric information for a skin temperature of a user when the wearable device is worn by the user;

determining the skin temperature of the user based on the biometric information received by the temperature sensor unit and determining whether the determined skin temperature is equal to or less than a reference temperature; and

outputting light for increasing the skin temperature of the user to a skin of the user, if the determined skin temperature is equal to or less than the reference temperature.

24. The method of claim 23, wherein the light is infrared (IR) light output from a time of flight (ToF) light source.

25. A wearable device comprising:

a first light source unit comprising a first time of flight (ToF) light source configured to output a first signal for determining a distance between a user and the wearable device when the wearable device is worn by the user;

a second light source unit comprising a second ToF light source configured to output the first signal and a light source configured to output a second signal for sensing a pulse of the user;

a light-receiving unit configured to receive the first signal and the second signal reflected from the user; and

a controller configured to determine the distance based on the reflected first signal and to obtain the biometric information of the user based on a change in an attribute of the reflected second signal,

wherein the controller controls the light source to output the second signal if the determined distance is equal to or less than a reference distance.

26. A wearable device comprising:

a controller;

a temperature sensor unit configured to sense a skin temperature of a user wearing the wearable device;

a first light source unit comprising a first time of flight (ToF) light source configured to output a first signal for increasing the skin temperature; and

a second light source unit comprising a second ToF light source configured to output the first signal and a light source configured to output a second signal for obtaining biometric information of the user,

wherein the controller controls the ToF light source to output the first signal if the sensed skin temperature is equal to or less than a reference temperature.

\* \* \* \* \*

专利名称(译)	可穿戴设备及其控制方法		
公开(公告)号	<a href="#">US20160199002A1</a>	公开(公告)日	2016-07-14
申请号	US14/991867	申请日	2016-01-08
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	LEE JEA HYUCK MIN JIN HONG BAEK IN GEOL LEE MIN HYOUNG CHO JAE GEOL		
发明人	LEE, JEA-HYUCK MIN, JIN-HONG BAEK, IN-GEOL LEE, MIN-HYOUNG CHO, JAE-GEOL		
IPC分类号	A61B5/00 A61B5/01		
CPC分类号	A61B5/6844 A61B5/0008 A61B5/681 A61B5/7246 A61B5/742 A61B5/01 A61B5/0059 A61B5/002 A61B5/02055 A61B5/02427 A61B5/02438 A61B5/7475 A61B2503/10		
优先权	1020150003365 2015-01-09 KR		
其他公开文献	US9782128		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

提供了一种可穿戴设备及其控制方法。可穿戴设备可以包括距离传感器单元，该距离传感器单元被配置为输出第一信号，用于确定用户和可穿戴设备之间的距离，并接收从用户反射的第一信号。可穿戴设备还可以包括生物传感器单元，其被配置为输出用于确定用户的生物信息并接收从用户反射的第二信号的第二信号，以及被配置为基于所接收的第一信号确定距离的控制器，并且基于所接收的第二信号的属性的变化来获得用户的生物信息。如果确定的距离等于或小于参考距离，则控制器可以控制生物传感器单元输出第二信号。

