



US010463267B2

(12) **United States Patent**
Scharf et al.

(10) **Patent No.:** **US 10,463,267 B2**
(45) **Date of Patent:** ***Nov. 5, 2019**

(54) **DEVICE AND METHOD FOR THE GEOMETRIC DETERMINATION OF ELECTRICAL DIPOLE DENSITIES ON THE CARDIAC WALL**

(71) Applicant: **Christoph Scharf**, Horgen, Zurich (CH)

(72) Inventors: **Christoph Scharf**, Zurich (CH);
Gunter Scharf, Zurich (CH)

(73) Assignee: **Christoph Scharf** (CH)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **15/882,097**

(22) Filed: **Jan. 29, 2018**

(65) **Prior Publication Data**
US 2018/0214044 A1 Aug. 2, 2018

Related U.S. Application Data
(63) Continuation of application No. 15/333,378, filed on Oct. 25, 2016, now Pat. No. 9,913,589, which is a (Continued)

(30) **Foreign Application Priority Data**
Jan. 17, 2008 (CH) 68/08

(51) **Int. Cl.**
A61B 5/04 (2006.01)
A61B 5/0402 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **A61B 5/04012** (2013.01); **A61B 5/02028** (2013.01); **A61B 5/0402** (2013.01); (Continued)

(58) **Field of Classification Search**
CPC **A61B 5/04005**; **A61B 5/0402**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,041,973 A 8/1991 Lebron et al.
5,156,151 A 10/1992 Imran
(Continued)

FOREIGN PATENT DOCUMENTS

CA 2829626 9/2012
CN 201223445 4/2009
(Continued)

OTHER PUBLICATIONS


European Office Action dated Apr. 23, 2018 issued in corresponding European Application No. 07785075.8.
(Continued)

Primary Examiner — Eric D. Bertram
(74) *Attorney, Agent, or Firm* — Onello & Mello, LLP

(57) **ABSTRACT**

Disclosed are devices, a systems, and methods for determining the dipole densities on heart walls. In particular, a triangularization of the heart wall is performed in which the dipole density of each of multiple regions correlate to the potential measured at various locations within the associated chamber of the heart.

21 Claims, 2 Drawing Sheets

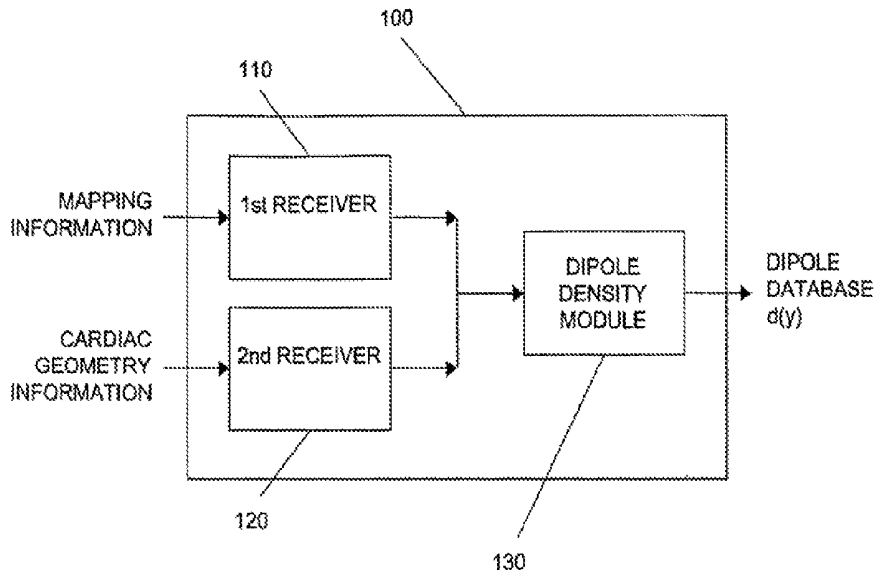

Related U.S. Application Data

continuation of application No. 14/886,449, filed on Oct. 19, 2015, now Pat. No. 9,504,395, which is a continuation of application No. 13/946,712, filed on Jul. 19, 2013, now Pat. No. 9,192,318, which is a continuation of application No. 12/863,411, filed as application No. PCT/IB2009/000071 on Jan. 16, 2009, now Pat. No. 8,512,255.

(51) **Int. Cl.**

- A61B 5/042* (2006.01)
- A61B 5/02* (2006.01)
- A61B 5/0432* (2006.01)
- A61B 5/00* (2006.01)
- A61B 6/03* (2006.01)
- A61B 8/13* (2006.01)
- A61B 18/02* (2006.01)
- A61B 18/18* (2006.01)
- A61N 7/00* (2006.01)
- A61B 5/044* (2006.01)
- A61B 5/046* (2006.01)
- A61B 18/12* (2006.01)
- A61B 18/00* (2006.01)

(52) **U.S. Cl.**

- CPC *A61B 5/044* (2013.01); *A61B 5/04005* (2013.01); *A61B 5/046* (2013.01); *A61B 5/0422* (2013.01); *A61B 5/0432* (2013.01); *A61B 5/4836* (2013.01); *A61B 5/6852* (2013.01); *A61B 6/032* (2013.01); *A61B 8/13* (2013.01); *A61B 18/02* (2013.01); *A61B 18/0206* (2013.01); *A61B 18/12* (2013.01); *A61B 18/18* (2013.01); *A61N 7/00* (2013.01); *A61B 2018/00351* (2013.01); *A61B 2018/00577* (2013.01)

(56)

References Cited

U.S. PATENT DOCUMENTS

5,293,868 A 3/1994 Nardella
 5,482,472 A 1/1996 Garoni et al.
 5,499,981 A 3/1996 Kordis
 5,555,883 A 9/1996 Avitall
 5,595,183 A 1/1997 Swanson et al.
 5,601,084 A 2/1997 Sheehan et al.
 5,647,367 A 7/1997 Lum et al.
 5,662,108 A 9/1997 Budd et al.
 5,722,402 A 3/1998 Swanson et al.
 5,722,416 A 3/1998 Swanson et al.
 5,740,808 A 4/1998 Panescu et al.
 5,749,833 A 5/1998 Hakki et al.
 5,759,158 A 6/1998 Swanson
 5,795,298 A 8/1998 Vesley et al.
 5,795,299 A 8/1998 Eaton et al.
 5,820,568 A 10/1998 Willis
 5,830,144 A 11/1998 Vesely
 5,876,336 A 3/1999 Swanson et al.
 5,928,228 A 7/1999 Kordis et al.
 5,968,040 A 10/1999 Swanson et al.
 6,014,590 A 1/2000 Wayne et al.
 6,024,703 A 2/2000 Zanelli et al.
 6,066,096 A 5/2000 Smith et al.
 6,086,532 A 7/2000 Panescu et al.
 6,107,699 A 8/2000 Swanson
 6,115,626 A 9/2000 Wayne et al.
 6,187,032 B1* 2/2001 Ohyu A61B 5/04007
 600/409
 6,188,928 B1 2/2001 Noren et al.
 6,216,027 B1 4/2001 Willis et al.
 6,216,043 B1 4/2001 Swanson et al.
 6,240,307 B1 5/2001 Beatty et al.

6,301,496 B1 10/2001 Reisfeld
 6,400,981 B1 6/2002 Govari
 6,490,474 B1 12/2002 Willis et al.
 6,514,249 B1 2/2003 Maguire et al.
 6,574,492 B1 6/2003 Ben-Haim et al.
 6,640,119 B1 10/2003 Budd et al.
 6,716,166 B2 4/2004 Govari
 6,728,562 B1 4/2004 Budd et al.
 6,772,004 B2 8/2004 Rudy
 6,773,402 B2 8/2004 Govari et al.
 6,824,515 B2 11/2004 Suorsa et al.
 6,826,420 B1 11/2004 Beatty et al.
 6,826,421 B1 11/2004 Beatty et al.
 6,839,588 B1 1/2005 Rudy
 6,895,267 B2 5/2005 Panescu et al.
 6,939,309 B1 9/2005 Beatty et al.
 6,950,689 B1 9/2005 Willis et al.
 6,970,733 B2 11/2005 Willis et al.
 6,978,168 B2 12/2005 Beatty et al.
 6,990,370 B1 1/2006 Beatty et al.
 7,187,964 B2 3/2007 Khoury
 7,187,973 B2 3/2007 Hauck
 7,258,674 B2 8/2007 Hillstead et al.
 7,263,397 B2 8/2007 Hauck et al.
 7,285,119 B2 10/2007 Stewart et al.
 7,289,843 B2 10/2007 Beatty et al.
 7,291,146 B2 11/2007 Steinke et al.
 7,479,141 B2 1/2009 Kleen et al.
 7,505,810 B2 3/2009 Harlev et al.
 7,573,182 B2 8/2009 Savage
 7,689,261 B2 3/2010 Mohr et al.
 7,766,838 B2 8/2010 Yagi et al.
 7,841,986 B2 11/2010 He et al.
 7,918,793 B2 4/2011 Altmann et al.
 7,953,475 B2 5/2011 Harlev et al.
 8,103,327 B2 1/2012 Harlev et al.
 8,147,486 B2 4/2012 Honour et al.
 8,150,499 B2 4/2012 Gelbart et al.
 8,208,998 B2 6/2012 Beatty et al.
 8,233,972 B2 7/2012 Zhang
 8,311,613 B2 11/2012 Danehorn
 8,320,711 B2 11/2012 Altmann et al.
 8,346,339 B2 1/2013 Kordis et al.
 8,360,786 B2 1/2013 Duryea
 8,364,234 B2 1/2013 Kordis et al.
 8,412,307 B2 4/2013 Willis et al.
 8,417,313 B2* 4/2013 Scharf A61B 5/042
 600/374
 8,428,690 B2 4/2013 Li et al.
 8,447,377 B2 5/2013 Harlev et al.
 8,454,596 B2 6/2013 Ma et al.
 8,465,433 B2 6/2013 Zwirn
 8,478,388 B2 7/2013 Nguyen et al.
 8,512,255 B2* 8/2013 Scharf A61B 5/042
 600/508
 8,571,647 B2 10/2013 Harlev et al.
 8,700,119 B2* 4/2014 Scharf A61B 5/042
 600/374
 8,755,861 B2 6/2014 Harlev et al.
 8,825,130 B2 9/2014 Just et al.
 8,825,134 B2 9/2014 Danehorn
 8,918,158 B2* 12/2014 Scharf A61B 5/042
 600/374
 8,934,988 B2 1/2015 Persson et al.
 8,948,837 B2 2/2015 Harlev et al.
 8,968,299 B2 3/2015 Kauphusman et al.
 8,979,839 B2 3/2015 De La Rama et al.
 8,989,842 B2 3/2015 Li et al.
 9,011,423 B2 4/2015 Brewster et al.
 9,026,196 B2 5/2015 Curran et al.
 9,031,642 B2 5/2015 Ghosh
 9,037,259 B2 5/2015 Mathur
 9,044,245 B2 6/2015 Condie et al.
 9,167,982 B2* 10/2015 Scharf A61B 5/042
 9,186,081 B2 11/2015 Afonso et al.
 9,186,212 B2 11/2015 Nabutovsky et al.
 9,192,318 B2* 11/2015 Scharf A61B 5/0422
 9,220,432 B2 12/2015 Bukhman
 9,241,687 B2 1/2016 Mcgee

(56)

References Cited

U.S. PATENT DOCUMENTS

9,351,789 B2	5/2016	Novichenok et al.	2010/0256627 A1	10/2010	Ma et al.
D758,596 S	6/2016	Perryman et al.	2010/0279263 A1	11/2010	Duryea
9,380,953 B2	7/2016	Houben et al.	2010/0286551 A1	11/2010	Harlev et al.
9,474,486 B2	10/2016	Eliason et al.	2010/0298690 A1	11/2010	Scharf
9,480,525 B2	11/2016	Lopes et al.	2011/0045130 A1	2/2011	Edens et al.
9,486,355 B2	11/2016	Gustus et al.	2011/0077526 A1	3/2011	Zwirn
9,492,227 B2	11/2016	Lopes et al.	2011/0092809 A1	4/2011	Nguyen et al.
9,492,228 B2	11/2016	Lopes et al.	2011/0118726 A1	5/2011	De La Rama et al.
9,504,395 B2*	11/2016	Scharf A61B 5/0422	2011/0125172 A1	5/2011	Gelbart et al.
9,526,573 B2	12/2016	Lopes et al.	2011/0172658 A1	7/2011	Gelbart et al.
9,549,708 B2	1/2017	Mercanzini et al.	2011/0201951 A1	8/2011	Zhang
9,579,149 B2	2/2017	Kelly et al.	2011/0213231 A1	9/2011	Hall et al.
D782,686 S	3/2017	Werneth et al.	2011/0270237 A1	11/2011	Werneth et al.
9,585,588 B2	3/2017	Marecki et al.	2012/0078077 A1	3/2012	Harlev et al.
9,603,651 B2	3/2017	Ghosh	2012/0082969 A1	4/2012	Schwartz et al.
9,610,024 B2	4/2017	Scharf et al.	2012/0136231 A1	5/2012	Markel
9,675,266 B2	6/2017	Afonso et al.	2012/0143298 A1	6/2012	Just et al.
9,713,730 B2	7/2017	Mathur et al.	2012/0165667 A1	6/2012	Altmann et al.
9,717,555 B2	8/2017	Chan et al.	2012/0172859 A1	7/2012	Condie et al.
9,717,559 B2	8/2017	Ditter et al.	2012/0184863 A1	7/2012	Harlev et al.
9,757,044 B2	9/2017	Scharf et al.	2012/0271138 A1	10/2012	Kordis et al.
9,827,039 B2	11/2017	Dandler et al.	2012/0271139 A1	10/2012	Kordis et al.
9,913,589 B2*	3/2018	Scharf A61B 5/0422	2012/0310064 A1	12/2012	Mcgee
9,968,268 B2	5/2018	Scharf et al.	2013/0006238 A1	1/2013	Ditter et al.
10,004,459 B2	6/2018	Werneth et al.	2013/0085361 A1	4/2013	Mercanzini et al.
10,082,395 B2	9/2018	Koyrakh et al.	2013/0096432 A1	4/2013	Hauck
2001/0007070 A1	7/2001	Stewart et al.	2013/0158537 A1	6/2013	Deladi et al.
2002/0026118 A1	2/2002	Govari	2013/0165916 A1	6/2013	Mathur
2002/0128565 A1	9/2002	Rudy	2013/0172715 A1	7/2013	Just et al.
2002/0165441 A1	11/2002	Coleman et al.	2013/0190587 A1	7/2013	Lopes et al.
2003/0036696 A1	2/2003	Willis et al.	2013/0197614 A1	8/2013	Gustus et al.
2003/0065271 A1	4/2003	Khoury	2013/0225983 A1	8/2013	Willis et al.
2003/0120318 A1	6/2003	Hauck	2013/0226017 A1	8/2013	Scharf et al.
2003/0153907 A1	8/2003	Suorsa et al.	2013/0245621 A1	9/2013	Persson et al.
2003/0158477 A1	8/2003	Panescu	2013/0253298 A1	9/2013	Harlev et al.
2003/0176799 A1	9/2003	Beatty	2013/0267853 A1	10/2013	Dausch et al.
2003/0231789 A1	12/2003	Willis et al.	2013/0274582 A1	10/2013	Afonso et al.
2003/0236466 A1	12/2003	Tarjan et al.	2013/0282084 A1	10/2013	Mathur et al.
2004/0039312 A1	2/2004	Hillstead et al.	2013/0304062 A1	11/2013	Chan et al.
2004/0082948 A1	4/2004	Stewart et al.	2013/0304065 A1	11/2013	Lopes et al.
2004/0254437 A1	12/2004	Hauck et al.	2013/0310827 A1	11/2013	Brewster et al.
2005/0059880 A1	3/2005	Mathias et al.	2013/0330701 A1	12/2013	Rubinstein et al.
2005/0101874 A1	5/2005	Beatty et al.	2014/0024910 A1	1/2014	Scharf et al.
2005/0113665 A1	5/2005	Mohr et al.	2014/0095105 A1	4/2014	Koyrakh et al.
2005/0148836 A1	7/2005	Kleen et al.	2014/0121470 A1	5/2014	Scharf et al.
2005/0203375 A1	9/2005	Willis et al.	2014/0148677 A1	5/2014	Liempde et al.
2006/0052716 A1	3/2006	Beatty et al.	2014/0180150 A1	6/2014	Scharf et al.
2006/0058663 A1	3/2006	Willis et al.	2014/0235988 A1	8/2014	Ghosh
2006/0058676 A1	3/2006	Yagi et al.	2014/0249505 A1	9/2014	Bukhman
2006/0058692 A1	3/2006	Beatty et al.	2014/0257069 A1	9/2014	Eliason et al.
2006/0058693 A1	3/2006	Beatty et al.	2014/0257071 A1	9/2014	Curran et al.
2006/0084884 A1	4/2006	Beatty et al.	2014/0275921 A1	9/2014	Harlev et al.
2006/0084970 A1	4/2006	Beatty et al.	2014/0276733 A1	9/2014	VanScoy et al.
2006/0084971 A1	4/2006	Beatty et al.	2014/0276746 A1	9/2014	Nabutovskiy et al.
2006/0084972 A1	4/2006	Beatty et al.	2014/0276789 A1	9/2014	Dandler et al.
2006/0116576 A1	6/2006	McGee et al.	2014/0358143 A1	12/2014	Novichenok et al.
2007/0060832 A1	3/2007	Levin	2015/0038862 A1	2/2015	Gijbsbers et al.
2007/0083194 A1	4/2007	Kunis et al.	2015/0196219 A1	7/2015	Scharf et al.
2007/0106146 A1	5/2007	Altmann et al.	2015/0208938 A1	7/2015	Houben et al.
2007/0232949 A1	10/2007	Saksena	2015/0223757 A1	8/2015	Werneth et al.
2008/0009758 A1	1/2008	Voth	2015/0223863 A1	8/2015	Ghosh
2008/0146937 A1	6/2008	Lee et al.	2015/0257732 A1	9/2015	Ryan
2008/0287777 A1	11/2008	Li et al.	2015/0257825 A1	9/2015	Kelly et al.
2008/0319297 A1	12/2008	Danehorn	2015/0342491 A1	12/2015	Marecki et al.
2009/0024086 A1	1/2009	Zhang et al.	2015/0366508 A1	12/2015	Chou et al.
2009/0076483 A1	3/2009	Danehorn	2015/0374252 A1	12/2015	dela Rama et al.
2009/0131930 A1	5/2009	Gelbart et al.	2016/0007869 A1	1/2016	Scharf et al.
2009/0143651 A1	6/2009	Kallback et al.	2016/0038051 A1	2/2016	Scharf et al.
2009/0148012 A1	6/2009	Altmann et al.	2016/0051321 A1	2/2016	Salahieh et al.
2009/0171274 A1	7/2009	Harlev et al.	2016/0100770 A1	4/2016	Afonso et al.
2009/0264781 A1*	10/2009	Scharf A61B 5/042 600/509	2016/0128771 A1	5/2016	Ditter et al.
2010/0076426 A1	3/2010	de la Rama et al.	2016/0128772 A1	5/2016	Reinders et al.
2010/0094279 A1	4/2010	Kauphusman et al.	2016/0192902 A1	7/2016	Werneth et al.
2010/0168578 A1	7/2010	Garson, Jr. et al.	2017/0035486 A1	2/2017	Lopes et al.
			2017/0100049 A1	4/2017	Scharf et al.
			2017/0202469 A1	7/2017	Scharf et al.
			2017/0258347 A1	9/2017	Scharf et al.
			2017/0311833 A1	11/2017	Afonso et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2017/0319180 A1 11/2017 Henneken et al.
 2018/0055374 A1 1/2018 Scharf et al.
 2018/0146948 A1 5/2018 Chou et al.

FOREIGN PATENT DOCUMENTS

CN	201275144	7/2009
CN	104462650	3/2015
EP	1166714	1/2002
EP	1760661	3/2007
EP	1779787	5/2007
EP	2051625	4/2009
EP	2252203	11/2010
EP	2683293	1/2014
JP	08501477	2/1996
JP	10137207	5/1998
JP	2000510030	8/2000
JP	2000510250	8/2000
JP	2001070269	3/2001
JP	2002051998	2/2002
JP	2002113004	4/2002
JP	2002522106	7/2002
JP	2003511098	3/2003
JP	2004350702	12/2004
JP	2005536313	12/2005
JP	2006-511296	4/2006
JP	2008149132	7/2008
JP	2009136679	6/2009
JP	2011504363	2/2011
JP	2011507656	3/2011
JP	2014506171	3/2014
WO	199406349	3/1994
WO	199905971	2/1999
WO	200007501	2/2000
WO	200245608	6/2002
WO	2002045608	6/2002
WO	2003026722	4/2003
WO	2004026134	4/2004
WO	2006060613	6/2006
WO	2008014629	2/2008
WO	2009065042	5/2009
WO	2009090547	7/2009
WO	2011136867	11/2011
WO	2012092016	7/2012
WO	2012100184	7/2012
WO	2012100185	7/2012
WO	2012110942	8/2012
WO	2012122517	9/2012
WO	2014124231	2/2013
WO	2014036439	3/2014
WO	2014124231	8/2014
WO	2014130169	8/2014
WO	2015148470	10/2015
WO	2016183285	11/2016
WO	2017192769	11/2017

OTHER PUBLICATIONS

Canadian Office Action dated Oct. 29, 2018 issued in corresponding Canadian Application No. 2829626.
 Extended European Search Report dated Dec. 5, 2018 issued in corresponding European Application No. 16793622.8.
 Canadian Office Action dated Nov. 7, 2018 issued in corresponding Canadian Application No. 2932956.
 Japanese Office Action dated Dec. 11, 2018 issued in corresponding Japanese Application No. 2018-024907, with machine translation to English.
 Extended European Search Report dated Oct. 4, 2018 issued in corresponding European Application No. 16793503.0.
 European Office Action dated Feb. 6, 2019 issued in corresponding European Application No. 14843283.4.
 Australian Examination Report dated Feb. 8, 2019 issued in corresponding Australian Application No. 2018250516.

Australian Examination Report dated Jun. 28, 2018, issued in corresponding Australian Patent Application No. 2014318872.
 Office Action dated Apr. 27, 2016 in corresponding Canadian Application No. 2,747,859.
 Anoop Kumar Gupta, et al., "Point of View Cardiac Mapping: Utility or Futility?, Non-contact Endocardial Mapping" Indian Pacing and Electrophysiology Journal, vol. 2, No. 1, Jan. 1, 2002, pp. 20-32 XP055128732.
 Dhristoph Scharf, et al. Declaration under 37 C.F.R. 1.132, Nov. 15, 2012.
 Australian Office Action dated Feb. 26, 2018 issued in Australian Application No. 2017201560.
 Australian Office Action dated Mar. 17, 2018 issued in corresponding Australian Application No. 2013308531.
 Canadian Office Action dated Apr. 26, 2017 issued in corresponding Canadian Application No. 2932956.
 Canadian Office Action dated Jan. 22, 2018 issued in corresponding Canadian Application No. 2932956.
 Canadian Office Action dated Mar. 30, 2017 issued in corresponding Canadian Application No. 2747859.
 Canadian Office Action dated Nov. 27, 2017 issued in corresponding Canadian Application No. 2829626.
 Chinese Office Action dated Apr. 17, 2017 issued in corresponding Chinese Application No. 201480018328.4.
 Decision dated Jan. 16, 2018 issued for European Patent Application No. 09702094.5.
 Decision dated Jan. 18, 2018 issued for European Patent Application No. 13176658.6.
 International Search Report in related Application No. PCT/IB2009/000071 dated Oct. 7, 2009.
 European Office Action dated Apr. 28, 2014, issued in corresponding European Application No. 09 702 094.5-1660.
 European Office Action dated Feb. 29, 2016 issued in corresponding European Application No. 07 785 075.8-1657.
 European Office Action dated Jan. 31, 2018, issued in corresponding European Application No. 13763151.1.
 European Office Action dated Mar. 21, 2017 issued in corresponding European Application No. 07785075.8.
 Extended European Search Report dated Mar. 14, 2017 issued in corresponding European Application No. EP14843283.4.
 Extended European Search Report dated Oct. 18, 2017, issued in European Application No. 15768711.
 International Search Report and Written Opinion dated Aug. 4, 2017 issued in corresponding International Application No. PCT/US17/30915.
 International Search Report and Written Opinion dated Dec. 12, 2017 issued in corresponding International Application No. PCT/US2017/056064.
 International Search Report and Written Opinion dated Jun. 26, 2015 issued in International Application No. PCT/US2015/022187.
 International Search Report and Written Opinion dated Sep. 25, 2017, issued in corresponding Application No. PCT/US17/30922.
 International Search Report dated Mar. 10, 2015 issued in corresponding International Application No. PCT/US14/54942.
 International Search Report dated Apr. 21, 2008 in related International Application No. PCT/CH2007/000380.
 Invitation to Pay Additional Fees dated Jan. 8, 2014 in corresponding International Application No. PCT/US2013/057579.
 ISRWO dated Aug. 8, 2016 issued in corresponding European Application No. PCT/US2016/031823.
 ISRWO dated Aug. 11, 2016 issued in corresponding International Application No. PCT/US2016/032017.
 ISRWO dated Aug. 18, 2016 issued in corresponding International Application No. PCT/US16/32420.
 ISRWO dated May 20, 2014 in International application No. PCT/US14/15261.
 Japanese Notice of Allowance dated Feb. 27, 2018 issued in corresponding Japanese Application No. 2015-530101, with English language translation.
 Japanese Office Action dated Jan. 31, 2017 issued in corresponding Japanese Application No. 2013-557-926, with English language summary.

(56)

References Cited

OTHER PUBLICATIONS

Japanese Office Action dated Jun. 27, 2017 issued in corresponding Japanese Application No. 2015-530101, with English language translation.

Japanese Office Action dated Sep. 26, 2017 issued in corresponding Japanese Application No. 2017-155346, with English translation.

Office Action dated Nov. 7, 2017, issued in European Application No. 15768711.

Office Action dated Oct. 10, 2017, issued in Application No. 2015-557091 with machine translation to English.

Office Action dated Mar. 9, 2016 in corresponding European Patent Application No. 13176658.6.

Office Action dated May 30, 2016 in related Australian Patent Application No. 2012225250.

Office Action dated Oct. 4, 2013 in corresponding Canadian Patent Application No. 2,659,898.

PCT ISRWO dated Jun. 5, 2014, issued in corresponding PCT Application No. PCT/US2013/057579.

Della Bella et al. "Non-contact mapping to guide catheter ablation of intolerated ventricular tachycardia" *European Heart Journal*, May 2002, 23(9)742-752.

Examination report dated Jul. 6, 2017 issued in Australian Patent Application No. 2014214756.

Examination Report dated Jun. 27, 2017 issued in Australian Application No. 2013308531.

Examiner's Report dated Dec. 22, 2015 in related Canadian Application No. 2656898.

Extended European Search Report for related Application No. 13176658 dated Sep. 29, 2014.

Extended European Search Report dated Jul. 8, 2016 in related European Application No. 14748567.6.

He et al. "An equivalent body surface charge model representing three-dimensional bioelectrical activity" *IEEE Transactions on Biomedical Engineering*, 42.7 (Jul. 7, 1995) pp. 637-646.

International Search Report and Written Opinion in related Application No. PCT/US2012/028593 dated Mar. 5, 2013.

Wolfgang Nolting: *Elektrodynamik—Grundkurs Theoretische Physik 3*, Springer Spectrum, Feb. 28, 2016, p. 89-91, XP009188752.

William G. Stevenson et al: "Recording Techniques for Clinical Electrophysiology" *Journal of Cardiovascular Electrophysiology*, vol. 16 No. 91, Sep. 2005, pp. 1017-1022.

European Office Action dated Jan. 28, 2019 issued in corresponding European Application No. 14748567.6.

Australian Office Action dated Jan. 26, 2019 issued in corresponding Australian Application No. 2018211348.

Japanese Office Action dated Aug. 28, 2018 issued in corresponding Japanese Application No. 2016-542062, with machine translation into English.

Japanese Notice of Allowance dated Sep. 18, 2018 issued in corresponding Japanese Application No. 2015-557091, with English language translation.

Patent Examination Report No. 2 dated Jun. 14, 2018 in related Australian Application No. 2014214756.

Jackson, JD, "Surface Distributions of Charges and Dipoles and Discontinuities in the Electric Field and Potential", *Classical Electrodynamics*, 3rd edition, Dec. 1998, pp. 31-34.

Leif et al., "Geometric modeling based on polygonal meshes". *Eurographics 2000 Tutorial*, Aug. 21, 2000.

Office Action dated Mar. 9, 2016 in corresponding European Patent Application No. 09702094.5.

Partial European Search Report dated Apr. 29, 2014 in corresponding European Application No. 13176658.

Patent Examination Report No. 3 dated Sep. 21, 2016 in related Australian Application No. 2012225250.

Pullan et al. "The inverse problem of electrocardiology" *Northeastern University Electrical and Computer Engineering*, Feb. 23, 2007. Van Oosterom A: "Solidifying the solid angle." *2002 Journal of Electrocardiology* 2002 vol. 35 Suppl pp. 181-192 ISSN: 0022-0736.

Japanese Office Action dated Feb. 16, 2016 issued in corresponding Japanese Application No. 2013-557-926, with English language summary.

Japanese Notice of Allowance Jul. 11, 2017 issued in corresponding Japanese Application No. 2013-557-926, with English language summary.

International Search Report and Written Opinion dated Apr. 8, 2019, issued in corresponding International Application No. PCT/US19/14498.

Japanese Office Action dated Feb. 19, 2019 issued in corresponding Japanese Application No. 2016-558799, with machine translation to English.

Japanese Notice of Allowance dated Mar. 5, 2019 issued in corresponding Japanese Application No. 2018061040, with English translation.

Japanese Notice of Allowance dated Jun. 11, 2019 issued in corresponding Japanese Application No. 2018-024907, with English translation.

Anatomy Warehouse, "Axis Heart Model", 2014, pp. 1-3, at <http://www.anatomywarehouse.com/axis-scientific-2-part-deluxe-life-size-human-heart-a-104269>. (Year: 2014).

Japanese Office Action dated Jul. 23, 2019 issued in corresponding Japanese Application No. 2016-542062, with machine translation to English.

International Search Report and Written Opinion dated Jul. 23, 2019 issued in corresponding International Application No. PCT/US2019/031131.

* cited by examiner

Fig. 1

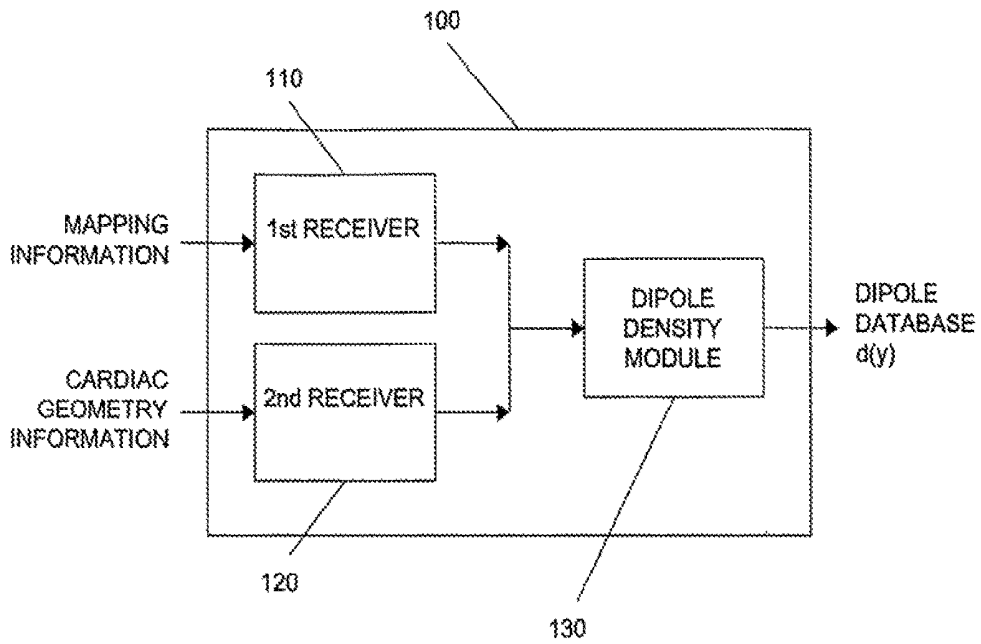


Fig. 2


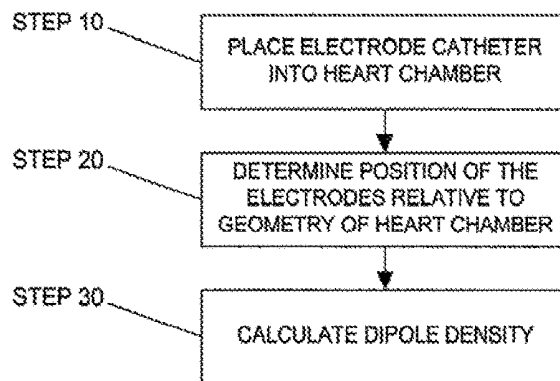


Fig. 3

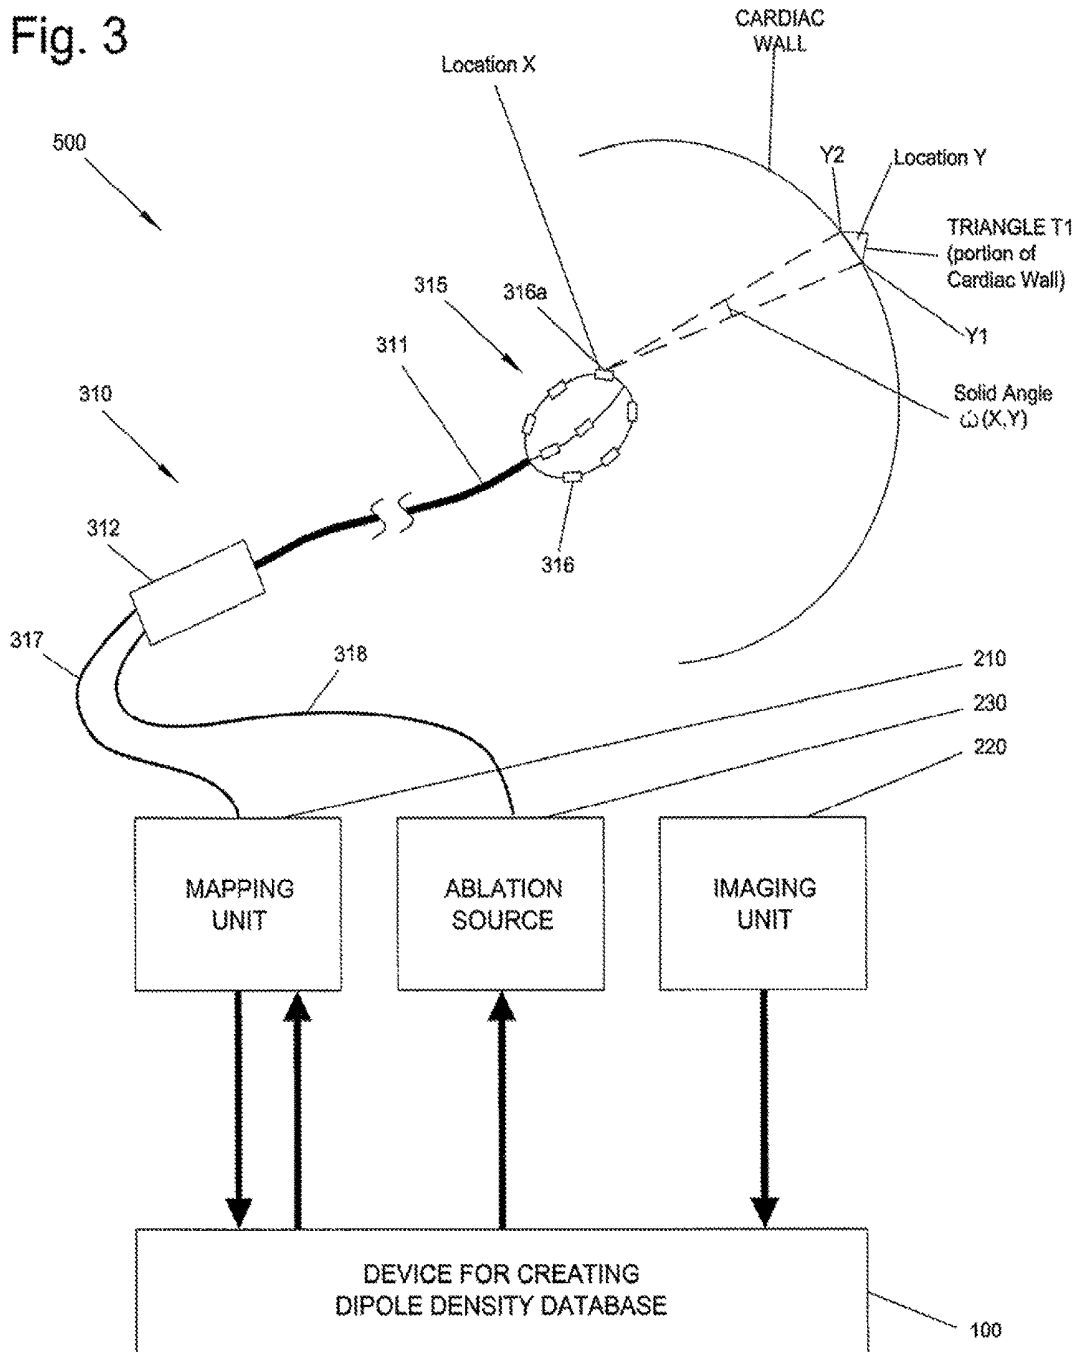

**DEVICE AND METHOD FOR THE
GEOMETRIC DETERMINATION OF
ELECTRICAL DIPOLE DENSITIES ON THE
CARDIAC WALL**

CROSS REFERENCE TO RELATED
APPLICATIONS

The present application is a continuation application of U.S. patent application Ser. No. 15/333,378 filed on Oct. 25, 2016, now U.S. Pat. No. 9,913,589, which is a continuation application of U.S. patent application Ser. No. 14/886,449 filed on Oct. 19, 2015, now U.S. Pat. No. 9,504,395, which is a continuation application of U.S. patent application Ser. No. 13/946,712 filed on Jul. 19, 2013, now U.S. Pat. No. 9,192,318, which is a continuation application of U.S. patent application Ser. No. 12/836,411, filed on Jul. 16, 2010, now U.S. Pat. No. 8,512,255, which is a 371 national stage application of Patent Cooperation Treaty Application No. PCT/162009/000071 filed Jan. 16, 2009, entitled A DEVICE AND METHOD FOR THE GEOMETRIC DETERMINATION OF ELECTRICAL DIPOLE DENSITIES ON THE CARDIAC WALL, which in turn claims priority to Swiss Patent Application 00068/08 filed Jan. 17, 2008, each of which is incorporated herein by reference.

FIELD OF THE INVENTION

The present invention relates generally to the localization and treatment of cardiac arrhythmias, and more particularly to devices and methods for the geometric determination of electrical dipole densities on the cardiac wall.

BACKGROUND

Systems used to localize the origin of cardiac arrhythmias measure potentials (e.g. in millivolts) in the cardiac chambers and localize them on a three dimensional representation of the cardiac chamber wall. The measurement of the electrical activity present on the cardiac walls is called mapping. For this purpose, a multiple electrode mapping catheter may be positioned within the heart such that multiple potentials can be simultaneously measured at different locations on the wall of the cardiac chamber without having direct wall contact (non-contact mapping). The cardiac chamber is visualized as a three dimensional structure, either directly by moving one or more mapping electrodes within the corresponding heart chamber or by importing an anatomical geometry of the cardiac chamber from an imaging device (e.g. Computed Tomography, MRI, or ultrasound). The electrical activity within the heart can be measured with the multi-electrode mapping catheter, which may be able to simultaneously measure potentials at different points in three dimensional space. In the current systems, the measured potentials from the non-contact multi-electrode mapping catheter do not directly correspond to the electrical activity on the cardiac wall as measured with an electrode with direct wall contact (contact mapping). The measured potentials of the non-contact mapping system have to be converted with computer programs and extrapolated into virtual electrograms projected on the heart chamber of the mapping system.

The current conversion methods are inaccurate, and further processing, termed regularization methods, have to be used. These regularization methods decrease spatial resolution. Another limitation of the current methods is that the provided potentials represent only the mean electrical activ-

ity that emanates from different cells, consisting of membranes separating electrical dipoles.

Since the localization of cardiac arrhythmias by the use of potentials is imprecise, the successful treatment of cardiac arrhythmias has been difficult and has demonstrated limited success and reliability. There is, therefore, a need for improved methods of localizing cardiac arrhythmias.

SUMMARY OF THE INVENTION

Several unique devices, systems, and methods for creating a database of dipole densities at a surface of a patient's heart are provided. Dipole density information can be used by a clinician to diagnose and treat heart diseases such as arrhythmias. The dipole density information is based on anatomical models of the patient's heart and mapping information recorded by multiple electrodes, such as electrodes included on the distal end of a three dimensional mapping catheter.

According to a first aspect of the invention, a device for creating a database of dipole densities at the surface of one or more cardiac chambers of a patient is provided. The device includes a first receiver that receives mapping information from multiple electrodes included in one or more mapping catheters. The electrodes are placed in a cardiac chamber of the patient's heart. The device further includes a second receiver that receives anatomical information. The anatomical information may be a generic heart model, or more preferably tissue contour and other anatomical information recorded from the patient's own heart. A dipole density module determines the database of dipole densities, in the table form $d(y)$, where y represents the location on the heart tissue including that particular dipole density. The potential at various locations x , within a cardiac chamber and termed $V(x)$, are recorded by the multiple electrodes. Solid angle $\omega(x,y)$ represents the solid angle for a triangle projection between location x (electrode location in chamber) and y (triangle location on chamber wall). The dipole density module determines the dipole density for individual triangle shaped projections onto the cardiac chamber wall based on the following: each triangle projection at location y contributes $\omega(x,y)$ times the dipole density $d(y)$ to the potential $V(x)$ at the point x .

In a preferred embodiment, the device comprises a software program, e.g., such as a software program loaded onto a personal computer; an ECG system; a cardiac tissue ablation system and/or an imaging system. The number of triangles determined by the dipole density module is sufficiently large (triangle area small enough) such that the dipole density for each triangle projection is relatively constant. Typically 1000 or more triangles are used in the calculations, such as a calculation based on a standard sized Left Atrium. Larger numbers of triangles are used for larger sized chambers.

In another preferred embodiment, the patient is being diagnosed and/or treated for a heart condition, such as an arrhythmia. The electrodes are included at the distal end of one or more mapping catheters and are placed into a chamber of the patient's heart to record potentials. An imaging instrument, such as an instrument that provides a generic model of a heart, or an instrument which provides an anatomical model of the patient's heart, delivers the anatomical information to the second receiver. In a preferred embodiment, the imaging instrument is one or more of: Computed Tomography; MRI; ultrasound; and an ECG system with mapping catheter.

In another preferred embodiment, the dipole density module implements an algorithm configured to assist in the

creation of the database of dipole densities. The algorithm may be a progressive algorithm configured to be modified or refined to improve spatial and/or time resolution of the database. The dipole density module may determine a map of dipole densities at corresponding time intervals. A synthesis of maps represents a cascade of activation sequences of each corresponding heart beat.

In another preferred embodiment, the device includes a third receiver. The third receiver receives mapping information from one or more skin electrodes. The dipole density module uses the skin electrode signals to calculate or recalculate the database of dipole densities, using equations listed herebelow.

According to another aspect of the invention, a system for creating a database of dipole densities at the surface of one or more cardiac chambers of a patient's heart is provided. In addition to the device of the present invention, the system includes one or more of a multiple electrode catheter; an imaging instrument; an ablation device; and at least one surface or skin electrode. In a preferred embodiment, the mapping catheter is also used for ablating tissue identified by the database of dipole densities. The system includes a monitor to display the dipole density information, such as information displayed in relative geometry to the chamber of the patient's heart.

According to another aspect of the invention, a method of creating a database of dipole densities at the surface of one or more cardiac chambers of a patient's heart is provided. The method can be used to diagnose and/or treat cardiac disease. In a preferred embodiment, the method is used to diagnose and treat Atrial Fibrillation (AF). In another preferred embodiment, the method is used to detect ventricular ischemia and/or quantify myocardial function. The method includes placing an array of multiple electrodes within a chamber of the patient's heart to measure potentials. The array of multiple electrodes may or may not be repositioned to determine dipole densities.

In another preferred embodiment, the method further includes placing one or more skin electrodes. The information recorded by the skin electrodes is used to determine the database of dipole densities.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate various embodiments in accordance with the present invention, and, together with the description, serve to explain the principles of the invention. In the drawings:

FIG. 1 illustrates a schematic view of an embodiment of a device for determining a database table of dipole densities $d(y)$ of at least one heart chamber, consistent with aspects of the present invention.

FIG. 2 illustrates a flow chart of an embodiment of a preferred method for determining a database table of dipole densities of at least one heart chamber, consistent with aspects of the present invention.

FIG. 3 illustrates a schematic view of an embodiment of a system for determining a database table of dipole densities of at least one heart chamber with help of the solid angle $\omega(x,y)$, consistent with aspects of the present invention.

DESCRIPTION OF THE EMBODIMENTS

Reference will now be made in detail to the embodiments in accordance with aspects of the present invention, examples of which are illustrated in the accompanying

drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

A device for calculating surface charge densities has been described in detail in PCT International Application Number PCT/CH2007/000380 (hereinafter the '380 Patent Application) naming Scharf as inventor, filed Aug. 3, 2007, and entitled METHOD AND DEVICE FOR DETERMINING AND PRESENTING SURFACE CHARGE AND DIPOLE DENSITIES ON CARDIAC WALLS, and is incorporated by reference herein in its entirety. The present invention provides an improved device, system and method for calculating and visualizing the distribution and activity of dipole charge densities on a cardiac wall. The dipole densities are directly determined geometrically, avoiding the errors encountered using previous extrapolation algorithms.

In accordance with the present invention, provided is a device that measures and calculates a database of dipole densities $d(y)$ on the cardiac wall. The actual measured potentials in the heart result from electrical activity of cells, which can be regarded as dipoles. The dipoles consist of ion charges on both sides of biological membranes. The use of dipole densities offers a precise representation of the electrical activity. Systems and methods in accordance with the present invention efficiently and effectively calculate the dipole densities utilizing one or more mathematical theorems. This calculation is significantly more precise than calculations of virtual potentials produced by current systems, which lose spatial precision because of the required numerical methods and the use of potentials instead of dipole densities. Systems and methods in accordance with the present invention are efficient in calculating dipole densities geometrically, such as through the use of computer systems, or similar microcontroller and/or mathematical processing equipment.

Definitions. To facilitate an understanding of the invention, a number of terms are defined below.

As used herein, the terms "subject" and "patient" refer to any animal, such as a mammal like livestock, pets, and preferably a human. Specific examples of "subjects" and "patients" include, but are not limited, to individuals requiring medical assistance, and in particular, patients with an arrhythmia such as atrial fibrillation (AF).

As used herein, the term "solid angle" is the angle subtended by a triangle on the heart wall at the position x of observation. When viewed from location x , straight lines are drawn from point x to the boundaries of the triangle, and a sphere is constructed of radius $r=1$ with center of x . The straight lines then define the spherical triangle on the surface of the sphere. The solid angle is proportional to the surface area of the projection of that object onto a sphere centered at the point x .

The methods and devices of the present invention have advantages over previous prior art devices. FIGS. 1-3 illustrate various preferred embodiments of devices, systems and methods in accordance with aspects of the present invention. However, the present invention is not limited to these particular configurations.

Referring now to FIG. 1, a schematic view of an embodiment of a device for determining a database table of dipole densities of at least one heart chamber of a patient is illustrated. Device **100** includes a first receiver **110** configured to receive electrical potentials from a separate device, such as a device including a multi-electrode mapping catheter placed in the circulating blood within a chamber of the patient's heart. Device **100** further includes a second receiver **120** configured to receive cardiac geometry infor-

mation (e.g. the geometric contour of the cardiac chamber wall), such as from an instrument including, but not limited to: Computed Tomography; MRI; Ultrasound; a multi-electrode mapping catheter; and combinations of these. Alternatively, a standard geometry can be loaded representing a model of the cardiac chamber. Device **100** further includes a dipole density module **130** which comprises mathematical processing element, such as a computer or other electronic module including software and/or hardware for performing mathematical or other calculations. Dipole density module **130** receives mapping information from first receiver **110** and cardiac geometry information from second receiver **120**. Dipole density module **130** preferably uses one or more algorithms to process the received mapping and geometry information to produce a database table of dipole densities.

The geometrical model of the cardiac chamber is processed by dipole density module **130** into multiple small triangles (triangularization). When the triangles are sufficiently small, the dipole density at each triangle can be regarded as constant. In a preferred embodiment, a standard cardiac chamber of 4-6 cm diameter is divided up into over 1000 triangles. In another preferred embodiment, the number of triangles determined by dipole density module **130** is based on the size of the heart chamber. With the electrodes positioned in a cardiac chamber by a clinician, such as an electrophysiologist, the potentials at each electrode are recorded. Each triangle is seen by the corresponding electrode under a certain solid angle. The dipole density module **130** computes the solid angle $\omega(x,y)$ subtended by each triangle at position y on each electrode at position x on the multi-electrode catheter. If the dipole density at the triangle is $d(y)$, the triangle contributes $\omega(x,y)$ times $d(y)$ to the potential $V(x)$ at the position x on the multi-electrode catheter. The total measured potential $V(x)$ is the sum resulting from all the triangles. A detailed description is provided in reference to FIG. 3 herebelow.

In a preferred embodiment, dipole density module **130** implements a progressive algorithm that can be modified and/or refined in order to improve spatial and/or time resolution of the database of dipole densities that are produced. The dipole densities $d(y)$ are obtained by solving a linear system of equations. This calculation requires some care to avoid numerical instabilities. Thereby a map of dipole densities can be created at each corresponding time interval. The synthesis of the maps generates a cascade of the activation sequence of each corresponding heart beat that can be used to define the origin of the electrical activity, arrhythmias or diagnose cardiac disease.

The measuring electrodes used in the present invention are placed in the blood flow in a heart chamber, a relatively homogeneous condition, such that the mathematical analysis of the present invention is well applicable. In a preferred embodiment, skin electrodes are also implemented such that dipole density module **130** can use the information received from the skin electrodes to calculate and/or recalculate the dipole densities for the cardiac wall. The spatial resolution which can be obtained by invasive (i.e., placed in the heart chamber) multi-electrode potential measurements is limited by the number of electrodes that can be placed in any cardiac chamber, such as the Left Atrium (LA). Skin placed electrodes, such as electrodes placed on the thorax, are not as space limited. However, due mainly to the inhomogeneous structure of the body, it is difficult to localize the actual sources of the skin electrode measured potentials. A highly complicated boundary value problem must be solved with boundary conditions that are poorly known, and previous

attempts at determining the "action potential" from body surface ECG (alone) have not been very successful.

The badly defined boundary value problem can be avoided by an additional measurement (in addition to the skin electrode measurements) of the multi-electrode array of the present invention. A small sinusoidal voltage V_i is applied to each electrode $i=1, \dots, L$ on the electrode array in the heart, and the resulting voltages W_k , $k=1, \dots, K$ is measured at the surface electrodes. This yields the $K \times L$ transition matrix A_{ki}

$$W_k = \sum_{i=1}^L A_{ki} V_i. \quad (1)$$

Calculating solid angles produces the linear transformation B_m between the electrode array potentials V_i and the dipole densities d_n , $n=1, \dots, N$ of N regions of the heart wall:

$$V_i = \sum_{n=1}^N B_{in} d_n. \quad (2)$$

N is chosen to be $N=K+L$ where K is the number of surface electrodes and L is the number of internally placed array electrodes.

Substituting equation (2) into (1) we have:

$$W_k = \sum_{i=1}^L \sum_{n=1}^N A_{ki} B_{in} d_n. \quad (3)$$

Therefore, by simultaneous measuring of the potentials of the cardiac activity with all $K+L$ electrodes, $N=K+L$ dipole densities of N regions on the heart wall can be calculated. This method yields a higher spatial resolution than the L array electrodes alone. In the solution of the linear system of equations (2)+(3), regularization techniques must be used (e.g. Tikhonov regularization and its modifications) in order to avoid numerical instabilities.

Referring now to FIG. 2, an embodiment of a preferred method for determining a database table of dipole densities of at least one heart chamber of a patient is illustrated. In Step **10**, a multi-electrode array is placed within the corresponding heart chamber. In Step **20**, the geometry of the corresponding heart chamber is obtained in relation to the multi-electrode array position, such as by moving around a second mapping electrode or by importing a geometry model from an imaging study (e.g. using computed tomography, MRI or ultrasound before or after the multi-electrode array of electrodes has been placed in the heart chamber). The surface of the geometry of the corresponding heart chamber is divided into small triangles, typically at least 1000 small triangles.

In Step **30**, the dipole density $d(y)$ can be calculated from the measured potential values and the calculated solid angles. The measurements can be repeated successively during the cardiac cycle giving a high timely resolution during each millisecond. The information of the timely dependent dipole densities can be depicted as an activation map of the corresponding heart chamber for the given heart beat. The information can be used to diagnose and/or treat a patient with a cardiac arrhythmia, such as an atrial fibrillation patient.

In a preferred embodiment, the information is used to determine cardiac wall treatment locations for lesion creation, such as a lesion created in the Left or Right atrium, by an RF, ultrasound or cryogenic ablation catheter. In another preferred embodiment, the multiple electrode mapping array is placed in a ventricle and the dipole densities are determined for the ventricular wall, such as to detect ischemia or quantify myocardial function.

Referring now to FIG. 3, an embodiment of a system for determining a database table of dipole densities of at least one heart chamber of a patient is illustrated. System 500 includes device 100, which is configured to create a database table of dipole densities $d(y)$ based on voltage potential measurements within the heart chamber and image information relating to the heart chamber, as has been described hereabove. System 500 further includes imaging unit 220, which is configured to provide a two or three-dimensional image of the heart chamber to device 100. Imaging unit 220 may perform at least one of Computed Tomography, MRI and/or ultrasound imaging. Imaging unit 220 may produce any form of real or virtual models of the cardiac chambers, such that a triangularization analysis is possible.

System 500 further includes mapping catheter 310, which includes shaft 311, shown inserted into a chamber of a patient's heart, such as the Left Atrium (LA). At the distal end of shaft 311 is an electrode array 315 including multiple electrodes 316. Electrode array 315 is shown in a basket construction, but numerous other constructions can be used including multiple independent arms, spiral arrays, electrode covered balloons, and other constructions configured to place multiple electrodes into a three-dimensional space. In a preferred embodiment, any catheter with a three-dimensional array of electrodes can be used to supply the mapping information to device 100.

In this embodiment, electrodes 316 are connected to wires, not shown, but traveling proximally to cable 317, which is electrically connected to a mapping unit 210, such as an electrocardiogram (ECG) unit. ECG unit 210 includes a monitor for displaying information, such as the potentials recorded by electrodes 316, as well as the dipole density information produced by device 100. In an alternative embodiment, device 100 further includes a monitor, not shown, but configured to display one or more of: dipole density information; potentials recorded by electrodes 316; and cardiac chamber contours and other geometry information. In a preferred embodiment, dipole density and or recorded potentials information is shown in reference to a three-dimensional representation of the heart chamber into which catheter 310 is inserted. In an alternative embodiment, imaging unit 220 may include a device configured to create an image of the cardiac chamber from signals recorded from an electrode catheter, such as catheter 310.

System 500 may include a device for treating a cardiac arrhythmia, such as ablation source 230, which is electrically attached to electrodes 316 via cable 318. Alternatively or additionally, ablation source 230 can be attached to a different ablation catheter, such as a single or multiple ablation element catheter configured to deliver ablation energy such as RF energy, cryogenic energy, or other tissue disrupting energy.

As shown in FIG. 3, triangle T1, defined by device 100, is at location Y. Electrode 316a of catheter 310 is at location X. The geometric relationship between triangle T1 and Location X is defined by the solid angle, angle $\omega(X,Y)$. Device 100 includes dipole density module 130 such that each triangle at location y contributes $\omega(x,y)$ times the dipole density $d(y)$ to the potential $V(x)$ at the position x on

a multi-electrode. Solid angle $\omega(x,y)$, as defined above, corresponds to the triangle at a location y and the electrode at positions x on the multi-electrode array. The dipole density module 130 of device 100 determines from the total measured potential $V(x)$, which is the sum resulting from all the triangles defined by device 100, the desired dipole density $d(y)$.

When sufficient potentials values $V(x)$ are measured (e.g. from 10 to 10,000 with increasing number of measured potentials providing more accurate results), the dipole density $d(y)$ at many equally distributed regions y on the cardiac wall is calculated by solving a linear equation system. By interpolation of the measured potentials (e.g. with help of splines) their number can be increased to a higher number of regions. The solid angle $\omega(x,y)$ of a region is the sum of the solid angles of the individual triangles in the region on the cardiac wall. This calculation of dipole density results, such as via an automatic computer program forming at least part of dipole density module 130.

In a preferred embodiment, the results are presented in a visual, anatomical format, such as depicting the dipole densities on a geometric image of the cardiac wall in relation to time (t). This format allows a clinician, such as an electrophysiologist, to determine the activation sequence on the cardiac wall, such as to determine treatment locations for a cardiac arrhythmia. The results may be shown on a display of mapping unit 210, or on a separate unit such as a display included with device 100, display not shown but preferably a color monitor. In a preferred embodiment, the device of the present invention is implemented as, or includes, a software program that is executable by at least one processor. The software program can be integrated into one or more of: an ECG system; a cardiac tissue ablation system; an imaging system; a computer; and combinations of these.

In a preferred embodiment, the multi-electrode catheter includes at least 10 electrodes, configured to represent a three dimensional body with known geometry. The electrodes are preferably positioned in a spherical geometry, such as a spherical geometry created in a basket catheter. Elliptical electrode array geometries may be used, such as those provided in the Ensite Array Catheter, manufactured by St. Jude Medical of St. Paul Minn. In an alternative embodiment, multiple catheters are inserted into the heart chamber to provide the multiple electrodes.

In an alternative embodiment, the electrodes of the multi-electrode mapping array are repositioned during the method of determining dipole densities. Repositioning of electrodes can be beneficial to increase the number of measured potential values, if electrode positions are known. Therefore, repositioning is in concordance with adjustment of the geometry map in relation to the multi-electrode mapping catheter.

Other embodiments of the invention will be apparent to those skilled in the art from consideration of the specification and practice of the embodiments disclosed herein. It is intended that the specification and examples be considered as exemplary only, with a true scope and spirit of the invention being indicated by the following claims. In addition, where this application has listed the steps of a method or procedure in a specific order, it may be possible, or even expedient in certain circumstances, to change the order in which some steps are performed, and it is intended that the particular steps of the method or procedure claims set forth herebelow not be construed as being order-specific unless such order specificity is expressly stated in the claim.

We claim:

1. A method of generating a database of dipole densities $d(y)$ at the surface of one or more cardiac chambers of a patient, comprising:

inserting an electrode array including multiple electrodes into a cardiac chamber of a patient;

placing at least one skin electrode onto the patient;

recording mapping information from the electrode array and the at least one skin electrode;

creating a database of dipole densities $d(y)$ at the surface of the cardiac chamber based on mapping information and a geometrical depiction of the cardiac chamber, wherein creating the database of dipole densities $d(y)$ includes determining a dipole density for individual triangle-shaped projections onto the cardiac chamber wall; and

choosing a number of triangle-shaped projections so that the dipole density $d(y)$ of each triangle-shaped projection is substantially constant.

2. The method according to claim 1, wherein each triangle-shaped projection at a location y contributes $\hat{\omega}(x,y)$ times the dipole density $d(y)$ to a potential $V(x)$ at a point x , wherein $\hat{\omega}(x,y)$ is the solid angle for that triangle projection, and where:

a) x represents a series of locations within one or more cardiac chambers; and

b) $V(x)$ is a measured potential at point x , said measured potential recorded by the multiple electrodes.

3. The method according to claim 1, wherein electrode array includes a three-dimensional array of electrodes.

4. The method according to claim 1, wherein generating the database $d(y)$ of dipole densities includes mapping the dipole densities $d(y)$ to the one or more surfaces of the one or more cardiac chambers.

5. The method according to claim 4, further comprising creating maps of the dipole densities $d(y)$ at different time intervals.

6. The method according to claim 5, further comprising synthesizing the maps of dipole densities $d(y)$ at different time intervals to create an activation sequence of cardiac activity over a plurality of time intervals.

7. The method according to claim 1, further comprising: updating the database of dipole densities $d(y)$ at a plurality of time intervals during the cardiac activity.

8. The method according to claim 7, wherein the plurality of time intervals includes at least one time interval per cardiac cycle.

9. The method according to claim 7, wherein the plurality of time intervals includes a plurality of time intervals per cardiac cycle.

10. The method according to claim 7, wherein the plurality of time intervals includes a time interval of about a millisecond.

11. The method according to claim 1, wherein the multiple electrodes of the electrode array are included in a single catheter.

12. The method according to claim 1, wherein the multiple electrodes of the electrode array are included in two or more catheters.

13. The method according to claim 1, further comprising: generating a computer display of dipole density information based on the database of dipole densities $d(y)$; and updating the computer display of the dipole information based on updating the database of dipole densities $d(y)$.

14. The method according to claim 1, wherein the database of dipole densities $d(y)$ represents a distribution and activity of dipole charge densities on one or more cardiac walls.

15. The method according to claim 1, wherein the mapping information recorded from the at least one skin electrode is used to recalculate the database of dipole densities.

16. The method according to claim 1, wherein the at least one skin electrode comprises more than one skin electrode.

17. The method according to claim 1, wherein the at least one skin electrode is placed on the thorax.

18. A method of generating a database of dipole densities $d(y)$ at the surface of one or more cardiac chambers of a patient, comprising:

inserting an electrode array including multiple electrodes into a cardiac chamber of a patient;

placing at least one skin electrode onto the patient;

recording mapping information from the electrode array and the at least one skin electrode; and

creating a database of dipole densities $d(y)$ at the surface of the cardiac chamber based on mapping information and a geometrical depiction of the cardiac chamber, wherein creating the database of dipole densities $d(y)$ includes determining a dipole density for individual triangle-shaped projections onto the cardiac chamber wall, and wherein the number of triangle-shaped projections is at least 1,000.

19. A method of generating a database of dipole densities $d(y)$ at the surface of one or more cardiac chambers of a patient, comprising:

inserting an electrode array including multiple electrodes into a cardiac chamber of a patient;

placing at least one skin electrode onto the patient;

recording mapping information from the electrode array and the at least one skin electrode;

creating a database of dipole densities $d(y)$ at the surface of the cardiac chamber based on mapping information and a geometrical depiction of the cardiac chamber; and

one or more computer processors calculating and/or recalculating the dipole densities $d(y)$ using the following equations:

$$W_k = \sum_{l=1}^L A_{kl} V_l. \quad (1)$$

wherein a small sinusoidal voltage V_l is applied to each electrode $l=1, \dots, L$ on the electrode array in the heart, and the resulting voltages W_k , $k=1, \dots, K$ is measured at the surface electrodes, which yields the $K \times L$ transition matrix A_{kl} ;

$$V_l = \sum_{n=1}^N B_n d_n. \quad (2)$$

wherein calculating solid angles produces the linear transformation B_n between the electrode array potentials V_l and the dipole densities d_n , $n=1, \dots, N$ of N regions of the cardiac chamber wall; and

$$W_k = \sum_{l=1}^L \sum_{n=1}^N A_{kl} B_{ln} d_n. \quad (3)$$

5

where equation (2) above is substituted into equation (1) to form equation (3).

20. The method according to claim **19**, further comprising the one or more computer processors solving equations (2) and (3) using regularization techniques. 10

21. The method according to claim **20**, wherein the regularization technique is Tikhonov regularization.

* * * * *

专利名称(译)	心脏壁上电偶极子密度几何确定的装置和方法		
公开(公告)号	US10463267	公开(公告)日	2019-11-05
申请号	US15/882097	申请日	2018-01-29
[标]申请(专利权)人(译)	克里斯托夫		
申请(专利权)人(译)	SCHARF , CHRISTOPH		
当前申请(专利权)人(译)	SCHARF , CHRISTOPH		
[标]发明人	SCHARF CHRISTOPH SCHARF GUNTER		
发明人	SCHARF, CHRISTOPH SCHARF, GUNTER		
IPC分类号	A61B5/04 A61B5/02 A61B5/0432 A61B5/00 A61B6/03 A61B5/042 A61B5/0402 A61B8/13 A61B18/12 A61B5/046 A61B18/02 A61B18/18 A61N7/00 A61B5/044 A61B18/00		
CPC分类号	A61B5/0422 A61B18/18 A61B6/032 A61B5/044 A61B5/4836 A61B5/04005 A61B5/046 A61N7/00 A61B18/02 A61B18/0206 A61B5/04012 A61B5/0402 A61B18/12 A61B8/13 A61B5/6852 A61B5/02028 A61B5/0432 A61B2018/00351 A61B2018/00577 A61B5/0036		
优先权	2008000068 2008-01-17 CH PCT/IB2009/000071 2009-01-16 WO		
其他公开文献	US20180214044A1		
外部链接	Espacenet		

摘要(译)

公开了用于确定心脏壁上的偶极子密度的装置，系统和方法。特别地，执行心脏壁的三角化，其中多个区域中的每个区域的偶极密度与在心脏的相关腔室内的各个位置处测量的电势相关。

