



US 20150257662A1

(19) **United States**

(12) **Patent Application Publication**

Lee et al.

(10) **Pub. No.: US 2015/0257662 A1**

(43) **Pub. Date: Sep. 17, 2015**

(54) **PHYSIOLOGICAL FUNCTION DETECTING
EARPHONE AND DETECTING METHOD
THEREOF**

(71) Applicant: **Cheng Uei Precision Industry Co.,
Ltd.**, New Taipei City (TW)

(72) Inventors: **James Cheng Lee**, New Taipei City
(TW); **Kuo Yang Wu**, New Taipei City
(TW); **Bor Kuan Lu**, New Taipei City
(TW); **Wen Shung Hu**, New Taipei City
(TW)

(73) Assignee: **Cheng Uei Precision Industry Co.,
Ltd.**, New Taipei City (TW)

(21) Appl. No.: **14/205,737**

(22) Filed: **Mar. 12, 2014**

Publication Classification


(51) **Int. Cl.**
A61B 5/024 (2006.01)
A61B 5/1455 (2006.01)
A61B 5/00 (2006.01)
H04R 1/10 (2006.01)

(52) **U.S. Cl.**
CPC *A61B 5/02427* (2013.01); *H04R 1/1091*
(2013.01); *A61B 5/14552* (2013.01); *A61B*
5/02405 (2013.01); *A61B 5/6803* (2013.01);
A61B 5/7207 (2013.01); *A61B 5/4035*
(2013.01); *A61B 5/746* (2013.01); *H04R*
2430/00 (2013.01); *H04R 2499/10* (2013.01)

(57) **ABSTRACT**

A physiological function detecting earphone includes an earphone body, an earplug mounted at one side of the earphone body and defining a window, a light processing module including a light sensing module towards the window, and a signal processing module. A detecting method includes steps: the participant inserts the earplug in the ear canal thereof; the light sensing module senses the changes of light emitted through the window and then reflected by the wall of the ear canal; the light processing module processes the reflected light of changes to get PPG signals; the signal processing module receives and processes the PPG signals to get physiological information of the participant. The window opened in the earplug can gather the light in a narrow area of the ear canal so that reduces effect of manufacturing material on transmittance of light and improves accuracy of the PPG signals and the physiological information.

1
~

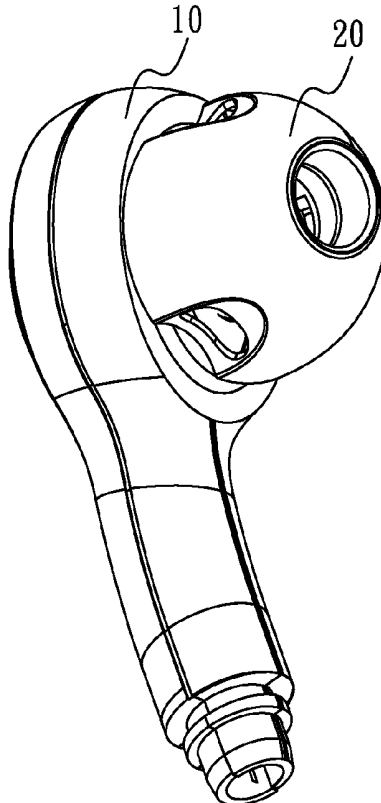

1
~

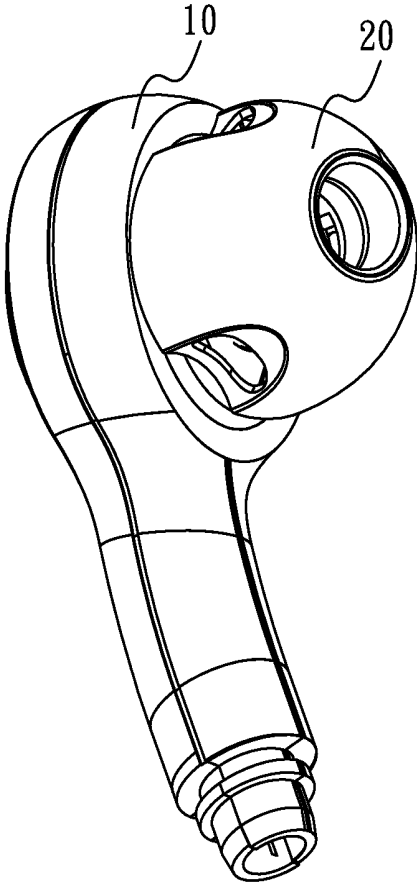


FIG. 1

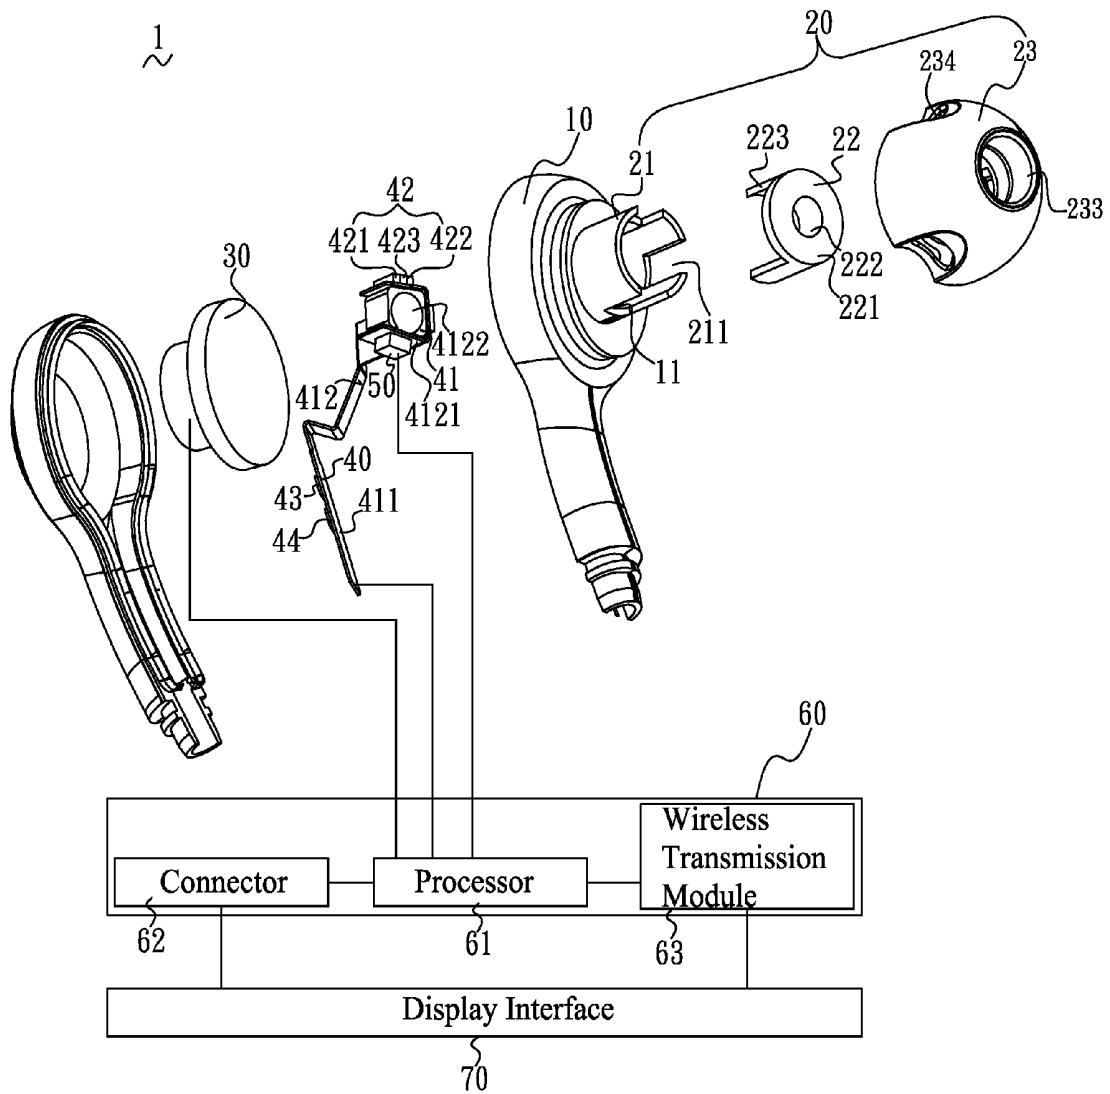


FIG. 2

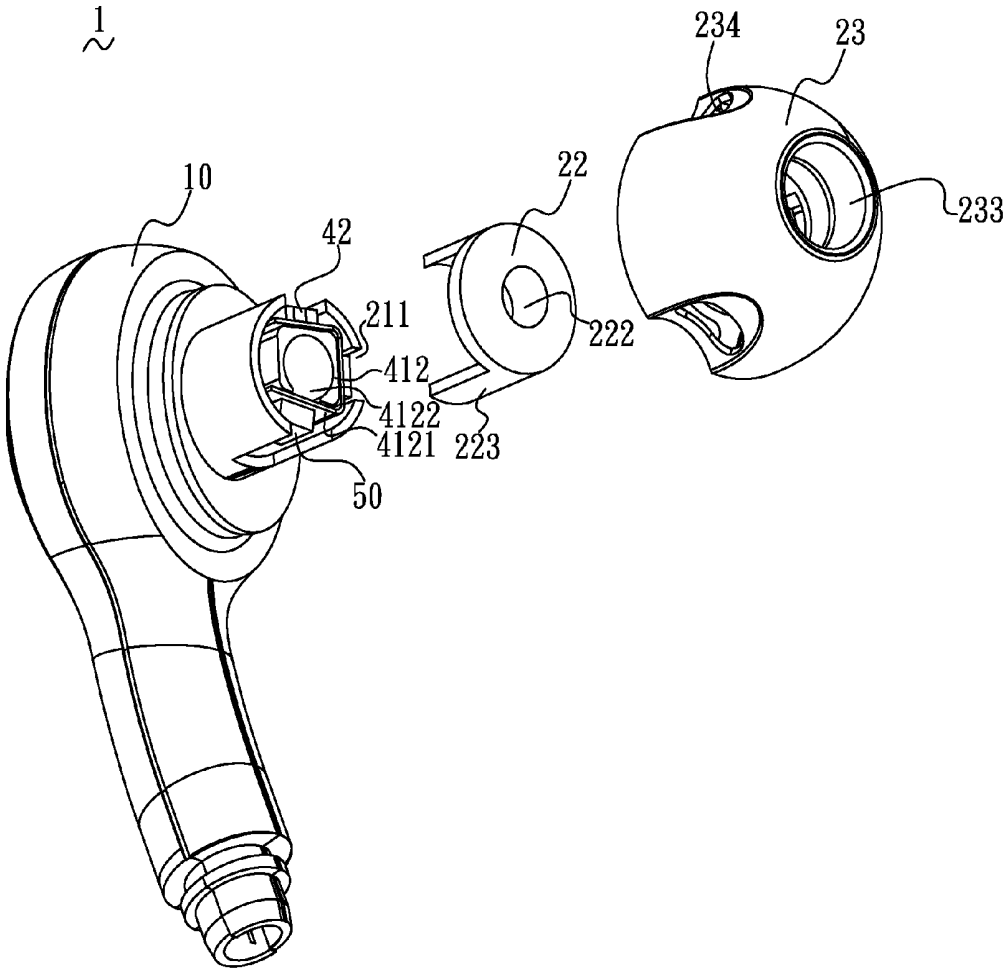


FIG. 3

23
~

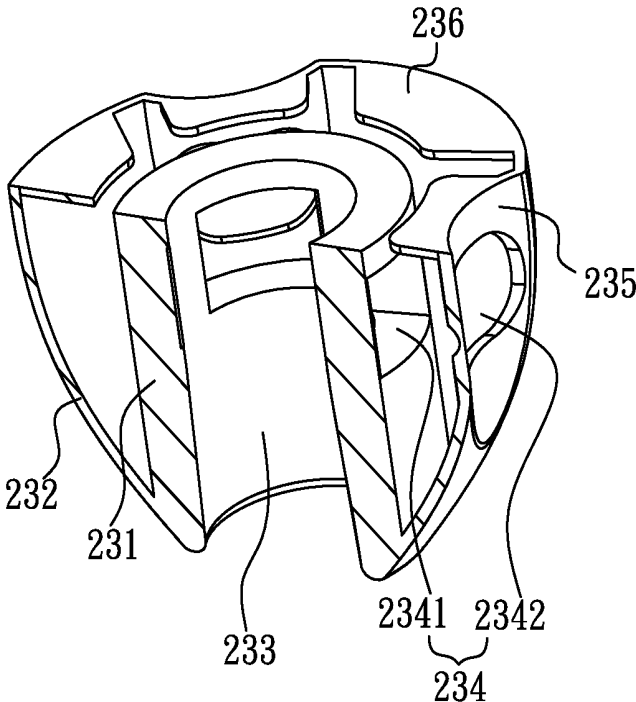


FIG. 4

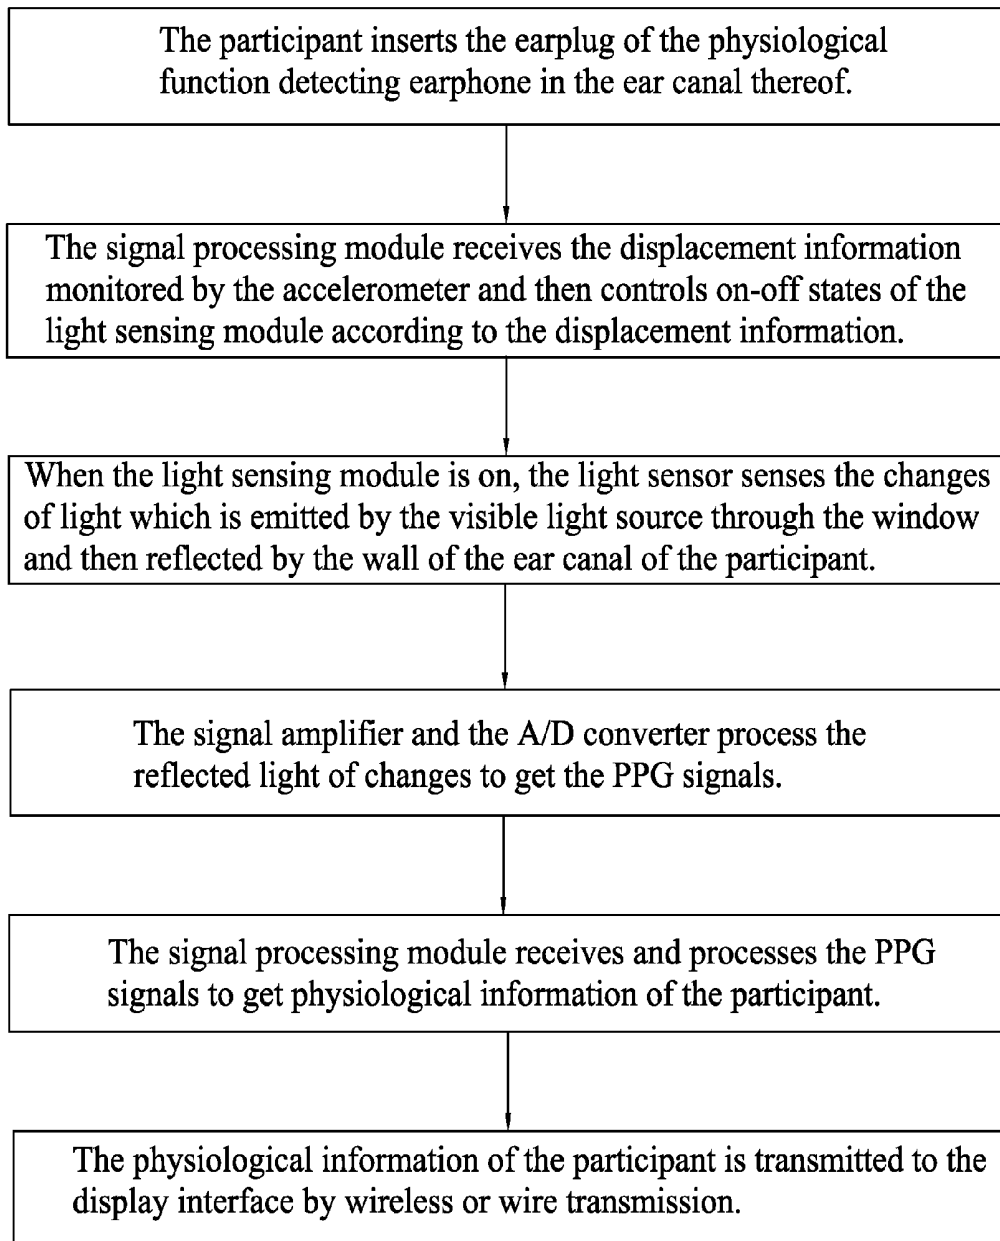


FIG. 5

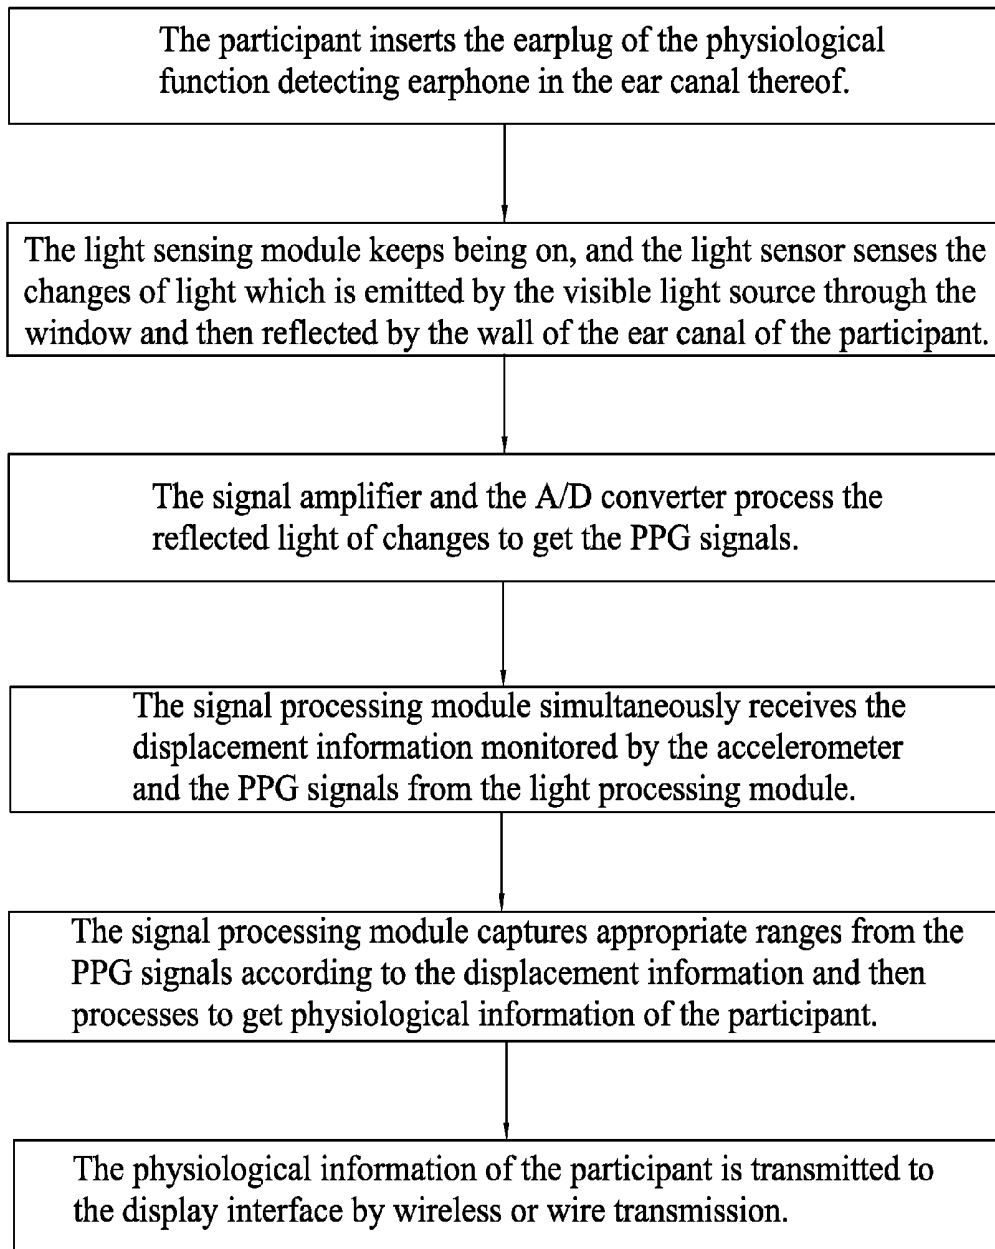


FIG. 6

PHYSIOLOGICAL FUNCTION DETECTING EARPHONE AND DETECTING METHOD THEREOF

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to an earphone, and more particularly to a physiological function detecting earphone and a detecting method thereof.

[0003] 2. The Related Art

[0004] The autonomic nervous system (ANS) is the part of the peripheral nervous system that acts as a control system, functioning largely below the level of consciousness, and controls visceral functions. The ANS affects heart rate, blood pressure, mood changes, life stress and so on. Therefore, if a person can early detect his autonomic nervous variation, personal health can be paid attention as early as possible to prevent individual physiological or psychological disease. Heart rate variability (HRV) is commonly used to show the ANS of variation in the time interval between heartbeats. Methods used to detect beats include: ECG, blood pressure, ballistocardiograms and the pulse wave signal derived from the photoplethysmography (PPG).

[0005] A traditional physiological function detecting earphone for detecting the HRV includes an earphone body, a light source and a light sensor. The earphone body has an earplug made of pervious to light material. In use, the earplug of the earphone body is inserted into the ear canal of a participant, then light emitted by the light source penetrates through the earplug and is reflected by the wall of the ear canal, and last the light sensor senses the reflected light of changes in a period of time to get PPG signals so as to detect the HRV.

[0006] However, manufacturing material of the earplug has an effect on transmittance of light through the earplug. Furthermore, the earphone is apt to move in the ear canal along with the shaking of the participant, so that will easily cause an interspace between the earplug and the wall of the ear canal. As a result, the light outside the ear canal can go into the ear canal through the interspace so that will affect the PPG signals got by the light sensor and ultimately affect the accuracy of the HRV.

[0007] Therefore, a physiological function detecting earphone capable of overcoming the abovementioned problems is required.

SUMMARY OF THE INVENTION

[0008] An object of the present invention is to provide a physiological function detecting earphone which includes an earphone body, an earplug mounted at one side of the earphone body, a light processing module and a signal processing module. At least one window is opened through the earplug. The light processing module includes an inner ring spacer, at least one light sensing module disposed on one end face of the inner ring spacer and facing to the window of the earplug, a signal amplifier and an A/D converter which are disposed on the inner ring spacer and coupled with the light sensing module. The light sensing module includes a visible light source for emitting at least one wavelength of light through the window of the earplug, and a light sensor for sensing reflected light of changes by the wall of the ear canal of a participant. The signal amplifier and the A/D converter process the reflected light of changes to get PPG signals. The

signal processing module is coupled with the signal amplifier and the A/D converter via the inner ring spacer for receiving and processing the PPG signals to get physiological information of the participant.

[0009] Another object of the present invention is to provide a detecting method of the physiological function detecting earphone. The detecting method includes the steps: the participant inserts the earplug of the physiological function detecting earphone in the ear canal thereof; the light sensor senses the changes of light which is emitted by the visible light source through the window and then reflected by the wall of the ear canal of the participant; the signal amplifier and the A/D converter process the reflected light of changes to get the PPG signals; and the signal processing module receives and processes the PPG signals to get physiological information of the participant.

[0010] As described above, the physiological function detecting earphone utilizes the window opened in the earplug to gather the light in a narrow area of the ear canal of the participant so as to reduce the effect of the manufacturing material on the transmittance of light. So the physiological function detecting earphone can effectively improve the accuracy of the PPG signals and the physiological information of the participant.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The present invention will be apparent to those skilled in the art by reading the following description thereof, with reference to the attached drawings, in which:

[0012] FIG. 1 is a perspective view of a physiological function detecting earphone according to an embodiment of the present invention;

[0013] FIG. 2 is an exploded view of the physiological function detecting earphone of FIG. 1;

[0014] FIG. 3 is a partly exploded view of the physiological function detecting earphone of FIG. 1;

[0015] FIG. 4 is a sectional view of an earplug of the physiological function detecting earphone of FIG. 2; and

[0016] FIG. 5 and FIG. 6 are flow diagrams showing two detecting methods of the physiological function detecting earphone of FIG. 1.

DETAILED DESCRIPTION OF THE EMBODIMENT

[0017] Referring to FIG. 1 and FIG. 2, a physiological function detecting earphone 1 according to an embodiment of the present invention includes an earphone body 10, an inserting body 20, a loudspeaker 30, a light processing module 40, an accelerometer 50 and a signal processing module 60.

[0018] One side of the earphone body 10 defines a first sound hole 11. The inserting body 20 is mounted at the one side of the earphone body 10 and is used to be inserted into the ear canal of a participant. The inserting body 20 includes a holder 21, a holding frame 22 and an earplug 23. The holder 21 is substantially of cylindrical shape and is formed by the circumferentia of the first sound hole 11 perpendicularly extending sideward. At least one opening 211 is opened through the inside, the outside and the free edge of the holder 21.

[0019] The holding frame 22 has a discoid cover board 221 covering the end mouth of the holder 21. The periphery of the cover board 221 perpendicularly extends to form at least one inserting board 223 made of pervious to light material and

inserted in the opening 211 of the holder 21. In practice, the cover board 221 can be made of lightproof material.

[0020] Referring to FIG. 1, FIG. 2 and FIG. 4, the earplug 23 is made of lightproof material and has a cylindric sleeve 231 worn around the holder 21 and the holding frame 22. The outer edge of the sleeve 231 extends towards the earphone body 10 to form a substantial bowl-shaped guiding portion 232. At least one window 234 is opened through the earplug 23. In detail, the window 234 includes a first window 2341 and a second window 2342 which are opened in the sleeve 231 and the guiding portion 232 respectively and are in alignment with each other. The earplug 23 is mounted outside the holder 21 and the holding frame 22 with the inserting board 223 being exposed through the window 234. The outside of the guiding portion 232 is partly concaved inward to form a groove 235 around the second window 2342 for deforming the guiding portion 232 easily. The free edge of the guiding portion 232 perpendicularly protrudes inward to form a light blocking eave 236. The sleeve 231 and the light blocking eave 236 abut against the one side of the earphone body 10 for blocking the light outside the ear canal of the participant.

[0021] Referring to FIG. 2 and FIG. 3, the light processing module 40 includes an inner ring spacer 41, at least one light sensing module 42 disposed on one end face of the inner ring spacer 41 and facing to the window 234 of the earplug 23, a signal amplifier 43 and an A/D converter 44 which are disposed on the inner ring spacer 41 and coupled with the light sensing module 42. In detail, the light sensing module 42 together with a part of the inner ring spacer 41 are located in the holder 21 and face to the inserting board 223 of the holding frame 22. The light sensing module 42 includes a visible light source 421 for emitting at least one wavelength of light through the inserting board 223 of the holding frame 22 and the window 234 of the earplug 23, and a light sensor 423 for sensing reflected light of changes by the wall of the ear canal of the participant. The signal amplifier 43 and the A/D converter 44 process the reflected light of changes to get PPG signals.

[0022] In detail, the inner ring spacer 41 includes a FPC board 411 and a connecting frame 412 connected with one end of the FPC board 411. The FPC board 411 is positioned in the earphone body 10 and the connecting frame 412 is positioned in the holder 21 of the inserting body 20. The connecting frame 412 defines at least one fitting surface 4121 facing to the inserting board 223 of the holding frame 22 and the window 234 of the earplug 23. The light sensing module 42 is disposed on the fitting surface 4121, and the signal amplifier 43 and the AID converter 44 are disposed on the FPC board 411.

[0023] Referring to FIG. 2, the signal processing module 60 is coupled with the signal amplifier 43 and the AID converter 44 via the inner ring spacer 41 for receiving and processing the PPG signals to get physiological information of the participant. In detail, the signal processing module 60 includes a processor 61 and a wireless transmission module 63. The processor 61 receives the PPG signals and change cycle of the PPG signals and further works out the time interval of each change cycle. Then the processor 61 describes a continuous variation of waveform and records physiological status of the participant by the HRV analytical method. The wireless transmission module 63 transmits the continuous variation of waveform and the physiological status of the participant to a display interface 70. The physiological status includes PPG curve chart, heart rate, HRV, degree of blood oxygen satura-

tion and so on. The signal processing module 60 further includes at least one connector 62 capable of transmitting the continuous variation of waveform and the physiological status of the participant to the display interface 70.

[0024] The display interface 70 can be a portable electronic product, such as a smart phone and a smart watch. According to the physiological information provided by the physiological function detecting earphone 1, the display interface 70 can instantly change the types of music to make the music change along with the physiological status of the participant.

[0025] Referring to FIG. 2 again, the light sensing module 42 further includes an invisible light source 422 disposed in one place with the visible light source 421 and the light sensor 423. Preferably, the visible light source 421 emits red light at a wavelength of about 610~700 nanometers which is more easily reflected by blood to get better signal contrast. According to the characteristics of the invisible light source 422, degree of blood oxygen saturation can be worked out by comparing reflected signals from the invisible light source 422 with the reflected light from the visible light source 421. It is worth mentioning that the invisible light source 422 can be omitted when monitoring the heart rate and the HRV.

[0026] Referring to FIG. 2 again, the physiological function detecting earphone 1 further includes an accelerometer 50 disposed on another end face of the inner ring spacer 41 and facing to another window 234 of the earplug 23. In detail, the accelerometer 50 is disposed on another fitting surface 4121 of the connecting frame 412 of the inner ring spacer 41 and faces to the inserting board 223 of the holding frame 22 and the window 234 of the earplug 23. The accelerometer 50 is coupled with the signal processing module 60 for continuously transmitting displacement information to the signal processing module 60 in use. Then the signal processing module 60 judges work start point of the light sensing module 42 and controls on-off states of the light sensing module 42 according to the displacement information so as to capture appropriate ranges from the PPG signals and further get the physiological information of the participant.

[0027] In this invention, the window 234 of the earplug 23 and the accelerometer 50 can effectively eliminate transmittance of light error caused by the manufacturing material of the earplug 23 and the shaking of the participant. Furthermore, the physiological function detecting earphone 1 can monitor sleep states of the participant by means of the accelerometer 50 and the light sensing module 42. So, the physiological function detecting earphone 1 can be further used in patients with sleep apnea so as to send an alarm in case of symptoms.

[0028] Referring to FIG. 2 and FIG. 3, the cover board 221 of the holding frame 22 defines a second sound hole 222 penetrating through a middle part thereof. A third sound hole 233 is circled by the sleeve 231 of the earplug 23 and penetrates through the sleeve 231. The connecting frame 412 of the inner ring spacer 41 defines a fourth sound hole 4122. The first sound hole 11, the second sound hole 222, the third sound hole 233 and the fourth sound hole 4122 are in alignment with one another to form a sound track, and the fourth sound hole 4122 is aligned between the first sound hole 11 and the second sound hole 222. The loudspeaker 30 is positioned in the earphone body 10 and faces to the first, fourth, second and third sound holes 11, 4122, 222 and 233.

[0029] Referring to FIG. 2 and FIG. 5, a detecting method of the physiological function detecting earphone 1 includes the following steps.

[0030] Step 1: the participant inserts the earplug 23 of the physiological function detecting earphone 1 in the ear canal thereof.

[0031] Step 2: the signal processing module 60 receives the displacement information monitored by the accelerometer 50 and then controls on-off states of the light sensing module 42 according to the displacement information.

[0032] Step 3: when the light sensing module 42 is on, the light sensor 423 senses the changes of light which is emitted by the visible light source 421 through the window 234 and then reflected by the wall of the ear canal of the participant.

[0033] Step 4: the signal amplifier 43 and the A/D converter 44 process the reflected light of changes to get the PPG signals.

[0034] Step 5: the signal processing module 60 receives and processes the PPG signals to get physiological information of the participant.

[0035] Step 6: the physiological information of the participant is transmitted to the display interface 70 by wireless or wire transmission.

[0036] In other embodiments, the light sensing module 42 can keep being on. The signal processing module 60 directly captures appropriate ranges from the PPG signals to get physiological information of the participant according to the displacement information.

[0037] Referring to FIG. 2 and FIG. 6, another detecting method of the physiological function detecting earphone 1 includes the following steps.

[0038] Step 1: the participant inserts the earplug 23 of the physiological function detecting earphone 1 in the ear canal thereof.

[0039] Step 2: the light sensing module 42 keeps being on, and the light sensor 423 senses the changes of light which is emitted by the visible light source 421 through the window 234 and then reflected by the wall of the ear canal of the participant.

[0040] Step 3: the signal amplifier 43 and the A/D converter 44 process the reflected light of changes to get the PPG signals.

[0041] Step 4: the signal processing module 60 simultaneously receives the displacement information monitored by the accelerometer 50 and the PPG signals from the light processing module 40.

[0042] Step 5: the signal processing module 60 captures appropriate ranges from the PPG signals according to the displacement information and then processes to get physiological information of the participant.

[0043] Step 6: the physiological information of the participant is transmitted to the display interface 70 by wireless or wire transmission.

[0044] In the detecting methods, the signal processing module 60 processes the PPG signals to describe a continuous variation of waveform and then record physiological status of the participant by the HRV analytical method.

[0045] As described above, the physiological function detecting earphone 1 according to the present invention utilizes the window 234 opened in the earplug 23 to gather the light in a narrow area of the ear canal of the participant so as to reduce the effect of the manufacturing material on the transmittance of light, and further utilizes the accelerometer 50 to eliminate the effect of the shaking of the participant on the transmittance of light. So the physiological function

detecting earphone 1 can effectively improve the accuracy of the PPG signals and the physiological information of the participant.

What is claimed is:

1. A physiological function detecting earphone, comprising:

an earphone body;

an earplug mounted at one side of the earphone body, at least one window being opened through the earplug;

a light processing module including an inner ring spacer, at least one light sensing module disposed on one end face of the inner ring spacer and facing to the window of the earplug, a signal amplifier and an A/D converter which are disposed on the inner ring spacer and coupled with the light sensing module, the light sensing module including a visible light source for emitting at least one wavelength of light through the window of the earplug, and a light sensor for sensing reflected light of changes by the wall of the ear canal of a participant, the signal amplifier and the A/D converter processing the reflected light of changes to get PPG signals; and

a signal processing module coupled with the signal amplifier and the A/D converter via the inner ring spacer for receiving and processing the PPG signals to get physiological information of the participant.

2. The physiological function detecting earphone as claimed in claim 1, wherein the inner ring spacer includes a FPC board and a connecting frame connected with one end of the FPC board, the FPC board is positioned in the earphone body and the connecting frame is positioned in the earplug, the connecting frame defines at least one fitting surface facing to the window of the earplug, the light sensing module is disposed on the fitting surface, the signal amplifier and the A/D converter are disposed on the FPC board.

3. The physiological function detecting earphone as claimed in claim 1, wherein the light sensing module further includes an invisible light source disposed in one place with the visible light source and the light sensor, degree of blood oxygen saturation can be worked out by comparing reflected signals from the invisible light source with the reflected light from the visible light source.

4. The physiological function detecting earphone as claimed in claim 1, wherein the visible light source emits red light at a wavelength of about 610~700 nanometers.

5. The physiological function detecting earphone as claimed in claim 1, wherein the one side of the earphone body defines a first sound hole of which the circumferentia perpendicularly extends sideward to form a holder, at least one opening is opened through the inside, the outside and the free edge of the holder, a holding frame has a cover board covering the end mouth of the holder, the periphery of the cover board perpendicularly extends to form at least one inserting board made of pervious to light material and inserted in the opening of the holder, the light sensing module together with a part of the inner ring spacer are located in the holder and face to the inserting board, the earplug is mounted outside the holder and the holding frame with the inserting board being exposed through the window.

6. The physiological function detecting earphone as claimed in claim 5, wherein the earplug is made of lightproof material and has a sleeve worn around the holder and the holding frame, the outer edge of the sleeve extends towards the earphone body to form a substantial bowl-shaped guiding portion, the window includes a first window and a second

window which are opened in the sleeve and the guiding portion respectively and are in alignment with each other.

7. The physiological function detecting earphone as claimed in claim 6, wherein the outside of the guiding portion is partly concaved inward to form a groove around the second window.

8. The physiological function detecting earphone as claimed in claim 6, wherein the free edge of the guiding portion perpendicularly protrudes inward to form a light blocking eave, the sleeve and the light blocking eave abut against the one side of the earphone body.

9. The physiological function detecting earphone as claimed in claim 1, wherein the signal processing module includes a processor and a wireless transmission module, the processor receives the PPG signals and change cycle of the PPG signals and further works out the time interval of each change cycle, then the processor describes a continuous variation of waveform and records physiological status of the participant by the HRV analytical method, the wireless transmission module transmits the continuous variation of waveform and the physiological status of the participant to a display interface.

10. The physiological function detecting earphone as claimed in claim 9, wherein the signal processing module further includes at least one connector capable of transmitting the continuous variation of waveform and the physiological status of the participant to the display interface.

11. The physiological function detecting earphone as claimed in claim 1, further comprising an accelerometer which is disposed on another end face of the inner ring spacer and faces to another window of the earplug, the accelerometer is coupled with the signal processing module for continuously transmitting a displacement information to the signal processing module in use, the signal processing module judges work start point of the light sensing module and controls on-off states of the light sensing module.

12. A detecting method of the physiological function detecting earphone, comprising the steps:

the participant inserting the earplug of the physiological function detecting earphone in the ear canal thereof;

the light sensor sensing the changes of light which is emitted by the visible light source through the window and then reflected by the wall of the ear canal of the participant;

the signal amplifier and the A/D converter processing the reflected light of changes to get the PPG signals; and

the signal processing module receiving and processing the PPG signals to get physiological information of the participant.

13. The detecting method as claimed in claim 12, wherein after the earplug is inserted in the ear canal of the participant, the signal processing module receives the displacement information monitored by the accelerometer and then controls on-off states of the light sensing module according to the displacement information.

14. The detecting method as claimed in claim 12, wherein after the earplug is inserted in the ear canal of the participant, the signal processing module simultaneously receives the displacement information monitored by the accelerometer and the PPG signals from the light processing module, then the signal processing module captures appropriate ranges from the PPG signals according to the displacement information and processes to get the physiological information of the participant.

15. The detecting method as claimed in claim 12, wherein the signal processing module processes the PPG signals to describe a continuous variation of waveform and then record physiological status of the participant by the HRV analytical method.

* * * * *

专利名称(译)	检测耳机的生理功能及其检测方法		
公开(公告)号	US20150257662A1	公开(公告)日	2015-09-17
申请号	US14/205737	申请日	2014-03-12
[标]申请(专利权)人(译)	正崧精密工业股份有限公司		
申请(专利权)人(译)	正崧精密工业股份有限公司.		
当前申请(专利权)人(译)	正崧精密工业股份有限公司.		
[标]发明人	LEE JAMES CHENG WU KUO YANG LU BOR KUAN HU WEN SHUNG		
发明人	LEE, JAMES CHENG WU, KUO YANG LU, BOR KUAN HU, WEN SHUNG		
IPC分类号	A61B5/024 A61B5/1455 A61B5/00 H04R1/10		
CPC分类号	A61B5/02427 H04R1/1091 A61B5/14552 A61B5/02405 H04R2499/10 A61B5/7207 A61B5/4035 A61B5/746 H04R2430/00 A61B5/6803		
其他公开文献	US9675259		
外部链接	Espacenet USPTO		

摘要(译)

一种生理功能检测耳机，包括耳机本体，安装在耳机本体一侧并限定窗口的耳塞，包括朝向窗口的光感测模块的光处理模块，以及信号处理模块。一种检测方法，包括以下步骤：参与者将耳塞插入其耳道内；光感测模块感测通过窗口发出的光的变化，然后由耳道壁反射；光处理模块处理变化的反射光以获得PPG信号；信号处理模块接收并处理PPG信号以获得参与者的生理信息。在耳塞中打开的窗口可以将光聚集在耳道的狭窄区域中，从而减少制造材料对光的透射率的影响并且提高PPG信号和生理信息的准确性。

