



US 20180280600A1

(19) **United States**

(12) **Patent Application Publication**
Harjes et al.

(10) **Pub. No.: US 2018/0280600 A1**
(43) **Pub. Date: Oct. 4, 2018**

(54) **ADJUSTING PUMP PROTOCOL BASED ON
IRREGULAR HEART RHYTHM**

A61B 5/024 (2006.01)
A61B 5/00 (2006.01)

(71) Applicant: **TC1 LLC**, St. Paul, MN (US)

(52) **U.S. Cl.**
CPC *A61M 1/1086* (2013.01); *A61M 1/122*
(2014.02); *A61B 5/02405* (2013.01); *A61M*
2210/125 (2013.01); *A61M 1/127* (2013.01);
A61M 2205/3507 (2013.01); *A61M 2205/3334*
(2013.01); *A61B 5/0031* (2013.01)

(72) Inventors: **Daniel I. Harjes**, Acton, MA (US);
John Freddy Hansen, Pleasanton, CA
(US); **Joseph C. Stark, III**, San
Leandro, CA (US); **Ghazal Anvar**
Mauro, San Ramon, CA (US); **Eric**
Lee, Oakland, CA (US); **Justin A.**
Callaway, Goffstown, NH (US); **Onur**
Dur, Milpitas, CA (US)

(57) **ABSTRACT**

(21) Appl. No.: **15/939,033**

(22) Filed: **Mar. 28, 2018**


Related U.S. Application Data

(60) Provisional application No. 62/478,424, filed on Mar.
29, 2017.

Publication Classification

(51) **Int. Cl.**
A61M 1/10 (2006.01)
A61M 1/12 (2006.01)

The present invention generally relates to heart treatment systems. In some aspects, methods and systems are provided for facilitating communication between implanted devices. For example, an implantable cardiac rhythm management device may be configured to communicate with an implantable blood pump. The implantable cardiac rhythm management device may deliver heart stimulation rate information in addition to information associated with any detected abnormalities in heart function. In response, the pump may be configured to adjust pumping by the pump to better accommodate a patient's particular needs.

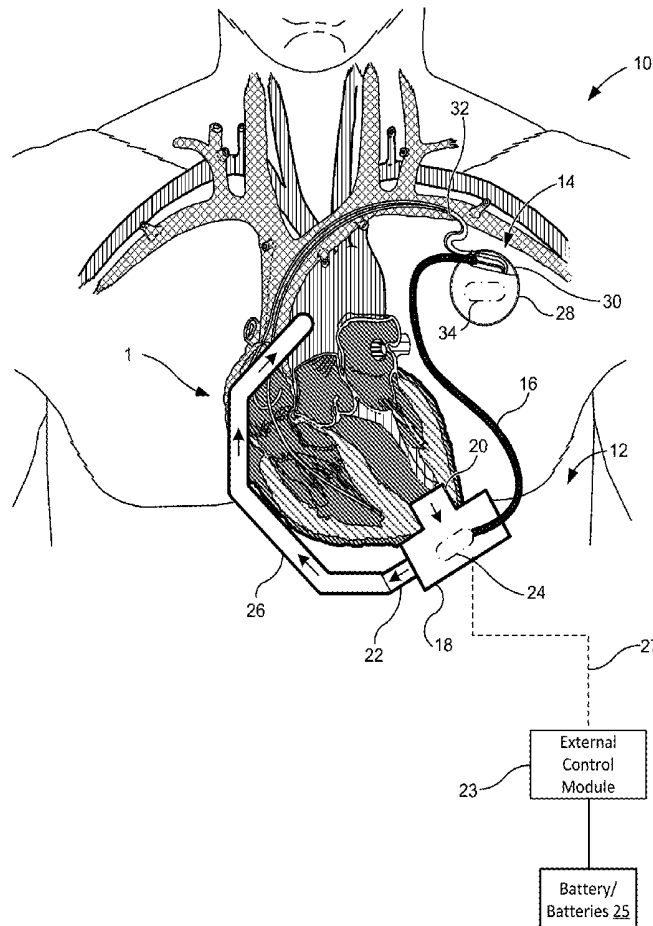

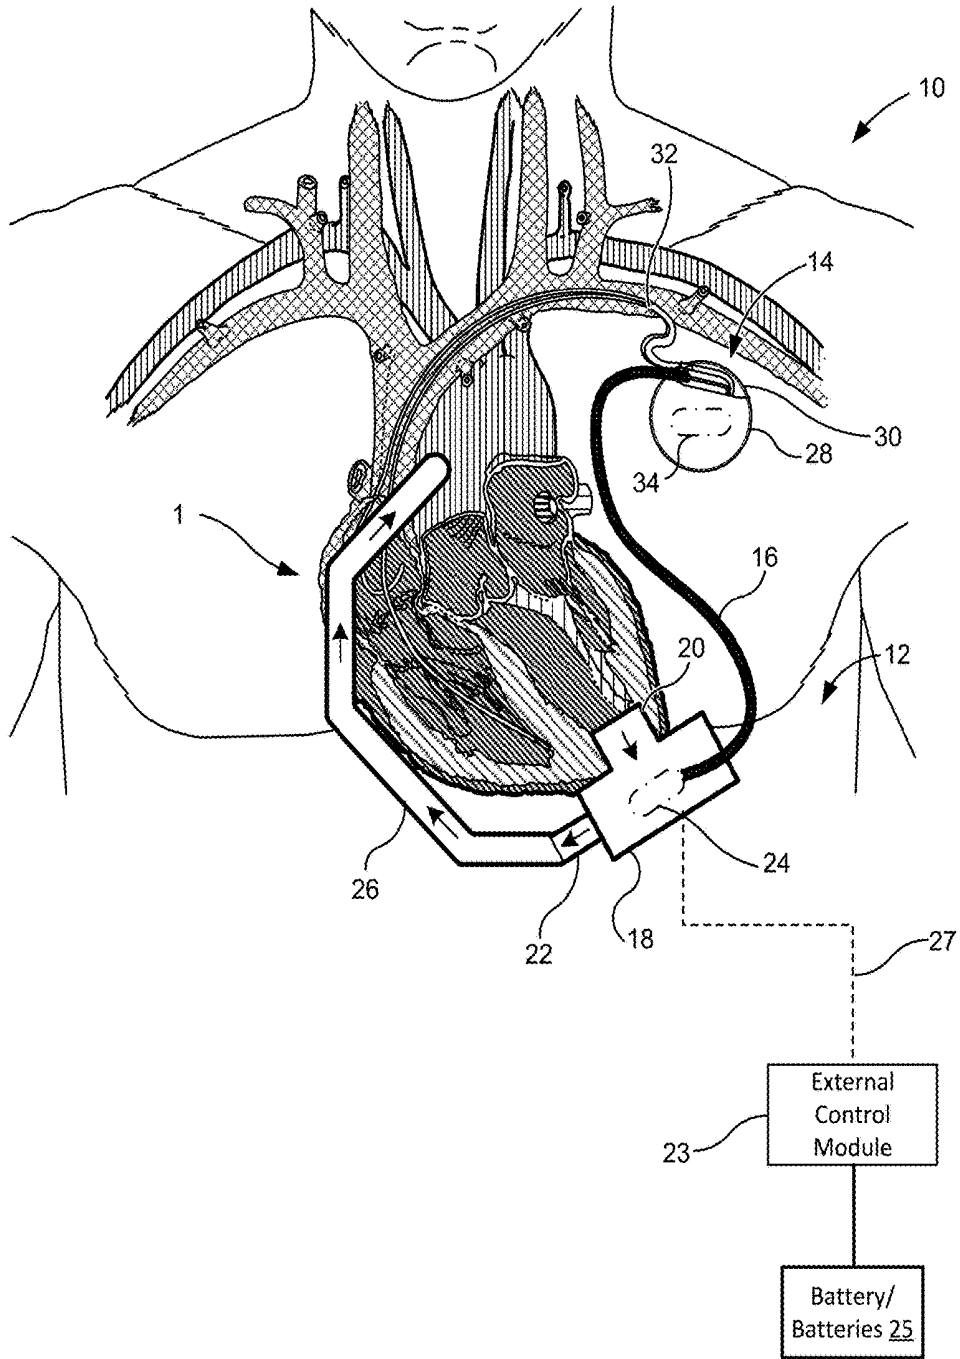


Figure 1

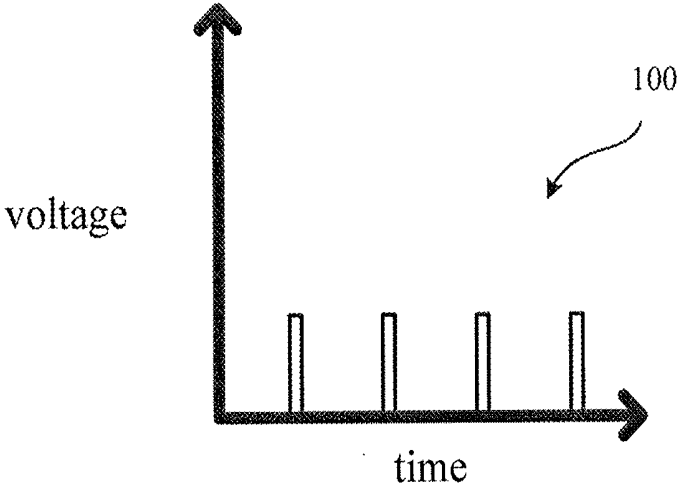


Figure 2

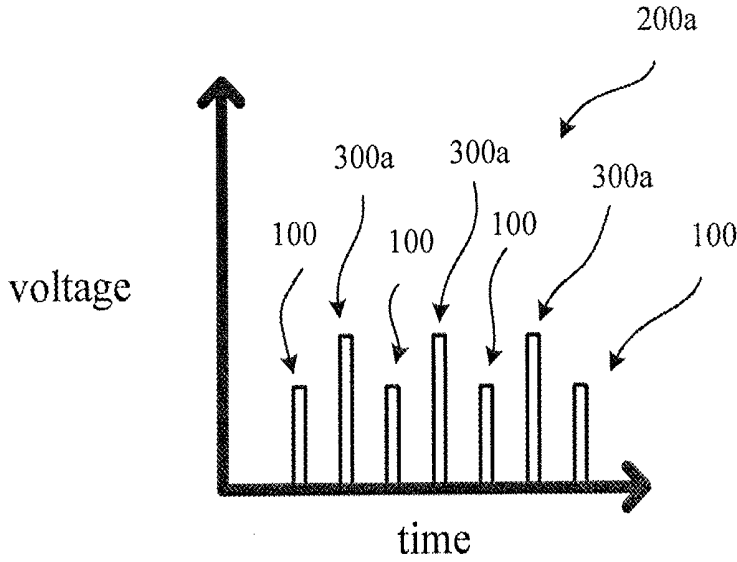


Figure 3

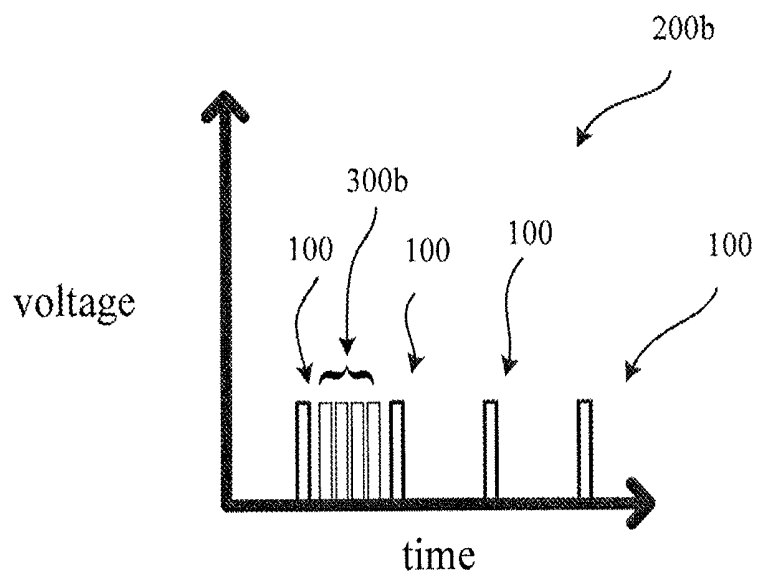


Figure 4

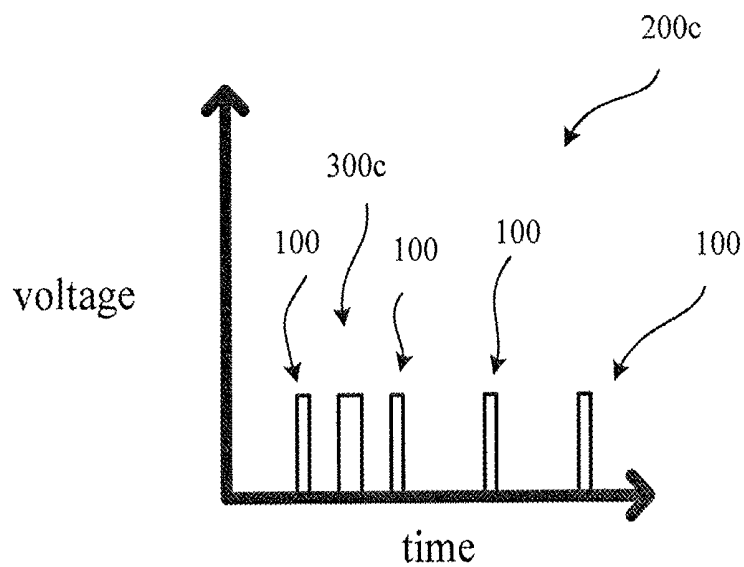


Figure 5

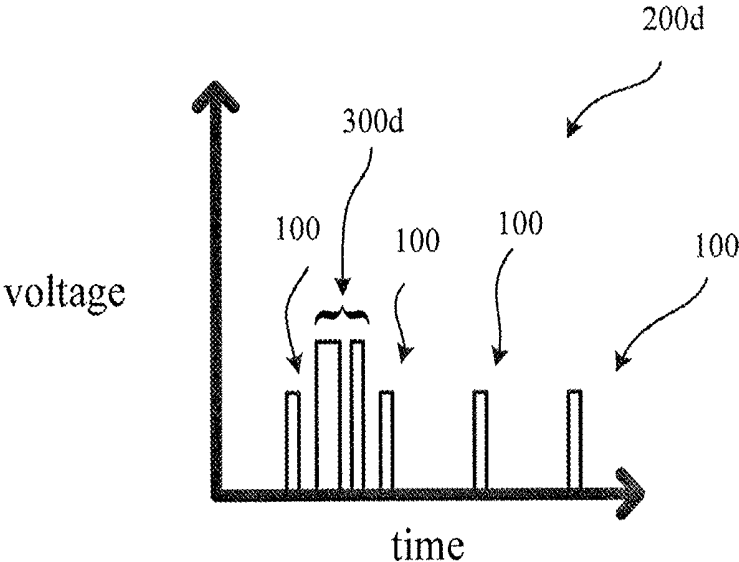


Figure 6

ADJUSTING PUMP PROTOCOL BASED ON IRREGULAR HEART RHYTHM

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims the benefit of U.S. Provisional Application No. 62/478,424, filed Mar. 29, 2017, the entire contents of which are hereby incorporated by reference herein in its entirety for all purposes.

[0002] The present application is related to U.S. Provisional Application No. 62/478,452, filed Mar. 29, 2017, and concurrently filed U.S. Non-Provisional Application No. _____ [Atty. Docket No. 096205-029010US-1073113], entitled "COMMUNICATION METHODS AND ARCHITECTURE FOR HEART TREATMENT SYSTEMS"; each of which is assigned to the same assignee as the present application and incorporated by reference herein in its entirety for all purposes.

BACKGROUND

[0003] The present invention generally relates to heart failure and disease state management systems, and in various respects, methods and systems for communicating information between an implantable blood pump and another device like a cardiac rhythm management device.

[0004] Cardiovascular disease remains the leading cause of death globally. Nearly one third of deaths in the U.S. are caused by heart disease, stroke, and other cardiovascular diseases according to the American Heart Association. Nearly one in ten deaths have cardiovascular disease as a contributing factor. Because of the size of this epidemic—nearly 6 million adults in the United States live with heart failure—there remains a need for improving the early diagnosis and treatment of cardiovascular disease. Many people unknowingly live with heart disease until they experience a significant event.

[0005] More recently, Ventricular Assist Devices (VADs) have become increasingly common for treating advanced heart failure. Advanced heart failure patients usually refers to patients in New York Heart Association (NYHA) Class III or IV. VAD therapy patients often have several comorbidities such as renal failure, respiratory failure, and other cardiovascular diseases. VAD patients often have other heart failure devices including implanted pacemakers (IPM), implantable cardioverter defibrillators (ICD), cardiac resynchronization therapy (CRT) devices, monitoring systems (e.g. CardioMEMS, implantable cardiac monitors, etc.), and/or other heart failure management devices. While VADs and implantable cardiac rhythm management devices separately provide beneficial heart assist functions, it may be advantageous to communicate information between the implanted devices to diagnose disease, improve therapy through device coordination, and more. And because these systems are not designed to interoperate at present, there is a need for systems and methods to establish communication and interoperability.

[0006] There is a need for improved systems for diagnosing and treating heart disease. There is a need for systems and methods for coordinating one or more heart assist devices.

SUMMARY

[0007] The present invention generally relates to heart assist systems and therapy. In some aspects, an implantable blood pump is provided. In some aspects, an implantable CRM/ICD or CRT device is provided. In still further aspects of the present invention, a heart assist system is provided that includes an implantable blood pump and an implantable cardiac rhythm management device in coordination with each other. Moreover, other aspects are generally related to methods of communication between two or more heart assist devices.

[0008] Communicating information between an implantable blood pump and an implantable cardiac rhythm management device can be beneficial. At first glance, such a goal may seem simple and straightforward, however such coordination between implanted devices comes with a variety of challenges. For instance, Medical Implant Communications Services (MICS) band radio transceivers, which are generally found in CRTs, IPMs and ICDs, may require high power demands for communicating information to the VAD. Such a communications scheme in turn may drastically reduce battery life of a pacemaker by several months to years and, thereby require more frequent and invasive replacement procedures. Similarly, such a communication scheme may require more frequent battery recharging of VAD systems, thereby requiring the patient to be tethered to a power source more frequently and inconveniencing the patient. As such, it may be advantageous to limit the power requirements for the communication scheme between the implanted devices because of the limited power source available to these implants. Accordingly, aspects of the present invention address one or more such challenges.

[0009] In some embodiments, a method of assisting a heart of a patient is provided. The method may include sensing a series of electrical pulses from an implantable cardiac rhythm management device electrically pacing the heart of the patient at a first frequency with electrical pulses with a first duration and first voltage. In various embodiments, the sensing can be performed using an implantable blood pump coupled to a heart of a patient. In various embodiments, a sensor is provided for performing the electrical pulse sensing, and the sensor outputs related information to the blood pump. The series of electrical pulses from the implantable cardiac rhythm management device sensed by the implantable blood pump may be associated with a type of abnormal heart rhythm detected by the implantable cardiac rhythm management device. Accordingly, in some embodiments, the implantable cardiac rhythm management device may be configured to sense the heart's electrical activity to determine when the heart is experiencing an abnormal heart rhythm. Additionally, the implantable cardiac rhythm management device may be configured to encode the detected information into the series of electrical pulses sent to the implantable blood pump to specifically identify a type of abnormal heart rhythm detected. For example, the series of electrical pulses may be provided at a second frequency different than the first frequency or may include electrical pulses with a second duration or second voltage different than the first duration or first voltage. The method may further include determining, with the implantable blood pump, the type of abnormal heart rhythm detected by the implantable cardiac rhythm management device by analyzing a frequency of the series of electrical pulses, durations of each of the electrical pulses of the series

of electrical pulses, or voltages of each of the electrical pulses of the series of electrical pulses. Thereafter, a pumping protocol of the implantable blood pump may be adjusted based on the type of abnormal heart rhythm determined by the analysis.

[0010] In some embodiments, the implantable blood pump determines the type of abnormal heart rhythm by analyzing the frequency of the series of electrical pulses. In some embodiments, the implantable blood pump determines the type of abnormal heart rhythm by referencing a database associating frequencies of sensed electrical pulses with types of abnormal heart rhythm and matches at type of abnormal heart rhythm with the received series of electrical pulses. In some embodiments, the implantable blood pump determines the type of abnormal heart rhythm by comparing the frequency of the series of electrical pulses to one or more frequency thresholds.

[0011] Optionally, the implantable blood pump determines the type of abnormal heart rhythm by analyzing durations of each of the electrical pulses of the series of electrical pulses. The series of electrical pulses may comprise a first pulse with a first duration and a second pulse with a second duration that is different than the first pulse.

[0012] In some embodiments, the type of abnormal heart rhythm is determined to be a fibrillation of the heart and the pumping protocol may be adjusted to cease the pumping of the implantable blood pump for a predetermined duration of time.

[0013] In some embodiments, a heart assist system may be provided. The system may include an implantable blood pump configured to couple with a circulatory system of a patient and to pump blood therethrough. The implantable blood pump may include a pump processor configured to sense a series of electrical pulses from an implantable cardiac rhythm management device electrically pacing the heart of the patient at a first frequency with electrical pulses with a first duration and a first voltage. The series of electrical pulses from the implantable cardiac rhythm management device configured to be sensed by the pump processor may be associated with a type of abnormal heart rhythm detected by the implantable cardiac rhythm management device and may be at a second frequency different than the first frequency or including electrical pulses with a second duration different than the first duration or a second voltage different than the first voltage. The pump processor may be configured to determine the type of abnormal heart rhythm detected by the implantable cardiac rhythm management device by analyzing a frequency of the series of electrical pulses, durations of each of the electrical pulses of the series of electrical pulses or voltages of each of the electrical pulses of the series of electrical pulses. The pump processor can be configured to adjust a pumping protocol of the implantable blood pump based on the type of abnormal heart rhythm determined by the analysis.

[0014] In some embodiments, the pump processor is configured to determine the type of abnormal heart rhythm by analyzing the frequency of the series of electrical pulses. In some embodiments, the pump processor is configured to determine the type of abnormal heart rhythm by referencing a database associating frequencies of sensed electrical pulses with types of abnormal heart rhythm. Optionally, the pump processor determines the type of abnormal heart rhythm by comparing the frequency of the series of electrical pulses to one or more frequency thresholds.

[0015] In some embodiments, the pump processor determines the type of abnormal heart rhythm by analyzing durations of each of the electrical pulses of the series of electrical pulses. The series of electrical pulses may include a first pulse with a first duration and a second pulse with a second duration that is different than the first pulse.

[0016] In some embodiments, when the type of abnormal heart rhythm is determined to be a fibrillation of the heart, the pumping processor adjusts the pumping protocol to cease the pumping of the implantable blood pump for a predetermined duration of time.

[0017] Optionally, the electrical pulses of the series of electrical pulses comprise square wave signals.

[0018] In still further embodiments, a method of assisting a heart of a patient. The method may include receiving, through a first lead having a first end coupled with an implantable cardiac rhythm management device and a second end opposite the first end coupled with a pump processor of an implantable blood pump, an electrical pace signal from the implantable cardiac rhythm management device. The implantable cardiac rhythm management device may be configured to deliver the electrical pace signal to pump processor of the implantable blood pump with each heart stimulation pulse delivered to the heart of the patient by the implantable cardiac rhythm management device. A pumping of the implantable blood pump may be adjusted based on the received electrical pace signal with the pump processor.

[0019] The electrical pace signal may be a square wave signal with a frequency equal to a heart rate of the patient.

[0020] The pump processor may be configured to compare a frequency of the electrical pace signal with a first frequency threshold and a second frequency threshold that is greater than the first frequency threshold.

[0021] Optionally, the pump processor may adjust the pumping of the implantable blood pump to a first speed when the frequency of the electrical pace signal is below the first frequency threshold, a second speed when the frequency of the electrical pace signal is above the first frequency threshold and below the second frequency threshold, and a third speed when the frequency of the electrical pace signal is above the first frequency threshold and the second frequency threshold. The first speed may be less than the second speed and the second speed may be less than the third speed.

[0022] The method may also include detecting, with the implantable cardiac rhythm management device, an abnormal heart rhythm of the heart of the patient, and delivering, with the implantable cardiac rhythm management device, a unique series of electrical pulses through the first lead to the pump processor of the implantable blood pump. Thereafter, the method may include differentiating, with the pump processor, the unique series of electrical pulses from the electrical pace signal which the implantable cardiac rhythm management device delivers simultaneously with the heart stimulation pulses. The received unique series of pulses may then be associated with a pumping protocol and the pumping protocol may be implemented in response to receiving the unique series of pulses.

[0023] In some embodiments, the pump processor differentiates the unique series of electrical pulses from the electrical pace signal based on a duration of the electrical pulses of the unique series of electrical pulses.

[0024] In some embodiments, the pump processor differentiates the unique series of electrical pulses from the electrical pace signal based on a frequency of the unique series of electrical pulses.

[0025] In some embodiments, the pump processor compares the frequency of the unique series of electrical pulses to a threshold frequency to differentiate the unique series of electrical pulses from the electrical pace signal.

[0026] In some embodiments, electrical pulses of the unique series of electrical pulses comprise a combination of a first pulse with a first duration and second pulse with a second duration different than the first pulse.

[0027] In some embodiments, the pump protocol may be a cessation of pumping for a predetermined duration of time.

[0028] In further aspects, a heart assist system may be provided that includes an implantable blood pump configured to couple with a circulatory system of a patient and to pump blood therethrough. The implantable blood pump may include a pump processor, the pump processor including an input. An implantable cardiac rhythm management device may be provided that is configured to deliver heart stimulation pulses to a heart of the patient. A first lead having a first end and a second end opposite the first end may be provided. The first end of the first lead may couple with the implantable cardiac rhythm management device and the second end of the first lead may couple with the input of the pump processor.

[0029] The implantable cardiac rhythm management (CRM) device may be configured to deliver an electrical pace signal through the first lead to the implantable blood pump with each heart stimulation pulse delivered to the heart of the patient. In various embodiments, a sensor system is provided for sensing the pulses from the CRM device. In various embodiments, a detector is provided in the VAD for receiving the signals from the CRM device. A converter in the VAD may be provided to convert the signals in the frequency and/or time domain. A converter may be provided to convert the signals between AC and/or DC.

[0030] The pump processor of the implantable blood pump may be configured to receive the electrical pace signal from the implantable cardiac rhythm management device and to adjust a pumping of the implantable blood pump based on the received electrical pace signal.

[0031] In some embodiments, the electrical pace signal comprises a square wave signal with a frequency equal to a heart rate of the patient.

[0032] In some embodiments, the pump processor of the implantable blood pump is configured to compare a frequency of the electrical pace signal with a first frequency threshold and a second frequency threshold that is greater than the first frequency threshold. For example, the processor of the implantable blood pump may adjust the pumping of the implantable blood pump to a first speed when the frequency of the electrical pace signal is below the first frequency threshold, a second speed when the frequency of the electrical pace signal is above the first frequency threshold and below the second frequency threshold, and a third speed when the frequency of the electrical pace signal is above the first frequency threshold and the second frequency threshold. The first speed may be less than the second speed and the second speed may be less than the third speed.

[0033] In some embodiments, the implantable cardiac rhythm management device comprises a pacemaker. Optionally, the pacemaker comprises one or more second leads, a

header, and internal circuitry for coordinating pacing the heart of the patient with the one or more second leads. The one or more second leads may couple to the internal circuitry through the header of the pacemaker. The first lead may couple the internal circuitry of the pacemaker to the input of the pump processor of the implantable blood pump through the header of the pacemaker. In some embodiments, the one or more second leads and the first lead have the same configuration.

[0034] In some embodiments, the implantable cardiac rhythm management device is configured to detect an abnormal heart rhythm of the heart of the patient. The implantable cardiac rhythm management device may also be configured to deliver a unique series of electrical pulses through the first lead to the pump processor of the implantable blood pump. The pump processor may differentiate the unique series of electrical pulses from the electrical pace signal which the implantable cardiac rhythm management device delivers simultaneously with the heart stimulation pulses and may associate the received unique series of pulses with a pumping protocol. Thereafter, the processor may implement the pumping protocol in response to receiving the unique series of pulses.

[0035] In some embodiments, the pump processor differentiates the unique series of electrical pulses from the electrical pace signal based on a duration or a voltage of the electrical pulses of the unique series of electrical pulses.

[0036] In some embodiments, the pump processor differentiates the unique series of electrical pulses from the electrical pace signal based on a frequency of the unique series of electrical pulses. For example, the pump processor may be configured to compare the frequency of the unique series of electrical pulses to a threshold frequency to differentiate the unique series of electrical pulses from the electrical pace signal.

[0037] Optionally, electrical pulses of the unique series of electrical pulses comprise a combination of a first pulse with a first duration and a second pulse with a second duration different from the first pulse.

[0038] Various aspects of the invention are directed to a method of detecting heart failure comprising using the system(s) according to any of paragraphs [0026] to [0035].

[0039] Embodiments of the invention covered by this patent are defined by the claims below, not this summary. This summary is a high-level overview of various aspects of the invention and introduces some of the concepts that are further described in the Detailed Description section below. This summary is not intended to identify key or essential features of the claimed subject matter, nor is it intended to be used in isolation to determine the scope of the claimed subject matter. The subject matter should be understood by reference to appropriate portions of the entire specification of this patent, any or all drawings, and each claim.

[0040] The invention will be better understood upon reading the following description and examining the figures which accompany it. These figures are provided by way of illustration only and are in no way limiting on the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0041] Further details, aspects, and embodiments of the invention will be described by way of example only and with reference to the drawings. In the drawings, like reference numbers are used to identify like or functionally similar

elements. Elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. [0042] FIG. 1 illustrates an exemplary system of the present invention.

[0043] FIG. 2 illustrates an exemplary train of heart stimulation pulses according to some embodiments.

[0044] FIG. 3 illustrates an exemplary series of electrical pulses from an implantable cardiac rhythm management device to a blood pump to communication physiological information.

[0045] FIG. 4 illustrates another exemplary series of electrical pulses from an implantable cardiac rhythm management device to a blood pump to communication physiological information.

[0046] FIG. 5 illustrates another exemplary series of electrical pulses from an implantable cardiac rhythm management device to a blood pump to communication physiological information.

[0047] FIG. 6 illustrates another exemplary series of electrical pulses from an implantable cardiac rhythm management device to a blood pump to communication physiological information.

DETAILED DESCRIPTION

[0048] The present invention generally relates to heart assist systems and in particular methods and systems for communicating information between an implantable blood pump and an implantable cardiac rhythm management device.

[0049] FIG. 1 illustrates an exemplary heart treatment or support system 10 of the present invention. As used herein, “heart treatment system,” “heart support system,” and “cardiovascular system” are used somewhat interchangeably. Heart treatment system 10 includes an implantable blood pump 12 and an implantable cardiac rhythm management device 14. In various embodiments, the blood pump refers to a ventricular assist system including a pump, battery, and peripherals. In various respects, “heart treatment system” can be used to refer to one or more cardiovascular systems. In one example, heart treatment system refers to a combined system including two subsystems: a left ventricular assist system and a cardiac rhythm management system. In some embodiments, the implantable blood pump 12 and the implantable cardiac rhythm management device 14 may be operatively coupled to one another by a communication line 16 to share information between the implanted devices. In some embodiments, the implantable cardiac rhythm management device 14 may send information to the implantable blood pump 12 through the communication line 16. In other embodiments the implantable blood pump 12 may send information to the implantable cardiac rhythm management device 14 through the communication line 16. And in further aspects, information may be passed from the implantable cardiac rhythm management device 14 to the implantable blood pump 12 and vice-versa.

[0050] The blood pump 12 may be configured to couple with the circulatory system (e.g., heart 1) of the patient and to assist in pumping blood therethrough. In some embodiments, the pump 12 includes a pump housing 18 and an inlet cannula 20 and an outlet 22 extending from the housing 18. In some embodiments, the pump 12 may further include an external control module 23. In some embodiments, the pump can be configured similar to an LVAD described in U.S. Patent Publication 2015/0290374; U.S. Patent Publication

2014/0188148; U.S. Pat. No. 9,091,271; U.S. Pat. No. 8,794,989, U.S. Pat. No. 8,682,431; and/or U.S. Pat. No. 8,894,561, the contents of which are incorporated herein by reference in their entirety.

[0051] The housing 18 may house a rotor of the blood pump 12 and may also include on-board electronics 24 (e.g., processor, battery, sensors, etc.). The inlet cannula 20 may be configured to couple with a chamber of the heart 1 and the rotor of blood pump 12 may draw blood from a coupled heart chamber and output blood through output 22. The output 22 of the pump 12 may couple with a vascular graft assembly 26 which may be coupled with another portion of the patient’s circulatory system (e.g., aorta, or the like) to deliver the pumped blood back into the circulatory system of the patient.

[0052] In some embodiments, an external control module 23 may be provided to send commands to and receive data from on-board electronics 24 of pump 12. The external control module 23 may be coupled with the pump by a percutaneous cable 27. In some embodiments, one or more batteries 25 may be coupled with the external control module 23 to power the control module 23. The batteries 25 may be external batteries or internal batteries 25.

[0053] While pump 12 is generally illustrated as a centrifugal pump, it should be understood that the communications systems and methods described herein are not limited to centrifugal pumps, but are equally applicable to other pump designs (e.g., axial flow or mixed flow, etc.). Additionally, while pump 12 is illustrated as supporting the left ventricle, it should be understood that the pump 12 may be coupled with other portions of the heart 1, such as the right ventricle or other chambers of the heart 1, or other catheter or intravascular pump systems that couple to cardiovascular locations (e.g., descending aorta and other intravascular placements).

[0054] The implantable cardiac rhythm management device 14 may be configured to couple with one or more portions of the heart 1 of the patient to pace, resynchronize, and/or sense electrical activity of the heart 1. In some embodiments, the device 14 can be configured similar to a devices described in U.S. Pat. No. 8,180,448; U.S. Pat. No. 8,295,939; U.S. Pat. No. 8,543,205; U.S. Pat. No. 7,945,333; U.S. Pat. No. 8,295,939; U.S. Pat. No. 7,853,325; U.S. Pat. No. 8,145,324; U.S. Pat. No. 8,180,448; U.S. Pat. No. 8,224,462; U.S. Pat. No. 8,364,283; U.S. Pat. No. 8,712,544; U.S. Pat. No. 8,897,887; U.S. Pat. No. 7,245,117; U.S. Pat. No. 7,439,723; U.S. Pat. No. 7,498,799; U.S. Pat. No. 7,550,978; U.S. Pat. No. 7,679,355; U.S. Pat. No. 7,839,153; U.S. Pat. No. 6,111,520; and/or U.S. Pat. No. 6,278,379, the contents of which are incorporated herein by reference in their entirety. In some embodiments, the implantable cardiac rhythm management device 14 may include a housing 28, a header 30, and one or more leads 32.

[0055] The housing 28 may house on-board electronics 34 of the implantable cardiac rhythm management device 14 (e.g., processor, sensor(s), battery, etc.). The header 30 may provide an interface between the electronics 34 and the one or more leads 32 extending from the housing 28.

[0056] The one or more leads 32 may operably couple the implantable cardiac rhythm management device 14 to the heart 1 of the patient for pacing, resynchronizing, and/or sensing electrical activity of the heart 1. The one or more leads 32 may couple the implantable cardiac rhythm management device 14 to the right ventricle, right atrium, left

ventricle, and/or the left atrium depending on the type of implantable cardiac rhythm management device **14** and treatment needed.

[0057] In some embodiments, the implantable cardiac rhythm management device **14** may be a pacemaker, CRT, ICD, or the like. Additionally, while generally illustrated as coupling, e.g., via leads, with the endocardium, the implantable cardiac rhythm management device **14** may be configured to couple with portions of the epicardium to carry out its functions.

[0058] Communication line **16** may couple the implantable blood pump **12** with the implantable cardiac rhythm management device **14** so that information may be shared from one implant to the other. For example, the communication line **16** may have a first end that couples to the on-board electronics **34** of the implantable cardiac rhythm management device **14** and a second end that couples to the on-board electronics **24** of the implantable blood pump **12**. In some embodiments, the first end connects to the on-board electronics **34** of the implantable cardiac rhythm management device **14** through an open through-hole or plug in the header of the implantable cardiac rhythm management device **14**. In some embodiments, the communication line **16** provides an electrical connection between the implantable blood pump **12** and the implantable cardiac rhythm management device **14**. Optionally, the communication line **16** may be a lead that may be similar in configuration to the one or more leads **32**. As such, the communication line **16** may couple to the on-board electronics **34** of the implantable cardiac rhythm management device **14** through the header **30**.

[0059] In certain embodiments, the communication line **16** may provide an optical connection between the implantable blood pump **12** and the implantable cardiac rhythm management device **14**. An optical connection may be desirable in some situations because the optical cable may be more resistant to corrosion and infection during long term implantation of the implant **14** and may be faster and higher resolution signaling, compared to an implant using an electrical connection. However, an electrical connection may be beneficial in some situations as fewer modifications are required to existing implantable cardiac rhythm management devices.

[0060] As set forth above, the heart treatment system **10** may improve patient treatment due to the fact that information may be shared between the implanted devices **12**, **14**. In some embodiments, the implantable cardiac rhythm management device **14** may be configured to deliver heart stimulation pulses to the heart **1** of the patient to pace the patient's heart **1**. FIG. 2 illustrates an exemplary train of heart stimulation pulses **100** according to some embodiments. In some embodiments, the heart stimulation pulses **100** may comprise a series of square wave signals.

[0061] In some embodiments, the train of heart stimulation pulses **100** delivered are pre-programmed at constant frequency. Optionally, the implantable cardiac rhythm management device **14** may adjust the frequency of the train of heart stimulation pulses **100** based on the patient's needs. For example, in some embodiments, the on-board electronics **34** of the implantable cardiac rhythm management device **14** may include a sensor (e.g., activity sensor, accelerometer, timers) for estimating physical exertion by the patient and/or the time of day. The frequency of heart stimulation pulses **100** may be increased during higher activity (e.g., walking)

and/or day time and lowered during lower activity (e.g., sleeping or resting) and/or night time.

[0062] In some embodiments, in addition to delivering heart stimulation pulses **100** to the heart **1** of the patient, the implantable cardiac rhythm management device **14** may also be configured to deliver an electrical pace signal through the communication line **16** to the implantable blood pump **12** with each heart stimulation pulse delivered to the heart **1**. In at least some embodiments, the electrical pace signal delivered to the implantable blood pump **12** is similar or identical to the heart stimulation pulses **100** delivered to the heart **1** of the patient in frequency, voltage, and/or duration. This may be advantageous in reducing the power requirements for communication information between the implanted devices.

[0063] The pump processor of the implantable blood pump **12** may be configured to receive the electrical pace signal from the implantable cardiac rhythm management device **14** and may adjust a pumping of the implantable blood pump **12** based on the received electrical pace signal. In embodiments where the implantable cardiac rhythm management device **14** is configured to adjust the frequency of the train of heart stimulation pulses **100** based on the patient's needs, so too will the frequency of the electrical pace signal delivered to the pump **12**. In response, an implantable blood pump **12** may provide additional pumping when the frequency of the electrical pace signal increases to further assist the patient's heart in pumping blood. Similarly, the implantable blood pump **12** may decrease pumping when the frequency of the electrical pace signal decreases, indicating a lower heart rate and a decreased need for blood circulation. Such adjustments in blood pumping may be advantageous in reducing adverse events in pumping action (e.g., suction events or the like). As such, the implantable blood pump may leverage one or more activity sensors of the implantable cardiac rhythm management device to adjust pumping. The one or more activity sensors may comprise electrical pulse detection (e.g., heart rate sensing), one or more accelerometers, time stamp information for time of day information, etc. Thus, the implantable cardiac rhythm management device may be configured to detect patient activity or position (e.g., sitting, standing, laying, walking, running, etc.) or infer activity (e.g., using an internal clock to determine time of day or the like) and may adjust a pacing signal delivered to the heart and/or the pump.

[0064] In some embodiments, the implantable cardiac rhythm management device **14** may continuously adjust frequency of the heart stimulation pulses **100** and the electrical pace signal or may switch between one or more pre-programmed modes (e.g., high activity, low activity, resting, sleeping, etc.) to adjust for patient needs throughout the day. Similarly, the implantable blood pump **12** may also continuously adjust pumping of blood in response to changes in frequency of the received electrical pace signal or may switch between one or more pre-programmed pumping modes. For example, the pump processor may be configured to compare a frequency of the electrical pace signal with one or more frequency thresholds. In some embodiments, a first frequency threshold and a second frequency threshold that is greater than the first frequency threshold may be provided. The pump processor may adjust the pumping of the implantable blood pump **12** to a first speed when the frequency of the electrical pace signal is below the first frequency thresh-

old, a second speed when the frequency of the electrical pace signal is above the first frequency threshold and below the second frequency threshold, and a third speed when the frequency of the electrical pace signal is above the first frequency threshold and the second frequency threshold. The first speed may be less than the second speed and the second speed may be less than the third speed.

[0065] While the example above is described using two separate thresholds and three separate speeds or pumping modes, it should be understood that one or more frequency thresholds and two or more speeds and/or pumping modes may be utilized in other embodiments.

[0066] In some embodiments, the implantable cardiac rhythm management device 14 may be configured to sense electrical signals from the heart 1 and may detect an abnormal heart rhythm of the patient based on the sensed electrical signals. Optionally, the implantable cardiac rhythm management device 14 may deliver a unique series of electrical pulses through the communication line 16 to the pump processor of the implantable blood pump 12. The unique series of electrical pulses may be associated with the specific type of abnormal heart rhythm detected by the implantable cardiac rhythm management device 14. In some embodiments, the series of electrical pulses comprise a series of simple square wave signals. This may be advantageous in reducing power requirements of the communications method.

[0067] The pump processor may receive the unique series of electrical pulses and may decode the unique series of electrical pulses to determine the type of abnormal heart rhythm being experienced by the patient. In response, the pump processor may be configured to adjust and implement a pumping protocol of the implantable blood pump 12 to account for the abnormal heart rhythm. For example, in some embodiments, the pump processor may temporarily cease operation of the pump in the event that fibrillation of the heart is sensed. After defibrillation, the pump 12 may resume pumping.

[0068] In some embodiments, the pump processor may decode the received unique series of electrical pulses using a look-up table. For example, the processor may compare the received series of electrical pulses to a database that stores a plurality of different possible signals and associates each of these possibilities with a type of abnormal heart rhythm. By identifying a match between the received signal and the signal stored in the database, the pump processor may then match the received signal with a specific type of abnormal heart rhythm signaled by the implantable cardiac rhythm management device 14.

[0069] Optionally, the pump processor may decode the received unique series of electrical using one or more thresholds. For example, one or more frequency, voltage, and/or duration thresholds may be utilized to decode the received unique series of electrical pulses.

[0070] In some embodiments, the implantable cardiac rhythm management device 14 may be configured to deliver heart stimulation pulses 100 to the heart 1 and also configured to sense electrical signals from the heart to detect abnormal heart rhythms. Accordingly, in some embodiments, the implantable cardiac rhythm management device 14 may deliver an electrical pace signal through the communication line 16 to the implantable blood pump 12 with each heart stimulation pulse delivered to the heart 1 and also a unique series of electrical pulses through the communica-

tion line 16 to the pump processor of the implantable blood pump 12 when an abnormal heart rhythm is detected. The pump processor may differentiate the unique series of electrical pulses from the electrical pace signal 100 which the implantable cardiac rhythm management device 14 delivers simultaneously with the heart stimulation pulses and may associate the received unique series of pulses with a pumping protocol. Thereafter, the processor may implement the pumping protocol in response to receiving the unique series of pulses while also adjusting pumping for heart rate.

[0071] For example, FIGS. 3-6 illustrate a plurality of exemplary electrical pulses 200a-200d from an implantable cardiac rhythm management device 14 to a blood pump 12 to communication physiological information. In FIG. 3, the series of electrical pulses 200a may comprise a series of square wave signals. The series of electrical pulses 200a may include the electrical pace signal 100 that is associated with the heart stimulation pulses delivered to the patient. Additionally, the series of electrical pulses 200a may also include the unique series of electrical pulses 300a associated with a type of abnormal heart rhythm detected by the implantable cardiac rhythm management device 14. As illustrated, in some embodiments, the unique series of electrical pulses 300a may overlap in time with the electrical pace signal 100. In this embodiment, the pump processor may differentiate the series of electrical pulses 300a from the pace signal 100 based on a voltage of the electrical pulses in the series of electrical pulses 200a. For example, the voltage of the pace signal 100 may be higher or lower than the electrical pulses associated with the abnormal heart rhythm. Accordingly, in some embodiments, the pump processor may utilize a voltage threshold to differentiate the series of electrical pulses 300a from the pace signal 100. After differentiating the series of electrical pulses 300a from the pace signal 100, the pump processor may adjust the pump 12 according to one or both of the signals received from the implantable cardiac rhythm management device 14. While the series of electrical pulses 300a is illustrated as including a plurality of higher voltage electrical pulses, it should be understood that a single higher or lower voltage pulse may be delivered to indicate the detection of an abnormal heart rhythm.

[0072] FIG. 4 illustrates another exemplary series of electrical pulses 200b from an implantable cardiac rhythm management device 14 to a blood pump 12 to communication physiological information. The pump 12 may differentiate the series of electrical pulses 300b (associated with the abnormal heart condition) from the pace signal 100 (associated with the heart stimulation signals) based on a frequency of the electrical pulses in the series of electrical pulses 200b. For example, the electrical pulses 300b, associated with the abnormal heart rhythm, may be delivered to the pump 12 at a higher frequency than the pacing signal 100. Accordingly, in some embodiments, the pump processor may utilize a frequency threshold to differentiate the series of electrical pulses 300b from the pace signal 100. For example, given that the pacing signal 100 is associated with a heart rate of the patient, it would be understood that there is an upper limit to this rate. The series of electrical pulses 300b associated with the abnormal heart rhythm may be delivered to the pump 12 at a frequency which exceeds the heart rate upper limit. For example, in some embodiments, the upper limit may be based on a highest expected heart rate for a heart failure patient. For example, the upper limit may

be 120 bpm in some instances, 150 bpm, 160 bpm, 200 bpm, or more (e.g., 250 bpm) in other instances. Optionally, the implantable cardiac rhythm management device **14** may be preprogrammed with an maximum heart stimulation rate (e.g., for safety purposes or the like). The series of electrical pulses **300b** associated with the abnormal heart rhythm may be delivered to the pump **12** at a frequency which exceeds the preprogrammed maximum heart stimulation rate of the implantable cardiac rhythm management device **14**. As such, the pump **12**, when receiving electrical pulses that exceed this frequency threshold would automatically recognize that the series of pulses are associated with a type of abnormal heart rhythm and may proceed to decode the type detected. Thereafter, the pump processor may adjust the pump **12** accordingly.

[0073] FIG. 5 illustrates another exemplary series of electrical pulses **200c** from an implantable cardiac rhythm management device **14** to a blood pump **12** to communication physiological information. In this embodiment, the pump processor may differentiate the electrical pulse **300c** (associated with the abnormal heart condition) from the pace signal **100** (associated with the heart stimulation signals) based on a duration of the electrical pulses in the series of electrical pulses **200c**. For example, the electrical pulse **300c** may have a longer duration than the pulses associated with the pace signal **100**. Accordingly, in some embodiments, the pump processor may utilize a pulse duration threshold to differentiate the electrical pulse **300c** from the pace signal **100**. While only a single electrical pulse **300c** is illustrated, it should be understood that one or more electrical pulses **300c** may be associated with different types of abnormal heart conditions. Additionally, more complex information may be transmitted to the pump **12** and decoded if electrical pulse **300c** is transmitted in varying combinations of long pulses and short pulses, similar to Morse code.

[0074] FIG. 6 illustrates another exemplary series of electrical pulses **200d** from an implantable cardiac rhythm management device **14** to a blood pump **12** to communication physiological information. The pump processor may differentiate the series of electrical pulses **300d** from the pace signal **100** (associated with the heart stimulation signals) based on a duration, voltage and/or frequency of the electrical pulses in the series of electrical pulses **200c**. By varying the voltage, duration, and/or frequency of the electrical pulses of the series **300d**, the implantable cardiac rhythm management device **14** may be able to deliver more complex information including, but not limited to, the abnormal heart conditions detected by the implantable cardiac rhythm management device **14**. Thereafter, the pump processor may adjust and implement the pump protocol, similar to the embodiments described above.

[0075] In some embodiments, a unique series of electrical pulses may be indicative of a start/stop to a communication. For example, a first unique series of electrical pulses may be received by the pump **12** which are indicative of a start of communication. A second unique series of electrical pulses may follow the first unique series of electrical pulses which communicate specific information to the pump **12**. A third unique series of electrical pulses may be indicative of a stop to communication. The first and third unique series of electrical pulses may be identical or different. The start communication signal may cause the pump processor to “wake up” and start receiving the second series of electrical pulses associated with the information transmitted by the

implantable cardiac rhythm management device **14**. Similarly the stop communication signal may cause the pump processor standby until the next start communication signal is received.

[0076] In some embodiments, the implantable cardiac rhythm management device and the implantable blood pump may be configured to communicate wirelessly. For example in some embodiments, the implantable cardiac rhythm management device may encode information (sensed patient information, time stamps, etc.) and transmit the information by Bluetooth communication to the implantable blood pump. As such, the implantable blood pump may be configured to receive the Bluetooth signal from the implantable cardiac rhythm management device and to decode the signal to determine the type of information sent from the implantable cardiac rhythm management device (e.g., heart rate information, abnormal heart rhythm detection, information associated with patient position or activity, etc.). Thereafter, the implantable blood pump may be configured to adjust a pumping operation (changing pumping modes, speeds, etc.).

[0077] In some embodiments, the implantable cardiac rhythm management device and implantable blood pump may communicate through the conductive pathways of the tissue, similar to the communication methods and systems described in U.S. Patent Publication No. 2007/0088397, the contents of which are incorporated herein by reference in their entirety. Accordingly, in some embodiments, the implantable cardiac rhythm management device may communicate by emitting an electric field which may be conducted through the tissue and detected by one or more sensors of the implantable blood pump.

[0078] While the above systems are generally described for communication between implanted devices, it should be understood that the cardiac rhythm management device and/or the pump may not be fully implanted in other embodiments.

[0079] One or more computing devices may be adapted to provide desired functionality by accessing software instructions rendered in a computer-readable form. When software is used, any suitable programming, scripting, or other type of language or combinations of languages may be used to implement the teachings contained herein. However, software need not be used exclusively, or at all. For example, some embodiments of the methods and systems set forth herein may also be implemented by hard-wired logic or other circuitry, including but not limited to application-specific circuits. Combinations of computer-executed software and hard-wired logic or other circuitry may be suitable as well.

[0080] Embodiments of the methods disclosed herein may be executed by one or more suitable computing devices. Such system(s) may comprise one or more computing devices adapted to perform one or more embodiments of the methods disclosed herein. As noted above, such devices may access one or more computer-readable media that embody computer-readable instructions which, when executed by at least one computer, cause the at least one computer to implement one or more embodiments of the methods of the present subject matter. Additionally or alternatively, the computing device(s) may comprise circuitry that renders the device(s) operative to implement one or more of the methods of the present subject matter.

[0081] Any suitable computer-readable medium or media may be used to implement or practice the presently-dis-

closed subject matter, including but not limited to, diskettes, drives, and other magnetic-based storage media, optical storage media, including disks (e.g., CD-ROMS, DVD-ROMS, variants thereof, etc.), flash, RAM, ROM, and other memory devices, and the like.

[0082] The subject matter of the present invention is described here with specificity, but the claimed subject matter may be embodied in other ways, may include different elements or steps, and may be used in conjunction with other existing or future technologies.

[0083] This description should not be interpreted as implying any particular order or arrangement among or between various steps or elements except when the order of individual steps or arrangement of elements is explicitly described. Different arrangements of the components depicted in the drawings or described above, as well as components and steps not shown or described are possible. Similarly, some features and sub-combinations are useful and may be employed without reference to other features and sub-combinations. Embodiments of the invention have been described for illustrative and not restrictive purposes, and alternative embodiments will become apparent to readers of this patent. Accordingly, the present invention is not limited to the embodiments described above or depicted in the drawings, and various embodiments and modifications may be made without departing from the scope of the claims below.

What is claimed is:

1. A method of assisting a heart of a patient, the method comprising:

sensing, with a controller of an implantable blood pump coupled with a heart of the patient, a series of electrical pulses from an implanted cardiac rhythm management device electrically pacing the heart of the patient at a first frequency with electrical pulses with a first duration of time and a first voltage, the series of electrical pulses sensed by the controller of the implantable blood pump being associated with a type of abnormal heart rhythm detected by the implantable cardiac rhythm management device and being at a second frequency different than the first frequency or including electrical pulses with a second duration of time different than the first duration of time or at a second voltage different from the first voltage;

determining, with the controller of the implantable blood pump, the type of abnormal heart rhythm detected by the implanted cardiac rhythm management device by analyzing a frequency of the series of electrical pulses, a duration of each of the electrical pulses of the series of electrical pulses, or a voltage of each of the electrical pulses of the series of electrical pulses; and

adjusting a pumping protocol of the implantable blood pump based on the type of abnormal heart rhythm determined by the analysis.

2. The method of claim 1, wherein the implantable blood pump determines the type of abnormal heart rhythm by analyzing the frequency of the series of electrical pulses.

3. The method of claim 2, wherein the implantable blood pump determines the type of abnormal heart rhythm by referencing a database associating frequencies of sensed electrical pulses with types of abnormal heart rhythm.

4. The method of claim 2, wherein the implantable blood pump determines the type of abnormal heart rhythm by

comparing the frequency of the series of electrical pulses to one or more frequency thresholds.

5. The method of claim 1, wherein the implantable blood pump determines the type of abnormal heart rhythm by analyzing the durations of each of the electrical pulses of the series of electrical pulses.

6. The method of claim 5, wherein the series of electrical pulses comprises a first pulse with a first duration and a second pulse with a second duration that is different than the first pulse.

7. The method of claim 1, wherein the type of abnormal heart rhythm is determined to be a fibrillation of the heart and wherein the pumping protocol is adjusted to cease the pumping of the implantable blood pump for a predetermined duration of time.

8. A heart treatment system, comprising:

an implantable blood pump configured to couple with a circulatory system of a patient and to pump blood therethrough, the implantable blood pump including a pump processor configured to:

sense a series of electrical pulses from an implanted cardiac rhythm management device electrically pacing the heart of the patient at a first frequency with electrical pulses with a first duration of time and at a first voltage, wherein the series of electrical pulses sensed by the pump processor are associated with a type of abnormal heart rhythm detected by the implanted cardiac rhythm management device and are at a second frequency different than the first frequency or include electrical pulses with a second duration of time different than the first duration of time or electrical pulses at a second voltage different than the first voltage;

determine the type of abnormal heart rhythm detected by the implanted cardiac rhythm management device by analyzing a frequency of the series of electrical pulses, a duration of each of the electrical pulses of the series of electrical pulses, or a voltage of each of the electrical pulses of the series of electrical pulses; and

adjust a pumping protocol of the implantable blood pump based on the type of abnormal heart rhythm determined by the analysis.

9. The heart treatment system of claim 8, wherein the pump processor is configured to determine the type of abnormal heart rhythm by analyzing the frequency of the series of electrical pulses.

10. The heart treatment system of claim 9, wherein the pump processor is configured to determine the type of abnormal heart rhythm by referencing a database associating frequencies of sensed electrical pulses with types of abnormal heart rhythm.

11. The heart treatment system of claim 9, wherein the pump processor determines the type of abnormal heart rhythm by comparing the frequency of the series of electrical pulses to one or more frequency thresholds.

12. The heart treatment system of claim 8, wherein the pump processor determines the type of abnormal heart rhythm by analyzing durations of each of the electrical pulses of the series of electrical pulses.

13. The heart treatment system of claim 12, wherein the series of electrical pulses comprises a first pulse with a first duration and a second pulse with a second duration that is different than the first pulse.

14. The heart treatment system of claim **8**, wherein when the type of abnormal heart rhythm is determined to be a fibrillation of the heart, the pumping processor adjusts the pumping protocol to cease the pumping of the implantable blood pump for a predetermined duration of time.

15. The heart treatment system of claim **8**, wherein the electrical pulses of the series of electrical pulses comprise square wave signals.

* * * * *

专利名称(译)	基于不规则心律调整泵协议		
公开(公告)号	US20180280600A1	公开(公告)日	2018-10-04
申请号	US15/939033	申请日	2018-03-28
[标]申请(专利权)人(译)	联合有限责任公司		
申请(专利权)人(译)	联合有限责任公司		
当前申请(专利权)人(译)	联合有限责任公司		
[标]发明人	HARJES DANIEL I HANSEN JOHN FREDDY STARK III JOSEPH C MAURO GHAZAL ANVAR LEE ERIC CALLAWAY JUSTIN A DUR ONUR		
发明人	HARJES, DANIEL I. HANSEN, JOHN FREDDY STARK, III, JOSEPH C. MAURO, GHAZAL ANVAR LEE, ERIC CALLAWAY, JUSTIN A. DUR, ONUR		
IPC分类号	A61M1/10 A61M1/12 A61B5/024 A61B5/00		
CPC分类号	A61M1/1086 A61M1/122 A61B5/02405 A61B5/0031 A61M1/127 A61M2205/3507 A61M2205/3334 A61M2210/125 A61M1/101 A61M1/1031 A61N1/36507 A61N1/36592		
优先权	62/478424 2017-03-29 US		
外部链接	Espacenet USPTO		

摘要(译)

本发明一般涉及心脏治疗系统。在一些方面，提供了用于促进植入设备之间的通信的方法和系统。例如，可植入心律管理设备可以被配置为与可植入血泵通信。除了与心脏功能中检测到的任何异常相关的信息之外，可植入心律管理设备还可以传递心脏刺激速率信息。作为响应，泵可以配置成通过泵调节泵送以更好地适应患者的特定需要。

