



US 20160161985A1

(19) **United States**
(12) **Patent Application Publication**
Zhang

(10) **Pub. No.: US 2016/0161985 A1**
(43) **Pub. Date: Jun. 9, 2016**

(54) **TECHNIQUES FOR POWER SOURCE MANAGEMENT USING A WRIST-WORN DEVICE**

H02J 7/00 (2006.01)
H02J 7/02 (2006.01)
(52) **U.S. Cl.**
CPC *G06F 1/163* (2013.01); *H02J 7/0027* (2013.01); *H02J 7/025* (2013.01); *A61B 5/02055* (2013.01); *A61B 5/681* (2013.01); *A61B 5/7282* (2013.01); *A61B 5/0022* (2013.01); *A61B 5/486* (2013.01); *A61B 2560/0209* (2013.01)

(71) Applicant: **Jack Ke Zhang**, Ijamsville, MD (US)

(72) Inventor: **Jack Ke Zhang**, Ijamsville, MD (US)

(21) Appl. No.: **14/949,743**

(22) Filed: **Nov. 23, 2015**



Related U.S. Application Data

(63) Continuation-in-part of application No. 14/565,373, filed on Dec. 9, 2014, now Pat. No. 9,197,082.

Publication Classification

(51) **Int. Cl.**
G06F 1/16 (2006.01)
A61B 5/00 (2006.01)
A61B 5/0205 (2006.01)

(57) **ABSTRACT**
A method, apparatus, and/or system for patient wellness monitoring using a wrist-worn device is disclosed. The wrist-worn device may include a faceplate device and a wristband monitoring device. Initially, a sensor of the wrist-worn device may be activated to collect sensor data of a user according to a first regimen. It may be determined that a battery level associated with the wrist-worn may be below a pre-determined threshold. As a result of the batter level, the wrist-worn device may be caused to store a portion of the sensor data in memory. The first regimen may be modified to generate a second regimen. Sensor activation may continue according to the second regimen.

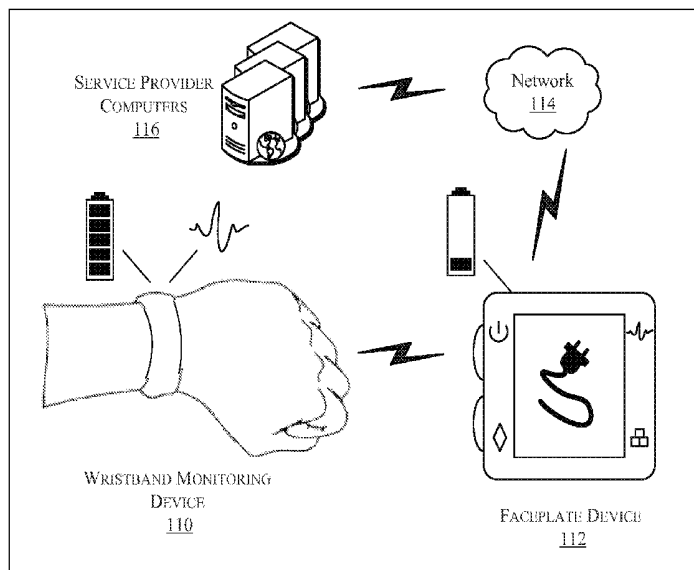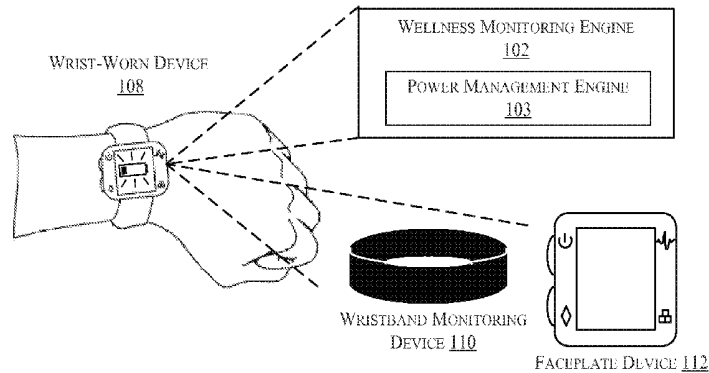

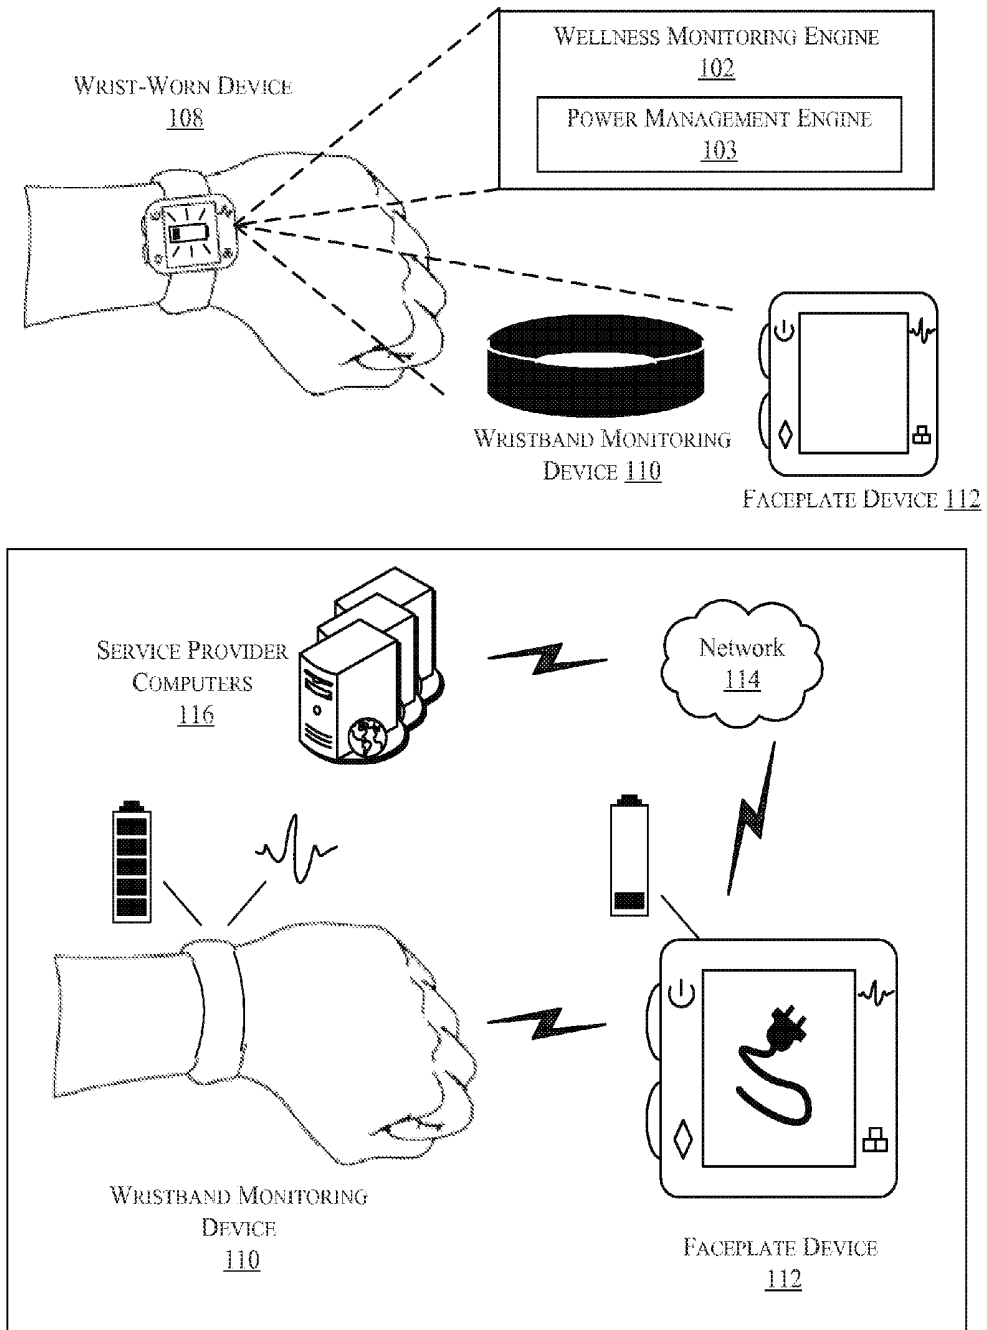


FIG. 1

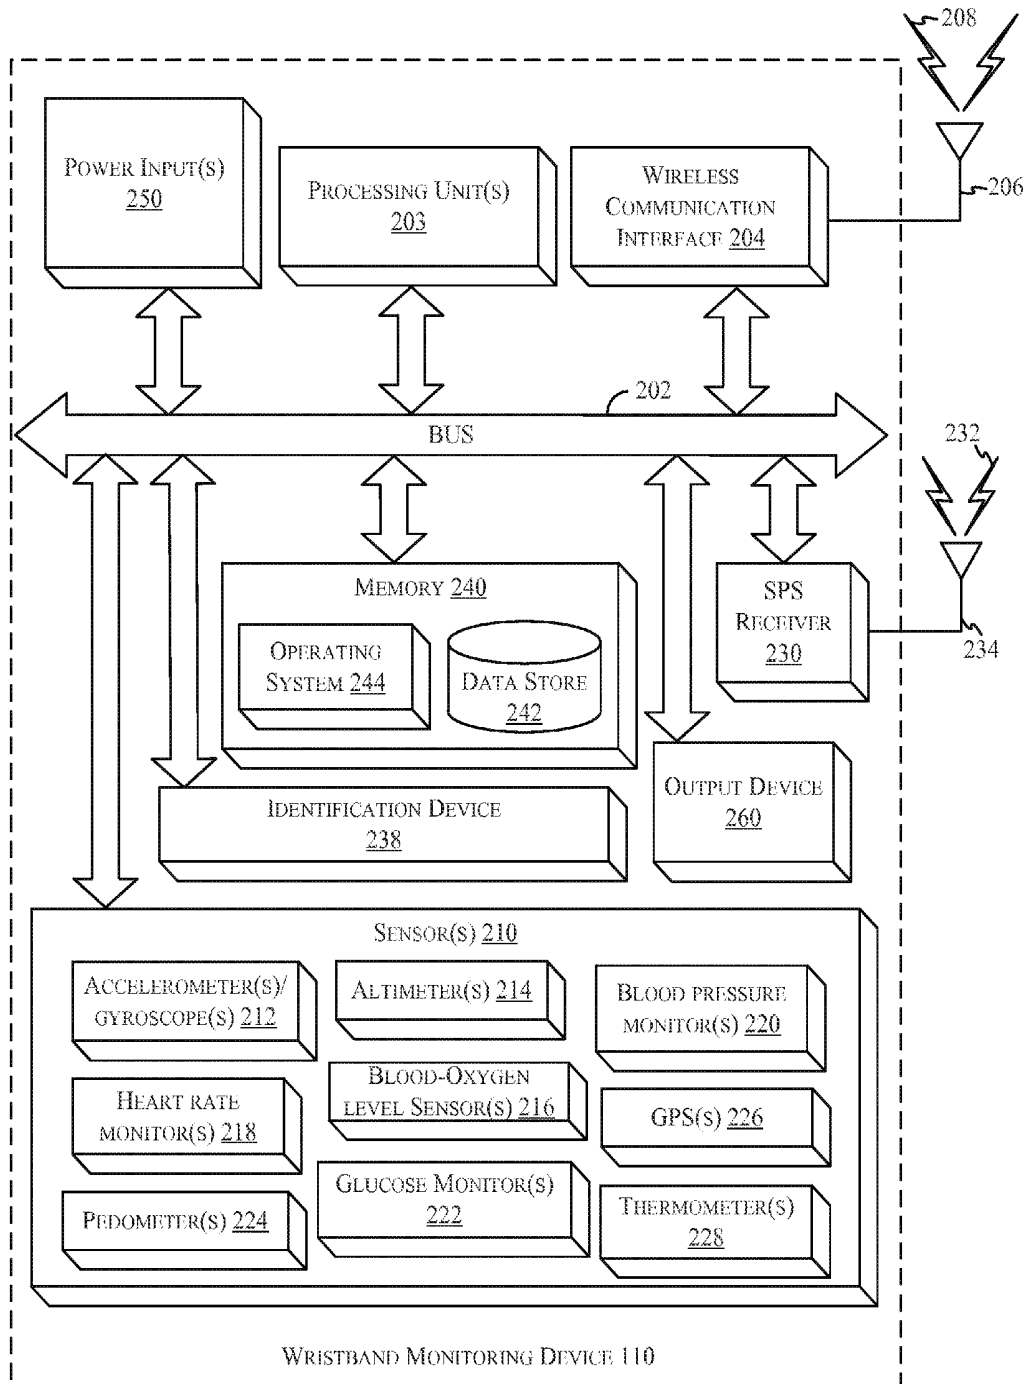


FIG. 2


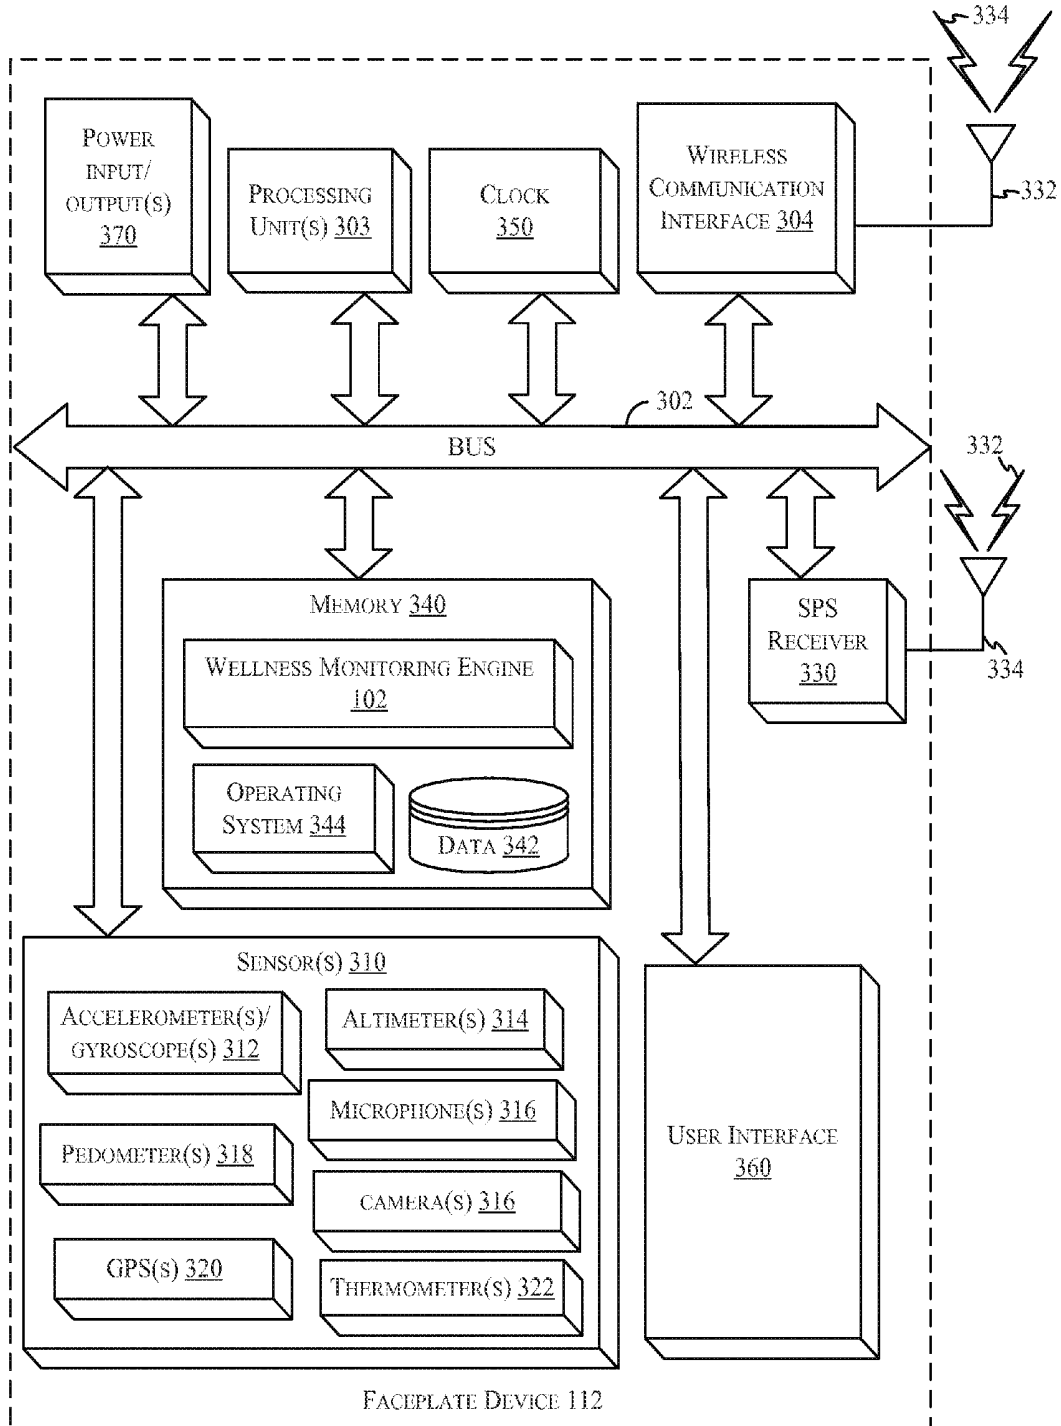


FIG. 3

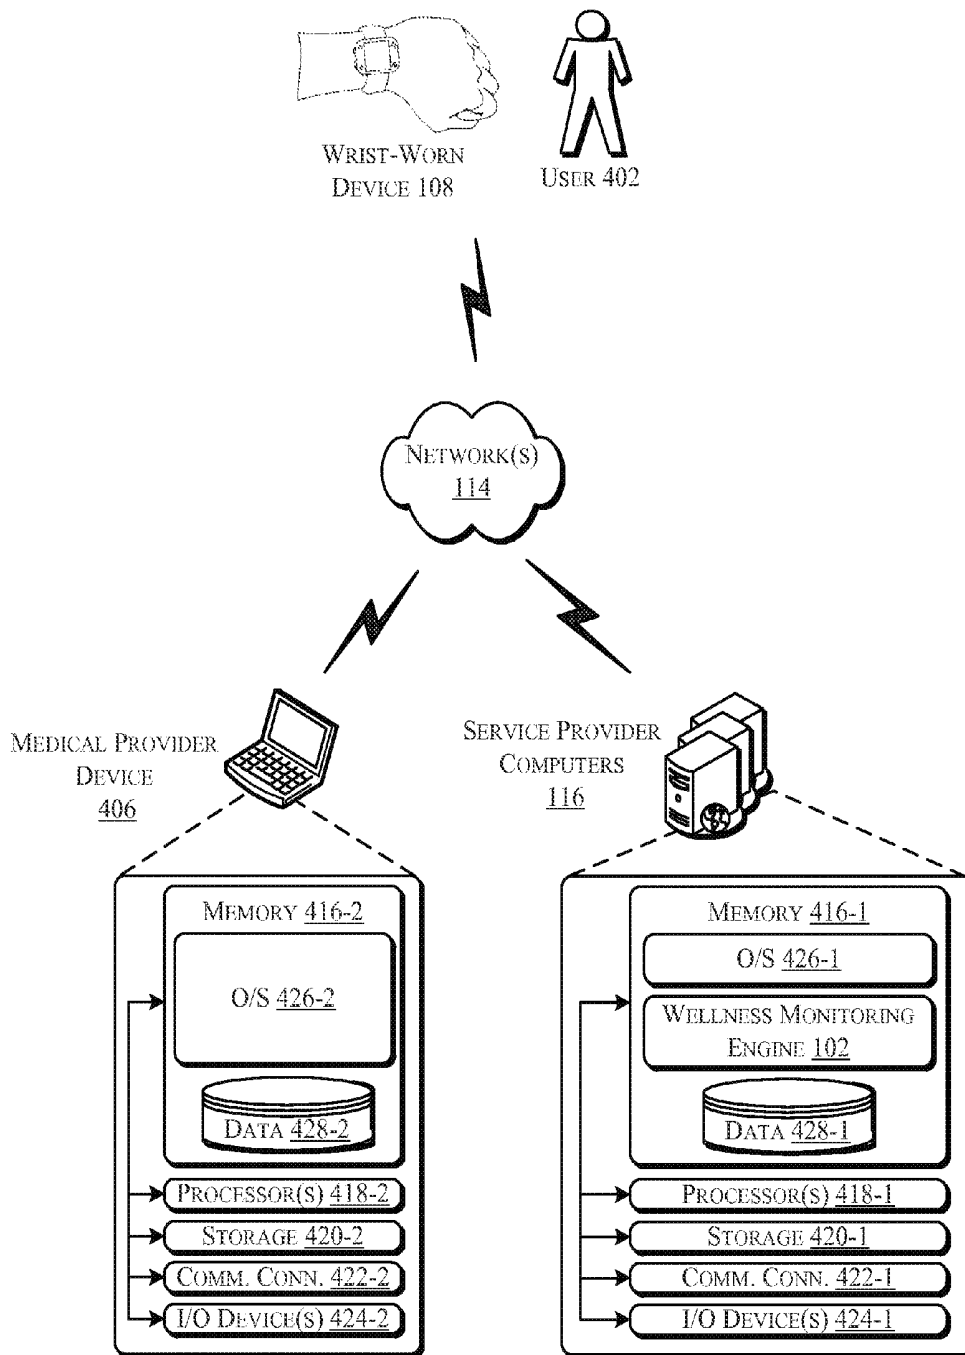

400 →

FIG. 4

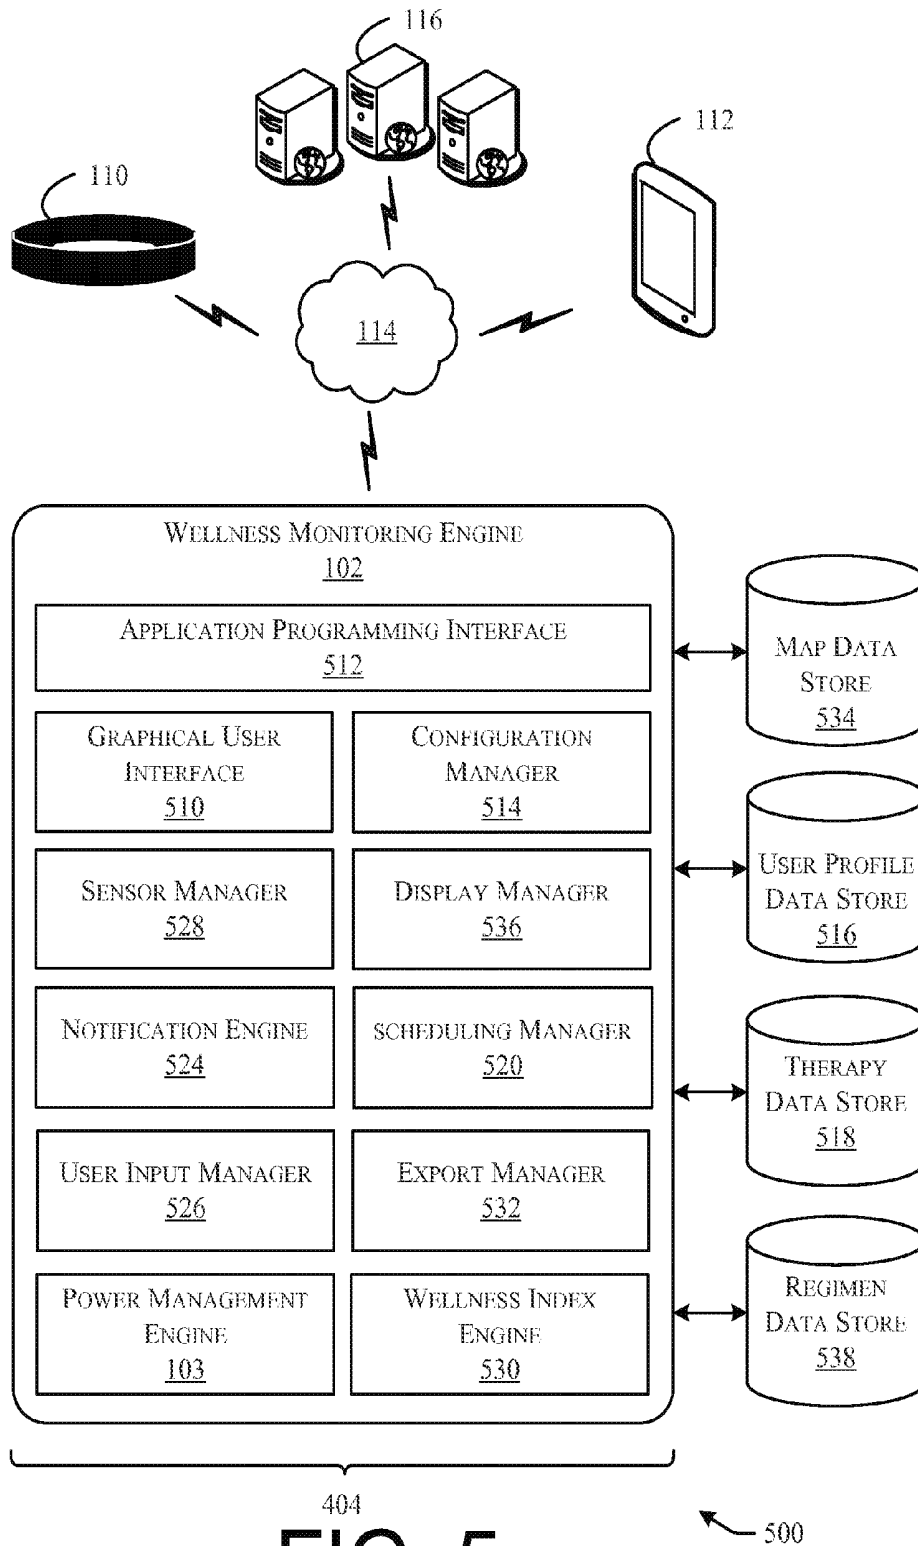


FIG. 5

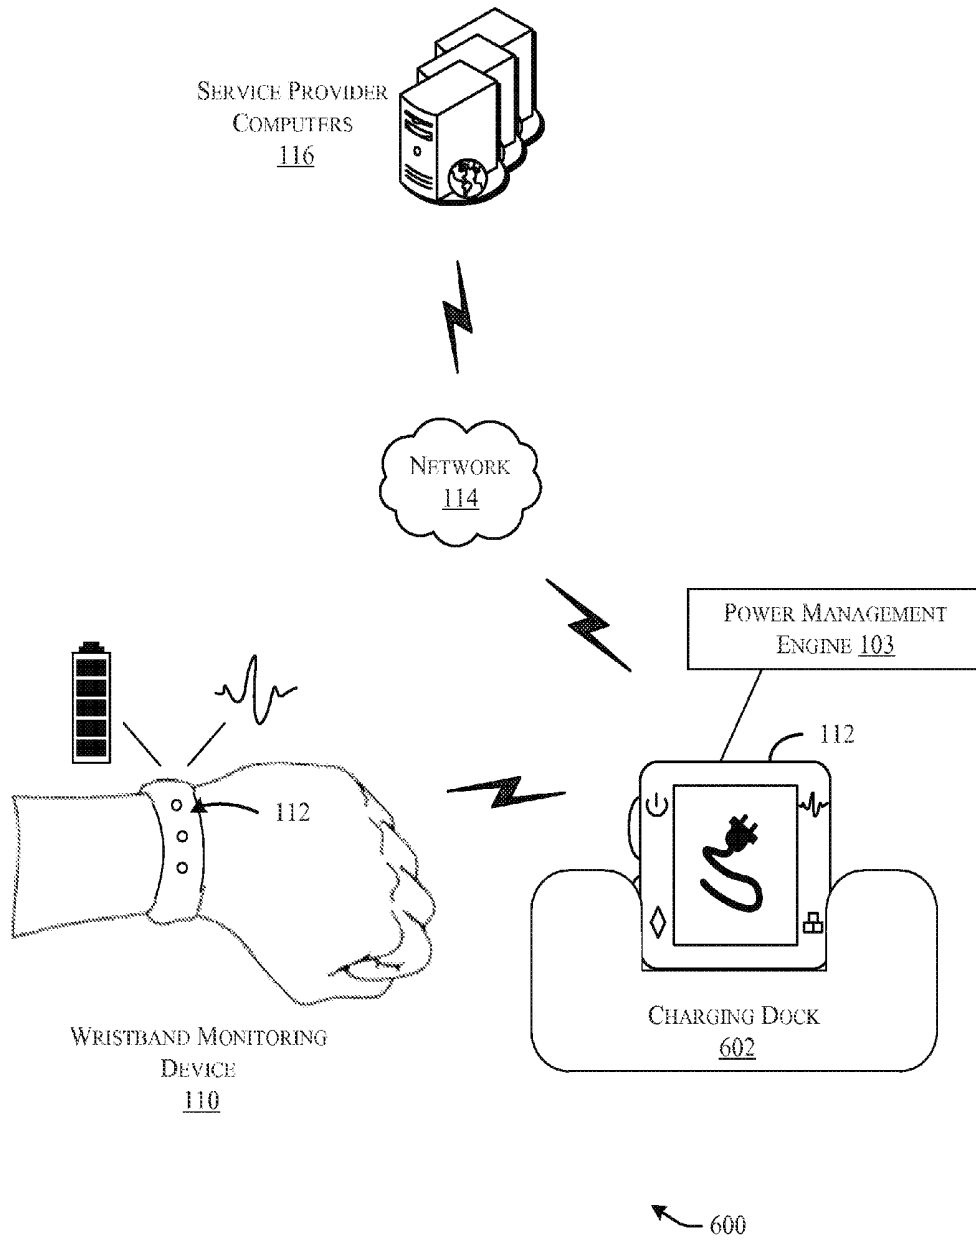


FIG. 6

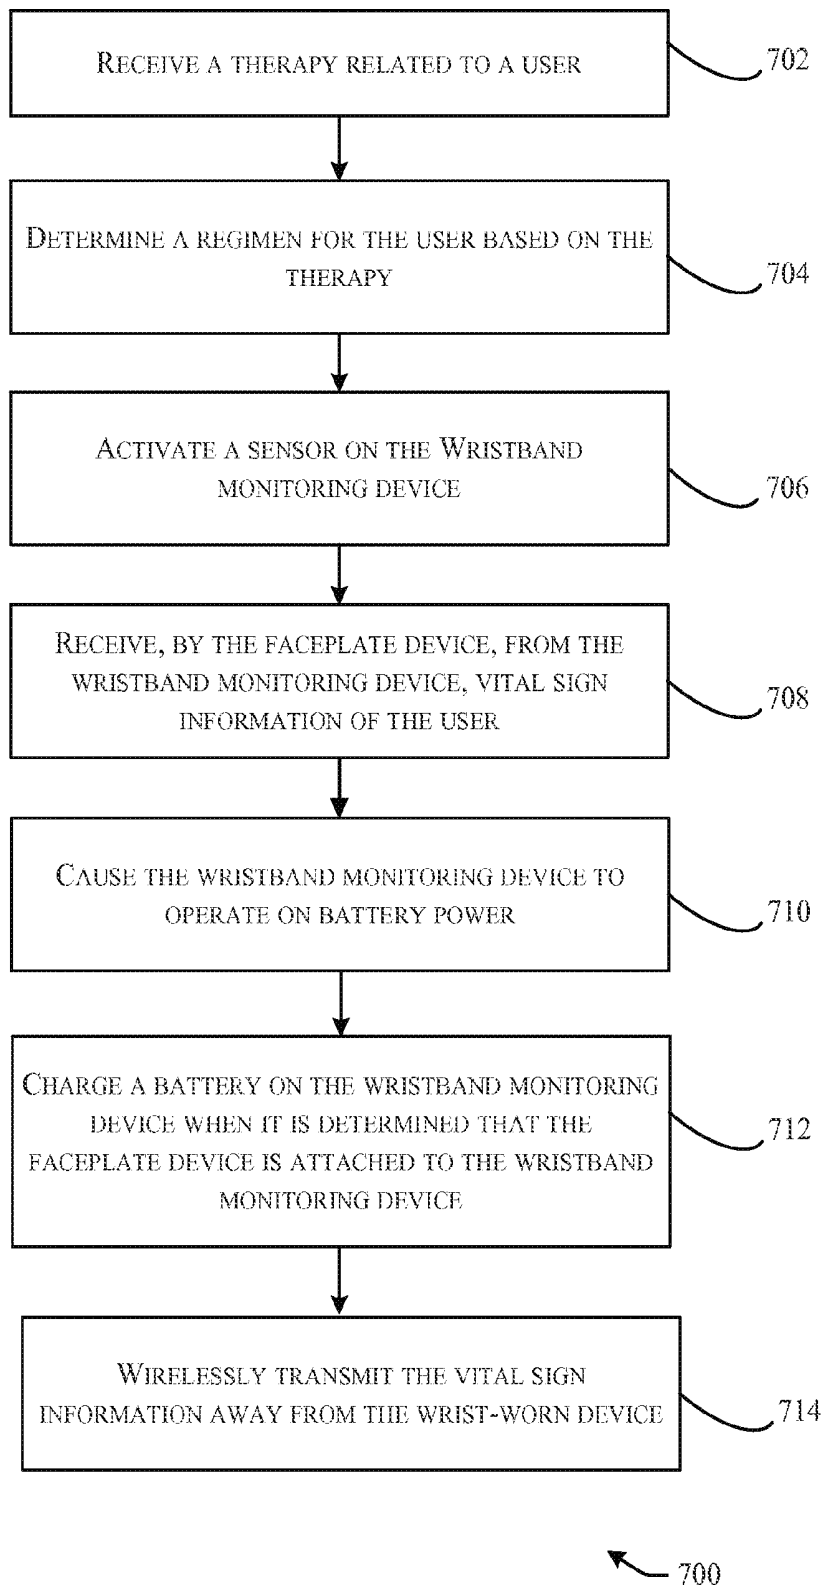


FIG. 7

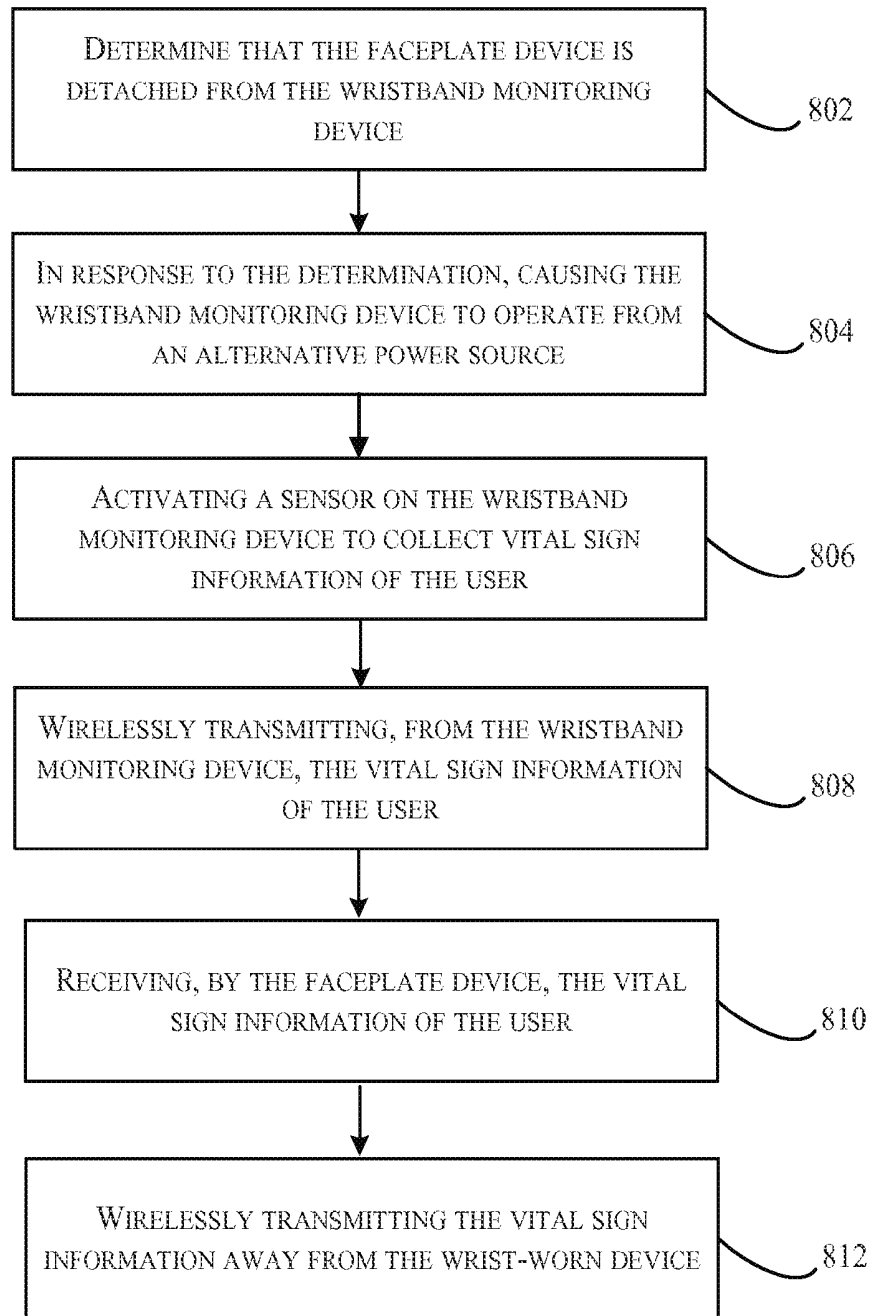


FIG. 8

800

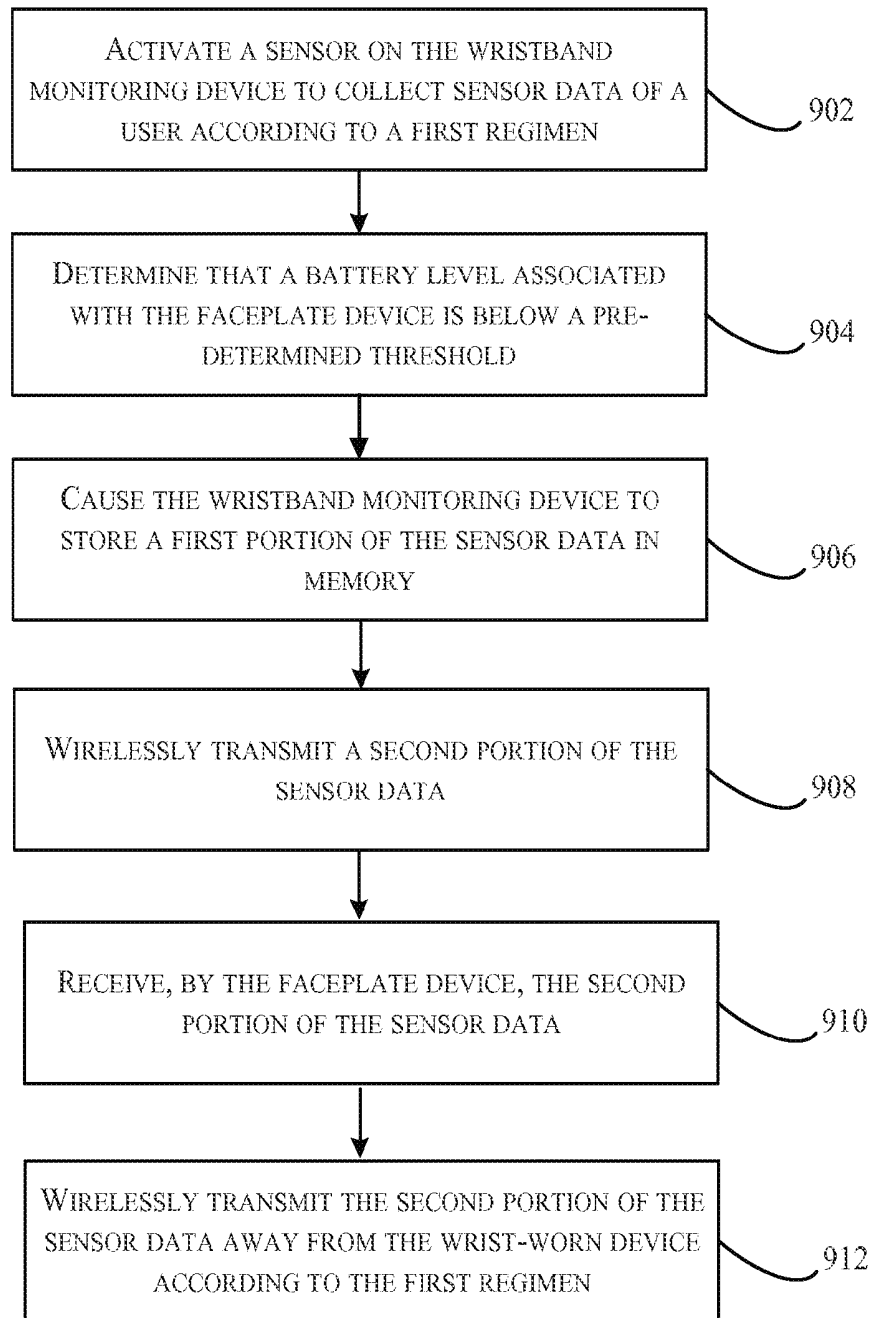


FIG. 9

900

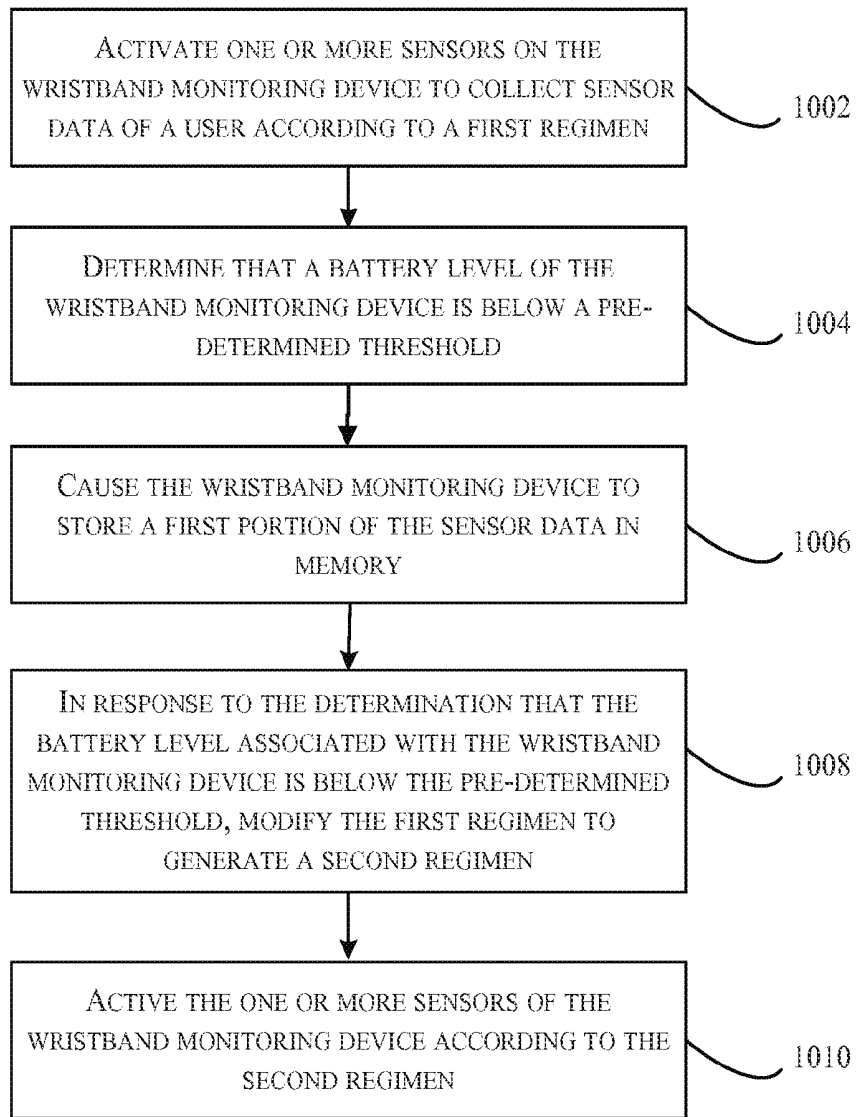


FIG. 10

1000

TECHNIQUES FOR POWER SOURCE MANAGEMENT USING A WRIST-WORN DEVICE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a Continuation-in-Part Application of co-pending U.S. patent application Ser. No. 14/565,373, filed Dec. 9, 2014, entitled “TECHNIQUES FOR POWER SOURCE MANAGEMENT USING A WRIST-WORN DEVICE”, which issued on Nov. 24, 2015 as U.S. Pat. No. 9,197,082, and which is incorporated herein by reference in its entirety.

BACKGROUND

[0002] This disclosure relates in general to power source management and, but not by way of limitation, to systems and methods that are used to manage the power source of devices used to monitor the wellness of a patient.

[0003] In the United States, it is estimated that 32 million people use three or more medications daily. 67 million, or 31 percent, of American adults have high blood pressure. 29 million, or 9.3 percent, of people in the United States are diabetic. The medical cost of obesity in the United States in 2008 alone was approximately \$147 billion. The statistics are staggering as more and more individuals find themselves in need of medical treatment.

[0004] A patient undergoing medical treatment may often be prescribed one or more therapies by his or her physician. Unfortunately, many people who are undergoing treatment do not follow the regimen as directed by their doctor or pharmacist. In fact, as many as 75% of patients fail to adhere to, or comply with, physician-prescribed treatment regimens. Non-adherence examples include, but are not limited to, failing to take a medication, failing to take various sensor (e.g., blood pressure, heart rate, glucose) readings, failing to exercise, to name a few. Monitoring a patient's overall wellness is difficult for medical personnel as patient data is typically collected and available to the medical personnel only when the patient avails himself to a doctor's office or hospital.

[0005] Current techniques related to self-monitoring wellness using a monitoring device are lacking with respect to power management. For example, a patient may have to remove a body-worn device in order to charge the device. During charging, the device may not be monitoring the user. This is especially detrimental to the user who may be using the device to actively monitor serious health concerns.

SUMMARY

[0006] In one example embodiment, the present disclosure provides a wrist-worn device for managing patient wellness. The wrist-worn device includes one or more processors and one or more memories coupled with the one or more processors. The one or more processors and one or more memories are configured to perform operations. The operations include receiving, by the wrist-worn device, a therapy for a user. The therapy may specify one or more treatments selected by a care provider. A regimen may be determined, by the wrist-worn device, for the user based on the therapy. A sensor of the wristband monitoring device may be activated to collect vital sign information of a user. Vital sign information of the user may be received by the faceplate device, from the wristband monitoring device. The wristband monitoring device may be

caused to operate on battery power when it is determined that the faceplate device is detached from the wristband device. A battery of the wristband monitoring device may be charged when it is determined that the faceplate device is attached to the wristband monitoring device. The vital sign information may be wirelessly transmitted away from the wrist-worn device.

[0007] In another example embodiment, the present disclosure provides a computer-implemented method for managing patient wellness with a wrist-worn device. The method includes determining that the faceplate device is detached from the wristband monitoring device. In response to the determination, the wristband monitoring device may operate on battery power. A sensor may be activated on the wristband monitoring device to collect vital sign information of a user. The vital sign information of the user may be wirelessly transmitted from the wristband monitoring device and received by the faceplate device. Upon determining that the faceplate device is attached to the wristband monitoring device, a battery of the wristband monitoring device may be charged.

[0008] In yet another example embodiment, the present disclosure provides a non-transitory computer-readable storage medium for managing patient wellness having computer-executable instructions stored thereon that, when executed by a processor, cause the processor to perform operations. The operations include determining that the faceplate device is detached from the wristband monitoring device. In response to the determination, the wristband monitoring device may be caused to operate from an alternative power source. A sensor of the wristband monitoring device may be activated to collect vital sign information of a user. The vital sign information of the user may be wirelessly transmitting from the wristband monitoring device and received by the faceplate device. The vital sign information may be wirelessly transmitted away from the wrist-worn device.

[0009] In another embodiment, the present disclosure provides a wrist-worn device for managing patient wellness. The wrist-worn device, including a wristband monitoring device and a faceplate device, comprising one or more processors and one or more memories coupled with the one or more processors. The one or more processors and one or more memories are configured to perform operations. The operations include receiving, by the wrist-worn device, a therapy for a user. The therapy may specify one or more treatments selected by a care provider. A regimen may be determined, by the wrist-worn device, for the user based on the therapy. A sensor of the wristband monitoring device may be activated to collect sensor data related to the user. The activation may be in accordance with the regimen. Sensor data related to the user may be received by the faceplate device, from the wristband monitoring device. The sensor data may be wirelessly transmitted away from the wrist-worn device. A battery level associated with the faceplate device may be determined to be below a pre-determined threshold. As a result of the determination that the battery level associated with the faceplate device is below the predetermined threshold, the regimen may be modified for the user such that a future wireless transmission of sensor data is altered according to the modified regimen.

[0010] In another example embodiment, the present disclosure provides a computer-implemented method for managing patient wellness with a wrist-worn device. The method includes activating a sensor of the wristband monitoring

device to collect sensor data of a user according to a first regimen associated with the user. The first regimen may be based on a therapy, the therapy specifying one or more treatments related to patient wellness. A battery level associated with the faceplate device may be determined to be below a pre-determined threshold. In response to the determination that the battery level associated with the faceplate device is below the pre-determined threshold, the wristband monitoring device may be caused to store a first portion of the sensor data in memory. The method may further include wirelessly transmitting from the wristband monitoring device, a second portion of the sensor data. The method may further include receiving, by the faceplate device, the second portion of the sensor data from the wristband monitoring device. The method may further include wirelessly transmitting the second portion of the sensor data away from the wrist-worn device according to the first regimen.

[0011] In once again, another example embodiment, the present disclosure provides a computer-implemented method for managing patient wellness with a wrist-worn device. The method includes activating one or more sensors of the wristband monitoring device to collect sensor data of a user according to a first regimen. The first regimen may be based on a therapy, the therapy specifying one or more treatments related to patient wellness. A battery level associated with the wristband monitoring device may be determined to be below a pre-determined threshold. In response to the determination that the battery level associated with the wristband monitoring device is below the pre-determined threshold, the wristband monitoring device may be caused to store a first portion of the sensor data in memory. In response to the determination that the battery level associated with the wristband monitoring device is below the pre-determined threshold, the method may further include modifying the first regimen to generate a second regimen such that activation of the one or more sensors occurs less frequently in accordance with the second regimen than activation of the one or more sensors occurs in accordance with the first regimen. The method may further include activating the one or more sensors on the wristband monitoring device to collect additional sensor data of a user according to the second regimen.

[0012] Further areas of applicability of the present disclosure will become apparent from the detailed description provided hereinafter. It should be understood that the detailed description and specific examples, while indicating various embodiments, are intended for purposes of illustration only and are not intended to necessarily limit the scope of the disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The present disclosure is described in conjunction with the appended figures:

[0014] FIG. 1 depicts an example environment of an embodiment of a power management engine included in a wellness monitoring engine;

[0015] FIG. 2 depicts an example wristband monitoring device for use with the wellness monitoring engine, in accordance with at least one embodiment;

[0016] FIG. 3 depicts an example faceplate device for use with the wellness monitoring engine, in accordance with at least one embodiment;

[0017] FIG. 4 depicts an example system or architecture for providing a wellness monitoring engine in accordance with at least one embodiment;

[0018] FIG. 5 depicts an example computer architecture for providing a wellness monitoring engine, including a power management engine that may carry out various embodiments;

[0019] FIG. 6 depicts an example of another embodiment of a power management engine;

[0020] FIG. 7 depicts a flowchart of an example method for using the power management engine;

[0021] FIG. 8 depicts a flowchart of another example method for using the power management engine;

[0022] FIG. 9 depicts a flowchart of still another example method for using the power management engine.

[0023] FIG. 10 depicts a flowchart of an additional example method for using the power management engine.

[0024] It should be understood that the drawings are not necessarily to scale. In certain instances, details that are not necessary for an understanding of the invention or that render other details difficult to perceive may have been omitted. It should be understood that the invention is not necessarily limited to the particular embodiments illustrated herein.

DETAILED DESCRIPTION

[0025] The ensuing description provides preferred exemplary embodiment(s) only, and is not intended to limit the scope, applicability, or configuration of the disclosure. Rather, the ensuing description of the preferred exemplary embodiment(s) will provide those skilled in the art with an enabling description for implementing a preferred exemplary embodiment. It should be understood that various changes could be made in the function and arrangement of elements without departing from the spirit and scope as set forth in the appended claims. Specific details are given in the following description to provide a thorough understanding of the embodiments. However, it will be understood by one of ordinary skill in the art that the embodiments may be practiced without these specific details.

[0026] As described in the background of this disclosure, embodiments of the present invention comprise methods for monitoring patient wellness. Specifically, these methods include the use of a wrist-worn device. The wrist-worn device may include one or many sensors that may be used to track vital signs, altitude, movement, temperature, and/or locational information of the patient. As used herein, a "sensor" may comprise an accelerometer, a gyroscope, a blood-oxygen level monitor, heart-rate monitor, a blood pressure monitor, a glucose monitor, a thermometer, a global positioning system (GPS) device, a pedometer, or an altimeter. Additionally, the device may be capable of presenting notifications to the user. These notifications may be audible, haptic, graphical, or textual in nature. The wrist-worn device may include a wristband monitoring device connected to a faceplate device for carrying out the features described herein. The wristband monitoring device has, among other things, a number of sensors located on the band to measure various vital signs, and visual indicators (e.g., LED lights) to indicate charging and sensor activation. The faceplate device includes, among other things, a number of sensors, a wireless transmitter, a battery charger, and a user interface (e.g., a touch screen) for interacting with the user and remote systems.

[0027] Generally speaking, embodiments of the present invention enable a patient to more effectively adhere to a physician-prescribed therapy and monitor overall health using the wrist-worn device described above. Additionally, these embodiments enable ongoing monitoring of a patient's overall wellness.

[0028] Embodiments for the present invention comprise wrist-worn devices and methods for managing patient wellness. In at least one example, a wrist-worn device (e.g., a watch) is preconfigured with information regarding at least one therapy. For instance, the watch is preconfigured to be used for a blood pressure therapy. As used herein, a “therapy” may include one or more medical treatments including, but not limited to, one or more prescribed medications, one or more physical activities, one or more sensor reading requirements, or any combination of the above. In at least one example, information is loaded onto the watch by a physician, a pharmacist, or another service provider. The pre-loaded information is then used to determine a regimen to be followed. A “regimen,” as used herein, is intended to mean a schedule specifying at least one situation for which at least one event associated with one or more therapies should be performed. For instance, a regimen may indicate that an event (e.g. medication intake, exercise commencement, sensor reading commencement) should occur at pre-determined periodic, or non-periodic, times.

[0029] Consider the case where a patient is diagnosed with high blood pressure. His physician prescribes medication A and instructs the patient to take 500 mg of medication A, twice daily, once in the morning, once in the evening, with each dose to be taken shortly after a meal. Additionally, the physician instructs the patient to take his own blood pressure and document the results 3 times daily, equally spanned over the course of the day. In this example, the physician preconfigures a watch with this therapy. A regimen schedule is generated by the watch based on the therapy. The regimen defines at least one day and time during which the patient should take his 500 mg of medication A. The regimen can further define when blood pressure readings may be taken. The watch can generate reminders for the users based on the regimen. Additionally, the watch may stimulate sensor reading intake based on the regimen or by user-initiation.

[0030] In accordance with at least one embodiment, the watch receives user input indicating compliance with the therapy. For instance, continuing with the previous example, the user is reminded to eat prior to taking his medication in accordance with the generated regimen. Subsequent to the reminder being presented to the user, the user may be prompted for input. The prompt may be included in the reminder or may exist as a separate prompt. In at least one example, the reminder constitutes a textual message presented on the faceplate device and/or an audible alert sounded by the faceplate device. The user acknowledges the reminder by dismissing the reminder and/or turning off the audible sound. In some cases, dismissing the reminder and/or turning off the audible sound may be considered user input indicating compliance with the reminder. In at least one example, the user is queried regarding his compliance. For instance, the user is posed the question “did you eat a meal?” The user enters input indicating either that he did eat a meal, or alternatively, that he did not eat a meal. In at least one example, a Bluetooth device is used to enter user input indicating compliance with the reminder. For instance, a medication container having Bluetooth communication capabilities sends, to the watch, an indication that the medication container has been opened. This indication, alone or in combination with the reminder information, constitutes user input indicating that the user has complied with taking his medication.

[0031] In accordance with at least one embodiment, the watch generates reminder events at the time the patient is

supposed to take the medication. The user responds in a similar fashion as described above, by dismissing the reminder, turning off the audible sound, or affirmatively answering a question posed by the device. In at least one example, the regimen dictates that the watch query the user with a question some period of time after the user has indicated that he has taken the medication. For instance, the user enters compliance input indicating that he has taken his blood pressure medication. The regimen specifies that one hour after receipt of the user compliance input the user be asked, “Are you feeling dizzy?” The user makes a selection on the watch indicating a response to the question. The response is recorded by the watch and reported, wirelessly, away from the watch (e.g., to a server responsible for storing such information), or alternatively, stored on the watch.

[0032] In at least one embodiment, the regimen causes a blood pressure sensor to be activated some period after the user compliance input has been received, and/or at another suitable time as defined by the regimen. The period between sensor activations may vary depending on the therapy and may further depend on user input. For example, the device may pose a question to the user to determine whether to initiate the sensor reading. For instance, the device poses the question “are you ready to take your blood pressure?” In at least one example, the user is required to indicate agreement before the sensor reading commences. Alternatively, the watch may initiate a sensor reading without user interaction. The watch records any sensor readings taken and reports the sensor readings away from the watch (e.g., to a server responsible for storing such information). Alternatively, the watch may store such sensor readings on the wrist-worn device.

[0033] In accordance with at least one embodiment, previously received user input is used to modify a regimen. User input, as described above, includes user actions taken in response to presented reminders, user actions taken regarding Bluetooth-enabled containers, user responses to questions posed by the watch, manual modification of the regimen by the user, and/or a lack of a user response. User input may be recorded by the watch at any suitable time. In at least one example, the watch reports user input electronically to a physician and/or pharmacist, for example. This report may be reported in an email message, a text message, or any suitable type of electronic communication. Based on the report, or at any suitable time, the physician and/or pharmacist modify the prescribed therapy. This modification is electronically communicated to the watch. In response to the modification, the watch alters the therapy and/or regimen to reflect the modification. Additionally, or alternatively, the watch modifies the regimen based on the received user responses in accordance with the therapy. For instance, the therapy is configured to adjust medication in response to a certain one or more user inputs. In one illustrative example, the regimen indicates that the user take 500 mg of medication A once a day. However, the user is posed a question such as “do you feel dizzy?” at some point in therapy, in accordance with the current regimen. The user indicates that he feels dizzy. Based on the affirmative response, the watch automatically modifies the regimen such that the user is prompted to take another 500 mg dose of medication A. Alternatively, the watch indicates to the user that he should refrain from taking any more medication. As yet another example, the dose may be adjusted to 250 mg of medication A as a result of the user input in accordance with the therapy. Additionally, or alternatively, a separate medication, medication B, may be substituted for medication

A (or added to augment medication A) in a suitable dose. A variety of modifications may be determined and would depend on the particular therapy being implemented and the user input received. In any of the afore-mentioned examples, the regimen is adjusted according to the change resulting from the user input, and the user is notified at the time of the change in regimen, at the time of the next event in the regimen, or at any suitable time.

[0034] In accordance with at least one embodiment, a user may detach a faceplate device on the wrist-worn device from a wristband device in order to charge the faceplate device (e.g., via A/C adaptor, via proximity charging or inductive charging techniques including magnetic or acoustic methods). While the faceplate device is charging, the user may wear and operate the wristband device. While detached, the wristband monitoring device and faceplate monitoring device may still communicate with one another wirelessly (e.g., via Bluetooth). During such time, the wristband device may operate using a power source located on the wristband device (e.g., a battery). When the faceplate device has charged, the user may reattach the faceplate device to the wristband device. Upon reattachment, a power source located on the wristband monitoring device may charge from a power source located on the faceplate device.

[0035] In accordance with at least one embodiment, the wrist-worn device may determine that a battery (e.g., a battery on the faceplate device and/or a battery on the wristband device) is low (e.g., under 25% remaining battery life). Accordingly, the wrist-worn device may automatically begin operating in a low-power mode. In some situations, the faceplate monitoring device may be operating in low-power mode while the wristband device is now, or vice versa. While in low-power mode, operations on the faceplate monitoring device and/or the wristband device may be altered to conserve battery life while still performing critical functions including, but not limited to, sensor monitoring, data storage, alert notification, wellness index calculations, emergency detection/notification, and/or data transmission away from the wrist-worn device.

[0036] Referring now to the drawings, in which like reference numerals represent like parts, FIG. 1 depicts an example environment of an embodiment 100 of a power management engine included in a wellness monitoring engine. The wrist-worn device 108 can include a wellness monitoring engine 102. The wellness monitoring engine 102 may include a power management engine 103. In accordance with at least one embodiment, the wrist-worn device 108 may be pre-configured with a prescribed therapy (e.g., by a medical provider). For example, a medical provider (or suitable administrator) may select from a number of pre-determined therapies and modify his selected therapy to meet the needs of the patient for which the wrist-worn device is intended. Alternatively, the wrist-worn device may be configured with a custom therapy. The wrist-worn device may include a wristband monitoring device 110 and a faceplate device 112. The wrist-worn device 108 utilizes one or more sensors (e.g., on the wristband monitoring device 110) to monitor the patient's vital signs according to the regimen. The wrist-worn device 108 enables interaction between the wellness monitoring engine 102 and the user. The wrist-worn device 108 may be used to illicit user input, to display information to the user, to wirelessly transmit patient data to service provider computers 116, and to receive information or data from service provider computers 116.

[0037] In at least one embodiment, the wellness monitoring engine 102 is a component of the wrist-worn device 108. Service provider computers 116 includes one or more computing devices responsible for storing and/or managing medical-related data associated with the patient. Service provider computers 116 may communicate wirelessly with wellness monitoring engine 102 to provide information regarding the therapy via a network 114. This information includes therapy configuration. Additionally, as described above, the medical provider 104 can utilize the medical provider device 406 to modify a therapy. Such modifications are communicated to service provider computers 116 via the network 114. Service provider computers 116 records such modifications and communicates the modifications to wellness monitoring engine 102. Wellness monitoring engine 102 generates a new regimen or, alternatively, alters an existing regimen in accordance with the modifications.

[0038] In some embodiments network 114 is a cellular network. Wrist-worn device 108 may exchange cellular network control, timing and status information with a cellular network access point so as to maintain communication capabilities in the cellular network. Cellular network access points may provide access to the internet or other data networks. The wrist-worn device 108 may establish an internet connection by detecting a cellular access point, performing joining procedures, and regularly exchanging status, control and routing information with the access point. The wrist-worn device 108 may use the internet connection to access weather data, GPS data, or to communicate with other devices described herein.

[0039] In at least one embodiment, wristband monitoring device 110 may be operated separately from faceplate device 112. For example, a user, wanting to sleep with a less bulky apparatus, may detach faceplate device 112 from wristband monitoring device 110. While detached, the faceplate device 112 may be charged via a charging dock, an A/C adaptor, inductive charging using magnetic or acoustic methods, or any suitable means for charging an electronic device. While detached, faceplate device 112 and wristband monitoring device 110 may continue communicating (e.g., via Bluetooth). For example, perhaps user's regimen specifies that blood pressure readings are to be taken every three hours. Faceplate device 112 may continue to activate sensors on wristband monitoring device 110 according to the regimen. Accordingly, wristband monitoring device 110 may wirelessly transmit (e.g., via Bluetooth) vital sign information to faceplate device 112. While detached, wristband monitoring device 110 may be configured to run on an alternate power source (e.g., a battery located on wristband monitoring device 110). When reattached, faceplate device 112 may serve as a charging source (e.g., via inductive charging) for wristband monitoring device 110. In this manner, the user may continue to have his vital signs monitored while wearing only the wristband monitoring device 110. Additionally, wristband monitoring device 110 is configured to be charged from faceplate device 112 without the need to remove wristband monitoring device 110 from the user.

[0040] In at least one embodiment, a battery operating on the wristband monitoring device 110 and/or the faceplate device 112 may fall below a pre-determined threshold. Upon determining that the battery has fallen under the threshold, operations on the wristband monitoring device 110 and/or the faceplate device 112 may be altered. Additionally, or alternatively, the regimen may be modified to extend battery life on one or both devices. As a non-limiting example, the faceplate

device 112, upon reaching a particular threshold of remaining battery life, may cause a display to dim to a lower illumination output in order to conserve battery life. A lower illumination output, in this case, may take less battery power than operating with an interface with a higher illumination output. In some cases, the faceplate device 112 may turn off its display altogether in order to conserve battery life. Still in further examples, the faceplate device 112 may cause only portions of the display to remain active (e.g., blinking lights, a time readout, etc.) in order to extend the remaining battery life. The faceplate device 112 may turn off all, or substantially all, wireless communications in order to conserve battery power. In some cases, the faceplate device 112 may prioritize communications such that some communications occur, and others (e.g., lesser-priority communications) that would normally occur, do not occur.

[0041] Likewise, the wristband monitoring device 110 may, upon determining that its battery has fallen under a pre-determined threshold, alter operations on the wristband monitoring device 110, or cause the regimen to be modified, in order to extend batter life. For example, the wristband monitoring device 110 may report a low battery status to the faceplate device 112, causing the faceplate device 112 to modify the regimen such that fewer sensor readings are taken by the wristband monitoring device, for example. In other examples, the wristband monitoring device 110 may directly cause the regimen to be altered (e.g., by communicating with the service provider computers 116 via the network 114). In at least one embodiment, the wristband monitoring device 110 may continue taking sensor readings, at a same or altered rate, but store such data locally, rather than transmit the data to the faceplate device 112. The wristband monitoring device 110 may turn off all, or substantially all, wireless communications in order to conserve battery power. In some cases, the wristband monitoring device 110 may prioritize communications such that some communications occur, and others (e.g., lesser-priority communications) that would normally occur, do not occur.

[0042] It should be appreciated that the faceplate device 112 and/or the wristband monitoring device 110 may perform various battery-saving techniques when reaching a same, or different pre-determined threshold. For example, a power saving mode on the faceplate device 112 may be activated upon remaining battery life reaching, or falling under 35% of total capacity, while the wristband monitoring device 110 may activate a power saving mode upon remaining battery life reaching, or falling under, 25% of total capacity. Further, operations on either or both devices may be altered in a step-wise fashion, with some operations being altered upon reaching a first threshold, while others are altered upon reaching a second (e.g., lower) threshold. In at least one embodiment, some or all of the battery-saving techniques and/or pre-determined thresholds discussed herein may be configured by the medical provider and/or the user during setup and/or operation of the wrist-worn device 108.

[0043] FIG. 2 depicts an example of the wristband monitoring device 110 of the wrist-worn device 108. It should be noted that FIG. 2 is meant only to provide a generalized illustration of various components, any or all of which may be utilized as appropriate. In some embodiments, some or all of the components included in the wristband monitoring device 110 may also or instead be located on the faceplate device 112. Moreover, system elements may be implemented in a relatively separated or relatively more integrated manner.

[0044] The wristband monitoring device 110 is shown comprising hardware elements that can be electrically coupled via a bus 202 (or may otherwise be in communication, as appropriate). The hardware elements may include a processing unit(s) 203 which can include without limitation one or more general-purpose processors, one or more special-purpose processors (such as digital signal processors (DSPs), application specific integrated circuits (ASICs), and/or the like), and/or other processing structure or means, which can be configured to perform one or more of the methods described herein.

[0045] The wristband monitoring device 110 might also include a wireless communication interface 204, which can include without limitation a modem, a network card, an infrared communication device, a wireless communication device, and/or a chipset (such as a Bluetooth device, an IEEE 802.11 device, an IEEE 802.15.4 device, a Wi-Fi device, a WiMax device, cellular communication facilities, etc.), and/or the like. The wireless communication interface 204 may permit data to be exchanged with a network, wireless access points, other computer systems, and/or any other electronic devices described herein. The communication can be carried out via one or more wireless communication antenna(s) 206 that send and/or receive wireless signals 208. In at least one embodiment, wristband monitoring device 110 may communicate with faceplate device 112 via the wireless communication interface 204.

[0046] Depending on desired functionality, the wireless communication interface 204 can include separate transceivers to communicate with base transceiver stations (e.g., base transceiver stations of a cellular network) and access points. These different data networks can include, an Orthogonal Frequency-Division Multiple Access (OFDMA), Code Divisional Multiple Access (CDMA), Global System for Mobile Communications (GSM), and/or other types of networks.

[0047] The wristband monitoring device 110 can further include sensor(s) 210. Such sensors can include, without limitation, one or more accelerometer(s) and/or gyroscope(s) 212, altimeter(s) 214, blood-oxygen level sensor(s) 216, heart rate monitor(s) 218, blood pressure monitor(s) 220, glucose monitor(s) 222, pedometer(s) 224, GPS(s) 226, thermometer(s) 228, and the like. At least a subset of the sensor(s) 220 can provide readings used to provide wellness monitoring as described herein.

[0048] Embodiments of wristband monitoring device 110 may also include a Satellite Positioning System (SPS) receiver 230 capable of receiving signals 232 from one or more SPS satellites using an SPS antenna 234. Such positioning can be utilized to complement and/or incorporate the techniques described herein. The SPS receiver can receive satellite data that can be transmitted to the GPS sensor 226. The satellite data can be information sufficient to allow the GPS sensor 226 to determine a geographic location of the wristband monitoring device based on the satellite data. It can be noted that, as used herein, an SPS may include any combination of one or more global and/or regional navigation satellite systems and/or augmentation systems, and SPS signals may include SPS, SPS-like, and/or other signals associated with such one or more SPS.

[0049] Embodiments of wristband monitoring device 110 may also include an identification device 238. Identification device 238 may include a device that utilizes radio-frequencies in communication (e.g., a radio-frequency identification (RFID) device). A RFID device is a device that uses electro-

magnetic fields to transfer data for the purposes of automatically identifying and tracking tags attached to objects, the tags containing electronically stored information. Other identification devices may be utilized, including, but not limited to devices utilizing near field communication (NFC). NFC is a set of standards used by smartphone and similar devices to establish radio communication with each other by touching them together or bring them into proximity of one another. In at least one embodiment,

[0050] The wristband monitoring device **110** may further include or be in communication with a memory **240**. The memory **240** is an example of a computer-readable storage media. In at least one example, computer-readable storage media include volatile or non-volatile, removable or non-removable, media implemented in any method or technology for storage of information such as computer-readable instructions, data structures, program modules, or other data. Additional types of computer storage media that may be included in the wristband monitoring device **110** may include, but are not limited to, PRAM, SRAM, DRAM, RAM, ROM, EEPROM, flash memory or other memory technology. CD-ROM, DVD or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by the wristband monitoring device **110**. Combinations of any of the above should also be included within the scope of computer-readable media. Memory **240** can further be used to store sensor data for any combination of sensors **210** in data store **242**. Additionally, or alternatively memory **240** may be used to store medical-related data for the user.

[0051] Turning to the contents of the memory **240** in more detail, the memory **240**, in at least one embodiment, includes an operating system **244** and one or more application programs, modules, or services for implementing the features disclosed herein including at least the perceived latency, such as via the wristband monitoring device **110** or dedicated applications. In at least one example embodiment, the wristband monitoring device **110** is configured to receive, store, and/or display content and at least one interface for interacting with the service provider computers **116** and/or user. Additionally, the memory **240** stores access credentials and/or other user information such as, but not limited to, user IDs, passwords, and/or other user information. In some examples, the user information includes information for authenticating an account access request such as, but not limited to, a device ID, a cookie, an IP address, a location, or the like. Additionally, the user information may include medical-related data associated with the user.

[0052] As used herein, medical-related data can include, for example, health information that is created or received by a health care provider, a processed or unprocessed version of medical data detected by medical equipment, and/or user-identified data. Medical-related data can include information that identifies a patient, such as personal information and/or demographic information. For example, the information can identify a patient's name, age, sex, race, physical address, phone number, email address and/or social security number. Medical-related data may include information collected by a health plan, a public health authority, an employer, a life insurer, a school or university, or a health care clearinghouse that relates to the past, present, or future physical or mental health or condition of any individual.

[0053] Medical-related data can include financial and/or insurance information corresponding to the patient. For example, the information can identify an insurance company, insurance plan, member identification number, group number, insurance contact information (e.g., address and/or phone number), deductible information, out-of-pocket information, copay information, an employer, an occupation and/or salary information.

[0054] Medical-related data can include medical-history information, such as past diagnoses, past or present symptoms or past procedures and/or corresponding dates (e.g., of diagnoses, symptom initiations and/or procedures). Medical-related data can identify past or present medications being taken by or having been prescribed to the patient and corresponding dates. In some examples, the medical-related data can identify orders pharmacology orders, whether associated with a patient, doctor, or otherwise.

[0055] Medical-related data can include an identification of one or more medical services being or having been requested by a patient. A medical service can include, for example, an evaluation performed by a medical care professional, a medical test, a surgery and/or other procedure. Medical-related data can identify a medical test or analysis that was performed or prescribed and/or a result of the test or analysis. For example, information can indicate that a test (e.g., lab test, MRI, x-ray, CT scan, echocardiography, EKG, EEG, EMG, or ultrasound) was performed on a particular date and/or by a particular entity and can further include a processed and/or unprocessed result of the test (e.g., a count or level; an indication as to whether a test result is normal; and/or an indication as to whether a particular feature (e.g., a fracture, tumor, lesion, slowed nerve conduction) was observed and/or a magnitude of the feature).

[0056] Medical-related data can identify one or more care providers or institutions. The care provider and/or institution can be one associated with recent or past care and/or with the patient. For example, data can be transmitted for a patient admitted in Hospital A and being treated by Specialist B, though the data can also identify that the patient's primary care physician is Doctor C.

[0057] Medical-related data can identify one or more emergency contacts or family members and contact data for the individuals. For example, medical-related data can identify that the patient's emergency contact is an adult child that may be contacted at a provided phone number.

[0058] Medical-related data can identify a patient health-care directive. For example, medical-related data can identify if the patient has a living will, a do not resuscitate order (DNR), or if another individual has the right to make medical decisions relating to the patient's medical care.

[0059] Medical-related data may further include one or more authorized viewers. Authorized viewers are those that the user has agreed to allow access to his medical-related data. For example, a user may authorize a doctor, an individual having rights to make medical decision related to the patient's medical care, a medical institution, and the like to access his medical-related data. The user may indicate that the authorization is contingent on certain events transpiring (e.g., an emergency situation).

[0060] Medical-related data may, or may not, selectively pertain to a particular patient. For example, non-patient-specific data may include a price of a prescription, a recommended or approved dosing schedule for a medication, a work schedule for a physician, an acceptance criteria for a clinical

study, Non-patient-specific data can include information pertaining to the operation of a medical care facility, financial information, administrative information, and generic clinical information.

[0061] Medical-related data can, depending on the implementation, include individually identifiable health information and/or de-identified information. Individually identifiable health information includes, for example, health information, including demographic information collected from an individual that is created or received by a health care provider, health plan, employer, or health care clearinghouse; and that relates to the past, present, or future physical or mental health or condition of an individual, the provision of health care to an individual, or the past, present, or future payment for the provision of health care to an individual; and that identifies the individual; or, with respect to which there is a reasonable basis to believe, can be used to identify the individual. De-identified information includes information that cannot be used on its own or with other information to identify a person to whom the information belongs. De-identified information can include normal ranges or values associated with various sensor data based on gender, age, or other classification. De-identified information can also include medical-related data aggregated from other wrist-worn device users or non-users related.

[0062] As used herein, medical-related data can include protected health information, which can include individually identifiable health information that is transmitted by electronic media, maintained in electronic media, or transmitted or maintained in any other form or medium. Examples of protected health information, include, for example any information about health status, provision of health care, or payment that can be linked to a particular patient and may include any of the following information capable of identifying the patient: names, geographic identifiers, dates directly relating to the patient, phone numbers, fax numbers, email addresses, social security numbers, medical record numbers, health insurance beneficiary numbers, account numbers, certificate/license numbers, vehicle identifiers and serial numbers, device identifiers and serial numbers, web Uniform Resource Locators, Internet Protocol addresses, biometric identifiers (e.g., finger, retinal, and voice prints), full face photographic images and any comparable images, and any other unique identifying number, characteristic, or code.

[0063] The memory 240 of the wristband monitoring device 110 also can comprise software elements (not shown), device drivers, executable libraries, and/or other code, such as one or more application programs, which may comprise computer programs provided by various embodiments, and/or may be designed to implement methods, and/or configure systems, provided by other embodiments, as described herein.

[0064] The wristband monitoring device 110 includes a output device 260. Output device 260 may include LED lights or other visual or audible indicators. The output device 260 may be used to indicate when a sensor is activated, when a reading is being taken, when the wristband monitoring device 110 is being charged, when the wristband monitoring device 110 is low on power, and the like.

[0065] The wristband monitoring device 110 includes a power source, and a means to charge said power source, indicated by power input(s) 250. In at least one embodiment, wristband monitoring device 110 may be connected to faceplate device 112 and the power source of the wristband monitoring

device 110 may be charged (e.g., via inductive charging including magnetic or acoustic methods) from the battery of faceplate device 112. The power source may include a battery, a capacitor, or any other suitable means for storing chemical or electrical energy for later use.

[0066] FIG. 3 depicts an example faceplate device (e.g., faceplate device 112) of wrist-worn device 108, in accordance with at least one embodiment. Faceplate device 112 can implement the wellness monitoring techniques discussed herein. It should be noted that FIG. 3 is meant only to provide a generalized illustration of various components, any or all of which may be utilized as appropriate. In some embodiments, some or all of the components included in the faceplate device 112 may also or instead be located on the wristband monitoring device 110. Moreover, system elements may be implemented in a relatively separated or relatively more integrated manner.

[0067] The faceplate device 112 is shown comprising hardware elements that can be electrically coupled via a bus 302 (or may otherwise be in communication, as appropriate). The hardware elements may include a processing unit(s) 310 which can include without limitation one or more general-purpose processors, one or more special-purpose processors (such as digital signal processors (DSPs), application specific integrated circuits (ASICs), and/or the like), and/or other processing structure or means, which can be configured to perform one or more of the methods described herein.

[0068] The faceplate device 112 might also include a wireless communication interface 304, which can include without limitation a modem, a network card, an infrared communication device, a wireless communication device, and/or a chipset (such as a Bluetooth device, an IEEE 802.11 device, an IEEE 802.15.4 device, a Wi-Fi device, a WiMax device, cellular communication facilities, etc.), and/or the like. The wireless communication interface 304 may permit data to be exchanged with a network, wireless access points, other computer systems, and/or any other electronic devices described herein (e.g. the wristband monitoring device 110). The communication can be carried out via one or more wireless communication antenna(s) 306 that send and/or receive wireless signals 308. For example, the wireless signals 308 can be cellular network signals or a Bluetooth connection. In at least one embodiment, wristband monitoring device 110 may communicate with faceplate device 112 via the wireless communication interface 304.

[0069] Depending on desired functionality, the wireless communication interface 304 can include separate transceivers to communicate with base transceiver stations (e.g., base transceiver stations of a cellular network) and access points. These different data networks can include, an Orthogonal Frequency-Division Multiple Access (OFDMA), Code Divisional Multiple Access (CDMA), Global System for Mobile Communications (GSM), and/or other types of networks.

[0070] The faceplate device 112 can further include sensor(s) 310. Such sensors can include, without limitation, one or more accelerometer(s) and/or gyroscope(s) 312, altimeter(s) 314, microphone(s) 316, pedometer(s) 318, GPS(s) 320, thermometer(s) 322, and the like. At least a subset of the sensor(s) 310 can provide readings used to provide wellness monitoring as described herein.

[0071] Embodiments of wristband monitoring device 110 may also include a Satellite Positioning System (SPS) receiver 330 capable of receiving signals 332 from one or more SPS satellites using an SPS antenna 334. The SPS

receiver can receive satellite data that can be transmitted to the GPS sensor 320. The satellite data can be information sufficient to allow the GPS sensor 320 to determine a geographic location of the wristband monitoring device based on the satellite data. Such positioning can be utilized to complement and/or incorporate the techniques described herein. It can be noted that, as used herein, an SPS may include any combination of one or more global and/or regional navigation satellite systems and/or augmentation systems, and SPS signals may include SPS, SPS-like, and/or other signals associated with such one or more SPS.

[0072] The faceplate device 112 may further include or be in communication with a memory 340. The memory 340 is an example of a computer-readable storage media. In at least one example, computer-readable storage media include volatile or non-volatile, removable or non-removable media implemented in any method or technology for storage of information such as computer-readable instructions, data structures, program modules, or other data. Additional types of computer storage media that may be included in the faceplate device 112 may include, but are not limited to, PRAM, SRAM, DRAM, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, DVD or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by the faceplate device 112. Combinations of any of the above should also be included within the scope of computer-readable memory 340 can further be used to store sensor data for any combination of sensors 310 in data store 342. Additionally, or alternatively memory 240 may be used to store medical-related data for the user.

[0073] Turning to the contents of the memory 340 in more detail, the memory 340, in at least one embodiment, includes an operating system 344 and one or more application programs, modules, or services for implementing the features disclosed herein including at least the perceived latency, such as via the faceplate device 112 or dedicated applications. In at least one example embodiment, the faceplate device 112 is configured to receive, store, and/or display content and at least one interface for interacting with the service provider computers 116 and users. Additionally, the memory 340 stores access credentials and/or other user information such as, but not limited to, user IDs, passwords, and/or other user information. In some examples, the user information includes information for authenticating an account access request such as, but not limited to, a device ID, a cookie, an IP address, a location, or the like. Additionally, the user information includes information regarding a therapy associated with the user.

[0074] The memory 340 of the faceplate device 112 also can comprise software elements (not shown), device drivers, executable libraries, and/or other code, such as one or more application programs, which may comprise computer programs provided by various embodiments, and/or may be designed to implement methods, and/or configure systems, provided by other embodiments, as described herein. Merely by way of example, one or more processes described with respect to the method(s) discussed above might be implemented as code and/or instructions executable by the faceplate device 112 (and/or processing unit(s) 303 within a faceplate device 112) and/or stored on a non-transitory and/or machine-readable storage medium (e.g., a “computer-readable storage medium,” a “machine-readable storage

medium,” etc.). In an aspect, then, such code and/or instructions can be used to configure and/or adapt a general purpose processor (or other device) to perform one or more operations in accordance with the described methods.

[0075] Faceplate device 112 may include clock 350. Clock 350 is used to generate a time stamp for each of the data observations generated by the sensors. The time stamps are used by the processing units 303 in the analysis of sensor data, and facilitate pattern recognition and improved capacity for determining the operational environment of the faceplate device 112 and wristband monitoring device 110. The clock 350 can also be used by the processing units 303 for alarms and other standard clock functions.

[0076] The faceplate device 112 includes a user interface 360. User interface 360 may include a touchscreen, a button or a keypad interface, a vibration generator, a sound generator, and/or other similar interface. The interface facilitates soliciting information from the wearer and obtaining input data and information provided by the wearer in response.

[0077] The faceplate device 112, using user interface 360, solicits information about the user or the user's condition or environment so as to analyze such data in order to provide the wellness monitoring features discussed herein. For example, the faceplate device 112 utilizes user inputs via user interface 360 to obtain information about the user's physique, lifestyle, health, activity level as well as information related to therapy compliance and other information relevant to ascertaining the user's overall wellness. The faceplate device 112 further solicits any inputs that may facilitate improved learning, analysis and sensing performed by the faceplate device 112, the wristband monitoring device 110, and/or other suitable devices or computers (e.g., service provider computers 116).

[0078] The faceplate device 112 includes an energy source, a means to charge said energy source, and a means to charge an energy source located on wristband monitoring device 110, indicated by power input/outputs 370. The energy source may be a battery, a capacitor, or any other suitable means for storing chemical or electrical energy for later use. In at least one embodiment, wristband monitoring device 110 may be connected to faceplate device 112 and the battery of the faceplate device 112 may charge the battery of wristband monitoring device 110. In some embodiments, wristband monitoring device 110 may be connected to the faceplate device 112 and the battery of faceplate device 112 may be the energy source for the wristband monitoring device 110 or vice versa. The faceplate device 112 may be configured to charge from a standard A/C adaptor, or by use of a charging dock (e.g., a charging cradle) configured to house the faceplate device 112, or other suitable charging means.

[0079] FIG. 4 depicts an example system or architecture 400 for monitoring wellness of a user of the wrist-worn device 108. Although wellness monitoring engine 102 is depicted as being located on service provider computers 116, wellness monitoring engine 102 may be located on any suitable device (e.g., the wrist-worn device 108, medical provider device 406). In architecture 400, a user 402 utilizes the wrist-worn device 108 (e.g., a wristband monitoring device 110 and a faceplate device 112) to access a wellness monitoring engine 102, or a user interface accessible by the wellness monitoring engine 102, via one or more networks 114. Wellness monitoring engine 102 may be hosted, managed, and/or provided by a computing resources service or service provider, such as by utilizing one or more service provider computers 116. The one or more service provider computers 116,

in some examples, provide computing resources such as, but not limited to, client entities, low latency data storage, durable data storage, data access, management, virtualization, cloud-based software solutions, electronic content performance management, etc. The one or more service provider computers 116 are also operable to provide web hosting, computer application development, and/or implementation platforms, combinations of the foregoing, or the like to the user. In some embodiments, the wellness monitoring engine 102 is provided on the wrist-worn device 108.

[0080] In some examples, the wrist-worn device 108 is in communication with the service provider computers 116 via the networks 114, or via other network connections. Additionally, the wrist-worn device 108 may be part of a distributed system managed by, controlled by, or otherwise part of the service provider computers 116. In some examples, the networks 114 include any one or a combination of many different types of networks, such as cable networks, the Internet, wireless networks, cellular networks and other private and/or public networks.

[0081] In at least one embodiment, the wellness monitoring engine 102 allows the user 402 to interact with the service provider computers 116 or medical provider device 406. The one or more service provider computers 116, perhaps arranged in a cluster of servers or as a server farm, host the wellness monitoring engine 102 and/or cloud-based software services. Other server architectures may be used to host the wellness monitoring engine 102 and/or cloud-based software services. The wellness monitoring engine 102 is capable of handling requests from a user 402 and serving, in response, various user interfaces that are rendered at the wrist-worn device 108. The wellness monitoring engine 102 provides any type of device or application control. The wellness monitoring engine 102 and/or corresponding control are provided by the operating system 344 of the faceplate device 112. As discussed above, the described techniques can similarly be implemented outside of the wellness monitoring engine 102, such as with other applications running on the wrist-worn device 108.

[0082] In some aspects, the service provider computers 116 and medical provider device 406 are any type of computing devices such as, but not limited to, a mobile phone, a smart phone, a personal digital assistant (PDA), a laptop computer, a desktop computer, a server computer, a thin-client device, a tablet PC, etc. Additionally, it should be noted that in some embodiments, the service provider computers 116 and/or medical provider device 406 are executed by one or more virtual machines implemented in a hosted computing environment. The hosted computing environment may include one or more rapidly provisioned and released computing resources, which computing resources may include computing, networking and/or storage devices. A hosted computing environment is also referred to as a cloud-computing environment.

[0083] In one illustrative configuration, the service provider computers 116 and medical provider device 406 each include at least one memory (e.g., the memory 416-1 and the memory 416-2) and one or more processing units (e.g., processor(s) 418-1 and processor(s) 418-2). The processor(s) 418-1 and/or the processor(s) 418-2 are implemented as appropriate in hardware, computer-executable instructions, firmware, or combinations thereof. Computer-executable instruction or firmware implementations of the processor(s) 418-1 and the processor(s) 418-2 include computer-execut-

able or machine-executable instructions written in any suitable programming language to perform the various functions described.

[0084] In at least one example embodiment, the memory 416-1 and/or the memory 416-2 store program instructions that are loadable and executable on the processor(s) 418-1 or the processor(s) 418-2, respectively, as well as data generated during the execution of these programs. Depending on the configuration and type of service provider computers 116 or medical provider device 406, the memory 416-1 and/or the memory 416-2 may be volatile (such as RAM) and/or non-volatile (such as ROM, flash memory, etc.). The service provider computers 116 and/or the medical provider device 406 also include additional storage (e.g., additional storage 420-1 and additional storage 420-2) which includes removable storage and/or non-removable storage. The memory 416-1, the memory 416-2, the additional storage 420-1, the additional storage 420-2, both removable and non-removable, are all examples of computer-readable storage media. In at least one example, computer-readable storage media include volatile or non-volatile, removable or non-removable media implemented in any method or technology for storage of information such as computer-readable instructions, data structures, program modules, or other data. Additional types of computer storage media that may be present in the service provider computers 116 and/or medical provider device 406 may include, but are not limited to, PRAM, SRAM, DRAM, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, DVD or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by the service provider computers 116 and/or medical provider device 406, respectively. Combinations of any of the above should also be included within the scope of computer-readable media.

[0085] In accordance with at least one embodiment, the service provider computers 116 and/or medical provider device 406 contain communications connection(s) (e.g., 422-1 and 422-2) that allow the service provider computers 116 and/or medical provider device 406 to communicate with a stored database, another computing device or server, user terminals and/or other devices on the networks 114. The service provider computers 116 and/or medical provider device 406 also include I/O device(s) 424-1 and/or I/O device (s) 424-2, respectively, such as a keyboard, a mouse, a pen, a voice input device, a touch input device, a display, speakers, a printer, etc.

[0086] Turning to the contents of the memory (e.g., the memory 416-1 and/or the memory 416-2) in more detail, each memory includes an operating system (e.g., 426-1 and 426-2), one or more data stores (e.g., 428-1 and 428-2), and/or one or more application programs, modules, or services for implementing the features disclosed herein. For example, medical-related data, sensor data collected from wrist-worn device 108, and any suitable data utilized by wellness monitoring engine 102 may be stored in data store 428-1 and/or data store 428-2.

[0087] FIG. 5 depicts an example computer architecture 500 for providing a wellness monitoring engine 102, including a plurality of modules 504 that may carry out various embodiments. Wellness monitoring engine 102 can be provided on wrist-worn device 108, medical provider device 406, service provider computers 116, or on another device in

communication with the wrist-worn device **108** via network **114**. In at least some examples, the modules **504** are software modules, hardware modules, or a combination thereof. If the modules **504** are software modules, the modules **504** are embodied on a computer-readable medium and processed by a processor in any of the computer systems described herein. It should be appreciated that any module or data store described herein, may be, in some embodiments, a service responsible for managing data of the type required to make corresponding calculations. The modules **504** may be configured in the manner suggested in FIG. **5** or may exist as separate modules or services external to the wellness monitoring engine **102**.

[**0088**] In accordance with at least one embodiment, a method is enabled for wellness monitoring using a wrist-worn device (e.g. wrist-worn device **108**). For example, the wellness monitoring engine **102** may be a component of the faceplate device **112**, wristband monitoring device **110**, or service provider computers **116** as discussed above in connection with FIGS. **2-4**, respectively. In at least one embodiment, wellness monitoring engine **102** is stored on faceplate device **112** or, alternatively, is stored on a server accessible to the faceplate device **112** via network **114**.

[**0089**] An administrator (e.g., a physician) configures the wellness monitoring engine **102** via a graphical user interface **510** the wellness monitoring engine **102** presented on medical provider device **406**. Medical provider device **406** may be any electronic device capable of receiving and transmitting electronic data (e.g., a laptop, a cellphone, another wrist-worn device **108**). The configuration information can include, but is not limited to, medical-related data. Once configuration information is entered via graphical user interface **510**, application programming interface **512**, a component of the wellness monitoring engine **102**, is utilized to receive the configuration information.

[**0090**] In accordance with at least one embodiment, configuration manager **514**, a component of the wellness monitoring engine **102**, is configured to receive configuration information. The configuration manager **514** is responsible for creating and maintaining a user profile utilized to store such configuration information, including therapy or treatment information for the user. Further, the configuration manager **514** causes such configuration data to be stored in a user profile data store **516** (e.g., data store **242**, data store **342**, or data store **428-1**). Additionally, or alternatively, configuration manager **514** interacts with therapy data store **518**, a data store responsible for storing information regarding one or more therapies. In at least one example, the configuration manager **514** queries the therapy data store **518** for information regarding one or more therapies indicated in the received configuration information. Any information returned from therapy data store **518** may be stored by the configuration manager **514** in user profile data store **516**, along with, or separate from, the user profile.

[**0091**] In at least one embodiment, scheduling manager **520** is configured to receive configuration information from configuration manager **514**, including information pertaining to a prescribed therapy. The prescribed therapy may be associated with a specific therapy stored in the therapy data store **518**. The scheduling manager **520** is responsible for generating a regimen based on the prescribed therapy. The regimen indicates one or more notifications to be provided to the user at a specific day and/or time. The regimen additionally indicates one or more particular times at which to transmit medi-

cal-related information gathered or obtained by the wrist-worn device **108** to service provider computers **116**. In at least one example, scheduling manager **520**, according to the generated regimen, causes notification engine **524** to provide one or more electronic notifications on faceplate device **112**. The notification may include, but is not limited to, a sensor reading request, to take a dosage of medication, or to conduct a form of exercise.

[**0092**] In at least one embodiment, user input manager **526** is configured to present questions to the user via faceplate device **112** of wrist-worn device **108**. In at least one example, scheduling manager **520** determines one or more questions to be posed to the user at a particular time in accordance with the generated regimen. A "regimen," as used herein, includes a schedule for one or more therapies that specifies various times in which to conduct various actions associated with the therapy. In the case where the regimen specifies that a question should be posed to the user, scheduling manager **520** causes user input manager **526** to pose the determined question(s) to the user via faceplate device **112** at the appropriate time. The user utilizes faceplate device **112** to respond to the question(s). Upon receipt of the response, user input manager **526** stores such response data in user profile data store **516** (e.g., data store **242**, **342**, or **428-1**). Additionally, user input manager **526** causes scheduling manager **520** to act upon the response in one or more ways based on the therapy implemented. In one example, scheduling manager **520**, determining that it is time for the user to take a sensor reading, causes notification engine **524** to present a reminder to the user on faceplate device **112**. The user input manager **526** sends to the device a question such as "are you ready to get your blood pressure taken?" The user responds affirmatively or negatively. Alternatively, the user, having had no question posed, affirmatively initiates, via faceplate device **112**, a sensor reading. Either or both user inputs are received by user input manager **526**. Additionally, such user input is stored in user profile data store **516** and is forwarded to scheduling manager **520**. Scheduling manager **520**, in response to such user input, updates the regimen.

[**0093**] In at least one example, scheduling manager **520** causes user input manager **526** to pose a question to the user via faceplate device **112**. For instance, scheduling manager **520** determines that a question ought to be posed to the user at a particular time, or because of a particular response. For instance, the regimen may specify that the user be asked, "Are you feeling light-headed?" an hour after the user has indicated that he took his medication. In such a case, scheduling manager **520** causes user input manager **526** to present the question to the user via faceplate device **112**. The user responds to the question via faceplate device **112** and such response is received by user input manager **526**, stored in user profile data store **516** (e.g., data store **342** or data store **428-1**), and/or forwarded to scheduling manager **520**. In at least one embodiment, scheduling manager **520** updates the regimen based on the response. For example, the therapy may indicate that, if the user responds that he does, in fact, feel light-headed when asked (e.g., an hour after taking his medication), the regimen be altered in some way (e.g., by increasing or decreasing the medication dosage). In at least one example, the regimen is altered such that the user is immediately prompted to take an additional dosage. Furthermore, the regimen is updated by the scheduling manager **520** to reflect changes brought on by the received user input. The regimen may be stored on regimen data store **538** or any suitable data

store configured to store such information. Regimen data store 538 may include as a component of wellness monitoring engine 102 or as a data store remote to wellness monitoring engine 102.

[0094] In at least one embodiment, a therapy may specify one or more times for which a sensor contained in the wrist-worn device 108 may be used to ascertain one or more patients' vital signs. For instance, a therapy specifies that the user's pulse and blood pressure should be taken once every hour. Such specifications are included in the regimen generated by scheduling manager 520. The therapy additionally, or alternatively, indicates certain chains of events that should result in activation of the sensor(s). For instance, a user is reminded to take his medication. He, in fact, takes the medication and responds to the reminder, or a posed question, indicating that he took his medication. Upon this input, or sometime later, scheduling manager 520 causes sensor manager 528, a component of wellness monitoring engine 102, to activate one or more sensors located on the wrist-worn device 108. Sensor manager 528 communicates with the one or more sensors to cause vital sign information to be collected. For instance, in the ongoing example, sensor manager 528 causes a heart rate sensor to be activated. The sensor manager 528 is configured to receive data from the heart rate sensor. The sensor manager 528 further causes the heart rate information to be stored in user profile data store 516 and/or forwards the heart rate information to the scheduling manager 520 for analysis. Sensor manager 528, additionally or alternatively, activates blood pressure sensor. The sensor manager 528 is configured to receive data from the blood pressure sensor. The sensor manager 528 causes the blood pressure sensor to be stored in the user profile data store 516 and/or forwards the blood pressure information to the scheduling manager 520. Scheduling manager 520, as discussed above, analyzes the heart rate information and/or the blood pressure information to determine any regimen modification(s) necessary in accordance with the therapy. Though a heart rate sensor and a blood pressure sensor are used in this example, it should be appreciated that any sensor, or combination of sensors, located on the wristband monitoring device 110 or faceplate device 112 may be utilized, in any suitable order, via a similar manner as described above.

[0095] Consider the case where the user's heart rate drops dangerously low, or even stops. The sensor manager 528 can receive such information and determine that the rate is in an unacceptable range as defined by the therapy. Upon such a determination, the sensor manager 528 can cause notification engine 524, or any other suitable component of the wellness monitoring engine 102, to access the user profile data store 516 for user profile data. User profile data indicates physician contact information and/or emergency contact information, for example. If the user profile data includes such information, the notification engine 524 may cause a notification to be sent to the indicated physician/emergency contact. In at least one example, the notification includes an automated phone call, email message, text message, or other suitable form of communication. Additionally, or alternatively, the notification engine 524 can transmit data related to the adverse condition (e.g., sensor data, user profile data) to an emergency response unit. In one example, upon determining the existence of an adverse condition, the sensor manager 528 causes the GPS sensor to activate to ascertain the user's location. Any other sensor, or combination of sensors, included on the device may be similarly activated. Information collected by

the sensor(s) is received by the sensor manager 528. The sensor manager 528 can relay the information to notification engine 524. Notification engine 524 may then report such information away from the device in a manner similar to that described above.

[0096] In at least one embodiment, the user may activate a setting on the device to indicate an emergency status. For example, the user may be aware that they are having a health issue and interact with a user interface (e.g., user interface 360) located on the faceplate device 112. The indication is received by the user input manager 526. User input manager is configured to access the user profile data store 516 to obtain user profile data in order to determine contact information similar to that described in the previous example. User input manager 526 is configured to cause notification engine 524 to notify the determined contacts and/or emergency response unit(s).

[0097] In at least one embodiment, another user, for example a physician or emergency medical personnel, may access medical-related data stored in memory 416-1 of service provider computers 116 or other information contained on and/or recorded by wrist-worn device 108. For example, in an emergency situation, another user can access medical allergy information of the user. Additionally, or alternatively, someone other than the user may access information recorded by the wrist-worn device 108. As an example, a physician can enable medical-related data to be displayed on the faceplate device 112 or a display of another device. The activation of such a setting is received by the user input manager 526. The user input manager 526 accesses the user profile data store 516 to obtain medical-related data for the user. The user input manager 526 can then display such information on the faceplate device 112 and/or enable the physician to access such information at a remote location (e.g., via a website presented on the medical provider device 406 or other computing device).

[0098] In accordance with at least one embodiment, scheduling manager 520 determines, based on the current regimen, user input, or sensor data, that medical-related data (e.g., user input, user responses, vital sign information) should be sent to a medical provider (e.g., the prescribing physician). Additionally, or alternatively, scheduling manager 520 receives input requesting the medical-related data. In either case, scheduling manager 520 causes export manager 532 to electronically transmit the medical-related data to a particular location. In at least one example, the medical-related data is displayed (e.g., via notification engine 524) on a medical provider's device (e.g., medical provider device 406).

[0099] In accordance with at least one embodiment, wellness index engine 530, a component of wellness monitoring engine 102, is responsible for calculating a wellness index for the patient. The wellness index, as described above, is a numerical value that indicates an overall wellness value for the patient. The wellness index engine 530 may be configured to receive, or otherwise obtain, at least one of sensor data, therapy data, regimen, or user input, from any combination of the modules discussed above. Therapy data may include information related to normal sensor data ranges (e.g., a normal heart rate range, normal glucose level). Such normal sensor data ranges may be based on age, sex, race, or other suitable demographic information. Upon receipt, or at a suitable time, the wellness index engine 530 may calculate a wellness index based on the sensor data, therapy data, regimen data, and user input and store the calculated value in user

profile data store 516. The wellness index may be calculated using various weights for the sensor data, therapy data, regimen, and user input or each may be weighed the same for purposes of the calculation. In at least one example, wellness index engine 530 may interact with user profile data store 516 to retrieve information regarding medical-related data of other users. For example, the wellness index engine 530 may take into account other users blood pressure readings, for example, when determining how much weight to give the user's blood pressure reading. Wellness index engine 530 may take into account all other users, or a subset of the other users. For example, wellness index engine 530 may compare the user's blood pressure readings to other user's under the same proscribed therapy, while ignoring medical-related data of users that are not under the same prescribed therapy.

[0100] Wellness index engine 530 may be configured to cause export manager 532 to transmit the wellness index to wrist-worn device 108, the medical provider device 406, service provider computers 116, or any suitable electronic device located away from wellness monitoring engine 102.

[0101] In at least one embodiment, display engine 536, a component of wellness monitoring engine 102, may be configured to interact with map data store 534 in order to display a map of a geographical location (e.g., a hospital ward floor plan, assisted living home floor plan, a region map, a state map). In at least one example, the display engine 536 may cause a floor plan of a hospital ward to be displayed, for example, on medical provider device 406, with, in some cases, at least one graphical element (e.g., a colored dot) superimposed over the floor plan indicating a location and wellness index generated by a wrist-worn device (e.g., a wrist-worn device worn by a patient of the hospital).

[0102] In at least one embodiment, power management engine 103, a component of wellness monitoring engine 102, may be configured to monitor power consumption of faceplate device 112 and/or power consumption of wristband monitoring device 110. In some examples, the power management engine 103 may reside on the wristband monitoring device 110 in order to monitor power consumption of the wristband monitoring device 110. The power management engine 103 may interact with display engine 536 to cause power levels of the faceplate device 112 and wristband monitoring device 110 to be displayed (e.g., on faceplate device 112). In some cases, the power levels displayed may be provided on the faceplate device 112 as a graphical element (e.g., a battery icon for each the faceplate device 112 and the wristband monitoring device 110). The power level for wristband monitoring device 110 may be provided via lights located on wristband monitoring device 110. Such lights, or even the wristband itself, may flash and/or change color depending on the power level remaining for the wristband monitoring device 110.

[0103] In accordance with at least one embodiment, the power management engine 103 may receive indication that the faceplate device 112 has been detached from wristband monitoring device 110. Upon receiving such an indication, power management engine 103 may track power usage of wristband monitoring device 110. Depending on the regimen and the power level remaining for the wristband monitoring device 110, the power management engine 103 may interact with scheduling manager 520 to cause updates to the regimen. For example, the power management engine 103 may cause sensor readings to be taken less frequently than a frequency at which sensor readings would have been taken if the wristband

monitoring device 110 was attached to the faceplate device 112, or alternatively, if the wristband monitoring device 110 was operating at full power strength. Additionally, or alternatively, the power management engine 103 may cause some sensor readings to be taken (e.g., at an originally-scheduled time or an altered time) while other sensor readings are suspended.

[0104] In accordance with at least one embodiment, power management engine 103 may interact with notification engine 524 to cause audible alerts to sound on either, or both, the faceplate device 112 or wristband monitoring device 110. For example, power management engine 103 may determine that faceplate device 112 has a remaining power level under a threshold amount (e.g., 10 percent or less of total power available). Based on the determination, power management engine may interact with notification to sound an audible alarm on the faceplate device 112. Similarly, may determine that wristband monitoring device 110 has a remaining power level under a threshold amount (e.g., 10 percent or less of total power available). The threshold amount may be the same, or different, than the threshold amount used in the previous example. Based on the determination, the power management engine 103 may interact with notification to sound an audible alarm on the wristband monitoring device 110. The sound of the alarm on wristband monitoring device 110 may be the same, or different, than the sound of the alarm on faceplate device 112.

[0105] In some aspects, the power management engine 103 can determine the format of the alert notification and method of transmission based, in part, on the battery (or power) level of the faceplate device 112 and/or the wristband monitoring device 110. An algorithm used to determine the format of the alert notification and transmission method can include the battery level associated with the faceplate device 112 and/or the wristband monitoring device 110 as a factor. For example, it can require more battery power to make a voice call on the cellular or Wi-Fi networks than to transmit an SMS message on the cellular network. By transmitting the alert notification as an SMS message on the cellular network during a time of when, for example, the battery level associated with the faceplate device 112 is below a pre-determined threshold (e.g. 25% battery life) the power management engine 103 can increase the chances of transmission of the alert notification prior to the faceplate device 112 losing battery power.

[0106] In at least one embodiment, the power management engine 103 can also manage what sensors, functions, and/or transmissions are activated or performed based on the battery level associated with the faceplate device 112 and/or the wristband monitoring device 110. For example, the power management engine 103 can cause the scheduling manager 520 to modify the regimen such that only select sensors that provide critical data related to the immediate wellness of the wearer (e.g., heart rate sensor) are utilized when the battery level associated with, for example, the wristband monitoring device 110, is below a pre-determined threshold. In some aspects, the power management engine 103 can cause transmission of non-critical wellness data to cease when the battery level associated with the device is below a pre-determined threshold. For example, the power management engine 103 can cause the wellness monitoring engine 102 (e.g., via the wristband monitoring device 110) to continue to gather and store sensor data, responses to questions provided by the wearer (e.g., via the faceplate device 112), and other non-critical data related to wellness of the wearer, but refrain from

transmitting that data off of the device when the battery level is below the pre-determine threshold. Critical data, including, for example, a wellness index that indicates an emergency, a sensor reading that indicates an emergency, an activation of the emergency indicator, or a positive fall detection can continue to be transmitted away from the device, for example to emergency personnel. In other aspects, the power management engine 103 can determine which sensors and what monitoring functionality is performed by the wrist-worn device 108 based on information, including health data related to the wearer, the battery level, the current wellness index of the wearer, or other information available to the wellness monitoring engine 102.

[0107] In accordance with at least one embodiment, the power management engine 103 may track the power usage of either, or both, the power source(s) located on faceplate device 112 or wristband monitoring device 110. Such tracked information may be communicated to export manager 532 in order to transmit such information away from the wrist-worn device (e.g., to a remote server configured to analyze such information). Additionally, or alternatively, export manager 532 may store tracked power source usage history in user profile data store 516, associated with the user's profile.

[0108] FIG. 6 depicts an example of another embodiment 600 of a power management engine 103. The faceplate device 112 may include a power management engine 103. In accordance with at least one embodiment, the wrist-worn device 108, including the wristband monitoring device 110 and faceplate device 112, may be pre-configured with a prescribed therapy (e.g., by a medical provider device 406).

[0109] In accordance with at least one embodiment, the user may decide to detach the faceplate device 112 from the wristband monitoring device 110. For example, the faceplate device 112 may be detached in order to charge the faceplate device 112 using charging dock 602. Although a charging dock is depicted, any suitable form of charging may be substituted. For example, while the faceplate device 112 may be charged via a charging dock, the wristband monitoring device 110 may be charged utilizing a form of wireless charging (e.g., inductive charging using magnetic or acoustic methods). In another example, both the faceplate device 112 and the wristband monitoring device 110 may be charged using an inductive charger. The wristband monitoring device 110 may include one or more sensors with which to monitor a patient's vital signs (e.g., using sensors 210). The wristband monitoring device 110 may continue monitoring vital signs while the faceplate device 112 is detached and charging. While detached, the wristband monitoring device may operate using, for example, battery power. Battery power levels and/or sensor activity may be indicated by LED lights 604 located on the wristband monitoring device or any suitable visual or audible means of indication. In at least one example, low battery power may cause LED lights 604 to flash red while a sensor reading may cause the LED lights 604 to flash blue.

[0110] In accordance with at least one embodiment, wristband monitoring device 110 may wirelessly transmit sensor readings to faceplate device 112. Such transmission may be accomplished using Bluetooth or any suitable means for wireless transmission. While detached, faceplate device 112 may continue to transmit vital sign information away from the wrist-worn device 108. Alternatively, or additionally, faceplate device 112 may transmit medical-related data away from wrist-worn device 108. While attached, or detached, faceplate device 112 may display power levels of wristband

monitoring device 110, for example, using user interface 360. Such display may include a battery icon indicating the remaining power levels of wristband monitoring device 110. While charging, otherwise, faceplate device 112 may display power levels of the faceplate device 112, for example, using user interface 360. Such display may include a battery icon indicating the remaining power levels of faceplate device 112.

[0111] In at least one embodiment, the faceplate device 112 (while attached or detached to the wristband monitoring device 110) may reach a remaining battery level of 35%. 35% is used merely for illustrative purposes, as are all of references to specific battery levels included herein. Any suitable pre-determined threshold may be utilized. Operations and interactions described in the examples herein, may occur as a result of reaching a single pre-determined threshold, or upon reaching multiple pre-determined thresholds. The following examples may state specific thresholds as being triggers for various changes in operation for various devices, however, it should be appreciated that these changes may occur at different thresholds, all at once, or separately. Further, the following examples may occur while the faceplate device 112 and the wristband monitoring device 110 are attached or detached.

[0112] As a non-limiting example, upon reaching a remaining battery level threshold of 35%, a component of the wellness monitoring engine 102 of FIG. 5 (e.g., the power management engine 103), may cause a display of the faceplate device 112 to dim. For example, the power management engine 103 may cause the display may begin to perform at a illumination level of 50% of the illumination level that was utilized prior to reaching the battery life threshold. The modification may result in less battery power consumption going forward. To the user, the display may appear darker. Additionally, or alternatively, the power management engine 103 may cause an indication of the remaining power levels to be displayed on the faceplate device 112. Further, the power management engine 103 may cause an audible, haptic, textual, or other alert/sound on the wrist-worn device 108, alerting the user to the low battery. The alert indicating low battery for the faceplate device 112 may be the same or different as an alert that indicates low battery for the wristband monitoring device 110. A sound, volume, duration, or type of alert may vary according to the amount of battery life remaining. For example, a chime may sound when the battery on the faceplate device 112 reaches 35%, while a buzzer may sound/resonant when the battery on the faceplate device 112 reaches 25%.

[0113] Continuing with the example above, upon reaching a remaining battery level of 35% (or other pre-determined threshold, for example, 25%), the power management engine 103 may cause a component of the wellness monitoring engine 102 (e.g., the scheduling manager 520) to reduce the frequency of sensor readings. For example, the scheduling manager 520 may modify the regimen such that sensor readings, in general, are taken less frequently. Modifying the regimen, in this example, may constitute ignoring, but not deleting, scheduled events. In other examples, modifying the regimen may delete scheduled events. Similarly, the scheduling manager 520, upon receiving indication of low battery status, may modify the regimen such that some, if not all, of the prompts for user input are suppressed (e.g., delayed, ignored, deleted, etc.). Still further, upon receiving indicating

of low battery status, the scheduling manager 520 may suppress one or more alerts or notifications.

[0114] In at least one example, the power management engine 103 may cause the wellness index engine 230 to suspend calculations of the wellness index, or at least calculate the wellness index less frequently than the wellness index would be calculated were the battery to be at full capacity. Additionally, or alternatively, the power management engine 103 may cause the wellness index to be transmitted away from the wrist-worn device less frequently.

[0115] In at least some examples, the power management engine 103 may determine that the faceplate device 112 has a low battery reading (e.g., 25%) but that the wristband monitoring device 110 has a healthy battery reading (e.g., above a pre-determined threshold, for example, 50%). In such cases, the power management engine 103 may cause the wristband monitoring device 110 to continue to perform operations (e.g., sensor readings) at a same, or modified rate. The power management engine 103 may further cause the wristband monitoring device 110 to store such readings in local memory rather than transmit such readings to the faceplate device 112. In some cases, more critical sensor readings (e.g., heart rate, oxygen levels, etc.) may still be communicated between the wristband monitoring device 110 and the faceplate device 112, while other less-critical sensor readings (e.g., temperature, glucose, etc.) are stored locally within the wristband monitoring device 110.

[0116] What constitutes “a critical sensor reading” may differ from patient to patient. Some readings indicating an emergency (e.g., a sensor reading indicating no pulse) may be universally determined to be a critical sensor reading. Accordingly, this critical reading may be prioritized above at least some, if not all, other sensor readings. As a non-limiting example, an sensor reading indicating a lack of heart rate may be transmitted from the wristband monitoring device 110 to the faceplate device 112 (e.g., and eventually away from the wrist-worn device 108), while a low glucose reading may be stored on local memory of the wristband monitoring device 110. Similarly, if the wristband monitoring device 110 were to sense that the user had fallen, such information may still be attempted to be transmitted to the faceplate device 112 regardless of remaining battery life.

[0117] In at least some examples, a wellness index may factor into what sensor readings are critical or not. For example, a wearer having a comparatively high wellness index, indicating generally good health, may have fewer critical sensor readings required than a wearer who has a comparatively low wellness index. Additionally, the therapy type may be factored in when determining which sensor readings are critical and which are not. For example, a wearer under a high blood pressure therapy, may have blood pressure readings prioritized higher than someone that was under a therapy to treat diabetes. Accordingly, the power management engine 103 may cause other sensors (e.g., a glucose sensor) to go inactive, or take readings less frequently, than say, a blood pressure sensor for a wearer under a high blood pressure therapy. In some cases, upon detecting a critical sensor reading (e.g., no pulse, low oxygen level, high blood pressure, etc.), the power management engine 103 may cause some or all sensors to cease taking readings depending the remaining battery level. For example, upon detecting that the wearer has no pulse, the wellness monitoring engine 102 may cause all sensors but the heart rate sensor to cease taking readings while the faceplate device 112 attempts to communicate such

data away from the wrist-worn device (e.g., to emergency personnel). In some cases, the heart rate sensor may continue to monitor the heart rate of the wearer if sufficient battery life remains to both monitor the wearer’s heart rate, as well as communicate data away from the wrist-worn device 108. If sufficient battery life does not remain, then even the heart rate sensor may be caused to cease taking sensor readings while the remaining battery life is utilized to communicate data away from the wrist-worn device 108 (e.g., to emergency personnel). In a similar manner, upon detection of a critical reading, the power management engine 103 may cause some or all of other operations of the faceplate device 112 to cease. For example, upon receiving indication that the wearer has no pulse, the display of the faceplate device 112 may be turned off.

[0118] In at least one example, upon a low battery life level of the faceplate device 112, as a result of receiving a critical sensor reading, or at any suitable time, and or all calculations (e.g., of wellness index) may be ceased for a time (e.g., while the battery level associated with the faceplate device 112 remains under the pre-determined threshold). In some cases, communications between the faceplate device 112 and the wristband monitoring device 110 may be suspended while the faceplate device 112 attempts to communicate emergency data (or other data) away from the wrist-worn device 108. Additionally, or alternatively, any or all data may be stored locally on the faceplate device 112 while the battery level remains under the pre-determined threshold. For example, the faceplate device 112 may continue to receive information from the wristband monitoring device 110, to calculate wellness index values, and perform at least some of its traditional operations. Instead of transmitting such data away from the wrist-worn device 108, the faceplate device 112 may store such data locally, in order to transmit the data at a later time (e.g., when battery life is increased over the pre-determined threshold, while the faceplate device 112 is charging, etc.).

[0119] In at least one example, the power management engine 103 may detect that the wristband monitoring device 110 has a battery level lower than a pre-determined threshold (e.g., 25%). Accordingly, the power management engine 103 may cause sensor readings to be modified in a similar manner as described above. Additionally, or alternatively, sensors may be prioritized based on power consumption. For example, a temperature sensor may consume less energy than an oxygen sensor. In some examples, when the wearer has a wellness index that is over a threshold value (e.g., indicating that the wearer is not experiencing, or generally is not at risk of experiencing, an adverse condition), the temperature sensor may be utilized regularly, or at least more than other sensors that consume energy more quickly. Additionally, based on the low level of battery life of the wristband monitoring device 110, sensor data may be stored locally rather than transmitted away from the wristband monitoring device 110.

[0120] In at least one embodiment, when the battery life of the faceplate device 112 and/or the wristband monitoring device 110 is increased over the pre-determined threshold value, or when the device(s) are charging, regular operations may be resumed. If data was collected and locally stored during a time when the device(s) had low batter levels, such data may be utilized by the device(s) in current calculations, and/or transmitted away from wrist-worn device 108. As a non-limiting example, the wellness index engine 530 may calculate a wellness index for the wearer utilizing data that

was stored by the wristband monitoring device 110 during a period of low battery life. The data may have been locally stored on the wristband monitoring device 110 and had not been used in wellness index calculations prior to the wristband monitoring device 110 being in an active state of being charged. As battery life levels rise over the pre-determined threshold, or while the device(s) are being charged, normal operations (e.g., alerts, notification, data collection, transmission, etc.) may resume according to the original regimen.

[0121] FIG. 7 depicts a flowchart of an example method 700 for using the power management engine 103. The method 700 begins at 702, where a therapy related to a user is received by wrist-worn device 108. As described above, a “therapy” includes, but is not limited to, one or more prescribed medications, one or more physical activities, one or more sensor requests, or any combination of the above. A user is a patient recipient of the therapy. The therapy is received by the wrist-worn device 108, or more specifically, by the faceplate device 112.

[0122] At 704, a regimen for the user is determined based on the therapy. For instance, the regimen is determined by the scheduling manager 520 of FIG. 5 in the manner described above. Alternatively, the regimen is determined by retrieving a previously store regimen from therapy data store 518 of FIG. 5. As described above, the regimen specifies at least one situation for which at least one event associated with a therapy should be performed. For instance, a regimen indicates that an event (e.g. sensor data collection) should occur at pre-determined periodic times. In at least one example, the regimen indicates that an event (e.g., a blood pressure sensor reading) ought to occur in response to a particular received input (e.g., indication that the patient wishes to take his blood pressure). A variety of situations exist and would depend on the therapy being implemented.

[0123] At 706, a sensor (e.g., one or more of sensors 210) may be activated on the wristband monitoring device 110. For example, blood pressure monitor sensor 220 may be activated. The blood pressure monitor sensor 220 may be activated based on the determined regimen from 704. In cases where the faceplate device 112 is detached from the wristband monitoring device 110. The sensor activation may further depend on a power level remaining on the wristband monitoring device 110. For example, a regimen may specify that a blood pressure reading should be taken once every four hours. If the wristband monitoring device 110 is operating at approximately full power (e.g., 90% or above of total power capacity) then the readings may continue to occur every four hours. At some point, the power level remaining on the wristband monitoring device 110 may drop below a threshold amount (e.g., 60% of total power capacity). At such time, power management engine 103 may cause an update to the regimen that causes blood pressure readings to be taken less frequently (e.g., every 5 hours) in order to conserve power on the wristband monitoring device 110.

[0124] At 708, vital sign information of the user may be received by faceplate device 112, from wristband monitoring device 110. In at least one example, wristband monitoring device 110 may transmit, wirelessly or otherwise, vital sign information to faceplate device 112. For instance, wristband monitoring device 110 may transmit vital sign information over Bluetooth to faceplate device 112.

[0125] At 710, wristband monitoring device 110 may be caused to operate on battery power (e.g., as a result of faceplate device 112 being detached). At such time, wristband

monitoring device 110 may display status related to the power level of wristband monitoring device 110 on wristband monitoring device 110. As depicted in FIG. 6, the status may be displayed by LED light located on the wrist band of the wristband monitoring device 110. Additionally, or alternatively, the wristband itself may change color in order to display the status related to the power level of the wristband monitoring device 110.

[0126] At 712, a battery on the wristband monitoring device 110 may be charged. For example, when it is determined that the faceplate device 112 is attached to the wristband monitoring device 110, power management engine 103 may cause a power source of wristband monitoring to be charged from a power source located on faceplate device 112.

[0127] At 714, faceplate device 112 may wirelessly report the vital sign information away from the wrist-worn device 108. Alternatively, or additionally, medical-related data may be wirelessly reported away from the faceplate device 112. In at least one example, the medical-related data is reported to service provider computers 116 and/or medical provider device 406. Alternatively, the information may be sent wirelessly, to a physician via email.

[0128] FIG. 8 depicts a flowchart of another example method 800 for using the power management engine. The method 800 begins at 802, where a determination that the faceplate device 112 is detached from the wristband monitoring device 110. Detachment could occur because the faceplate device 112 is being charged, or because the user wishes to wear only the wristband monitoring device 110, or for any suitable reason for detachment.

[0129] At 804, in response to the determination from 802, the wristband monitoring device 110 may be caused to operate from an alternative power source (e.g., from battery power). For example, power management engine 103 may cause the wristband monitoring device 110 to begin operating under battery power.

[0130] At 806, a sensor (e.g., blood pressure sensor(s) 220) on the wristband monitoring device 110 may be activated to collect vital sign information of the user. The activation may be based on a regimen as described above. The activation may occur during a time when the faceplate device 112 is detached from the wristband monitoring device 110.

[0131] At 808, vital sign information (e.g., blood pressure sensor readings) may be wirelessly transmitted from the wristband monitoring device. At 810, the faceplate device 112 may receive the vital sign information of the user. In some cases, the vital sign information may be received by the faceplate device 112 from the wristband monitoring device 110 via a Bluetooth connection.

[0132] At 810, the vital sign information may be wirelessly transmitted away from the wrist-worn device 108 (e.g., using export manager 532). For example, faceplate device 112 may transmit such data to service provider computers 116.

[0133] FIG. 9 depicts a flowchart of still another example method 900 for using the power management engine 103 of FIG. 5. The method 900 begins at 902 where a sensor is activated on the wristband monitoring device 110 to collect sensor data of the user according to a first regimen. For example, the first regimen may be based on a particular therapy associated with or more treatments related to patient wellness. For example, the user (e.g., the wearer) may have a wrist-worn device 108 that is pre-configured to treat the patient for a diabetic condition. According to the first regimen, the wearer may be reminded to administer insulin shots

to himself at particularly scheduled times. Additionally, the wearer may be prompted to respond to questions regarding his health at specific scheduled times, or in response to a particular sensor reading indication, or in response to a particular user input, or in response to any suitable combination of the above. Further, the first regimen may specify particular times at which vital sign information is collected. Still further, the first regimen may specify particular times at which a glucose reading should be taken.

[0134] At 904, it is determined that the battery level associated with the faceplate device is below a pre-determined threshold. In some cases, the pre-determined threshold may be configured as part of the setup of the wrist-worn device 108. In at least some examples, the pre-determined threshold may be configured according to user input (e.g., user preferences) at any suitable time (e.g., during general operations of the wrist-worn device 108). The pre-determined threshold may be adjusted at any suitable time (e.g., by the user and/or by a medical provider via wireless transmission). In some examples, the wrist-worn device 108 may be configured with multiple pre-determined thresholds, each pre-determined threshold being associated with a particular change in operations to the wristband monitoring device 110 and/or the faceplate device 112. For example, detecting that a battery level has fallen below a first pre-determined threshold (e.g., 35%) may change a regimen or cause a change to operations of the wrist-worn device that are different than a regimen or change caused by detecting that the battery level has fallen below a different pre-determined threshold (e.g., 25%).

[0135] At 906, the wrist-worn device causes the wristband monitoring device 110 to store a first portion of the sensor data in memory. For example, as a result of determining that the battery level associated with the faceplate device is below the pre-determined threshold (e.g., 35%). Communications between the wristband monitoring device 110 and the faceplate device 112 may be suspended, or at least altered. Thus, instead of transmitting all sensor data collected, the wristband monitoring device 110 may store a first portion of the collected sensor data in memory for transmission at a later time (e.g., upon detecting that the faceplate device 112 has a battery level above the pre-determined threshold). In at least one example, the first portion of sensor data may include non-critical sensor data as determined by a pre-defined prioritization scheme. The first portion of sensor data being stored may further depend on power consumption requirements associated with individual sensors. The storage of the first portion of the sensor data may, in some cases, reduce wireless communications required between the wristband monitoring device 110 and the faceplate device 112. Reducing wireless communications of the wristband monitoring device 110 and/or the faceplate device 112 may conserve battery power on the corresponding device, enabling the device to operate for a longer period of time.

[0136] At 908, a second portion of the sensor data is wirelessly transmitted. For example, although a first portion of the sensor data was collected and stored by the wristband monitoring device 110, a second portion may still be transmitted to the faceplate device 112. In some examples, this second portion of sensor data may comprises critical sensor data (e.g., sensor data indicating an emergency situation such as a lack of pulse of the wearer).

[0137] At 910, the second portion of the sensor data is received by the faceplate device 112. The sensor data is wirelessly transmitted away from the wrist-worn device 108

according to the first regimen at 912. The first regimen, in some cases, may specify that the sensor data is transmitted away from the wrist-worn device 108 at specific times and/or at periodic intervals. As a result of determining that the battery level associated with the wristband monitoring device 110 is below the pre-determined threshold, less sensor data may be transmitted by the faceplate device 112, resulting in fewer wireless transmission, or at least less data being transmitted via wireless transmission away from the wrist-worn device which may result in less power consumption than transmitting the whole of the sensor data collected.

[0138] FIG. 10 depicts a flowchart of an additional example method 1000 for using the power management engine 103 of FIG. 5. The method 1000 begins at 1002 where a sensor is activated on the wristband monitoring device 110 to collect sensor data of the user according to a first regimen. As described above, the first regimen may be based on a particular therapy associated with or more treatments related to patient wellness (e.g., treatment(s) for a diabetic condition). The first regimen may specify similar events as described above in connection with FIG. 9.

[0139] At 1004, it is determined that the battery level associated with the wristband monitoring device is below a pre-determined threshold. As described above, the pre-determined threshold may be configured as part of the setup of the wrist-worn device 108 or according to user input at any suitable time.

[0140] At 1006, the wrist-worn device causes the wristband monitoring device 110 to store a first portion of the sensor data in memory. For example, as a result of determining that the battery level associated with the wristband monitoring device is below the pre-determined threshold (e.g., 35%). Communications between the wristband monitoring device 110 and the faceplate device 112 may be suspended, or at least altered. Thus, instead of transmitting all sensor data collected, the wristband monitoring device 110 may store a first portion of the collected sensor data in memory for transmission at a later time (e.g., upon detecting that the faceplate device 112 has a battery level above the pre-determined threshold). In at least one example, the first portion of sensor data may include non-critical sensor data as determined by a pre-defined prioritization scheme. The contents of the first portion of sensor data may further depend on power consumption requirements associated with individual sensors. The storage of the first portion of the sensor data may, in some cases, reduce wireless communications required between the wristband monitoring device 110 and the faceplate device 112. Reducing wireless communications of the wristband monitoring device 110 and/or the faceplate device 112 may conserve battery power on the corresponding device, enabling the device to operate for a longer period of time.

[0141] In at least one embodiment, the content of the first portion of sensor data may depend on a ranking as determined by a component of the wellness monitoring engine 102 (e.g., the power management engine 103). For example, the sensors may be ranked based on one or more considerations. The considerations include, but are not limited to, the therapy associated with the user, a wellness index for the user (e.g., a most recently calculated wellness index), a specific battery level associated with the wristband monitoring device 110 and/or the faceplate device 112, consumption requirements associated with an individual sensor, historical sensor readings, or user input. Activation of an individual sensor may depend on the rank associated with the individual sensor. As

a non-limiting example, the wrist-worn device may be pre-configured to monitor a high-blood pressure condition, but during the course of treatment, high glucose levels are detected. Based on the historical sensor readings, a ranking for the glucose sensor may be increased, for example, in order to increase the prioritization of glucose data over other less-critical sensor data (e.g., temperature data).

[0142] At 1008, in response to the determination that the battery level associated with the wristband monitoring device 110 is below the pre-determined threshold, the first regimen is modified to generate a second regimen. As a non-limiting example, the first regimen may be modified based on a ranking of the sensors to generate a second regimen. The second regimen may specify that some sensor data will not be collected that was previously being collected according to the first regimen. Additionally, or alternatively, the second regimen may specify that some sensor data will be collected at different times and/or at different rates than was previously occurring according to the first regimen.

[0143] At 1010, the one or more sensors of the wristband monitoring device 110 are activated according to the second regimen. In at least one example, the method 1000 enables a battery level of the wristband monitoring device 110 (and/or the faceplate device 112) to be accounted for during operations implementing the events specified by the regimen.

[0144] Implementation of the techniques, blocks, steps, and means described above may be done in various ways. For example, these techniques, blocks, steps and means may be implemented in hardware, software, or a combination thereof. For a hardware implementation, the processing units may be implemented within one or more application specific integrated circuits (ASICs), digital signal processors (DSPs), digital signal processing devices (DSPDs), programmable logic devices (PLDs), field programmable gate arrays (FPGAs), processors, controllers, micro-controllers, microprocessors, other electronic units designed to perform the functions described above, and/or a combination thereof.

[0145] Also, it is noted that the embodiments may be described as a process which is depicted as a flowchart, a flow diagram, a swim diagram, a data flow diagram, a structure diagram, or a block diagram. Although a depiction may describe the operations as a sequential process, many of the operations can be performed in parallel or concurrently. In addition, the order of the operations may be re-arranged. A process is terminated when its operations are completed, but could have additional steps not included in the figure. A process may correspond to a method, a function, a procedure, a subroutine, a subprogram, etc. When a process corresponds to a function, its termination corresponds to a return of the function to the calling function or the main function.

[0146] Furthermore, embodiments may be implemented by hardware, software, scripting languages, firmware, middleware, microcode, hardware description languages, and/or any combination thereof. When implemented in software, firmware, middleware, scripting language, and/or microcode, the program code or code segments to perform the necessary tasks may be stored in a machine-readable medium such as a storage medium. A code segment or machine-executable instruction may represent a procedure, a function, a subprogram, a program, a routine, a subroutine, a module, a software package, a script, a class, or any combination of instructions, data structures, and/or program statements. A code segment may be coupled to another code segment or a hardware circuit by passing and/or receiving information, data, arguments,

parameters, and/or memory contents. Information, arguments, parameters, data, etc. may be passed, forwarded, or transmitted via any suitable means including memory sharing, message passing, token passing, network transmission, etc.

[0147] For a firmware and/or software implementation, the methodologies may be implemented with modules (e.g., procedures, functions, and so on) that perform the functions described herein. Any machine-readable medium tangibly embodied instructions may be used in implementing the methodologies described herein. For example, software codes may be stored in a memory. Memory may be implemented within the processor or external to the processor. As used herein the term “memory” refers to any type of long term, short term, volatile, nonvolatile, or other storage medium and is not to be limited to any particular type of memory or number of memories, or type of media upon which memory is stored.

[0148] Moreover, as disclosed herein, the term “storage medium” may represent one or more memories for storing data, including read-only memory (ROM), random access memory (RAM), magnetic RAM, core memory, magnetic disk storage mediums, optical storage mediums, flash memory devices and/or other machine-readable mediums for storing information. The term “machine-readable medium” includes, but is not limited to, portable or fixed storage devices, optical storage devices, and/or various other storage mediums capable of storing that contain or carry instruction(s) and/or data.

[0149] While the principles of the disclosure have been described above in connection with specific apparatuses and methods, it is to be clearly understood that this description is made only by way of example and not as limitation on the scope of the disclosure.

What is claimed is:

1. A wrist-worn device for managing patient wellness, the wrist-worn device including a wristband monitoring device and a faceplate device, comprising:

- one or more processors; and
- one or more memories coupled with said one or more processors, wherein the one or more processors and one or more memories are configured to:
 - receive, by the wrist-worn device, a therapy for a user, wherein the therapy specifies one or more treatments selected by a care provider;
 - determine, by the wrist-worn device, a regimen for the user based on the therapy;
 - activate a sensor of the wristband monitoring device to collect sensor data related to the user, the activation being in accordance with the regimen;
 - receive, by the faceplate device, from the wristband monitoring device, the sensor data related to the user;
 - wirelessly transmit the sensor data away from the wrist-worn device;
 - determine that a battery level associated with the faceplate device is below a pre-determined threshold;
 - as a result of the determination that the battery level associated with the faceplate device is below the pre-determined threshold, modify the regimen for the user such that a future wireless transmission of sensor data is altered according to the modified regimen.

2. The wrist-worn device for managing patient wellness of claim 1, wherein the one or more processors and one or more memories are further configured to decrease illumination of a

display on the faceplate device as a result of the determination that the battery level associated with the faceplate device is below the predetermined threshold.

3. The wrist-worn device for managing patient wellness of claim 1, wherein the one or more processors and one or more memories are further configured to:

determine that the face plate device has a remaining battery power level under a subsequent pre-determined threshold; and

as a result of the determination that the battery level associated with the faceplate device is below the subsequent pre-determined threshold, further alter the regimen for the user.

4. The wrist-worn device for managing patient wellness of claim 1, wherein modifying the regimen includes decreasing a rate at which data is wirelessly transmitted away from the wrist-worn device.

5. The wrist-worn device for managing patient wellness of claim 1, wherein the one or more processors and one or more memories are further configured to:

rank a plurality of operations of the faceplate device according to an amount of battery consumption required to perform individual operations of the plurality of operations; and

modify the regimen such that operations are performed by the faceplate device according to the rank.

6. The wrist-worn device for managing patient wellness of claim 1, wherein the one or more processors and one or more memories are further configured to:

determine that a battery level associated with the wristband monitoring device is below the pre-determined threshold; and

as a result of the determination that the battery level associated with the wristband monitoring device is below the predetermined threshold, modify the regimen for the user such that sensor data collection times are altered.

7. A method for managing patient wellness with a wrist-worn device, the wrist-worn device including a wristband monitoring device and a faceplate device, comprising:

activating a sensor of the wristband monitoring device to collect sensor data of a user according to a first regimen associated with the user, wherein the first regimen is based on a therapy, and wherein the therapy specifies one or more treatments related to patient wellness;

determining that a battery level associated with the faceplate device is below a pre-determined threshold;

in response to the determination that the battery level associated with the faceplate device is below the pre-determined threshold, causing the wristband monitoring device to store a first portion of the sensor data in memory;

wirelessly transmitting from the wristband monitoring device, a second portion of the sensor data;

receiving, by the faceplate device, the second portion of the sensor data from the wristband monitoring device, and wirelessly transmitting the second portion of the sensor data away from the wrist-worn device according to the first regimen.

8. The method for managing patient wellness with the wrist-worn device of claim 7, wherein the wristband monitoring device includes at least one of a thermometer, a pedometer, a blood pressure monitor, a heart rate sensor, a blood-oxygen level sensor, a global positioning satellite sensor, or a glucose monitor.

9. The method for managing patient wellness with the wrist-worn device of claim 7, further comprising:

determining that the second portion of sensor data indicates an emergency situation;

as a result of determining that the second portion of sensor data indicates an emergency situation, causing the wristband monitoring device to wirelessly transmit the first portion of the sensor data to the faceplate device; and wirelessly transmitting the first portion of the sensor data away from the wrist-worn device.

10. The method for managing patient wellness with the wrist-worn device of claim 7, further comprising:

determining a wellness index from the sensor data according to the regimen; and

as a result of the determination that the battery level associated with the faceplate device is below the pre-determined threshold, modifying the first regimen to generate a second regimen such that the second regimen causes a future determination of the wellness index to occur at a later time than the determination of the wellness index according to the first regimen.

11. The method for managing patient wellness with the wrist-worn device of claim 10, further comprising:

determining that the battery level associated with the faceplate device has increased from below the pre-determined threshold to above the pre-determined threshold;

in response to the determination that the battery level associated with the faceplate device has increased from below the pre-determined threshold to above the pre-determined threshold, modifying the regimen such that a future determination of the wellness index occurs at a time according to the first regimen.

12. The method for managing patient wellness with the wrist-worn device of claim 7, further comprises, in response to the determination that the battery level associated with the faceplate device is below the pre-determined threshold, modifying the first regimen to produce a second regimen such that the second regimen causes a future wireless transmission of sensor data away from the wrist-worn device to occur at a different time than the future wireless transmission of sensor data away from the wrist-worn device according to the first regimen.

13. The method for managing patient wellness with the wrist-worn device of claim 12, further comprising:

determining that the battery level associated with the faceplate device has increased from below the pre-determined threshold to above the pre-determined threshold;

in response to the determination that the battery level associated with the faceplate device has increased from below the pre-determined threshold to above the pre-determined threshold, modifying the regimen such that a future wireless transmission of sensor data away from the wrist-worn device occurs at a time according to the first regimen.

14. A method for managing patient wellness with a wrist-worn device, the wrist-worn device including a wristband monitoring device and a faceplate device, comprising:

activating one or more sensors on the wristband monitoring device to collect sensor data of a user according to a first regimen, wherein the first regimen is based on a therapy, and wherein the therapy specifies one or more treatments related to patient wellness;

determining that a battery level associated with the wristband monitoring device is below a pre-determined threshold;

in response to the determination that the battery level associated with the wristband monitoring device is below the pre-determined threshold, causing the wristband monitoring device to store a portion of the sensor data in memory;

in response to the determination that the battery level associated with the wristband monitoring device is below the pre-determined threshold, modifying the first regimen to generate a second regimen such that activation of the one or more sensors occurs less frequently in accordance with the second regimen than activation of the one or more sensors occurs in accordance with the first regimen; and

activating the one or more sensors on the wristband monitoring device according to the second regimen to collect additional sensor data of the user.

15. The method for managing patient wellness with the wrist-worn device of claim **14**, further comprising:

wirelessly transmitting from the wristband monitoring device, a second portion of the sensor data;

receiving, by the faceplate device, the second portion of the sensor data from the wristband monitoring device; and wirelessly transmitting the second portion of the sensor data away from the wrist-worn device.

16. The method for managing patient wellness with the wrist-worn device of claim **14**, further comprising determining a ranking for the one or more sensors, wherein the ranking is based on one or more of the therapy associated with the user, a wellness index for the user, a specific battery level associated with the battery, consumption requirements associated with an individual sensor, historical sensor readings, or user input, wherein activating the one or more sensors according to the second regimen is based on the ranking.

17. The method for managing patient wellness with the wrist-worn device of claim **14**, further comprising:

determining that the battery level associated with the wristband monitoring device has increased from below the pre-determined threshold to above the pre-determined threshold; and

in response to determining that the battery level associated with the wristband monitoring device has increased from below the pre-determined threshold to above the pre-determined threshold, wirelessly transmitting from the wristband monitoring device, a third portion of sensor data that is locally stored on the wristband monitoring device; and

removing, from memory of the wristband monitoring device, the third portion of sensor data.

18. The method for managing patient wellness with the wrist-worn device of claim **14**, further comprising:

tracking power usage history of the wristband monitoring device and the faceplate device; and

wirelessly transmitting the power usage history away from the wrist-worn device.

19. The method for managing patient wellness with the wrist-worn device of claim **14**, further comprising:

providing, by the faceplate device, a query to the user;

receiving, by the faceplate device, an affirmative user response to the query;

determining that a battery level associated with the faceplate device is below the pre-determined threshold;

in response to the determination that the battery level associated with the faceplate device is below the pre-determined threshold, modifying the second regimen to generate a third regimen, wherein operations according to the third regimen cause the affirmative user response to be stored in local memory on the faceplate device;

in response to determining that the battery level associated with the faceplate device has increased from below the pre-determined threshold to above the pre-determined threshold, wirelessly transmitting from the wristband monitoring device, the affirmative user response.

20. The method for managing patient wellness with the wrist-worn device of claim **14**, wherein the one or more sensors on the wristband monitoring device are activated by the faceplate device utilizing a wireless transmission.

* * * * *

专利名称(译)	使用腕戴式设备进行电源管理的技术		
公开(公告)号	US20160161985A1	公开(公告)日	2016-06-09
申请号	US14/949743	申请日	2015-11-23
[标]申请(专利权)人(译)	张JACK KE		
申请(专利权)人(译)	张, JACK KE		
当前申请(专利权)人(译)	张, JACK KE		
[标]发明人	ZHANG JACK KE		
发明人	ZHANG, JACK KE		
IPC分类号	G06F1/16 A61B5/00 A61B5/0205 H02J7/00 H02J7/02		
CPC分类号	G06F1/163 H02J7/0027 H02J7/025 A61B5/02055 A61B2560/0209 A61B5/7282 A61B5/0022 A61B5/486 A61B5/681 A61B5/02438 A61B5/14532 A61B2560/0214 G06F19/3418 G06F19/3456 G06F19/3481 G16H20/17 G16H40/63 H02J7/0042 H02J7/0047		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种使用腕戴式装置进行患者健康监测的方法，装置和/或系统。腕戴式设备可包括面板设备和腕带监测设备。最初，可以激活腕戴式设备的传感器以根据第一方案收集用户的传感器数据。可以确定与腕戴式运动相关联的电池水平可以低于预定阈值。作为电池水平的结果，可以使腕戴式设备将一部分传感器数据存储在存储器中。可以修改第一种方案以产生第二种方案。根据第二种方案，传感器激活可以继续。

