



US 20180315883A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2018/0315883 A1**
(43) **Pub. Date: Nov. 1, 2018**(54) **A LIGHT-BASED SENSOR APPARATUS AND ASSOCIATED METHODS***A61B 5/6898* (2013.01); *A61B 5/681* (2013.01); *A61B 5/0205* (2013.01)(71) Applicant: **Nokia Technologies Oy**, Espoo (FI)(72) Inventors: **Alexander BESSONOV**, Cambridge (GB); **Darryl COTTON**, St. Ives (GB); **Adam ROBINSON**, Cambridge (GB)(73) Assignee: **Nokia Technologies Oy**, Espoo (FI)(21) Appl. No.: **15/770,277**(22) PCT Filed: **Oct. 7, 2016**(86) PCT No.: **PCT/FI2016/050701**

§ 371 (c)(1),

(2) Date: **Apr. 23, 2018**(30) **Foreign Application Priority Data**

Oct. 28, 2015 (EP) 15191911.5

Publication Classification(51) **Int. Cl.***H01L 31/173* (2006.01)*H01L 31/113* (2006.01)*H01L 31/024* (2006.01)*A61B 5/0205* (2006.01)*A61B 5/1455* (2006.01)*A61B 5/00* (2006.01)(52) **U.S. Cl.**CPC *H01L 31/173* (2013.01); *H01L 31/1136* (2013.01); *H01L 31/024* (2013.01); *H01L 27/3227* (2013.01); *A61B 5/14552* (2013.01);(57) **ABSTRACT**

An apparatus (201) comprises a light emitter (202) and a photodetector (203) formed on a single fluid-permeable substrate (206) such that the photodetector (203) is able to detect light emitted by the light emitter (202) after interaction of the light with a user of the apparatus (201). The photodetector comprises a channel member (207) which may be made from graphene, respective source and drain electrodes (208, 209), a layer of photosensitive material (210) configured to vary the flow of electrical current through the channel member (207) on exposure to light from the light emitter (202), and a gate electrode (211). The apparatus (201) further comprises a layer of fluid-impermeable dielectric material (212) configured to inhibit a flow of electrical current between the channel member (207) and the gate electrode (211) of the photodetector (203) to enable the electrical conductance of the channel member (207) to be controlled by a voltage applied to the gate electrode (211) and to inhibit exposure of the light emitter (202) to fluid which has permeated through the fluid-permeable substrate (206). The layer of fluid-impermeable dielectric material (212) allows resilient substrates made from polymeric material to be used without the risk of damage to the overlying components caused by the permeated fluid. The dual functionality of the layer of fluid-impermeable dielectric material (212) reduces the number of fabrication steps used to form the apparatus (201) and results in a thinner, more compact device.

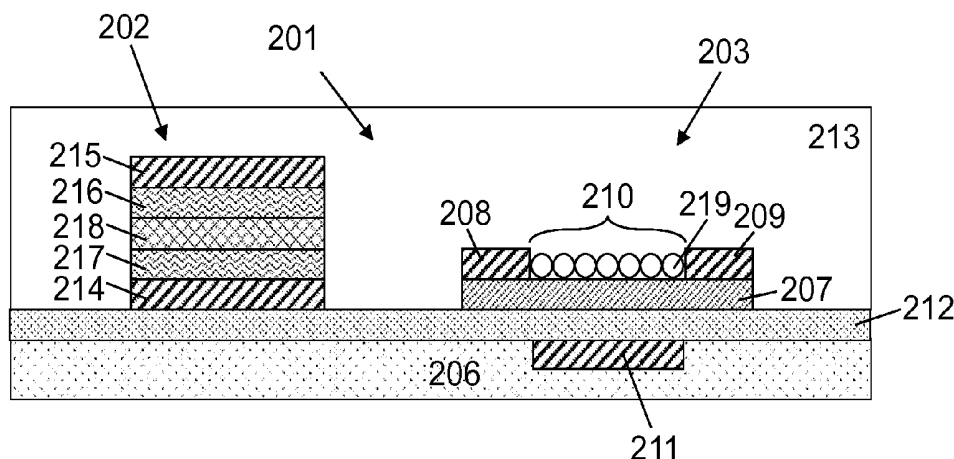


Figure 1a

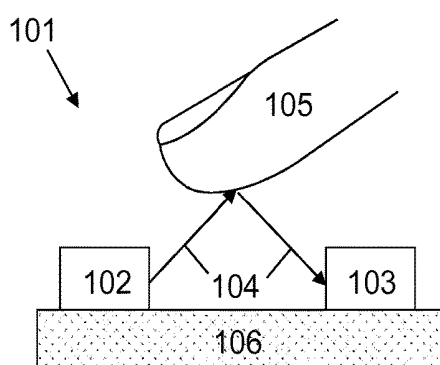


Figure 1b

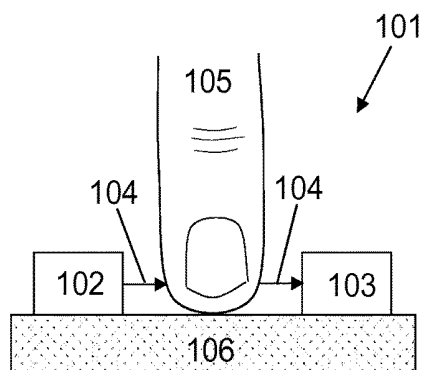


Figure 2

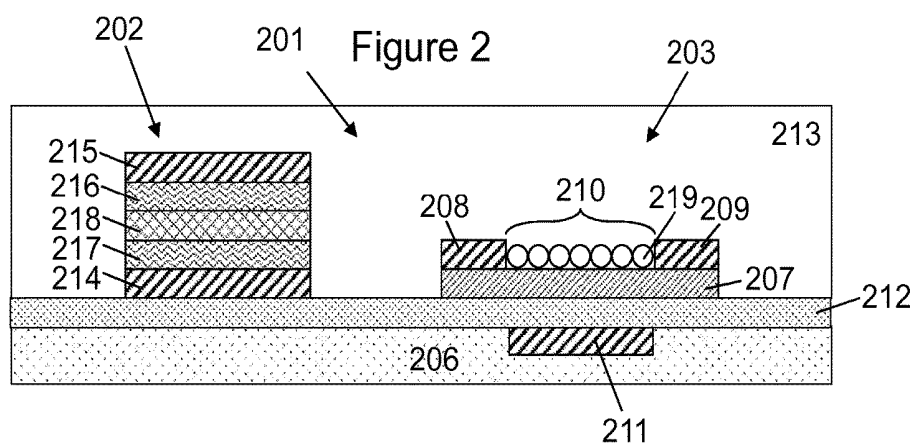


Figure 3a

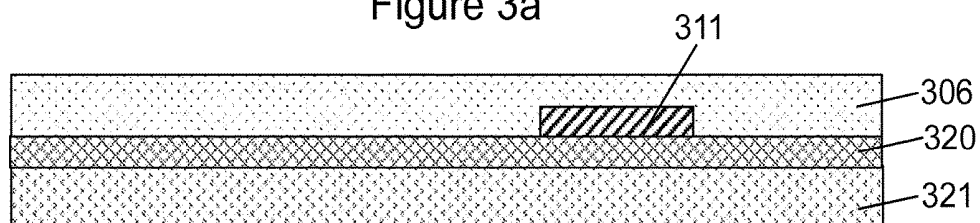


Figure 3b

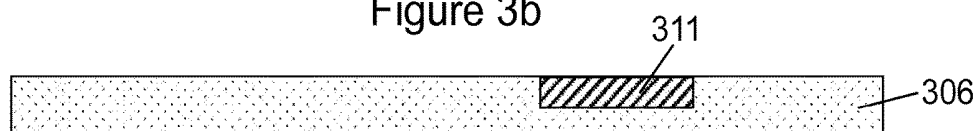


Figure 3c

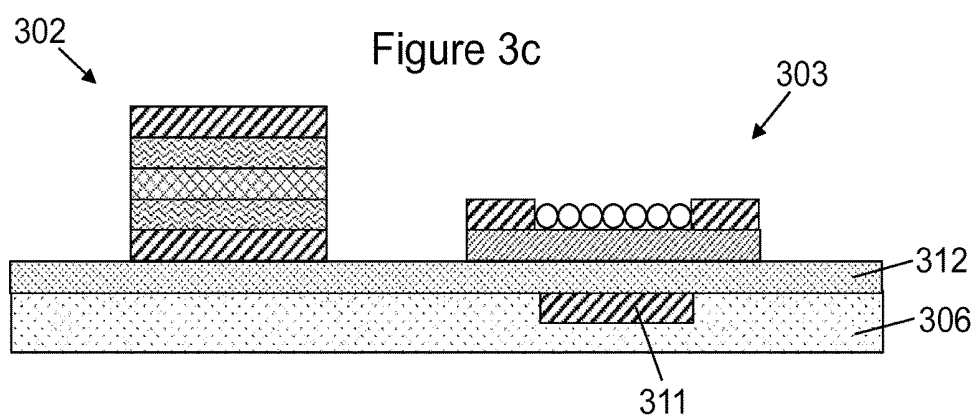


Figure 3d

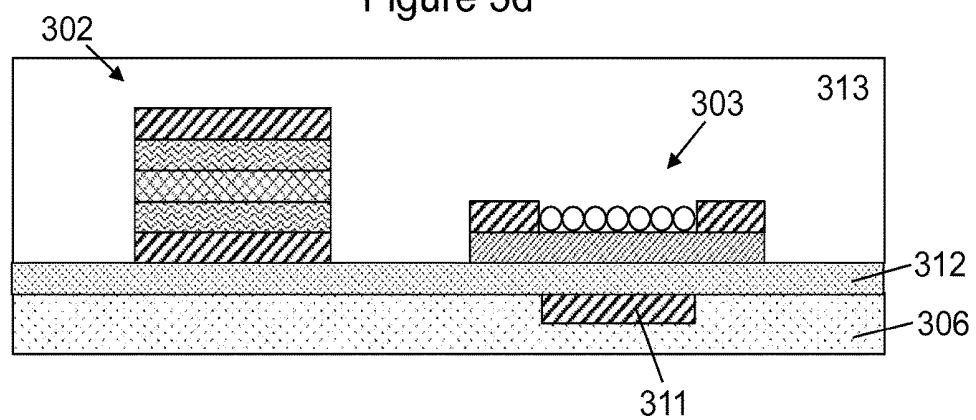


Figure 4

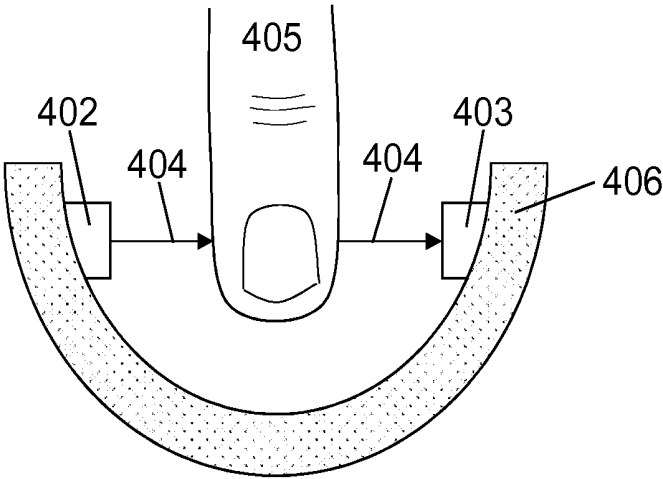


Figure 5

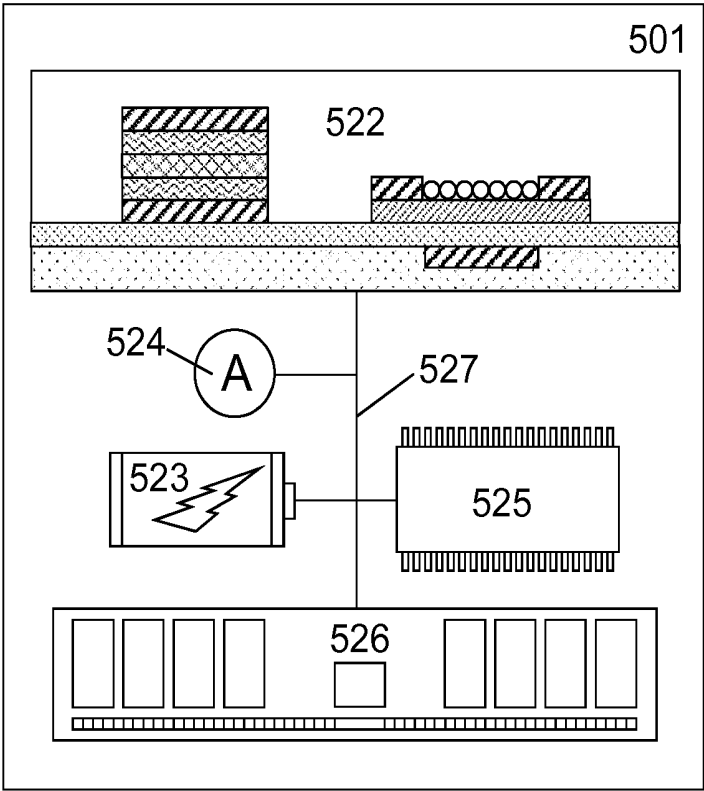


Figure 6a

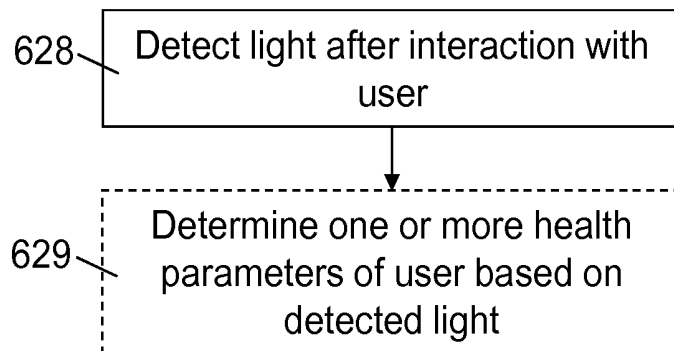


Figure 6b


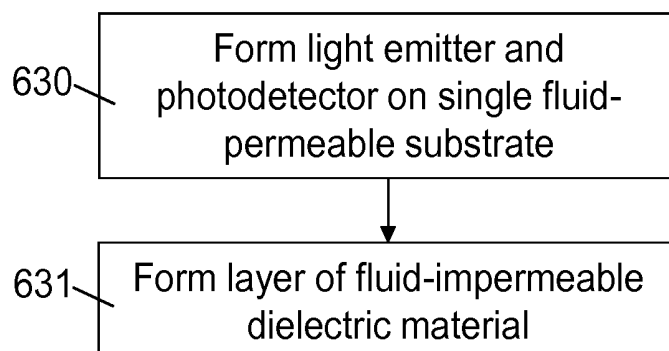


Figure 7



A LIGHT-BASED SENSOR APPARATUS AND ASSOCIATED METHODS

TECHNICAL FIELD

[0001] The present disclosure relates particularly to sensors, associated methods and apparatus. Certain embodiments specifically concern an apparatus comprising a light emitter and a photodetector formed on a single fluid-permeable substrate such that the photodetector is able to detect light emitted by the light emitter after interaction of the light with a user of the apparatus. Certain aspects/embodiments may relate to sensors for medical applications, such as SpO_2 sensors, blood pressure sensors and pulse sensors. Such sensors may form part of portable electronic devices, in particular, so-called hand-portable electronic devices which may be hand-held in use (although they may be placed in a cradle in use). Such hand-portable electronic devices include so-called Personal Digital Assistants (PDAs) and tablet PCs.

[0002] The portable electronic devices/apparatus according to one or more disclosed example aspects/embodiments may provide one or more audio/text/video communication functions (e.g. tele-communication, video-communication, and/or text transmission, Short Message Service (SMS)/Multimedia Message Service (MMS)/emailing functions, interactive/non-interactive viewing functions (e.g. web-browsing, navigation, TV/program viewing functions), music recording/playing functions (e.g. MP3 or other format and/or (FM/AM) radio broadcast recording/playing), downloading/sending of data functions, image capture function (e.g. using a (e.g. in-built) digital camera), and gaming functions.

BACKGROUND

[0003] Research is currently being done to develop new sensor devices.

[0004] The listing or discussion of a prior-published document or any background in this specification should not necessarily be taken as an acknowledgement that the document or background is part of the state of the art or is common general knowledge.

SUMMARY

[0005] According to a first aspect, there is provided an apparatus comprising a light emitter and a photodetector formed on a single fluid-permeable substrate such that the photodetector is able to detect light emitted by the light emitter after interaction of the light with a user of the apparatus,

[0006] the photodetector comprising a channel member and respective source and drain electrodes configured to enable a flow of electrical current through the channel member between the source and drain electrodes, a layer of photosensitive material configured to vary the flow of electrical current through the channel member on exposure to light from the light emitter, and a gate electrode,

[0007] wherein the apparatus comprises a layer of fluid-impermeable dielectric material configured to:

[0008] inhibit a flow of electrical current between the channel member and the gate electrode of the photodetector to enable the electrical conductance of the channel member to be controlled by a voltage applied to the gate electrode; and

[0009] inhibit exposure of the light emitter to fluid which has permeated through the fluid-permeable substrate.

[0010] The fluid-permeable substrate may comprise one or more resilient polymeric materials. The term “resilient” in this sense may be taken to mean that the one or more polymeric materials are capable of returning at least once to their original form after being bent, compressed, or stretched.

[0011] The gate electrode may be embedded within the fluid-permeable substrate, and the layer of fluid-impermeable dielectric material may be positioned between the embedded gate electrode and the channel member.

[0012] The layer of fluid-impermeable dielectric material may be configured to facilitate the dissipation of heat produced by the light emitter.

[0013] The light emitter and photodetector may be at least partly formed on top of the layer of fluid-impermeable dielectric material, and the fluid-impermeable dielectric material on which the light emitter is at least partly formed may have a different thickness than the fluid-impermeable dielectric material on which the photodetector is at least partly formed.

[0014] The layer of fluid-impermeable dielectric material may have a thickness of between 10 and 200 nm, and a surface roughness of less than 1 nm, 5 nm, 10 nm or 25 nm.

[0015] The light emitter and photodetector may be formed on the fluid-permeable substrate such that the photodetector is able to detect light emitted by the light emitter after one or more of reflection of the light from a body part of the user and transmission of the light through a body part of the user.

[0016] One or more of the fluid-permeable substrate and layer of fluid-impermeable dielectric material may be sufficiently resilient to enable the light emitter and photodetector to be positioned on opposite sides of the user's body part by mechanical deformation of the fluid-permeable substrate such that the photodetector can detect the transmitted light.

[0017] One or more of the fluid-permeable substrate and layer of fluid-impermeable dielectric material may be one or more of reversibly flexible, reversibly stretchable and reversibly compressible.

[0018] The light emitter and photodetector may be encapsulated within a fluid-impermeable material to inhibit their exposure to fluid in the surrounding environment.

[0019] The fluid may comprise one or more of a liquid and a gas.

[0020] The fluid may comprise one or more of water and oxygen.

[0021] The layer of fluid-impermeable dielectric material may comprise one or more of SiO_x , SiN_x , AlO_x , Al_2O_3 , AlN_x and HfO_2 .

[0022] The one or more polymeric materials may comprise at least one of polyimide, polyethylene naphthalate and polyethylene terephthalate.

[0023] The light emitter may be one or more of a light-emitting diode, an organic light-emitting diode and an organic light-emitting transistor.

[0024] The light may comprise one or more of visible light, infrared light and ultraviolet light.

[0025] One or more components of the light emitter and photodetector may comprise graphene.

[0026] The layer of photosensitive material may comprise a quantum dot material.

[0027] The layer of fluid-impermeable dielectric material may be configured to prevent exposure of the light emitter to up to 50%, 60%, 70%, 80%, 90% or 100% of the fluid which has permeated through the fluid-permeable substrate.

[0028] The apparatus may be one or more of an electronic device, a portable electronic device, a portable telecommunications device, a mobile phone, a personal digital assistant, a tablet, a phablet, a desktop computer, a laptop computer, a server, a smartphone, a smartwatch, smart eyewear, a sensor, an SpO_2 sensor, a blood pressure sensor, a pulse sensor, and a module for one or more of the same.

[0029] According to a further aspect, there is provided a method of using an apparatus, the apparatus comprising a light emitter and a photodetector formed on a single fluid-permeable substrate such that the photodetector is able to detect light emitted by the light emitter after interaction of the light with a user of the apparatus,

[0030] the photodetector comprising a channel member and respective source and drain electrodes configured to enable a flow of electrical current through the channel member between the source and drain electrodes, a layer of photosensitive material configured to vary the flow of electrical current through the channel member on exposure to light from the light emitter, and a gate electrode,

[0031] wherein the apparatus comprises a layer of fluid-impermeable dielectric material configured to:

[0032] inhibit a flow of electrical current between the channel member and the gate electrode of the photodetector to enable the electrical conductance of the channel member to be controlled by a voltage applied to the gate electrode; and

[0033] inhibit exposure of the light emitter to fluid which has permeated through the fluid-permeable substrate,

[0034] the method comprising detecting, by the photodetector, light emitted by the light emitter after interaction of the light with a user of the apparatus.

[0035] According to a further aspect, there is provided a method of making an apparatus, the method comprising:

[0036] forming a light emitter and a photodetector on a single fluid-permeable substrate such that the photodetector is able to detect light emitted by the light emitter after interaction of the light with a user of the apparatus, the photodetector comprising a channel member and respective source and drain electrodes configured to enable a flow of electrical current through the channel member between the source and drain electrodes, a layer of photosensitive material configured to vary the flow of electrical current through the channel member on exposure to light from the light emitter, and a gate electrode; and

[0037] forming a layer of fluid-impermeable dielectric material configured to:

[0038] inhibit a flow of electrical current between the channel member and the gate electrode of the photodetector to enable the electrical conductance of the channel member to be controlled by a voltage applied to the gate electrode; and

[0039] inhibit exposure of the light emitter to fluid which has permeated through the fluid-permeable substrate.

[0040] Forming the light emitter and photodetector on a single fluid-permeable substrate may comprise depositing a

layer of material which is common to both the light emitter and photodetector, and subsequently dividing the common layer of material into respective portions for the light emitter and photodetector after deposition.

[0041] The steps of any method disclosed herein do not have to be performed in the exact order disclosed, unless explicitly stated or understood by the skilled person.

[0042] Throughout the present specification, descriptors relating to relative orientation and position, such as “top”, “bottom”, “upper”, “lower”, “above” and “below”, as well as any adjective and adverb derivatives thereof, are used in the sense of the orientation of the apparatus as presented in the drawings. However, such descriptors are not intended to be in any way limiting to an intended use of the described or claimed invention.

[0043] Corresponding computer programs for implementing one or more steps of the methods disclosed herein are also within the present disclosure and are encompassed by one or more of the described example embodiments.

[0044] One or more of the computer programs may, when run on a computer, cause the computer to configure any apparatus, including a circuit, controller, or device disclosed herein or perform any method disclosed herein. One or more of the computer programs may be software implementations, and the computer may be considered as any appropriate hardware, including a digital signal processor, a microcontroller, and an implementation in read only memory (ROM), erasable programmable read only memory (EPROM) or electronically erasable programmable read only memory (EEPROM), as non-limiting examples. The software may be an assembly program.

[0045] One or more of the computer programs may be provided on a computer readable medium, which may be a physical computer readable medium such as a disc or a memory device, or may be embodied as a transient signal. Such a transient signal may be a network download, including an internet download.

[0046] The present disclosure includes one or more corresponding aspects, example embodiments or features in isolation or in various combinations whether or not specifically stated (including claimed) in that combination or in isolation. Corresponding means for performing one or more of the discussed functions are also within the present disclosure.

[0047] The above summary is intended to be merely exemplary and non-limiting.

BRIEF DESCRIPTION OF THE FIGURES

[0048] A description is now given, by way of example only, with reference to the accompanying drawings, in which:

[0049] FIG. 1a shows a sensor comprising a photodetector configured to detect reflected light (cross-section);

[0050] FIG. 1b shows a sensor comprising a photodetector configured to detect transmitted light (cross-section);

[0051] FIG. 2 shows one example of the present apparatus (cross-section);

[0052] FIGS. 3a-3d show one method of making the apparatus of FIG. 2 (cross-section);

[0053] FIG. 4 shows another example of the present apparatus comprising a photodetector configured to detect transmitted light (cross-section);

[0054] FIG. 5 shows another example of the present apparatus (schematic);

[0055] FIG. 6a shows a method of using the present apparatus (flow chart);

[0056] FIG. 6b shows a method of making the present apparatus (flow chart); and

[0057] FIG. 7 shows a computer-readable medium comprising a computer program configured to perform, control or enable a method described herein (schematic).

DESCRIPTION OF SPECIFIC ASPECTS/EMBODIMENTS

[0058] There is a growing need for medical professionals to be able to monitor the health of their patients remotely. In order to enable remote monitoring, it is necessary to produce reliable sensor devices that are easy for the patients to use and which can be manufactured at a reasonable cost.

[0059] A number of medical devices are currently being developed which may be suitable for the remote monitoring of patients. These include light-based sensors which can be attached to part of the patient's body to provide information on his/her blood and cardiovascular system. For example, light-based sensors can provide information on oxygen content, blood pressure, pulse and heart rhythm. Of course, health sensors are also used by individuals without reference to remote monitoring by medical professionals, and by patients in the presence of medical professionals.

[0060] FIG. 1a shows one example of a light-based sensor 101 which may be used for blood pressure, pulse or electrocardiography measurements. The apparatus 101 comprises a light emitter 102 and a photodetector 103 formed on a substrate 106 which are configured such that the photodetector 103 is able to detect light 104 emitted by the light emitter 102 after interaction of the light 104 with the patient. In this case, the sensor 101 is arranged such that the photodetector 103 is able to detect light 104 which has been reflected from a body part 105 of the user, such as a finger, toe or ear lobe. Infrared light 104 (e.g. from an infrared diode 102) is directed into the patient's tissue 105 and is reflected back onto the photodetector 103 (e.g. a phototransistor) in quantities related to the amount of blood currently in the artery. When the heart pumps, the user's blood pressure rises sharply, and so does the amount of infrared light 104 received by the photodetector 103. The patient's pulse and heart rhythm can therefore be determined from the pattern of peaks in the detected signal. In addition, the blood pressure can be derived from the time it takes for a pulse to travel down the artery (i.e. the Pulse Wave Transit Time, PWTT) using the waveform of blood pressure pulses.

[0061] FIG. 1b shows an example of a light-based sensor 101 which may be used for SpO₂ measurements. The term SpO₂ refers to the percentage of haemoglobin molecules in the arterial blood which are saturated with oxygen, as determined by pulse oximetry. As per the example shown in FIG. 1a, the apparatus 101 comprises a light emitter 102 and photodetector 103 formed on a substrate 106 which are configured such that the photodetector 103 is able to detect light 104 emitted by the light emitter 102 after interaction of the light 104 with the patient. In this example, however, the sensor 101 is arranged such that the photodetector 103 is able to detect light 104 which has been transmitted through a body part 105 of the user. Most SpO₂ sensors work on extremities such as a finger, toe or ear lobe. Red and infrared light 104 (e.g. from respective light emitting diodes 102) is passed through the patient's tissue 105 onto the photodetector 103. Much of the light 104 is absorbed by tissue, bone

and venous blood, but these amounts do not change dramatically over short periods of time. However, since the amount of arterial blood varies with pulsation, the amount of light 104 absorbed by this blood does vary over short periods of time and can be isolated from the other components. The photodetector 103 measures the amount of red and infrared light 104 received, which provides an indication of the amount of oxygen bound to the haemoglobin in the arterial blood. Oxygenated haemoglobin absorbs more infrared light than red light, whilst deoxygenated haemoglobin absorbs more red light than infrared light. Therefore, by comparing the amounts of red and infrared light 104 received, the sensor 101 is able to calculate the percentage of haemoglobin molecules in the arterial blood which are saturated with oxygen.

[0062] In some cases it may be desirable to monitor a patient's health continuously over long periods of time. To help ensure that the measurements are consistent and reliable during this time, and without interfering too much with the patient's day-to-day life, the sensor apparatus 101 may be attached to the patient. In this scenario, the apparatus 101 should ideally be formed from resilient materials to allow it to conform to the patient's body 105. This improves the comfort of the wearable device 101 and helps to prevent damage caused by mechanical deformation during movement of the patient.

[0063] FIG. 2 shows one example of the present apparatus 201. The apparatus 201 comprises a light emitter 202 and a photodetector 203 formed on a single fluid-permeable substrate 206 such that the photodetector 203 is able to detect light emitted by the light emitter 202 after interaction of the light with a user of the apparatus. The photodetector 203 comprises a channel member 207 and respective source 208 and drain 209 electrodes configured to enable a flow of electrical current through the channel member 207 between the source 208 and drain 209 electrodes, a layer of photo-sensitive material 210 configured to vary the flow of electrical current through the channel member 207 on exposure to light from the light emitter 202, and a gate electrode 211. The apparatus 201 also comprises a layer of fluid-impermeable dielectric material 212 configured to inhibit a flow of electrical current between the channel member 207 and gate electrode 211 of the photodetector 203 to enable the electrical conductance of the channel member 207 to be controlled by a voltage applied to the gate electrode 211. Furthermore, the layer of fluid-impermeable dielectric material 212 is also configured to inhibit exposure of the light emitter 202 (and overlying components of the photodetector 203) to fluid which has permeated through the fluid-permeable substrate 206.

[0064] The layer of fluid-impermeable dielectric material 212 therefore serves as both a gate insulator for the photodetector 203, and as a fluid barrier for the light emitter 202/photodetector 203. The presence of the fluid-impermeable dielectric layer 212 allows plastic substrates 206 to be used without the risk of damage to the overlying components 202, 203 caused by water, oxygen or other fluids which have permeated through the plastic substrate 206. Plastic substrates, which are typically fluid permeable due to their lack of ordering, can be used instead of conventional silicon wafer substrates to take advantage of the flexible/stretchable nature of the plastic. Furthermore, in some cases, the presence of the fluid-impermeable dielectric layer 212 can also create a smoother surface for the overlying com-

ponents **202**, **203** (which advantageously reduces electrostatic interactions caused by the irregular surfaces of plastic substrates) and help to dissipate heat produced by these components (which could otherwise damage plastic substrates due to their relatively low melting points).

[0065] In practice, the fluid-impermeable dielectric material **212** may be configured to prevent exposure of the light emitter **202** and photodetector **203** to up to 50%, 60%, 70%, 80%, 90% or 100% of the fluid which has permeated through the fluid-permeable substrate **206**. The apparatus of FIG. 2 also comprises a layer of fluid-impermeable material **213** configured to encapsulate the light emitter **202** and photodetector **203** to inhibit their exposure to fluid in the surrounding environment (e.g. water droplets in the air).

[0066] The dual functionality of the fluid-impermeable dielectric material **212** reduces the number of fabrication steps used to form the apparatus **201** and results in a thinner, more compact device **201**. In some cases, the layer of fluid-impermeable dielectric material **212** may also be configured to facilitate the dissipation of heat produced by one or more of the light emitter **202** and photodetector **203**, thus preventing the underlying substrate **206** from melting.

[0067] The light emitter **202** may be one or more of a light-emitting diode, an organic light-emitting diode and an organic light-emitting transistor. In the example shown in FIG. 2, the light emitter **202** is an organic light-emitting diode comprising an anode **214** and cathode **215** separated from one another by an electron transporting layer **216**, a hole transporting layer **217** and an emitting layer **218**. When a voltage is applied between the anode **214** and cathode **215**, electrons flow from the cathode **215** through the electron transporting layer **216** towards the anode **214**. Simultaneously, electron-holes flow from the anode **214** through the hole transporting layer **217** towards the cathode **215**. Since the electron transporting layer **216** blocks the flow of holes and the hole transporting layer **217** blocks the flow of electrons, the electrons and holes recombine at the emitting layer **218** positioned therebetween. Recombination of the electrons and holes results in the emission of a light photon from the emitting layer **218** having a frequency which is given by the difference in energy between the highest occupied and lowest unoccupied molecular orbitals of the electron **216** and hole **217** transporting layers. For example, the band gap may be such that the emitted light comprises one or more of visible, infrared and ultraviolet light.

[0068] Typically, the upper electrode **215** (in this case, the cathode) would be substantially optically transparent to allow the generated light photons to exit the top surface of the light emitter **202**. To increase the efficiency of the light emitter **202**, the lower electrode **214** (in this case, the anode) may be formed from a reflective material configured to redirect stray light photons towards the top surface of the light emitter **202**. Additionally or alternatively, the light emitter **202** may comprise a separate layer of reflective material positioned beneath the lower electrode **214**. In view of the above, the upper electrode **215** may comprise graphene or indium-tin-oxide, and the lower electrode **214** may comprise silver or aluminium.

[0069] Regarding the photodetector **203**, the photosensitive material **210** shown in the example of FIG. 2 is a quantum dot material comprising a plurality of quantum dots **219** coated with surface ligands, and the channel member **207** comprises a two-dimensional material. The quantum dots **219** may comprise one or more of CdSe, CdS, PbSe,

PbS, ZnO, ZnS, CZTS, Cu₂S, Bi₂S₃, Ag₂S, HgTe, CdSe, CdHgTe, InAs, InSb, Ge and CIS; the surface ligands may comprise one or more of 1,2-ethanedithiol, pyridine, butylamine and 1,3-benzenedithiol; and the two-dimensional material may comprise one or more of graphene, MoS₂, WS₂, MoSe₂, WSe₂ and WTe₂. When light from the light emitter **202** is incident on the quantum dot material **210**, electron-hole pairs are generated within the quantum dots **219**. After generation of these electron-hole pairs, either the electrons or the holes are transferred to the channel member **207** (depending on the particular surface ligands) leaving the remaining charge carriers localised on the quantum dots **219**. The remaining charge carriers then gate the channel member **207** causing a change in the current flowing therethrough. In this way, the change in electrical current is indicative of the amount of light incident on the photodetector **203**. The photosensitive material **210** of the present apparatus **201** is not limited to quantum dot materials, however. For example, the photosensitive material **210** may be a photodiode comprising a p-n or PIN junction.

[0070] The gate electrode **211** of the photodetector **203** in FIG. 2 is embedded within the fluid-permeable substrate **206** such that the layer of fluid-impermeable dielectric material **212** is positioned between the embedded gate electrode **211** and the channel member **207**. This “back-gate” configuration allows the gate electrode **211** to tune the conductance of the channel member **207** by increasing or decreasing the number of charge carriers to increase the sensitivity of the photodetector **203**. When the channel member **207** comprises graphene, the gate electrode **211** can also be used to switch between p-type conductance and n-type conductance by changing the Dirac point location.

[0071] Furthermore, by embedding the gate electrode **211** within the fluid-permeable substrate **206**, the fluid-impermeable dielectric material **212** can be deposited onto the fluid-permeable substrate **206** as a continuous layer thus providing a planar surface on which to form the light emitter **202** and photodetector **203**. In some cases, the thickness of dielectric material **212** required to inhibit exposure of the light emitter **202** to fluid which has permeated through the fluid-permeable substrate **206** may be different than the thickness of dielectric material **212** required to inhibit a flow of electrical current between the gate electrode **211** and channel member **207** of the photodetector **203**. In this scenario, the fluid-impermeable dielectric material **212** on which the light emitter **202** is formed may have a different thickness than the fluid-impermeable dielectric material **212** on which the photodetector **203** is formed (e.g. by depositing a non-uniform layer of dielectric material **212** on top of the fluid-permeable substrate **206**).

[0072] Non-embedded embodiments are also possible. For example, the gate electrode **211** may be formed on the upper surface of the fluid-permeable substrate **206** with the layer of fluid-impermeable dielectric material **212** deposited thereon. This would, however, result in a non-planar (but not necessarily discontinuous) layer of fluid-impermeable dielectric material **212**.

[0073] The fluid-permeable substrate **206** may comprise one or more polymeric materials configured to provide the required resilience (e.g. reversibly flexible, stretchable and/or compressible). These polymeric materials may comprise at least one of HD Microsystems™ PI-2545, PI-2610 or PI-2525, polyimide, polyethylene naphthalate and polyethylene terephthalate. Substrates formed from polymeric

materials often have irregular surfaces which create a poor interface with the overlying layers of material. It has been found, however, that the presence of the fluid-impermeable dielectric material **212** on top of the fluid-permeable substrate **206** can advantageously reduce the surface roughness. For example, a 25 nm layer of Al_2O_3 on top of a polyethylene naphthalate substrate exhibits a surface roughness of around 1 nm. In general, the layer of fluid-impermeable dielectric material **212** may have a thickness of between 10 and 200 nm, and a surface roughness of less than 1 nm, 5 nm, 10 nm or 25 nm. Suitable dielectric materials include SiO_x , SiN_x , AlO_x , Al_2O_3 , AlN_x and HfO_2 .

[0074] FIGS. 3a-3d illustrate one method of forming the present apparatus. First, a layer of release material **320** is deposited on a carrier wafer **321** (e.g. via chemical vapour deposition) followed by the deposition of a gate electrode **311** (e.g. via evaporation or sputtering through a photoresist mask). The release material **320** may comprise one or more of a refractory metal, a ceramic, SiO , SiO_2 , Mo, W, Al_2O_3 and Si_3N_4 ; the carrier wafer **321** may comprise one or more of silicon, quartz and sapphire; and the gate electrode **311** may comprise one or more of a metal, alloy, gold, silver, copper, aluminium, indium-tin-oxide and graphene. A layer of polymeric material **306** is then deposited on top of the layer of release material **320** such that it encapsulates the gate electrode **311** (FIG. 3a). Deposition of the polymeric material may be performed via spin coating, bar coating or spray coating a liquid polymer and curing to cross-link, or by hot embossing a polymer foil (i.e. heating above the glass transition temperature and imprinting).

[0075] The layer of release material **320** is then etched (e.g. via wet chemical etching using hydrofluoric acid if etching silicon oxide) to remove the release material **320** and carrier wafer **321**, and the stack is turned upside down (e.g. using the polymeric supporting substrate **306** for handling) so that the layer of polymeric material **306** is at the bottom of the stack (FIG. 3b). A layer of fluid-impermeable dielectric material **312** is then formed on the polymeric substrate **306** (e.g. via atomic layer deposition or chemical vapour deposition), and the constituent layers of the light emitter **302** and photodetector **303** are built-up on top of the fluid-impermeable dielectric material **312** using techniques known in the art (FIG. 3c). Finally, a further fluid-impermeable material **313** (typically an electrically insulating material such as a polymer or oxide) is then deposited over the layer of fluid-impermeable dielectric material **312** such that it encapsulates the light emitter **302** and photodetector **303** (FIG. 3d).

[0076] The present apparatus may be used in the reflective or transmissive modes illustrated in FIGS. 1a and 1b, respectively. In the reflective mode, the light emitter **302** and photodetector **303** are formed on the fluid-permeable substrate **306** such that the photodetector **303** is able to detect light emitted by the light emitter **302** after reflection of the light from a body part of the user. In the transmissive mode, on the other hand, the light emitter **302** and photodetector **303** are formed on the fluid-permeable substrate **306** such that the photodetector **303** is able to detect light emitted by the light emitter **302** after transmission of the light through a body part of the user.

[0077] FIG. 4 shows another example of the present apparatus **401** configured for use in the transmissive mode. One reason for using a polymeric substrate is to make the apparatus **401** sufficiently resilient that it is able to conform

to the user's body **405**. In some cases, therefore, the fluid-permeable substrate **406** may be sufficiently resilient to enable the light emitter **402** and photodetector **403** to be positioned on opposite sides of the user's body part **405** by mechanical deformation of the fluid-permeable substrate **406** such that the photodetector **403** can detect the transmitted light **404**. In this example, the light emitter **402** and photodetector **403** are positioned on opposite sides of the user's finger **405**, but they could be attached to the user's toe or ear lobe instead.

[0078] It is important that, in the deformed state, the layer of fluid-impermeable dielectric material is still able to inhibit a flow of electrical current between the channel member and gate electrode of the photodetector **403**, and inhibit exposure of the light emitter **402**/photodetector **403** to fluid which has permeated through the fluid-permeable substrate **406**. In some cases, the layer of fluid-impermeable dielectric material may provide this functionality in both the deformed and relaxed states, whilst in other cases, the layer of fluid-impermeable dielectric material may only provide this functionality in the mechanical state in which it is intended to be used (i.e. the deformed state in FIG. 4).

[0079] Although the above examples utilise resilient polymeric substrates, the fluid-permeable substrate is not limited to such materials. For example, the fluid-permeable substrate could comprise other resilient materials which are inherently fluid-permeable, such as natural or synthetic sponge or a textile.

[0080] FIG. 5 shows another example of the present apparatus **501**. The apparatus **501** may be one or more of an electronic device, a portable electronic device, a portable telecommunications device, a mobile phone, a personal digital assistant, a tablet, a phablet, a desktop computer, a laptop computer, a server, a smartphone, a smartwatch, smart eyewear, a sensor, an SpO_2 sensor, a blood pressure sensor, a pulse sensor, and a module for one or more of the same. In the example shown, the apparatus **501** comprises the various components described previously (denoted collectively by reference numeral **522**), a power source **523**, an ammeter **524**, a processor **525** and a storage medium **526**, which are electrically connected to one another by a data bus **527**.

[0081] The processor **525** is configured for general operation of the apparatus **501** by providing signalling to, and receiving signalling from, the other components to manage their operation. The storage medium **526** is configured to store computer code configured to perform, control or enable operation of the apparatus **501**. The storage medium **526** may also be configured to store settings for the other components. The processor **525** may access the storage medium **526** to retrieve the component settings in order to manage the operation of the other components.

[0082] Under the control of the processor **525**, the power source **523** is configured to apply a voltage between the cathode and anode of the light emitter to generate light photons for interaction with the user. In addition, the power source **523** is configured to apply a voltage between the source and drain electrodes of the photodetector to enable a flow of electrical current through the channel member, and a further voltage to the gate electrode to control the electrical conductance of the channel member.

[0083] The ammeter **524** is configured to measure the current through the channel member of the photodetector so that any changes in current caused by light from the light

emitter can be determined. Based on these changes in current, one or more parameters relating to the user's health can be calculated (e.g. blood pressure, oxygen content, pulse and heart rhythm). The user's health parameters may be calculated automatically by the processor 525 or manually by the user or a health professional.

[0084] The processor 525 may be a microprocessor, including an Application Specific Integrated Circuit (ASIC). The storage medium 526 may be a temporary storage medium such as a volatile random access memory. On the other hand, the storage medium 526 may be a permanent storage medium 526 such as a hard disk drive, a flash memory, or a non-volatile random access memory. The power source 523 may comprise one or more of a primary battery, a secondary battery, a capacitor, a supercapacitor and a battery-capacitor hybrid.

[0085] FIG. 6a shows schematically the main steps 628-629 of a method of using the present apparatus. The method generally comprises: detecting, by a photodetector, light emitted by a light emitter after interaction of the light with a user of the apparatus 628; and determining one or more health parameters of the user based on the detected light 629.

[0086] FIG. 6b shows schematically the main steps 630-631 of a method of making the present apparatus. The method generally comprises: forming a light emitter and a photodetector on a single fluid-permeable substrate such that the photodetector is able to detect light emitted by the light emitter after interaction of the light with a user of the apparatus 630; and forming a layer of fluid-impermeable dielectric material configured to inhibit a flow of electrical current between a channel member and the gate electrode of the photodetector to enable the electrical conductance of the channel member to be controlled by a voltage applied to the gate electrode, and inhibit exposure of the light emitter to fluid which has permeated through the fluid-permeable substrate 631.

[0087] FIG. 7 illustrates schematically a computer/processor readable medium 732 providing a computer program according to one embodiment. The computer program may comprise computer code configured to perform, control or enable one or more of the method steps 628-631 of FIG. 6a or 6b. In this example, the computer/processor readable medium 732 is a disc such as a digital versatile disc (DVD) or a compact disc (CD). In other embodiments, the computer/processor readable medium 732 may be any medium that has been programmed in such a way as to carry out an inventive function. The computer/processor readable medium 732 may be a removable memory device such as a memory stick or memory card (SD, mini SD, micro SD or nano SD).

[0088] Other embodiments depicted in the figures have been provided with reference numerals that correspond to similar features of earlier described embodiments. For example, feature number 1 can also correspond to numbers 101, 201, 301 etc. These numbered features may appear in the figures but may not have been directly referred to within the description of these particular embodiments. These have still been provided in the figures to aid understanding of the further embodiments, particularly in relation to the features of similar earlier described embodiments.

[0089] It will be appreciated to the skilled reader that any mentioned apparatus/device and/or other features of particular mentioned apparatus/device may be provided by apparatus arranged such that they become configured to carry out

the desired operations only when enabled, e.g. switched on, or the like. In such cases, they may not necessarily have the appropriate software loaded into the active memory in the non-enabled (e.g. switched off state) and only load the appropriate software in the enabled (e.g. on state). The apparatus may comprise hardware circuitry and/or firmware. The apparatus may comprise software loaded onto memory. Such software/computer programs may be recorded on the same memory/processor/functional units and/or on one or more memories/processors/functional units.

[0090] In some embodiments, a particular mentioned apparatus/device may be pre-programmed with the appropriate software to carry out desired operations, and wherein the appropriate software can be enabled for use by a user downloading a "key", for example, to unlock/enable the software and its associated functionality. Advantages associated with such embodiments can include a reduced requirement to download data when further functionality is required for a device, and this can be useful in examples where a device is perceived to have sufficient capacity to store such pre-programmed software for functionality that may not be enabled by a user.

[0091] It will be appreciated that any mentioned apparatus/circuitry/elements/processor may have other functions in addition to the mentioned functions, and that these functions may be performed by the same apparatus/circuitry/elements/processor. One or more disclosed aspects may encompass the electronic distribution of associated computer programs and computer programs (which may be source/transport encoded) recorded on an appropriate carrier (e.g. memory, signal).

[0092] It will be appreciated that any "computer" described herein can comprise a collection of one or more individual processors/processing elements that may or may not be located on the same circuit board, or the same region/position of a circuit board or even the same device. In some embodiments one or more of any mentioned processors may be distributed over a plurality of devices. The same or different processor/processing elements may perform one or more functions described herein.

[0093] It will be appreciated that the term "signalling" may refer to one or more signals transmitted as a series of transmitted and/or received signals. The series of signals may comprise one, two, three, four or even more individual signal components or distinct signals to make up said signalling. Some or all of these individual signals may be transmitted/received simultaneously, in sequence, and/or such that they temporally overlap one another.

[0094] With reference to any discussion of any mentioned computer and/or processor and memory (e.g. including ROM, CD-ROM etc), these may comprise a computer processor, Application Specific Integrated Circuit (ASIC), field-programmable gate array (FPGA), and/or other hardware components that have been programmed in such a way to carry out the inventive function.

[0095] The applicant hereby discloses in isolation each individual feature described herein and any combination of two or more such features, to the extent that such features or combinations are capable of being carried out based on the present specification as a whole, in the light of the common general knowledge of a person skilled in the art, irrespective of whether such features or combinations of features solve any problems disclosed herein, and without limitation to the scope of the claims. The applicant indicates that the dis-

closed aspects/embodiments may consist of any such individual feature or combination of features. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the disclosure.

[0096] While there have been shown and described and pointed out fundamental novel features as applied to different embodiments thereof, it will be understood that various omissions and substitutions and changes in the form and details of the devices and methods described may be made by those skilled in the art without departing from the spirit of the invention. For example, it is expressly intended that all combinations of those elements and/or method steps which perform substantially the same function in substantially the same way to achieve the same results are within the scope of the invention. Moreover, it should be recognized that structures and/or elements and/or method steps shown and/or described in connection with any disclosed form or embodiment may be incorporated in any other disclosed or described or suggested form or embodiment as a general matter of design choice. Furthermore, in the claims means-plus-function clauses are intended to cover the structures described herein as performing the recited function and not only structural equivalents, but also equivalent structures. Thus although a nail and a screw may not be structural equivalents in that a nail employs a cylindrical surface to secure wooden parts together, whereas a screw employs a helical surface, in the environment of fastening wooden parts, a nail and a screw may be equivalent structures.

1-15. (canceled)

16. An apparatus comprising:

a light emitter and a photodetector formed on a single fluid-permeable substrate,

the photodetector comprising a channel member and respective source and drain electrodes configured to enable a flow of electrical current through the channel member between the source and drain electrodes,

a layer of photosensitive material configured to vary the flow of electrical current through the channel member on exposure to light from the light emitter, and from a gate electrode,

a layer of fluid-impermeable dielectric material configured to:

inhibit a flow of electrical current between the channel member and the gate electrode of the photodetector to enable the electrical conductance of the channel member to be controlled by a voltage applied to the gate electrode; and

inhibit exposure of the light emitter to fluid which has permeated through the fluid-permeable substrate.

17. The apparatus of claim 16, wherein the fluid-permeable substrate comprises one or more resilient polymeric materials.

18. The apparatus of claim 16, wherein the gate electrode is embedded within the fluid-permeable substrate, and the layer of fluid-impermeable dielectric material is positioned between the embedded gate electrode and the channel member.

19. The apparatus of claim 16, wherein the layer of fluid-impermeable dielectric material is configured to facilitate the dissipation of heat produced by the light emitter.

20. The apparatus of claim 16, wherein the light emitter and photodetector are at least partly formed on top of the layer of fluid-impermeable dielectric material, and wherein

the fluid-impermeable dielectric material on which the light emitter is at least partly formed has a different thickness than the fluid-impermeable dielectric material on which the photodetector is at least partly formed.

21. The apparatus of claim 16, wherein the layer of fluid-impermeable dielectric material has a thickness of between 10 and 200 nm, and a surface roughness of less than 1 nm, 5 nm, 10 nm or 25 nm.

22. The apparatus of claim 16, wherein the light emitter and photodetector are formed on the fluid-permeable substrate such that the photodetector is able to detect light emitted by the light emitter after one or more of reflection of the light from a body part of the user and transmission of the light through a body part of the user.

23. The apparatus of claim 22, wherein one or more of the fluid-permeable substrate and layer of fluid-impermeable dielectric material are sufficiently resilient to enable the light emitter and photodetector to be positioned on opposite sides of the user's body part by mechanical deformation of the fluid-permeable substrate such that the photodetector can detect the transmitted light.

24. The apparatus of claim 16, wherein the light emitter and photodetector are encapsulated within a fluid-impermeable material to inhibit their exposure to fluid in the surrounding environment.

25. The apparatus of claim 16, wherein the fluid comprises one or more of water and oxygen.

26. The apparatus of claim 16, wherein the layer of fluid-impermeable dielectric material is configured to prevent exposure of the light emitter to up to 50%, 60%, 70%, 80%, 90% or 100% of the fluid which has permeated through the fluid-permeable substrate.

27. The apparatus of claim 16, wherein the apparatus is one or more of an electronic device, a portable electronic device, a portable telecommunications device, a mobile phone, a personal digital assistant, a tablet, a phablet, a desktop computer, a laptop computer, a server, a smartphone, a smartwatch, smart eyewear, a sensor, an SpO₂ sensor, a blood pressure sensor, a pulse sensor, and a module for one or more of the same.

28. A method of using an apparatus,

the apparatus comprising a light emitter and a photodetector formed on a single fluid-permeable substrate,

the photodetector comprising a channel member and respective source and drain electrodes configured to enable a flow of electrical current through the channel member between the source and drain electrodes, a layer of photosensitive material configured to vary the flow of electrical current through the channel member on exposure to light from the light emitter, and from a gate electrode,

wherein the apparatus comprises a layer of fluid-impermeable dielectric material configured to:

inhibit a flow of electrical current between the channel member and the gate electrode of the photodetector to enable the electrical conductance of the channel member to be controlled by a voltage applied to the gate electrode; and

inhibit exposure of the light emitter to fluid which has permeated through the fluid-permeable substrate,

the method comprising detecting, by the photodetector, light emitted by the light emitter after interaction of the light with a user of the apparatus.

29. The method of claim **28**, wherein the fluid-permeable substrate comprises one or more resilient polymeric materials.

30. The method of claim **28**, wherein the layer of fluid-impermeable dielectric material is configured to facilitate the dissipation of heat produced by the light emitter.

31. The method of claim **28**, wherein the layer of fluid-impermeable dielectric material has a thickness of between 10 and 200 nm, and a surface roughness of less than 1 nm, 5 nm, 10 nm or 25 nm.

32. The method of claim **28**, wherein the light emitter and photodetector are encapsulated within a fluid-impermeable material to inhibit their exposure to fluid in the surrounding environment.

33. The method of claim **28**, wherein the fluid comprises one or more of water and oxygen.

34. A method of making an apparatus, the method comprising:

forming a light emitter and a photodetector on a single fluid-permeable substrate, the photodetector compris-

ing a channel member and respective source and drain electrodes configured to enable a flow of electrical current through the channel member between the source and drain electrodes, a layer of photosensitive material configured to vary the flow of electrical current through the channel member on exposure to light from the light emitter, and from a gate electrode; and forming a layer of fluid-impermeable dielectric material configured to:

inhibit a flow of electrical current between the channel member and the gate electrode of the photodetector to enable the electrical conductance of the channel member to be controlled by a voltage applied to the gate electrode; and

inhibit exposure of the light emitter to fluid which has permeated through the fluid-permeable substrate.

35. A computer program comprising computer code configured to perform the method of claim **28**.

* * * * *

专利名称(译)	基于光的传感器设备和相关方法		
公开(公告)号	US20180315883A1	公开(公告)日	2018-11-01
申请号	US15/770277	申请日	2016-10-07
[标]申请(专利权)人(译)	诺基亚技术有限公司		
申请(专利权)人(译)	NOKIA TECHNOLOGIES OY		
当前申请(专利权)人(译)	NOKIA TECHNOLOGIES OY		
[标]发明人	BESSONOV ALEXANDER COTTON DARRYL ROBINSON ADAM		
发明人	BESSONOV, ALEXANDER COTTON, DARRYL ROBINSON, ADAM		
IPC分类号	H01L31/173 H01L31/113 H01L31/024 A61B5/0205 A61B5/1455 A61B5/00		
CPC分类号	H01L31/173 H01L31/1136 H01L31/024 A61B5/0205 A61B5/14552 A61B5/6898 A61B5/681 H01L27/3227 A61B5/021 A61B5/02433 A61B2562/0238 A61B2562/12 A61B5/6826 A61B2562/0233		
优先权	2015191911 2015-10-28 EP		
外部链接	Espacenet USPTO		

摘要(译)

装置 (201) 包括在单个流体可渗透基板 (206) 上形成的光发射器 (202) 和光电探测器 (203)。这样光电探测器 (203) 能够在光与设备使用者相互作用后检测光发射器发出的光 (202) (201) 的)。光电探测器包括通道构件 (207)，其可以由石墨烯，相应的源电极和漏电极 (209) 制成，一层光敏材料 (210) 配置为在暴露于来自光发射器的光 (202) 和栅极时改变通过通道构件的电流 (207) 电极 (211)。该装置 (201) 还包括一层不透流体的介电材料 (212)，其被配置为抑制流动通道构件 (207) 与光电探测器 (203) 的栅电极 (211) 之间的电流，以实现电导率通道构件 (207) 由施加到栅极电极 (211) 的电压控制并抑制发光器的曝光 (202) 渗透透过流体可渗透基质的流体 (206)。该流体不可渗透的介电材料层 (212) 允许使用由聚合物材料制成的弹性基底，而没有由渗透流体引起的对上覆部件的损坏的风险。流体不可渗透的介电材料层 (212) 的双重功能减少了用于形成设备的制造步骤的数量 (201) 并且导致更薄，更多紧凑设备。

