

US010182661B2

(12) **United States Patent**  
**Nunn et al.**

(10) **Patent No.:** **US 10,182,661 B2**  
(45) **Date of Patent:** **Jan. 22, 2019**

(54) **INFLATABLE AIR MATTRESS ALERT AND MONITORING SYSTEM**

(58) **Field of Classification Search**  
CPC ..... A47C 27/083; A47C 27/082; A47C 27/10;  
A47C 27/088; A47C 27/15; A47C 27/04;  
(Continued)

(71) Applicants: **Sleep Number Corporation**,  
Minneapolis, MN (US); **Select Comfort Retail Corporation**, Minneapolis, MN (US)

(56) **References Cited**

(72) Inventors: **Rob Nunn**, Eden Prairie, MN (US);  
**Wade Daniel Palashewski**, Andover, MN (US); **Matthew Wayne Tilstra**, Rogers, MN (US); **Stacy Stusynski**, Blaine, MN (US); **Steven Young**, Campbell, CA (US); **Carl Hewitt**, Campbell, CA (US)

U.S. PATENT DOCUMENTS

3,727,606 A 4/1973 Sielaff  
4,146,885 A 3/1979 Lawson, Jr.  
(Continued)

FOREIGN PATENT DOCUMENTS

JP 2004/049388 2/2004  
JP 2004-229875 A 8/2004  
(Continued)

(73) Assignee: **Sleep Number Corporation and Select Comfort Retail Corporation**, Minneapolis, MN (US)

OTHER PUBLICATIONS

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 821 days.

U.S. Appl. No. 14/687,633, filed Apr. 15, 2015, Brosnan et al.  
(Continued)

(21) Appl. No.: **14/209,222**

(22) Filed: **Mar. 13, 2014**

*Primary Examiner* — Nicholas F Polito  
*Assistant Examiner* — Morgan J McClure

(65) **Prior Publication Data**

US 2014/0259433 A1 Sep. 18, 2014

(74) *Attorney, Agent, or Firm* — Fish & Richardson P.C.

**Related U.S. Application Data**

(57) **ABSTRACT**


(60) Provisional application No. 61/781,266, filed on Mar. 14, 2013.

This disclosure describes, among other things, techniques for waking a user by changing the user's sleep environment. In one example, a method includes receiving, at a central controller of an air mattress system, at least one user alarm setting, generating, via the central controller, at least one instruction based on the received user alarm setting, and transmitting, from the central controller, the at least one instruction to a first component of the air mattress system to adjust a feature of the first component.

(51) **Int. Cl.**  
**A47C 27/08** (2006.01)  
**A47C 31/00** (2006.01)  
(Continued)

(52) **U.S. Cl.**  
CPC ..... **A47C 27/083** (2013.01); **A47C 31/00** (2013.01); **A47C 27/082** (2013.01); **A47C 27/10** (2013.01); **A61B 5/1115** (2013.01); **A61B 5/6892** (2013.01)

**26 Claims, 7 Drawing Sheets**

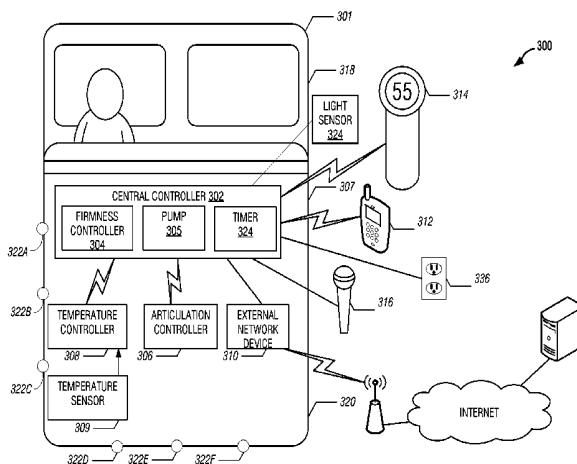



(56)		References Cited					
		U.S. PATENT DOCUMENTS					
8,032,960	B2	10/2011	Rawls-Meehan	2007/0118054	A1	5/2007	Pinhas et al.
8,046,114	B2	10/2011	Rawls-Meehan	2007/0149883	A1	6/2007	Yesha
8,046,115	B2	10/2011	Rawls-Meehan	2007/0179334	A1	8/2007	Groves et al.
8,046,116	B2	10/2011	Rawls-Meehan	2007/0180047	A1	8/2007	Dong et al.
8,046,117	B2	10/2011	Rawls-Meehan	2007/0180618	A1	8/2007	Weismiller et al.
8,050,805	B2	11/2011	Rawls-Meehan	2007/0276202	A1	11/2007	Raisanen et al.
8,052,612	B2	11/2011	Tang	2008/0052837	A1*	3/2008	Blumberg ..... A47C 23/002 5/727
8,065,764	B2	11/2011	Kramer	2008/0071200	A1	3/2008	Rawls-Meehan
8,069,852	B2	12/2011	Burton	2008/0077020	A1	3/2008	Young et al.
8,073,535	B2	12/2011	Jung et al.	2008/0092291	A1	4/2008	Rawls-Meehan
8,078,269	B2	12/2011	Suzuki et al.	2008/0092292	A1	4/2008	Rawls-Meehan
8,078,336	B2	12/2011	Rawls-Meehan	2008/0092293	A1	4/2008	Rawls-Meehan
8,078,337	B2	12/2011	Rawls-Meehan	2008/0092294	A1	4/2008	Rawls-Meehan
8,083,682	B2	12/2011	Dalal et al.	2008/0093784	A1	4/2008	Rawls-Meehan
8,090,478	B2	1/2012	Skinner et al.	2008/0097774	A1	4/2008	Rawls-Meehan
8,092,399	B2	1/2012	Sasaki	2008/0097778	A1	4/2008	Rawls-Meehan
8,094,013	B1	1/2012	Lee et al.	2008/0097779	A1	4/2008	Rawls-Meehan
8,096,960	B2	1/2012	Loree, IV et al.	2008/0104750	A1	5/2008	Rawls-Meehan
8,144,001	B1	3/2012	D'Souza	2008/0104754	A1	5/2008	Rawls-Meehan
8,146,191	B2	4/2012	Bobey et al.	2008/0104755	A1	5/2008	Rawls-Meehan
8,150,562	B2	4/2012	Rawls-Meehan	2008/0104756	A1	5/2008	Rawls-Meehan
8,166,589	B2	5/2012	Hijlkema	2008/0104757	A1	5/2008	Rawls-Meehan
8,181,290	B2	5/2012	Brykalski et al.	2008/0104758	A1	5/2008	Rawls-Meehan
8,181,296	B2	5/2012	Rawls-Meehan	2008/0104759	A1	5/2008	Rawls-Meehan
8,266,742	B2	9/2012	Andrienko	2008/0104760	A1	5/2008	Rawls-Meehan
8,272,892	B2	9/2012	McNeely et al.	2008/0104761	A1	5/2008	Rawls-Meehan
8,276,585	B2	10/2012	Buckley	2008/0109959	A1	5/2008	Rawls-Meehan
8,279,057	B2	10/2012	Hirose	2008/0109964	A1	5/2008	Flocard et al.
8,280,748	B2	10/2012	Allen	2008/0109965	A1	5/2008	Mossbeck
8,281,433	B2	10/2012	Riley et al.	2008/0115272	A1	5/2008	Rawls-Meehan
8,282,452	B2	10/2012	Grigsby et al.	2008/0115273	A1	5/2008	Rawls-Meehan
8,284,047	B2	10/2012	Collins, Jr.	2008/0115274	A1	5/2008	Rawls-Meehan
8,287,452	B2	10/2012	Young et al.	2008/0115275	A1	5/2008	Rawls-Meehan
8,336,369	B2	12/2012	Mahoney	2008/0115276	A1	5/2008	Rawls-Meehan
8,341,784	B2	1/2013	Scott	2008/0115277	A1	5/2008	Rawls-Meehan
8,341,786	B2	1/2013	Oexman et al.	2008/0115278	A1	5/2008	Rawls-Meehan
8,348,840	B2	1/2013	Heit et al.	2008/0115279	A1	5/2008	Rawls-Meehan
8,350,709	B2	1/2013	Receveur	2008/0115280	A1	5/2008	Rawls-Meehan
8,375,488	B2	2/2013	Rawls-Meehan	2008/0115281	A1	5/2008	Rawls-Meehan
8,376,954	B2	2/2013	Lange et al.	2008/0115282	A1	5/2008	Rawls-Meehan
8,382,484	B2	2/2013	Wetmore et al.	2008/0120775	A1	5/2008	Rawls-Meehan
8,386,008	B2	2/2013	Yuen et al.	2008/0120776	A1	5/2008	Rawls-Meehan
8,398,538	B2	3/2013	Dothie	2008/0120777	A1	5/2008	Rawls-Meehan
8,403,865	B2	3/2013	Halperin et al.	2008/0120778	A1	5/2008	Rawls-Meehan
8,413,274	B2	4/2013	Weismiller et al.	2008/0120779	A1	5/2008	Rawls-Meehan
8,421,606	B2	4/2013	Collins, Jr. et al.	2008/0120784	A1	5/2008	Warner et al.
8,428,696	B2	4/2013	Foo	2008/0122616	A1	5/2008	Warner
8,517,953	B2	4/2013	Lange et al.	2008/0126122	A1	5/2008	Warner et al.
8,444,558	B2	5/2013	Young et al.	2008/0126132	A1	5/2008	Warner
8,620,615	B2	12/2013	Oexman	2008/0127418	A1	6/2008	Rawls-Meehan
8,672,853	B2	3/2014	Young	2008/0127424	A1	6/2008	Rawls-Meehan
8,679,034	B2	3/2014	Halperin et al.	2008/0147442	A1	6/2008	Warner
8,769,747	B2	7/2014	Mahoney et al.	2008/0162171	A1	7/2008	Rawls-Meehan
8,840,564	B2	9/2014	Pinhas et al.	2008/0189865	A1	8/2008	Bhai
8,931,329	B2	1/2015	Mahoney et al.	2008/0275314	A1	11/2008	Mack et al.
8,966,689	B2	3/2015	McGuire et al.	2008/0281611	A1	11/2008	Rawls-Meehan
8,973,183	B1	3/2015	Palashewski et al.	2008/0281612	A1	11/2008	Rawls-Meehan
8,984,687	B2	3/2015	Stusynski et al.	2008/0281613	A1	11/2008	Rawls-Meehan
2002/0124311	A1	9/2002	Peftoulidis	2008/0288272	A1	11/2008	Rawls-Meehan
2003/0045806	A1	3/2003	Brydon	2008/0288273	A1	11/2008	Rawls-Meehan
2003/0128125	A1	6/2003	Burbank et al.	2008/0306351	A1	12/2008	Izumi
2003/0166995	A1	9/2003	Jansen	2008/0307582	A1	12/2008	Flocard et al.
2003/0182728	A1	10/2003	Chapman et al.	2009/0018853	A1	1/2009	Rawls-Meehan
2003/0221261	A1	12/2003	Torbet et al.	2009/0018854	A1	1/2009	Rawls-Meehan
2004/0049132	A1	3/2004	Barron et al.	2009/0018855	A1	1/2009	Rawls-Meehan
2005/0022606	A1	2/2005	Partin et al.	2009/0018857	A1	1/2009	Rawls-Meehan
2005/0038326	A1	2/2005	Mathur	2009/0018858	A1	1/2009	Rawls-Meehan
2005/0115561	A1	6/2005	Stahmann et al.	2009/0024406	A1	1/2009	Rawls-Meehan
2005/0190068	A1	9/2005	Gentry et al.	2009/0037205	A1	2/2009	Rawls-Meehan
2005/0283039	A1	12/2005	Cornel	2009/0043595	A1	2/2009	Rawls-Meehan
2006/0020178	A1	1/2006	Sotos et al.	2009/0064420	A1	3/2009	Rawls-Meehan
2006/0031996	A1	2/2006	Rawls-Meehan	2009/0100599	A1	4/2009	Rawls-Meehan
2006/0047217	A1	3/2006	Mirtalebi	2009/0121660	A1	5/2009	Rawls-Meehan
2006/0152378	A1	7/2006	Lokhorst	2009/0139029	A1	6/2009	Rawls-Meehan
2006/0162074	A1	7/2006	Bader	2009/0203972	A1	8/2009	Heneghan et al.
				2009/0275808	A1	11/2009	DiMaio et al.
				2009/0314354	A1	12/2009	Chaffee

(56)

References Cited

U.S. PATENT DOCUMENTS

2010/0025900 A1 2/2010 Rawls-Meehan  
 2010/0090383 A1 4/2010 Rawls-Meehan  
 2010/0094139 A1 4/2010 Brauers et al.  
 2010/0099954 A1 4/2010 Dickinson et al.  
 2010/0152546 A1 6/2010 Behan et al.  
 2010/0170043 A1 7/2010 Young et al.  
 2010/0174198 A1 7/2010 Young  
 2010/0174199 A1 7/2010 Young et al.  
 2010/0191136 A1 7/2010 Wolford  
 2010/0199432 A1 8/2010 Rawls-Meehan  
 2010/0231421 A1 9/2010 Rawls-Meehan  
 2010/0302044 A1 12/2010 Chacon et al.  
 2010/0317930 A1 12/2010 Oexman et al.  
 2011/0001622 A1 1/2011 Gentry  
 2011/0010014 A1 1/2011 Oexman et al.  
 2011/0015495 A1 1/2011 Dothie et al.  
 2011/0041592 A1 2/2011 Schmoeller et al.  
 2011/0043359 A1\* 2/2011 Toler ..... A61B 5/1115  
 340/539.15  
 2011/0068935 A1 3/2011 Riley et al.  
 2011/0087113 A1 4/2011 Mack et al.  
 2011/0094041 A1 4/2011 Rawls-Meehan  
 2011/0115635 A1 5/2011 Petrovski et al.  
 2011/0144455 A1 6/2011 Young et al.  
 2011/0156915 A1 6/2011 Brauers et al.  
 2011/0163885 A1 7/2011 Poulos et al.  
 2011/0224510 A1 9/2011 Oakhill  
 2011/0239374 A1 10/2011 Rawls-Meehan  
 2011/0252569 A1 10/2011 Rawls-Meehan  
 2011/0258784 A1 10/2011 Rawls-Meehan  
 2011/0282216 A1 11/2011 Shinar et al.  
 2011/0283462 A1 11/2011 Rawls-Meehan  
 2011/0291795 A1 12/2011 Rawls-Meehan  
 2011/0291842 A1 12/2011 Oexman  
 2011/0295083 A1 12/2011 Doelling et al.  
 2011/0302720 A1 12/2011 Yakam et al.  
 2011/0306844 A1 12/2011 Young  
 2012/0025992 A1 2/2012 Tallent et al.  
 2012/0053423 A1 3/2012 Kenalty et al.  
 2012/0053424 A1 3/2012 Kenalty et al.  
 2012/0056729 A1 3/2012 Rawls-Meehan  
 2012/0057685 A1 3/2012 Rawls-Meehan  
 2012/0090698 A1 4/2012 Giori et al.  
 2012/0110738 A1 5/2012 Rawls-Meehan  
 2012/0110739 A1 5/2012 Rawls-Meehan  
 2012/0110740 A1 5/2012 Rawls-Meehan  
 2012/0112890 A1 5/2012 Rawls-Meehan  
 2012/0112891 A1 5/2012 Rawls-Meehan  
 2012/0112892 A1 5/2012 Rawls-Meehan  
 2012/0116591 A1 5/2012 Rawls-Meehan  
 2012/0119886 A1 5/2012 Rawls-Meehan  
 2012/0119887 A1 5/2012 Rawls-Meehan  
 2012/0138067 A1 6/2012 Rawls-Meehan  
 2012/0154155 A1 6/2012 Brasch  
 2012/0186019 A1 7/2012 Rawls-Meehan  
 2012/0198632 A1 8/2012 Rawls-Meehan  
 2012/0311790 A1 12/2012 Nomura et al.  
 2013/0160212 A1 6/2013 Oexman et al.  
 2013/0174347 A1 7/2013 Oexman et al.  
 2013/0227787 A1 9/2013 Herbst et al.

2014/0007656 A1 1/2014 Mahoney  
 2014/0137332 A1 5/2014 McGuire et al.  
 2014/0182061 A1 7/2014 Zaiss  
 2014/0250597 A1 9/2014 Chen et al.  
 2014/0257571 A1 9/2014 Chen et al.  
 2014/0259417 A1 9/2014 Nunn et al.  
 2014/0259418 A1 9/2014 Nunn et al.  
 2014/0259419 A1 9/2014 Stusynski  
 2014/0259431 A1 9/2014 Fleury  
 2014/0259434 A1 9/2014 Nunn et al.  
 2014/0277611 A1 9/2014 Nunn et al.  
 2014/0277778 A1 9/2014 Nunn et al.  
 2014/0277822 A1 9/2014 Nunn et al.  
 2014/0313700 A1 10/2014 Connell et al.  
 2015/0008710 A1 1/2015 Young et al.  
 2015/0025327 A1 1/2015 Young et al.  
 2015/0026896 A1 1/2015 Fleury et al.  
 2015/0136146 A1 5/2015 Hood et al.  
 2015/0157137 A1 6/2015 Nunn et al.  
 2015/0157519 A1 6/2015 Stusynski et al.  
 2015/0182033 A1 7/2015 Brosnan et al.  
 2015/0182397 A1 7/2015 Palashewski et al.  
 2015/0182399 A1 7/2015 Palashewski et al.  
 2015/0182418 A1 7/2015 Zaiss

FOREIGN PATENT DOCUMENTS

WO WO-2004/082549 A1 9/2004  
 WO WO 2008/128250 10/2008  
 WO WO-2009/108228 A1 9/2009  
 WO WO 2009/123641 10/2009

OTHER PUBLICATIONS

U.S. Appl. No. 14/675,355, filed Mar. 31, 2015, Palashewski et al.  
 U.S. Appl. No. 14/283,675, filed May 21, 2014, Mahoney et al.  
 U.S. Appl. No. 13/933,285, filed Jul. 2, 2013, Palashewski.  
 U.S. Appl. No. 14/146,281, filed Jan. 2, 2014, Palashewski et al.  
 U.S. Appl. No. 14/146,327, filed Jan. 2, 2014, Palashewski et al.  
 International Application Serial No. PCT/US2014/027752, International Search Report dated Jul. 15, 2014, 5 pages.  
 International Application Serial No. PCT/US2014/026568, International Search Report dated May 26, 2014, 3 pages.  
 International Application Serial No. PCT/US2014/026390, International Search Report dated May 26, 2014, 4 pages.  
 International Application Serial No. PCT/US2014/026347, International Search Report dated Jun. 27, 2014, 6 pages.  
 "International Application Serial No. PCT/US2014/024891, International Search Report dated May 15, 2014", 4 pgs.  
 "International Application Serial No. PCT/US2014/024891, Written Opinion dated May 15, 2014", 4 pgs.  
 "International Application Serial No. PCT/US2014/026288, International Search Report dated May 15, 2014", 4 pgs.  
 "International Application Serial No. PCT/US2014/026288, Written Opinion dated May 15, 2014", 4 pgs.  
 "International Application Serial No. PCT/US2014/026526, International Search Report dated May 15, 2014", 3 pgs.  
 "International Application Serial No. PCT/US2014/026526, Written Opinion dated May 15, 2014", 4 pgs.

\* cited by examiner

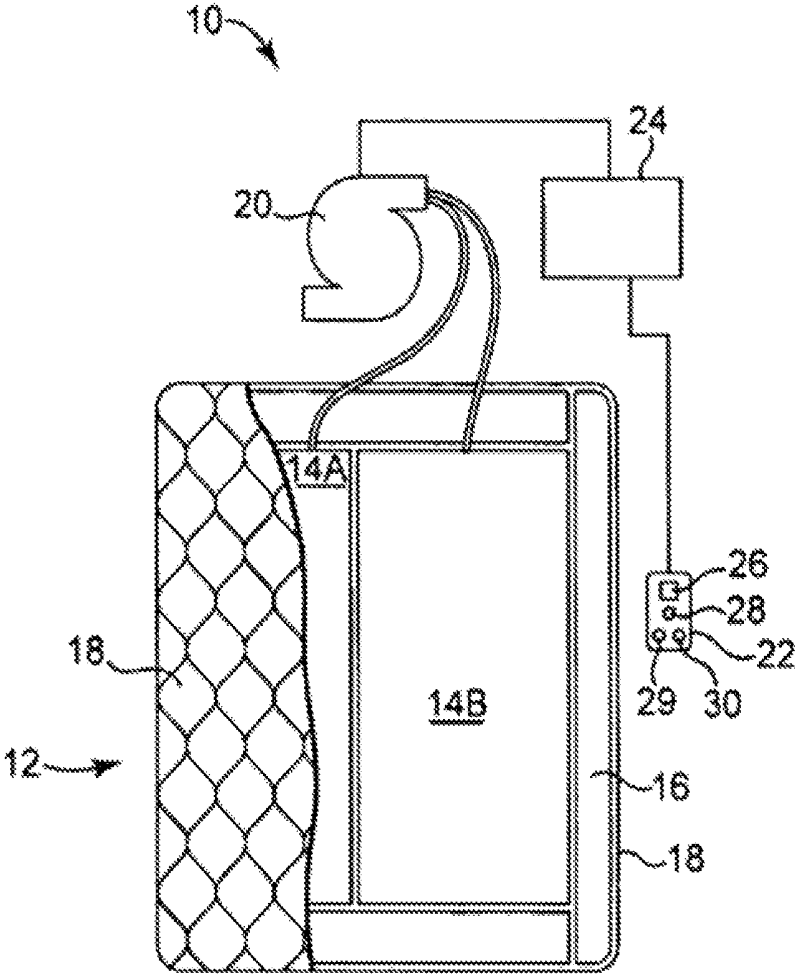


Fig. 1

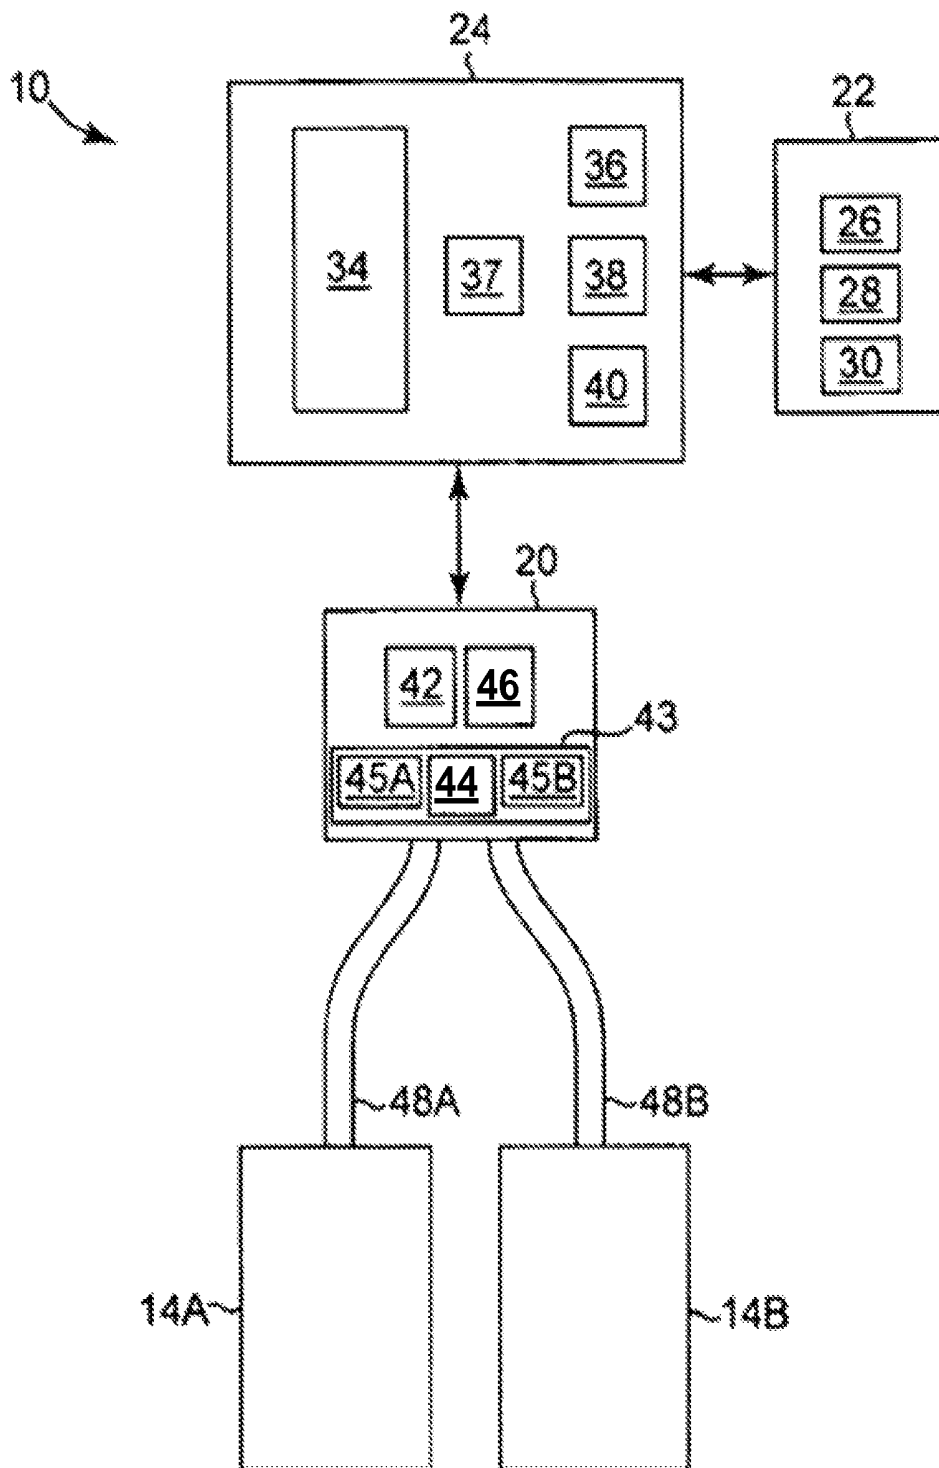
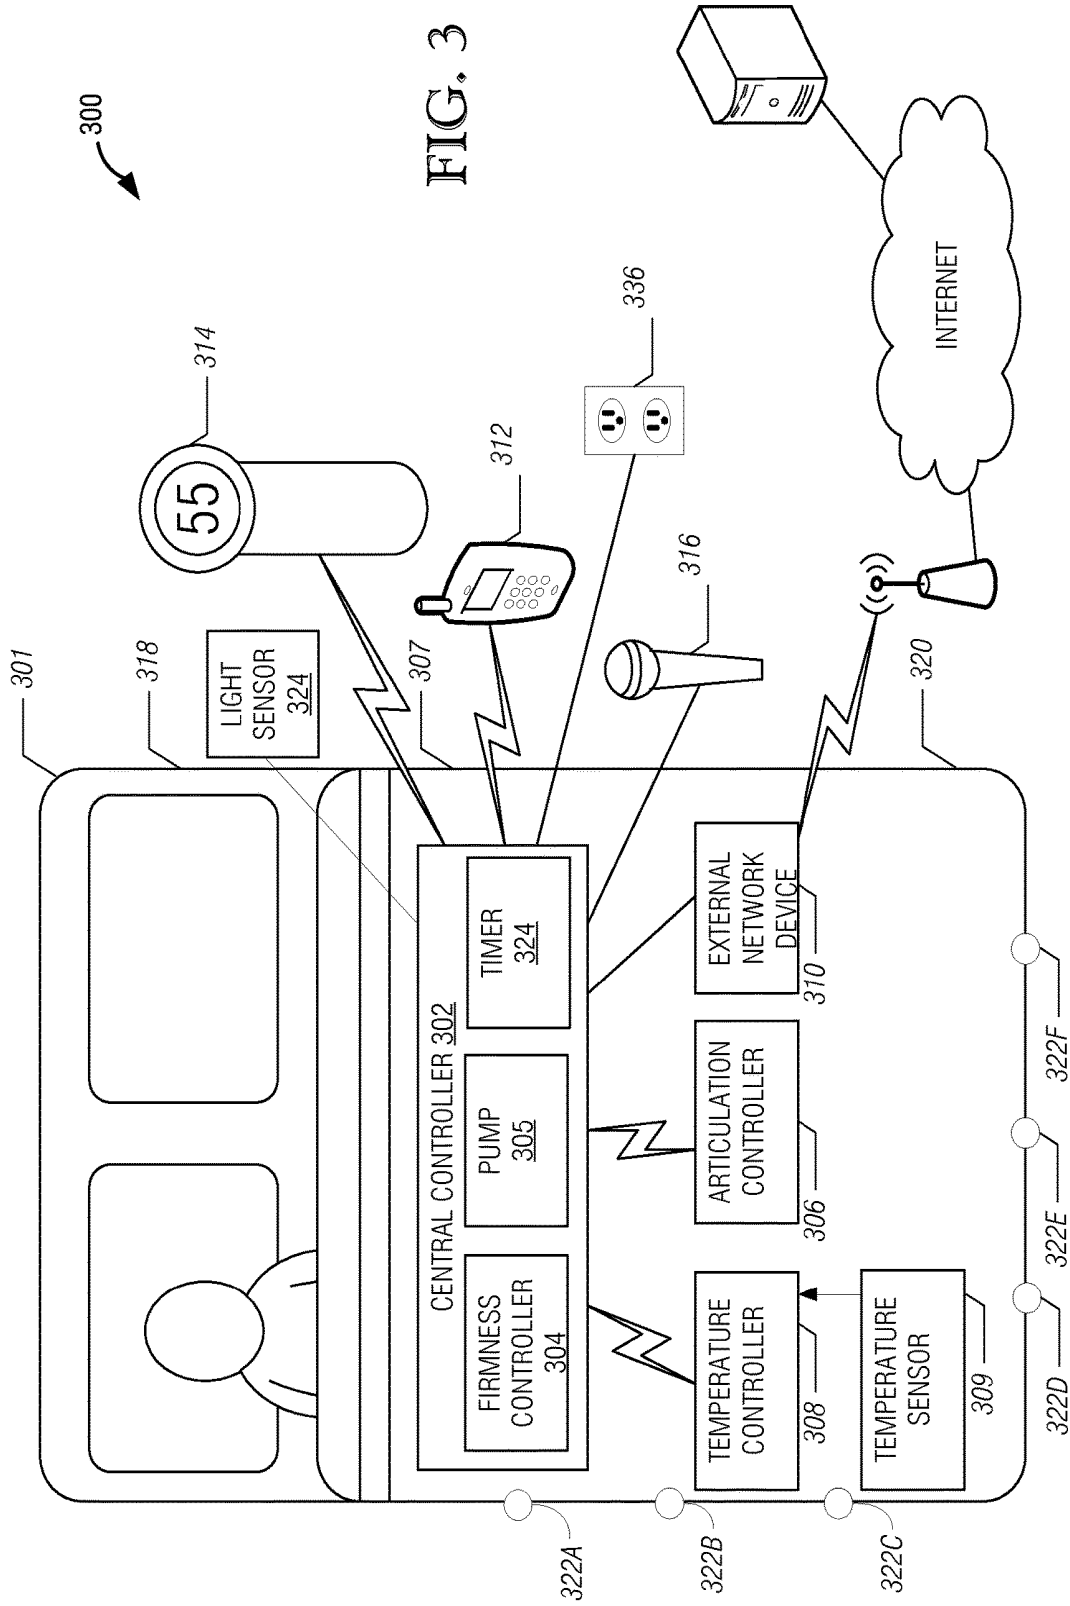


Fig. 2



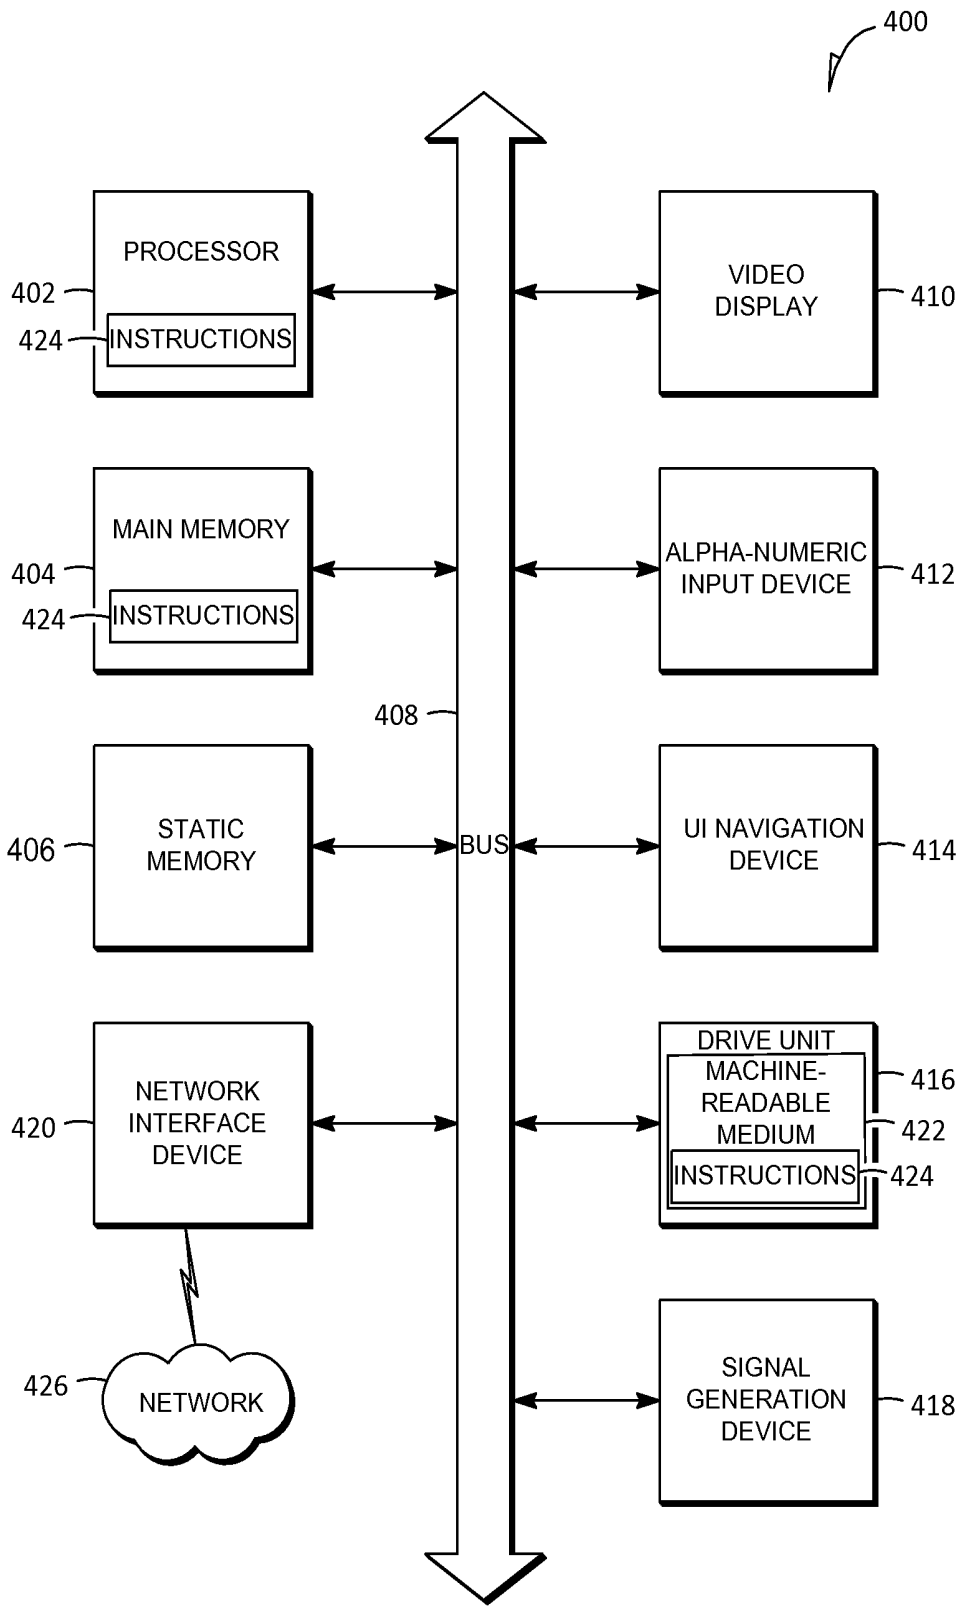


FIG. 4

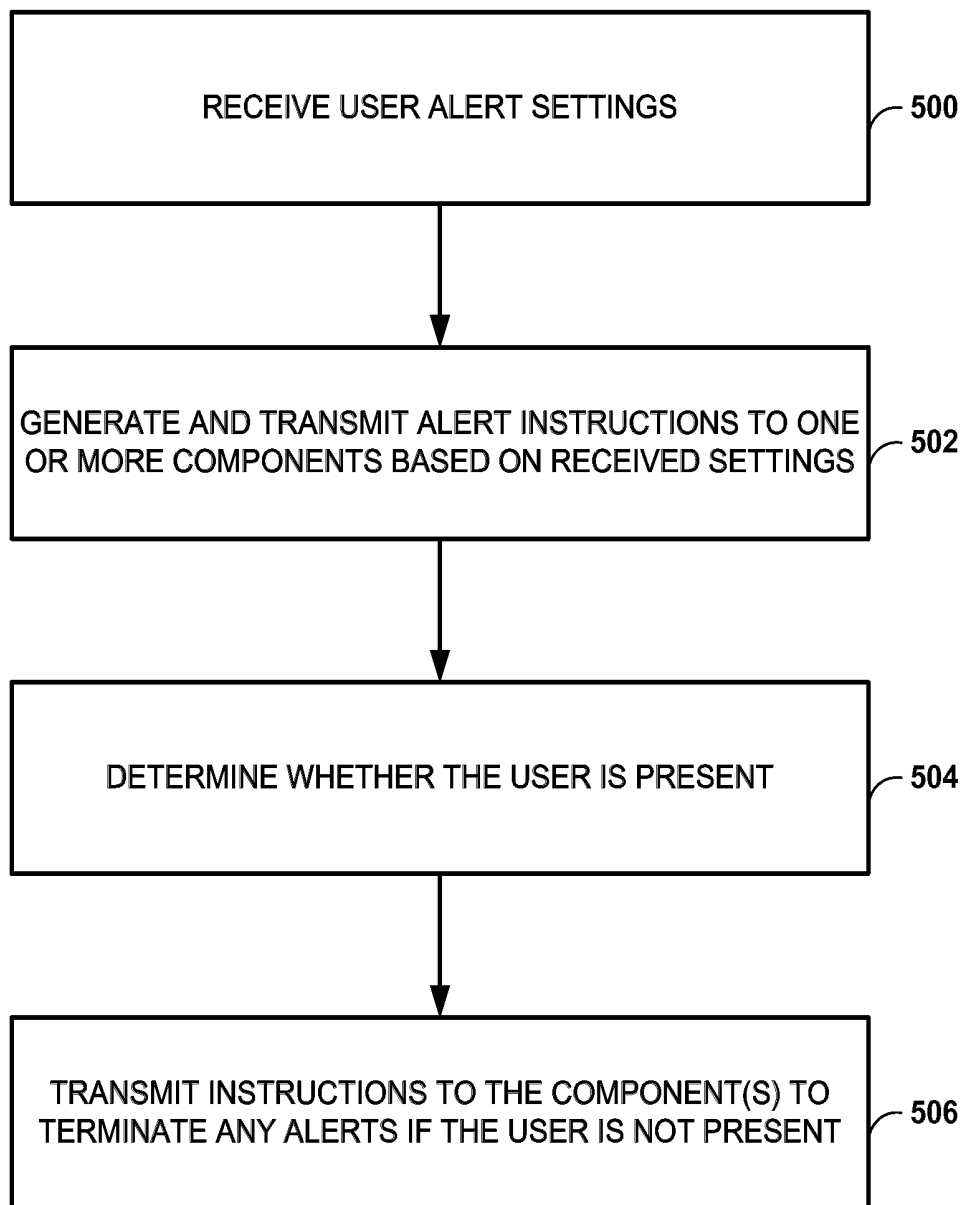


FIG. 5

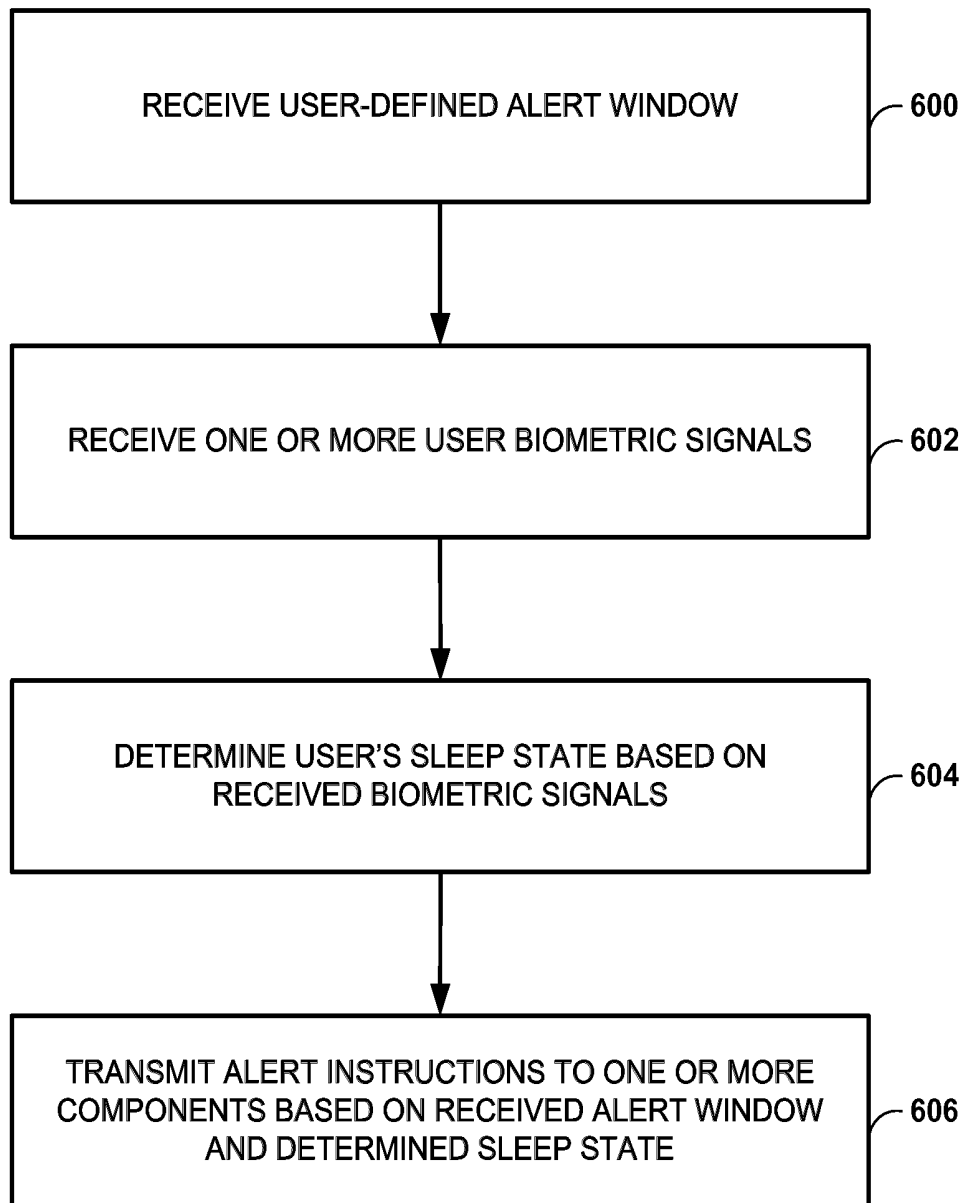


FIG. 6

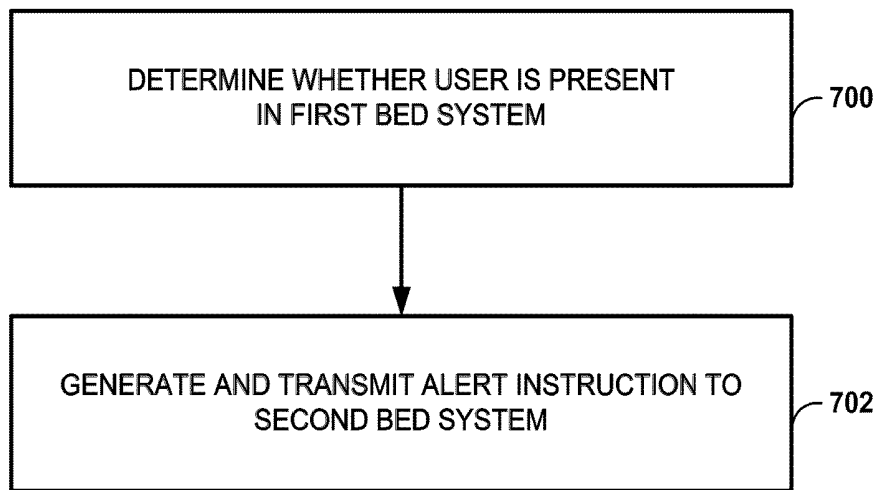


FIG. 7

## INFLATABLE AIR MATTRESS ALERT AND MONITORING SYSTEM

This application claims the benefit of priority of U.S. Provisional Application No. 61/781,266 titled, “INFLATABLE AIR MATTRESS ALARM AND MONITORING SYSTEM” to Rob Nunn and filed on Mar. 14, 2013, the entire content being incorporated herein by reference in its entirety.

### CROSS-REFERENCES

The subject matter described in this application is related to subject matter disclosed in the following applications: U.S. application Ser. No. 61/781,503, filed on Mar. 14, 2013, titled “INFLATABLE AIR MATTRESS SYSTEM ARCHITECTURE”; U.S. application Ser. No. 61/781,541, filed on Mar. 14, 2013, titled “INFLATABLE AIR MATTRESS AUTOFILL AND OFF BED PRESSURE ADJUSTMENT”; U.S. application Ser. No. 61/781,571, filed on Mar. 14, 2013, titled “INFLATABLE AIR MATTRESS SLEEP ENVIRONMENT ADJUSTMENT AND SUGGESTIONS”; U.S. application Ser. No. 61/782,394, filed on Mar. 14, 2013, titled “INFLATABLE AIR MATTRESS SNORING DETECTION AND RESPONSE”; U.S. application Ser. No. 61/781,296, filed on Mar. 14, 2013, titled “INFLATABLE AIR MATTRESS WITH LIGHT AND VOICE CONTROLS”; U.S. application Ser. No. 61/781,311, filed on Mar. 14, 2013, titled “INFLATABLE AIR MATTRESS SYSTEM WITH DETECTION TECHNIQUES.” The contents of each of the above-references U.S. patent applications are herein incorporated by reference in their entirety.

### TECHNICAL FIELD

This patent document pertains generally to mattresses and more particularly, but not by way of limitation, to an inflatable air mattress system.

### BACKGROUND

Air bed systems, such as the one described in U.S. Pat. No. 5,904,172 which is incorporated herein by reference in its entirety, generally allow a user to select a desired pressure for each air chamber within the mattress. Upon selecting the desired pressure, a signal is sent to a pump and valve assembly in order to inflate or deflate the air bladders as necessary in order to achieve approximately the desired pressure within the air bladders.

In various examples, an air mattress control system allows a user to adjust the firmness or position of an air mattress bed. The mattress may have more than one zone thereby allowing a left and right side of the mattress to be adjusted to different firmness levels. Additionally, the bed may be adjustable to different positions. For example, the head section of the bed may be raised up while the foot section of the bed stays in place. In various examples, two separate remote controls are used to adjust the position and firmness, respectively.

### BRIEF DESCRIPTION OF DRAWINGS

Some embodiments are illustrated by way of example and not limitation in the figures of the accompanying drawings in which:

FIG. 1 is a diagrammatic representation of an air bed system, according to an example.

FIG. 2 is a block diagram of various components of the air bed system of FIG. 1, according to an example.

FIG. 3 is a block diagram of an air bed system architecture, according to an example.

FIG. 4 is a block diagram of machine in the example form of a computer system within which a set instructions, for causing the machine to perform any one or more of the methodologies discussed herein, may be executed.

FIG. 5 is a flow diagram depicting an example method of waking a person by changing the person’s sleep environment, in accordance with various techniques of this disclosure.

FIG. 6 is a flow diagram depicting an example method of waking a person using biometric signals, in accordance with various techniques of this disclosure.

FIG. 7 is a flow diagram depicting an example method of remote monitoring, in accordance with various techniques of this disclosure.

### DETAILED DESCRIPTION

FIG. 1 is a diagrammatic representation of air bed system 10 in an example embodiment. System 10 can include bed 12, which can comprise at least one air chamber 14 surrounded by a resilient border 16 and encapsulated by bed ticking 18. The resilient border 16 can comprise any suitable material, such as foam.

As illustrated in FIG. 1, bed 12 can be a two chamber design having a first air chamber 14A and a second air chamber 14B. First and second air chambers 14A and 14B can be in fluid communication with pump 20. Pump 20 can be in electrical communication with a remote control 22 via control box 24. Remote control 22 can communicate via wired or wireless means with control box 24. Control box 24 can be configured to operate pump 20 to cause increases and decreases in the fluid pressure of first and second air chambers 14A and 14B based upon commands input by a user through remote control 22. Remote control 22 can include display 26, output selecting means 28, pressure increase button 29, and pressure decrease button 30. Output selecting means 28 can allow the user to switch the pump output between the first and second air chambers 14A and 14B, thus enabling control of multiple air chambers with a single remote control 22. For example, output selecting means may be a physical control (e.g., switch or button) or an input control displayed on display 26. Alternatively, separate remote control units can be provided for each air chamber and may each include the ability to control multiple air chambers. Pressure increase and decrease buttons 29 and 30 can allow a user to increase or decrease the pressure, respectively, in the air chamber selected with the output selecting means 28. Adjusting the pressure within the selected air chamber can cause a corresponding adjustment to the firmness of the air chamber.

FIG. 2 is a block diagram detailing data communication between certain components of air bed system 10 according to various examples. As shown in FIG. 2, control box 24 can include power supply 34, processor 36, memory 37, switching means 38, analog to digital (A/D) converter 40, and radios for communication with remotes and smartphones. Switching means 38 can be, for example, a relay or a solid state switch. Switching means 38 can be located in the pump 20 rather than the control box 24.

Pump 20 and remote control 22 can be in two-way communication with the control box 24. Pump 20 can include a motor 42, a pump manifold 43, a relief valve 44, a first control valve 45A, a second control valve 45B, and a

pressure transducer **46**, and can be fluidly connected with the first air chamber **14A** and the second air chamber **14B** via a first tube **48A** and a second tube **48B**, respectively. First and second control valves **45A** and **45B** can be controlled by switching means **38**, and can be operable to regulate the flow of fluid between pump **20** and first and second air chambers **14A** and **14B**, respectively.

In an example, pump **20** and control box **24** can be provided and packaged as a single unit. Alternatively, pump **20** and control box **24** can be provided as physically separate units.

In operation, power supply **34** can receive power, such as 110 VAC power, from an external source and can convert the power to various forms required by certain components of the air bed system **10**. Processor **36** can be used to control various logic sequences associated with operation of the air bed system **10**, as will be discussed in further detail below.

The example of the air bed system **10** shown in FIG. **2** contemplates two air chambers **14A** and **14B** and a single pump **20**. However, other examples may include an air bed system having two or more air chambers and one or more pumps incorporated into the air bed system to control the air chambers. In an example, a separate pump can be associated with each air chamber of the air bed system or a pump may be associated with multiple chambers of the air bed system. Separate pumps can allow each air chamber to be inflated or deflated independently and simultaneously. Furthermore, additional pressure transducers can also be incorporated into the air bed system such that, for example, a separate pressure transducer can be associated with each air chamber.

In the event that the processor **36** sends a decrease pressure command to one of air chambers **14A** or **14B**, switching means **38** can be used to convert the low voltage command signals sent by processor **36** to higher operating voltages sufficient to operate relief valve **44** of pump **20** and open control valves **45A** or **45B**. Opening relief valve **44** can allow air to escape from air chamber **14A** or **14B** through the respective air tube **48A** or **48B**. During deflation, pressure transducer **46** can send pressure readings to processor **36** via the A/D converter **40**. The A/D converter **40** can receive analog information from pressure transducer **46** and can convert the analog information to digital information useable by processor **36**. Processor **36** may send the digital signal to remote control **22** to update display **26** on the remote control in order to convey the pressure information to the user.

In the event that processor **36** sends an increase pressure command, pump motor **42** can be energized, sending air to the designated air chamber through air tube **48A** or **48B** via electronically operating corresponding valve **45A** or **45B**. While air is being delivered to the designated air chamber in order to increase the firmness of the chamber, pressure transducer **46** can sense pressure within pump manifold **43**. Again, pressure transducer **46** can send pressure readings to processor **36** via A/D converter **40**. Processor **36** can use the information received from A/D converter **40** to determine the difference between the actual pressure in air chamber **14A** or **14B** and the desired pressure. Processor **36** can send the digital signal to remote control **22** to update display **26** on the remote control in order to convey the pressure information to the user.

Generally speaking, during an inflation or deflation process, the pressure sensed within pump manifold **43** provides an approximation of the pressure within the air chamber. An example method of obtaining a pump manifold pressure reading that is substantially equivalent to the actual pressure within an air chamber is to turn off pump **20**, allow the

pressure within the air chamber **14A** or **14B** and pump manifold **43** to equalize, and then sense the pressure within pump manifold **43** with pressure transducer **46**. Thus, providing a sufficient amount of time to allow the pressures within pump manifold **43** and chamber **14A** or **14B** to equalize may result in pressure readings that are accurate approximations of the actual pressure within air chamber **14A** or **14B**. In various examples, the pressure of **48 A/B** is continuously monitored using multiple pressure sensors.

In an example, another method of obtaining a pump manifold pressure reading that is substantially equivalent to the actual pressure within an air chamber is through the use of a pressure adjustment algorithm. In general, the method can function by approximating the air chamber pressure based upon a mathematical relationship between the air chamber pressure and the pressure measured within pump manifold **43** (during both an inflation cycle and a deflation cycle), thereby eliminating the need to turn off pump **20** in order to obtain a substantially accurate approximation of the air chamber pressure. As a result, a desired pressure setpoint within air chamber **14A** or **14B** can be achieved without the need for turning pump **20** off to allow the pressures to equalize. The latter method of approximating an air chamber pressure using mathematical relationships between the air chamber pressure and the pump manifold pressure is described in detail in U.S. application Ser. No. 12/936,084, the entirety of which is incorporated herein by reference.

FIG. **3** illustrates an example air bed system architecture **300**. Architecture **300** includes bed **301**, central controller **302**, firmness controller **304**, articulation controller **306**, temperature controller **308** in communication with one or more temperature sensors **309**, external network device **310**, remote controllers **312**, **314**, and voice controller **316**. While described as using an air bed, the system architecture may also be used with other types of beds.

As illustrated in FIG. **3**, network bed architecture **300** is configured as a star topology with central controller **302** and firmness controller **304** functioning as the hub and articulation controller **306**, temperature controller **308**, external network device **310**, remote controls **312**, **314**, and voice controller **316** functioning as possible spokes, also referred to herein as components. Thus, in various examples, central controller **302** acts a relay between the various components.

In yet another example, central controller **302** listens to communications (e.g., control signals) between components even if the communication is not being relayed through central controller **302**. For example, consider a user sending a command using remote **312** to temperature controller **308**. Central controller **302** may listen for the command and check to determine if instructions are stored at central controller **302** to override the command (e.g., it conflicts with a previous setting). Central controller **302** may also log the command for future use (e.g., determining a pattern of user preferences for the components).

In other examples, different topologies may be used. For example, the components and central controller **302** may be configured as a mesh network in which each component may communicate with one or all of the other components directly, bypassing central controller **302**. In various examples, a combination of topologies may be used. For example, remote controller **312** may communicate directly to temperature controller **308** but also relay the communication to central controller **302**.

In various examples, the controllers and devices illustrated in FIG. **3** may each include a processor, a storage device, and a network interface. The processor may be a general purpose central processing unit (CPU) or applica-

tion-specific integrated circuit (ASIC). The storage device may include volatile or non-volatile static storage (e.g., Flash memory, RAM, EPROM, etc.). The storage device may store instructions which, when executed by the processor, configure the processor to perform the functionality described herein. For example, a processor of firmness control **304** may be configured to send a command to a relief valve to decrease the pressure in a bed.

In various examples, the network interface of the components may be configured to transmit and receive communications in a variety of wired and wireless protocols. For example, the network interface may be configured to use the 802.11 standards (e.g., 802.11a/b/c/g/n/ac), PAN network standards such as 802.15.4 or Bluetooth, infrared, cellular standards (e.g., 3G/4G etc.), Ethernet, USB for receiving and transmitting data, and powerline networking. The previous list is not intended to be exhaustive and other protocols may be used. Not all components of FIG. 3 need to be configured to use the same protocols. For example, remote control **312** may communicate with central controller **302** via Bluetooth while temperature controller **308** and articulation controller **306** are connected to central controller using 802.15.4. Within FIG. 3, the lightning connectors represent wireless connections and the solid lines represent wired connections, however, the connections between the components is not limited to such connections and each connection may be wired or wireless.

Moreover, in various examples, the processor, storage device, and network interface of a component may be located in different locations than various elements used to affect a command. For example, as in FIG. 1, firmness controller **302** may have a pump that is housed in a separate enclosure than the processor used to control the pump. Similar separation of elements may be employed for the other controllers and devices in FIG. 3.

In various examples, firmness controller **304** is configured to regulate pressure in an air mattress. For example, firmness controller **304** may include a pump such as described with reference to FIG. 2 (see e.g., pump **20**). Thus, in an example, firmness controller **304** may respond to commands to increase or decrease pressure in the air mattress. The commands may be received from another component or based on stored application instructions that are part of firmness controller **304**.

As illustrated in FIG. 3 central controller **302** includes firmness controller **304** and pump **305**. Thus, in an example, the processor of central controller **302** and firmness control **304** may be the same processor. Furthermore, the pump may also be part of central controller **302**. Accordingly, central controller **302** may be responsible for pressure regulation as well as other functionality as described in further portions of this disclosure.

In various examples, articulation controller **306** is configured to adjust the position of a bed (e.g., bed **301**) by adjusting the foundation that supports the bed. In an example, separate positions may be set for two different beds (e.g., two twin beds placed next to each other). The foundation may include more than one zone that may be independently adjusted. Articulation control **306** may also be configured to provide different levels of massage to a person on the bed.

In various examples, temperature controller **308** is configured to increase, decrease, or maintain the temperature of a user. For example, a pad may be placed on top of or be part of the air mattress. Air may be pushed through the pad and vented to cool off a user of the bed. Conversely, the pad may include a heating element that may be used to keep the user

warm. In various examples, the pad includes the temperature sensor **309** and temperature controller **308** receives temperature readings from the temperature sensor **309**. In other examples, the temperature sensor **309** can be separate from the pad, e.g., part of the air mattress or foundation.

In various examples, additional controllers may communicate with central controller **302**. These controllers may include, but are not limited to, illumination controllers for turning on and off light elements placed on and around the bed and outlet controllers for controlling power to one or more power outlets. In some examples, one or more of these controllers can be located offsite, e.g., cloud computing implementations.

In various examples, external network device **310**, remote controllers **312**, **314** and voice controller **316** may be used to input commands (e.g., from a user or remote system) to control one or more components of architecture **300**. The commands may be transmitted from one of the controllers **312**, **314**, or **316** and received in central controller **302**. Central controller **302** may process the command to determine the appropriate component to route the received command. For example, each command sent via one of controllers **312**, **314**, or **316** may include a header or other metadata that indicates which component the command is for. Central controller **302** may then transmit the command via central controller **302**'s network interface to the appropriate component.

For example, a user may input a desired temperature for the user's bed into remote control **312**. The desired temperature may be encapsulated in a command data structure that includes the temperature as well as identifies temperature controller **308** as the desired component to be controlled. The command data structure may then be transmitted via Bluetooth to central controller **302**. In various examples, the command data structure is encrypted before being transmitted. Central controller **302** may parse the command data structure and relay the command to temperature controller **308** using a PAN. Temperature controller **308** may be then configured its elements to increase or decrease the temperature of the pad depending on the temperature originally input into remote control **312**.

In various examples, data may be transmitted from a component back to one or more of the remote controls. For example, the current temperature as determined by a sensor element of temperature controller **308**, e.g., temperature sensor **309**, the pressure of the bed, the current position of the foundation or other information may be transmitted to central controller **302**. Central controller **302** may then transmit the received information and transmit it to remote control **312** where it may be displayed to the user. In some examples, the data can be transmitted to a customer service center to help diagnose a problem with system.

In various examples, multiple types of devices may be used to input commands to control the components of architecture **300**. For example, remote control **312** may be a mobile device such as a smart phone or tablet computer running an application. Other examples of remote control **312** may include a dedicated device for interacting with the components described herein. In various examples, remote controls **312/314** include a display device for displaying an interface to a user. Remote control **312/314** may also include one or more input devices. Input devices may include, but are not limited to, keypads, touchscreen, gesture, motion and voice controls.

Remote control **314** may be a single component remote configured to interact with one component of the mattress architecture. For example, remote control **314** may be con-

figured to accept inputs to increase or decrease the air mattress pressure. Voice controller 316 may be configured to accept voice commands to control one or more components. In various examples, more than one of the remote controls 312/314 and voice controller 316 may be used.

With respect to remote control 312, the application may be configured to pair with one or more central controllers. For each central controller, data may be transmitted to the mobile device that includes a list of components linked with the central controller. For example, consider that remote control 312 is a mobile phone and that the application has been authenticated and paired with central controller 302. Remote control 312 may transmit a discovery request to central controller 302 to inquire about other components and available services. In response, central controller 302 may transmit a list of services that includes available functions for adjusting the firmness of the bed, position of the bed, and temperature of the bed. In various embodiments, the application may then display functions for increasing/decreasing pressure of the air mattress, adjusting positions of the bed, and adjusting temperature. If components are added/removed to the architecture under control of central controller 302, an updated list may be transmitted to remote control 312 and the interface of the application may be adjusted accordingly.

In various examples, central controller 302 is configured as a distributor of software updates to components in architecture 300. For example, a firmware update for temperature controller 308 may become available. The update may be loaded into a storage device of central controller 302 (e.g., via a USB interface or using wireless techniques). Central controller 302 may then transmit the update to temperature controller 308 with instructions to update. Temperature controller 308 may attempt to install the update. A status message may be transmitted from temperature controller 308 to central controller 302 indicating the success or failure of the update.

In various examples, central controller 302 is configured to analyze data collected by a pressure transducer (e.g., transducer 46 with respect to FIG. 2) to determine various states of a person lying on the bed. For example, central controller 302 may determine the heart rate or respiration rate, motion, presence, arrhythmias, apneas, and sleep state of a person lying in the bed. Additional processing may be done using the collected data to determine a possible sleep state of the person. For example, central controller 302 may determine when a person falls asleep and, while asleep, the various sleep states of the person.

In various examples, external network device 310 includes a network interface to interact with an external server for processing and storage of data related to components in architecture 300. For example, the determined sleep data as described above may be transmitted via a network (e.g., the Internet) from central controller 302 to external network device 310 for storage. In an example, the pressure transducer data may be transmitted to the external server for additional analysis. The external network device 310 may also analyze and filter the data before transmitting it to the external server.

In an example, diagnostic data of the components may also be routed to external network device 310 for storage and diagnosis on the external server. For example, if temperature controller 308 (or a leak detector or system health monitor) detects an abnormal temperature reading (e.g., a drop in temperature over one minute that exceeds a set threshold) diagnostic data (sensor readings, current settings, etc.) may be wireless transmitted from temperature controller 308 to

central controller 302. Central controller 302 may then transmit this data via USB to external network device 310. External device 310 may wirelessly transmit the information to a WLAN access point where it is routed to the external server for analysis.

Example Machine Architecture and Machine-Readable Medium

FIG. 4 is a block diagram of machine in the example form of a computer system 400 within which instructions, for causing the machine to perform any one or more of the methodologies discussed herein, may be executed. In alternative embodiments, the machine operates as a standalone device or may be connected (e.g., networked) to other machines. In a networked deployment, the machine may operate in the capacity of a server or a client machine in server-client network environment, or as a peer machine in a peer-to-peer (or distributed) network environment. The machine may be a personal computer (PC), a tablet PC, a set-top box (STB), a Personal Digital Assistant (PDA), a cellular telephone, a web appliance, a network router, switch or bridge, or any machine capable of executing instructions (sequential or otherwise) that specify actions to be taken by that machine. Further, while only a single machine is illustrated, the term “machine” shall also be taken to include any collection of machines that individually or jointly execute a set (or multiple sets) of instructions to perform any one or more of the methodologies discussed herein. In some examples, one or more of machines can be located offsite, e.g., cloud computing implementations.

The example computer system 400 includes a processor 402 (e.g., a central processing unit (CPU), a graphics processing unit (GPU), ASIC or a combination), a main memory 404 and a static memory 406, which communicate with each other via a bus 408. The computer system 400 may further include a video display unit 410 (e.g., a liquid crystal display (LCD) or a cathode ray tube (CRT)). The computer system 400 also includes an alphanumeric input device 412 (e.g., a keyboard and/or touchscreen), a user interface (UI) navigation device 414 (e.g., a mouse), a disk drive unit 416, a signal generation device 418 (e.g., a speaker) and a network interface device 420.

Machine-Readable Medium

The disk drive unit 416 includes a machine-readable medium 422 on which is stored one or more sets of instructions and data structures (e.g., software) 424 embodying or utilized by any one or more of the methodologies or functions described herein. The instructions 424 may also reside, completely or at least partially, within the main memory 404 and/or within the processor 402 during execution thereof by the computer system 400, the main memory 404 and the processor 402 also constituting machine-readable media.

While the machine-readable medium 422 is shown in an example embodiment to be a single medium, the term “machine-readable medium” may include a single medium or multiple media (e.g., a centralized or distributed database, and/or associated caches and servers) that store the one or more instructions or data structures. The term “machine-readable medium” shall also be taken to include any tangible medium that is capable of storing, encoding or carrying instructions for execution by the machine and that cause the machine to perform any one or more of the methodologies of the present invention, or that is capable of storing, encoding or carrying data structures utilized by or associated with such instructions. The term “machine-readable medium” shall accordingly be taken to include, but not be limited to, solid-state memories, and optical and magnetic media. Specific examples of machine-readable media

include non-volatile memory, including by way of example semiconductor memory devices, e.g., Erasable Programmable Read-Only Memory (EPROM), Electrically Erasable Programmable Read-Only Memory (EEPROM), and flash memory devices; magnetic disks such as internal hard disks and removable disks; magneto-optical disks; and CD-ROM and DVD-ROM disks.

#### Transmission Medium

The instructions **424** may further be transmitted or received over a communications network **426** using a transmission medium. The instructions **424** may be transmitted using the network interface device **420** and any one of a number of well-known transfer protocols (e.g., HTTP). Examples of communication networks include a local area network (“LAN”), a wide area network (“WAN”), the Internet, mobile telephone networks, Plain Old Telephone (POTS) networks, and wireless data networks (e.g., WiFi and WiMax networks). The term “transmission medium” shall be taken to include any intangible medium that is capable of storing, encoding or carrying instructions for execution by the machine, and includes digital or analog communications signals or other intangible media to facilitate communication of such software.

#### Alarm Techniques

In addition to the techniques described above, this disclosure is directed to techniques for waking a user by changing the user’s sleep environment. As described in more detail below, by changing the user’s sleep environment, e.g., air mattress pressure, air mattress foundation motion, temperature, the techniques of this disclosure can provide the user with a “minimally invasive” alarm system that gently wakes the user, in contrast with an alarm clock, for example.

In one example, the user can set a desired time and method for waking via a user interface (or “alarm settings”), e.g., remote controllers **312**, **314** or voice controller **316**. In some examples, the user can set a desired time and method for waking via a web portal connected to the Internet. In response to receiving the user’s alarm settings, the web portal can communicate the user’s desired wake setting(s) to the central controller **302** via the Internet to a WiFi module, for example, in communication with the central controller **302**. In some examples, upon receiving the user settings, the central controller **302** can store the settings in a memory device.

In one example implementation, the user can choose to change the pressure of one or more air chambers, e.g., air chambers **14A**, **14B** of FIG. 2, of the mattress as a method for waking. For example, the user may program the system architecture **300** and, in particular, the central controller **302**, to increase the pressure in an air chamber via the firmness controller **304** at a particular time, e.g., in order to wake the user by way of a minimally invasive alarm.

In another example implementation, the user can choose to adjust the position of the bed and/or add motion to the bed, e.g., via a massage function, as a method for waking. For example, the user may program the system architecture **300** and, in particular, the central controller **302**, to transmit instructions to the articulation controller **306** at a particular time. In response, the articulation controller **306** can adjust the foundation of the bed **301**, e.g., in a manner specified by the user during programming or in a default manner, to move from its current position to another, different position. Alternatively or in addition to adjusting the position of the foundation of the bed **301**, the articulation controller can provide the user with one or more levels of massage, e.g., in order to wake the user by way of a minimally invasive alarm.

In another example implementation, the user can choose to adjust the temperature of the bed as a method for waking. For example, the user may program the system architecture **300** and, in particular, the central controller **302**, to transmit instructions to the temperature controller **308** at a particular time. In response, the temperature controller **308** can adjust the temperature of the user, e.g., via a cooling or heating mechanism provided by a pad placed on top of or forming a part of the air mattress e.g., in order to wake the user by way of a minimally invasive alarm.

Although the minimally invasive techniques for waking a user were described above separately, each of the described techniques can be used in combination with one another, as desired. For example, a user may program the central controller **302** to provide an alarm function that includes changes to both air mattress pressure and temperature. Or, a user may program the central controller **302** to provide an alarm function that includes changes to both air mattress pressure and temperature and that further includes adjusting the position of and/or providing motion to the foundation of the bed **301**.

In some example implementations, the user can program two or more minimally invasive techniques for waking the user in a pattern, e.g., one after another. For example, the user can program the central controller **302** to provide an alarm function that initially changes the pressure of one or more air chambers, e.g., air chambers **14A**, **14B** of FIG. 2, and then change the temperature of the user a predetermined period of time after the change to the pressure of the air chambers. In addition, the user can, for example, program the central controller **302** to control the articulation controller **306** to adjust the foundation of the bed **301** a period of time after changing the temperature or, in some examples, substantially simultaneously with changing the temperature. In this manner, a waking function pattern can be achieved by sequentially or progressively changing various aspects of the user’s sleep environment.

In some examples, presence detection can be included in order to prevent an alarm from occurring or terminate an alarm in progress. For example, the pressure transducer **46** (of FIG. 2) can be used to detect the user’s presence within the bed **301**, e.g., via a gross pressure change determination and/or via one or more of a respiration rate signal, heart rate signal, and/or other biometric signals. Upon determining that the user has gotten out of bed, e.g., via a gross pressure change determination, the central controller **302** can terminate any active minimally invasive alarms, e.g., changes to pressure, temperature, motion of the foundation, etc. In other examples, upon determining that the user is not present in the bed, e.g., the user is away on a business trip, the central controller **302** can prevent any pending minimally invasive alarms from occurring, e.g., changes to pressure, temperature, motion of the foundation, etc.

This disclosure is not limited to the example minimally invasive alarms mentioned above. In addition to changes to pressure, temperature, and motion of the foundation, other example minimally invasive alarms include, but are not limited to, changes to lighting, e.g., turning lights on/off as well as opening and/or closing window shades, turning on/off a television, and turning on/off a sound system.

FIG. 5 is a flow diagram depicting an example method of waking a person by changing the person’s sleep environment. In FIG. 5, the central controller **302** receives alarm settings from a user, e.g., via a user interface such as the remote controllers **312**, **314**, voice controller **316**, or via a web portal connected to the Internet (**500**). In response to receiving the user’s alarm settings, e.g., a time and method

for waking, the central controller 302 transmits alarm instructions to one or more components of the bed system, e.g., firmness controller 304, articulation controller 306, and temperature controller 308, based on the received user alarm settings (502). Upon receiving the instructions, the component(s) operate to change the user's sleep environment, e.g., change the air pressure in a chamber, change the temperature, etc.

In some examples the method of FIG. 5 further includes determining whether the user is present in the bed (504). For example, the central controller 302 can determine whether a user is present using a change in gross pressure as using received pressure signals from the pressure transducer 46 of FIG. 2. If the central controller 302 determines that the user is not present, the central controller 302 can transmit instructions to the component(s) of the bed system to terminate any active alarms.

In some examples, presence can be determined using the presence of human or animal biosignals.

In one example implementation, the central controller 302 can detect user presence using temperature changes detected in the mattress, e.g., using one or more temperature sensors positioned in or on the mattress. The temperature sensors and the central controller 302 can detect a rise in temperature, e.g., over a specified period of time, and determine that a user is present in the bed. For example, if the central controller 302 detects a rise in temperature and then determines that the detected rise in temperature was not caused by the system's temperature controller 308, the central controller 302 can determine that the user is present.

In addition to the techniques described above, this disclosure is directed to techniques for waking a user using a biometric alarm system. As indicated above, the central controller 302 can determine a user's sleep state, e.g., rapid eye movement ("REM") or non-rapid eye movement ("NREM"). The central controller 302 can determine a user's sleep state by using various biometric signals such as heart rate, respiration, and/or movement of the user. Techniques for monitoring a user's sleep using heart rate information, respiration rate information, and other user information are disclosed in U.S. patent application Publication No. 20100170043 to Steven J. Young et al., titled "APPARATUS FOR MONITORING VITAL SIGNS," the entire content of which is incorporated herein by reference. Using various techniques of this disclosure, the user can set a window of time in which to wake up (or "alarm window") and allow the central controller 302 to determine the optimum time within that window to wake the user based on the determined sleep state.

By way of specific example, a user can set a desired window of time for waking of between 5:00 AM and 6:00 AM via a user interface, e.g., remote controllers 312, 314, voice controller 316, or via a web portal connected to the Internet. In some examples, upon receiving the user settings, the central controller 302 can store the settings in a memory device. While the user is sleeping, the central controller 302 can receive one or more of the user's biometric signals, e.g., heart rate, respiration, and motion, and determine the user's present sleep state based on the received biometric signals. It may be desirable to wake a person during a particular portion of a sleep cycle, e.g., in NREM sleep in contrast to REM sleep.

If the central controller 302 has determined that at the beginning of the user-defined window, e.g., 5:00 AM, the user is not in an optimum state in their sleep cycle for waking, e.g., in REM sleep, the central controller 302 can delay transmitting any instructions to one or more compo-

ponents of the bed system, e.g., firmness controller 304, articulation controller 306, and temperature controller 308, to activate and wake the user. Then, the central controller 302 can continue to receive one or more of the user's biometric signals and continue to determine the user's sleep state. Once the user's sleep state transitions from one portion of a sleep cycle to a more desirable portion at which to be awakened, e.g., from REM sleep to NREM sleep, the central controller 302 can transmit any instructions to one or more components of the bed system, e.g., firmness controller 304, articulation controller 306, and temperature controller 308, to activate and wake the user. In this manner, the user is awakened.

Of course, if the central controller 302 has determined that at the beginning of the user-defined window, e.g., 5:00 AM, the user is in an optimum state for waking based on the determine sleep cycle, e.g., NREM sleep, the central controller 302 can transmit any instructions to one or more components of the bed system, e.g., firmness controller 304, articulation controller 306, and temperature controller 308, to activate and wake the user. In this manner, the user is awakened.

In some examples, if the central controller 302 has determined that the user is still in REM sleep once the end of the user-defined window has been reached (thus not in an optimum sleep state for waking), then the central controller 302 will nevertheless wake the user. That is, once the end of the user-defined window has been reached, e.g., 6:00 AM in the example above, the central controller 302 can transmit any instructions to one or more components of the bed system, e.g., firmness controller 304, articulation controller 306, and temperature controller 308, to activate and wake the user even if the user is not in an optimum sleep state.

FIG. 6 is a flow diagram depicting an example method of waking a person using biometric signals. In FIG. 6, the central controller 302 receives a user-defined alarm window from a user, e.g., via a user interface such as the remote controllers 312, 314, voice controller 316, or via web portal connected to the Internet (600), indicating a desired window of time in which to wake up, e.g., 5:00 AM to 6:00 AM. The central controller 302 can receive biometric signals of the user, such as heart rate, respiration, and/or motion signals, via the pressure transducer 46 of FIG. 2 (602).

Using the received biometric signal(s), the central controller 302 can determine the user's present sleep state, e.g., REM or NREM (604). If the central controller 302 determines that the user is in an optimum sleep state, e.g., NREM, and that the current time is within the user-defined alarm window, then the central controller 302 can transmit alarm instructions to one or more components of the bed system, e.g., firmness controller 304, articulation controller 306, and temperature controller 308 to wake the user (606).

In some example implementations, if the central controller 302 determines that the user is not an optimum sleep state, e.g., REM, and that the current time is beyond the user-defined alarm window, then the central controller 302 can nevertheless transmit alarm instructions to one or more components of the bed system, e.g., firmness controller 304, articulation controller 306, and temperature controller 308 to wake the user within the defined window of time.

In some examples, the biometric signal(s) can be processed by another device or component instead of by the central controller 302, e.g., remote server. In such an implementation, the other device or component can process the biometric signal(s) and transmit a signal representing the processed signal to the central controller 302. Then, the central controller 302 can determine a sleep state based on

the received signal. Or, in other examples, the other device or component can process the biometric signal(s), determine the sleep state of the user, and transmit a signal representing the determined sleep state to the central controller **302**.

#### Remote Monitoring Techniques

In addition to the techniques described above, this disclosure is directed to remote monitoring techniques. Using various techniques of this disclosure, a first bed system **300** can detect when a first user of the first bed system **300**, e.g., a child in a first room, is out of bed and, in response to detecting that the first user is out of bed, transmit an alert signal to a second bed system **300** that can alert a second user of the second bed system, e.g., a parent in a second room, that the first user is out of bed.

In one example implementation, the bed system can detect whether a user is out of the bed using a presence detection technique. For example, the pressure transducer **46** (of FIG. 2) can be used to detect the user's presence within the bed **301**, e.g., via a gross pressure change determination, presence of biosignals, or a vision system. Upon determining that the user has gotten out of bed, e.g., via a gross pressure change determination, the central controller **302** of the first bed system can generate and transmit one or more instructions that, when received and executed by a central controller **302** of a second bed system, can cause one or more components of the second bed system to alert a user of the second bed system, e.g., changes to pressure, temperature, motion of the foundation, etc. The instruction(s) from the first central controller **302** to the second central controller **302** using wired or wireless techniques and protocols, some of which are described above.

By way of specific example, upon determining that a first user, e.g., child, has gotten out of bed, the central controller **302** of the first bed system can generate and transmit an instruction that, when received and executed by a central controller **302** of a second bed system, can cause the articulation controller **306** of the second bed system to move the foundation of the second bed system in order to alert the user of the second bed system, e.g., parent, that the first user is out of bed. In other examples, the instruction generated and transmitted by the central controller **302** of the first bed system can alternatively or additionally cause the temperature controller **308** of the second bed system and/or the firmness controller **304** of the second bed system to change temperature or pressure, respectively, of the second bed system.

The disclosure is not limited to these specific components for alerting a user of the second bed system. Instead, the central controller **302** can, for example, be used to turn lights on/off, open and/or close window shades, turn on/off a television, and turn on/off a sound system.

FIG. 7 is a flow diagram depicting an example method of remote monitoring, in accordance with various techniques of this disclosure. In FIG. 7, a central controller **302** of a first bed system can determine whether a user of the first bed system, e.g., a child, is present (**700**). For example, the central controller **302** of the first bed system can use a gross pressure change technique to determine presence. If the central controller **302** of the first bed system determines that the user has gotten out of the bed, the central controller **302** generates and transmits an instruction that, when received and executed by a central controller **302** of a second bed system, can one or more instructions that, when received and executed by a central controller **302** of a second bed system, can cause one or more components of the second bed system to alert a user of the second bed system, e.g., changes to pressure, temperature, motion of the foundation, etc.

Although an embodiment has been described with reference to specific example embodiments, it will be evident that various modifications and changes may be made to these embodiments without departing from the broader spirit and scope of the invention. Accordingly, the specification and drawings are to be regarded in an illustrative rather than a restrictive sense. The accompanying drawings that form a part hereof, show by way of illustration, and not of limitation, specific embodiments in which the subject matter may be practiced. The embodiments illustrated are described in sufficient detail to enable those skilled in the art to practice the teachings disclosed herein. Other embodiments may be utilized and derived therefrom, such that structural and logical substitutions and changes may be made without departing from the scope of this disclosure. This Detailed Description, therefore, is not to be taken in a limiting sense, and the scope of various embodiments is defined only by the appended claims, along with the full range of equivalents to which such claims are entitled. As it common, the terms "a" and "an" may refer to one or more unless otherwise indicated.

The invention claimed is:

#### 1. A method comprising:

determining, at a first central controller of a first air mattress system, that a mattress of the first air mattress system does not have a user present, wherein the first central controller of the first air mattress system is configured to communicate with elements of the first air mattress system to facilitate function of the first air mattress system, wherein a second air mattress system comprises a second central controller of the second air mattress system, wherein the second central controller of the second air mattress system is configured to communicate with elements of the second air mattress system, wherein the first central controller of the first air mattress system is configured to communicate via one or more communication networks to transmit and receive instructions, wherein the second central controller of the second air mattress system is configured to communicate via one or more communication networks to transmit and receive instructions;

responsive to determining that the mattress of the first air mattress system does not have a user present, generating, at the first central controller of the first air mattress system, an instruction to adjust a feature of a component of a second air mattress system that is remote from the first air mattress system;

transmitting, on a communication network by the first central controller of a first air mattress system, the instruction to adjust the feature of the component of the second air mattress system such that the instruction is routed to the second central controller of the second air mattress system; and

adjusting, by the second central controller, responsive to receiving the instruction, the feature of the component of the second air mattress system such that the user of the second air mattress system is awakened by the adjustment of the feature of the component of the second air mattress system in response to the first central controller determining that the first air mattress does not have a user present.

2. The method of claim 1, wherein determining, at the first central controller of the first air mattress system, that a mattress of the first air mattress system does not have a user present comprises:

detecting a gross pressure change of the first air mattress system.

3. The method of claim 1, wherein determining, at the first central controller of the first air mattress system, that a mattress of the first air mattress system does not have a user present comprises:

detecting a lack of a biometric signal.

4. The method of claim 1, wherein determining, at the first central controller of the first air mattress system, that a mattress of the first air mattress system does not have a user present comprises:

detecting a temperature change.

5. The method of claim 1, wherein the instruction to adjust the feature of the component of the second air mattress system is configured to alert a user of the second air mattress system.

6. The method of claim 1, wherein the instruction to adjust the feature of the component of the second air mattress system is an instruction to change gross pressure of an air mattress of the second air mattress system.

7. The method of claim 1, wherein the instruction to adjust the feature of the component of the second air mattress system is an instruction to change temperature of the component of the second air mattress system.

8. The method of claim 1, wherein the instruction to adjust the feature of the component of the second air mattress system is an instruction to adjust a foundation of the second air mattress systems.

9. A sleep system comprising:

a first air mattress system comprising:

an first air mattress; and

a first central controller configured to:

communicate with elements of the first air mattress system to facilitate function of the first air mattress system;

communicate via one or more communication networks to transmit and receive instructions;

determine that the first air mattress does not have a user present;

responsive to determining that the first air mattress of the first air mattress system does not have a user present, generate an instruction to adjust a feature of a component of a second air mattress system that is remote from the first air mattress system; and

transmit on a communication network by the first central controller of a first air mattress system, the instruction to adjust the feature of the component of the second air mattress system such that the instruction is routed to a second central controller of the second air mattress system; and

the second air mattress system comprising:

the second central controller configured to:

communicate with elements of the second air mattress system to facilitate function of the second air mattress system; and

communicate via one or more communication networks to transmit and receive instructions.

10. The sleep system of claim 9, wherein the second central controller is further configured to:

receive the instruction to adjust the feature of the component of the second air mattress system; and

responsive to receiving the instruction to adjust the feature of the component of the second air mattress system, adjust the component of the second air mattress system.

11. The sleep system of claim 9, wherein, to determine that the first air mattress does not have a user present, the first central controller is configured to detect a gross pressure change.

12. The sleep system of claim 9, wherein, to determine that the first air mattress does not have a user present, the first central controller is configured to detect a lack of a biometric signal.

13. The sleep system of claim 9, wherein, to determine that the first air mattress does not have a user present, the first central controller is configured to detect a temperature change.

14. The sleep system of claim 9, wherein the instruction to adjust the feature of the component of the second air mattress system is configured to alert a user of the second air mattress system.

15. The sleep system of claim 9, wherein the instruction to adjust the feature of the component of the second air mattress system is an instruction to change gross pressure of an air mattress of the second air mattress system.

16. The sleep system of claim 9, wherein the instruction to adjust the feature of the component of the second air mattress system is an instruction to change temperature of the component of the second air mattress system.

17. The sleep system of claim 9, wherein the instruction to adjust the feature of the component of the second air mattress system is an instruction to adjust a foundation of the second air mattress systems.

18. A sleep system comprising:

a first air mattress system comprising:

an first air mattress; and

a first central controller configured to:

determine that the first air mattress does not have a user present;

responsive to determining that the first air mattress of the first air mattress system does not have a user present, generate an instruction to adjust a feature of a component of a second air mattress system that is remote from the first air mattress system; and

transmit the instruction to adjust the feature of the component of the second air mattress system;

the second air mattress system comprising:

a second central controller configured to:

receive the instruction to adjust the feature of the component of the second air mattress system; and responsive to receiving the instruction to adjust the feature of the component of the second air mattress system, adjust the component of the second air mattress system;

determine that the second air mattress system does not have a second user present; and

prevent adjustment of the feature of the component of the second air mattress system in response to determining that the second air mattress system does not have the second user present.

19. The method of claim 1, the method further comprising:

determining that the second air mattress system does not have a second user present; and

preventing adjustment of the feature of the component of the second air mattress system in response to determining that the second air mattress system does not have the second user present.

20. The method of claim 1, wherein the first air mattress system is in a first room, wherein the second air mattress system is a mattress system for a caregiver in a second room,

17

and wherein the second air mattress system is connected via a wireless network connection to the first air mattress to alert the caregiver when the user is out of bed.

21. The method of claim 1, wherein the method further comprises determining that the mattress of the first air mattress system does not have a user present. 5

22. The method of claim 21, wherein determining that the mattress of the first air mattress system does not have a user present comprises sensing air pressure of the mattress with a pressure transducer; and

wherein generating, at the first central controller of the first air mattress system, an instruction to adjust a feature of a component of a second air mattress system that is remote from the first air mattress system is performed responsive to sensing air pressure of the mattress with a pressure transducer. 10

23. The sleep system of claim 9, wherein the first central controller is further configured to determine that the first air mattress of the first air mattress system does not have a user present.

24. The sleep system of claim 23, wherein to determine that the first air mattress of the first air mattress system does not have a user present, the first central controller is further configured to sense air pressure of the mattress with a pressure transducer; and 20

18

wherein the first central controller is configured to generate an instruction to adjust a feature of a component of a second air mattress system that is remote from the first air mattress system in response to sensing air pressure of the mattress with a pressure transducer.

25. The sleep system of claim 9, wherein the second central controller is configured to, responsive to receiving the instruction, adjust the feature of the component of the second air mattress system such that the user of the second air mattress system is awakened by the adjustment the feature of the component of the second air mattress system in response to receiving the instruction at the second central controller.

26. The sleep system of claim 9, wherein the second central controller is configured to, responsive to receiving the instruction, adjust the feature of the component of the second air mattress system such that the user of the second air mattress system is awakened by the adjustment of the feature of the component of the second air mattress system in response to the first central controller determining that the first air mattress does not have a user present.

\* \* \* \* \*

专利名称(译)	充气气垫警报和监控系统		
公开(公告)号	<a href="#">US10182661</a>	公开(公告)日	2019-01-22
申请号	US14/209222	申请日	2014-03-13
[标]申请(专利权)人(译)	ROB NUNN PALASHEWSKI WADE DANIEL TILSTRA MATTHEW WAYNE STUSYNSKI STACY YOUNG史蒂芬 HEWITT CARL		
申请(专利权)人(译)	NUNN , ROB PALASHEWSKI , WADE DANIEL TILSTRA , MATTHEW WAYNE STUSYNSKI , STACY YOUNG , 史蒂芬 HEWITT , CARL		
[标]发明人	NUNN ROB PALASHEWSKI WADE DANIEL TILSTRA MATTHEW WAYNE STUSYNSKI STACY YOUNG STEVEN HEWITT CARL		
发明人	NUNN, ROB PALASHEWSKI, WADE DANIEL TILSTRA, MATTHEW WAYNE STUSYNSKI, STACY YOUNG, STEVEN HEWITT, CARL		
IPC分类号	A47C27/08 A47C31/00 A61B5/00 A47C27/10 A61B5/11		
CPC分类号	A47C27/083 A47C31/00 A61B5/6892 A47C27/10 A61B5/1115 A47C27/082 A47C27/04 A47C31/008 A61B5/15		
代理机构(译)	FISH & RICHARDSON P.C.		
优先权	61/781266 2013-03-14 US		
其他公开文献	US20140259433A1		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

除了别的以外，本公开描述了通过改变用户的睡眠环境来唤醒用户的技术。在一个示例中，一种方法包括在充气床垫系统的中央控制器处接收至少一个用户警报设置，经由中央控制器基于所接收的用户警报设置生成至少一个指令，并从该设备发送中央控制器，至少一个指令到充气床垫系统的第一部件以调节第一部件的特征。

