




US 20180126179A1

(19) **United States**(12) **Patent Application Publication**
Haas et al.(10) **Pub. No.: US 2018/0126179 A1**(43) **Pub. Date: May 10, 2018**(54) **IMPLANTABLE MEDICAL DEVICE FOR
ATRIAL DEPLOYMENT****Publication Classification**(71) Applicant: **CARDIAC PACEMAKERS, INC.**, St.
Paul, MN (US)(72) Inventors: **Benjamin J. Haas**, Forest Lake, MN
(US); **Michael J. Kane**, St. Paul, MN
(US); **Arthur J. Foster**, Blaine, MN
(US); **Lance Eric Juffer**, Lino Lakes,
MN (US); **Michael J. Johnson**, North
Oaks, MN (US); **Keith R. Maile**, New
Brighton, MN (US); **Brian L. Schmidt**,
White Bear Lake, MN (US); **Brendan
Early Koop**, Ham Lake, MN (US)(73) Assignee: **CARDIAC PACEMAKERS, INC.**, St.
Paul, MN (US)(21) Appl. No.: **15/804,768**(22) Filed: **Nov. 6, 2017****Related U.S. Application Data**(60) Provisional application No. 62/419,176, filed on Nov.
8, 2016.(51) **Int. Cl.***A61N 1/375* (2006.01)*A61B 5/042* (2006.01)*A61B 5/00* (2006.01)*A61N 1/365* (2006.01)(52) **U.S. Cl.**CPC *A61N 1/37518* (2017.08); *A61B 5/0422*
(2013.01); *A61N 1/3756* (2013.01); *A61N*
1/365 (2013.01); *A61N 1/37512* (2017.08);
A61B 5/686 (2013.01)

(57)

ABSTRACT

An implantable medical device (IMD) may be deployed within a patient's right atrium at a location near a right atrial appendage of the patient's heart in order to pace the patient's heart and/or to sense electrical activity within the patient's heart. In some cases, an IMD may be implanted within the right atrial appendage. The IMD may include an expandable anchoring mechanism configured to secure the IMD in place.

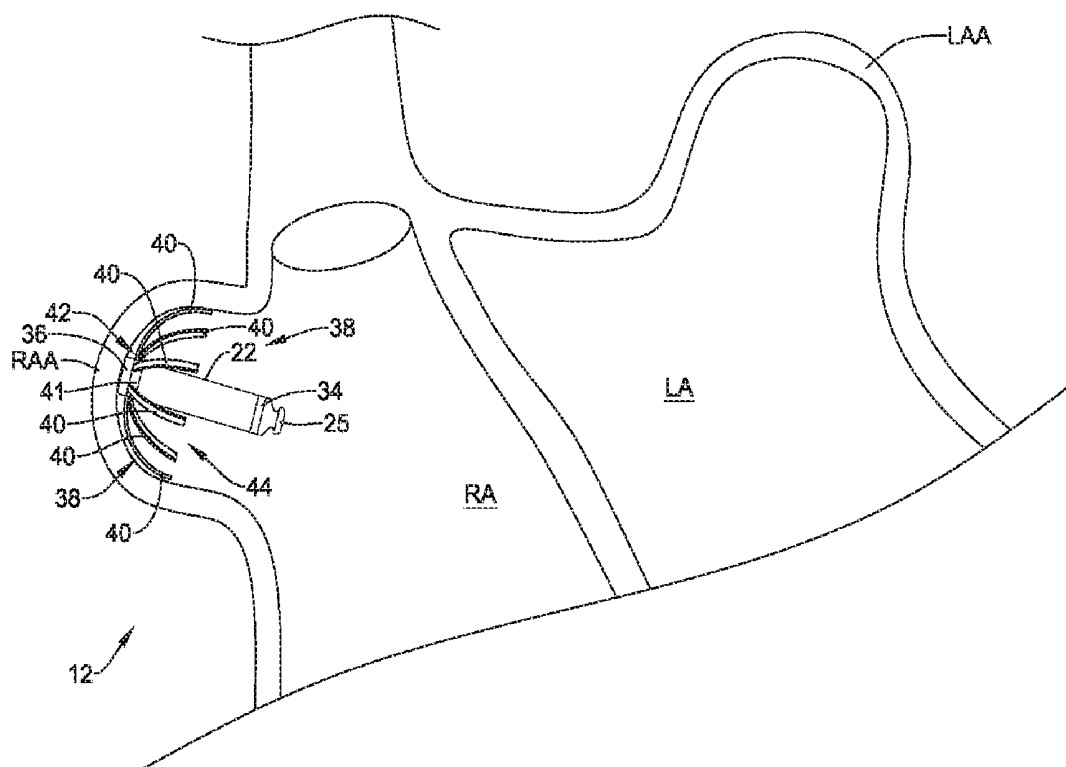

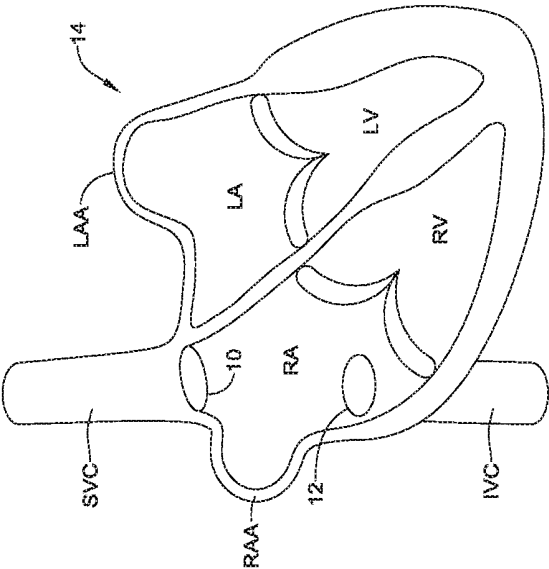


FIG. 1

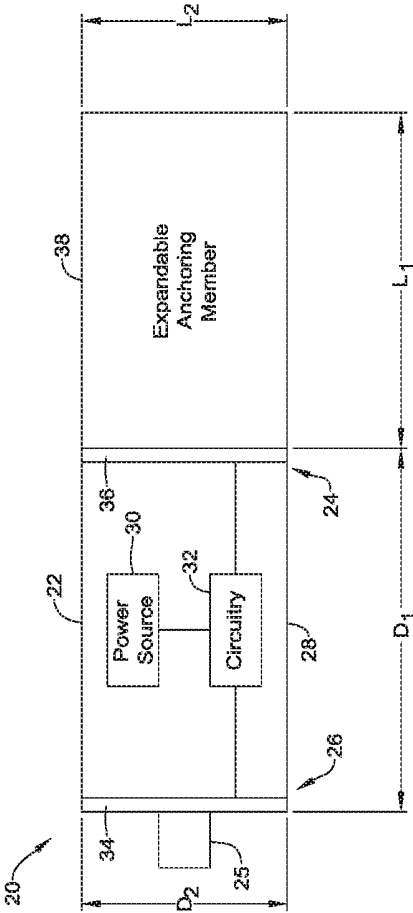


FIG. 2A

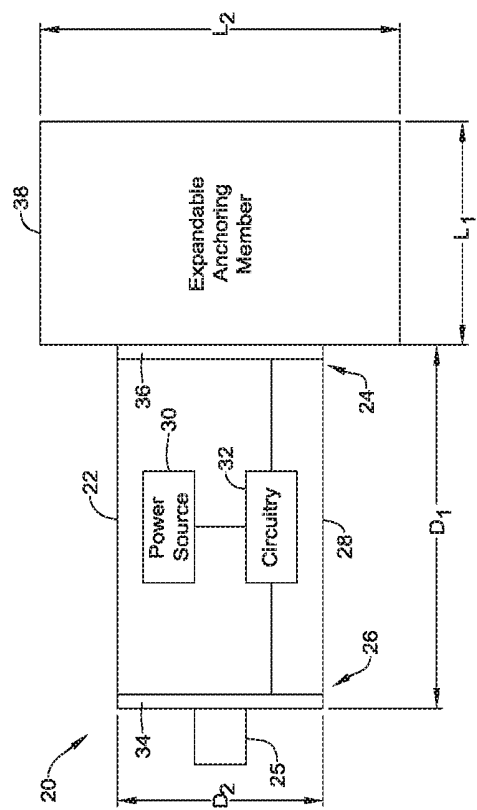


FIG. 2B

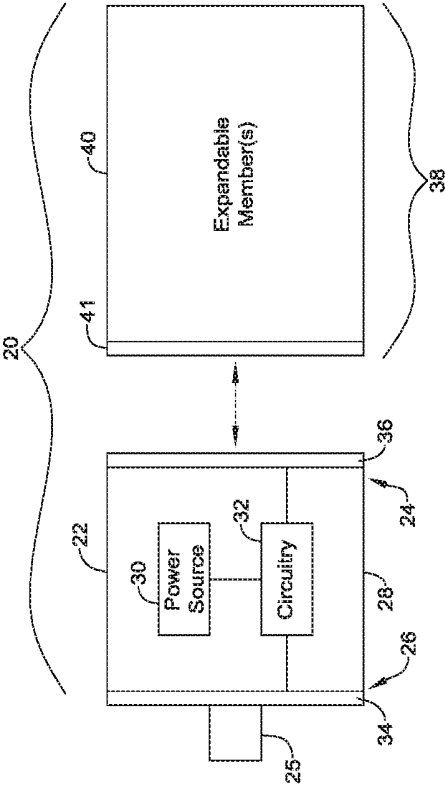


FIG. 3A

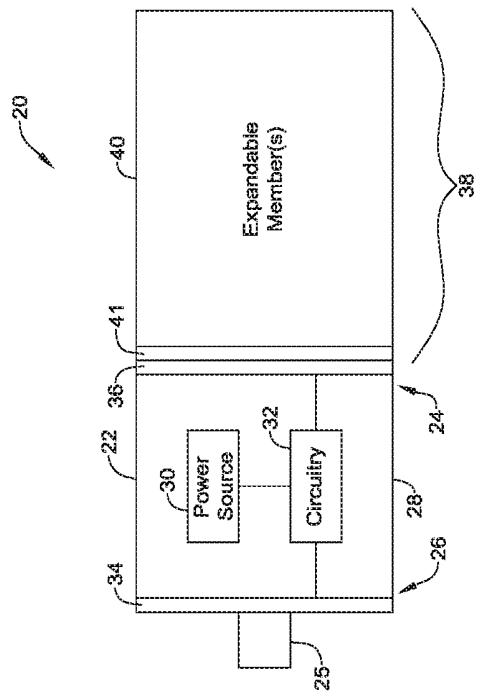


FIG. 3B

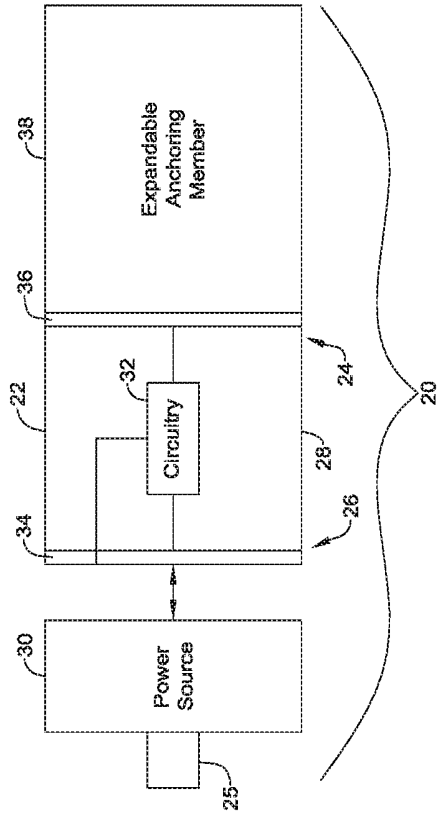


FIG. 4A

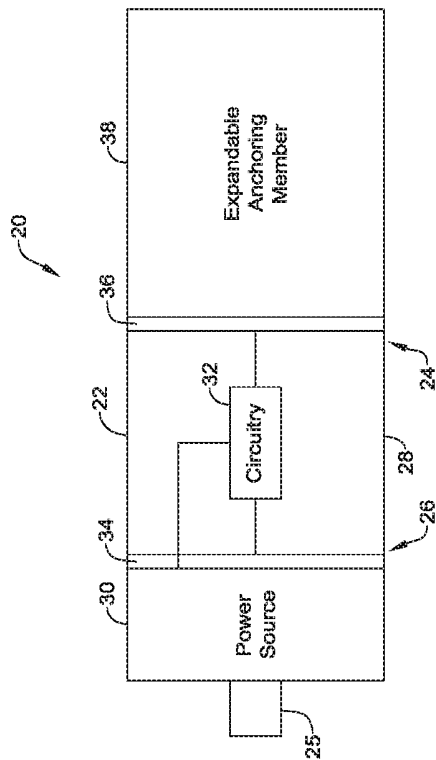


FIG. 4B

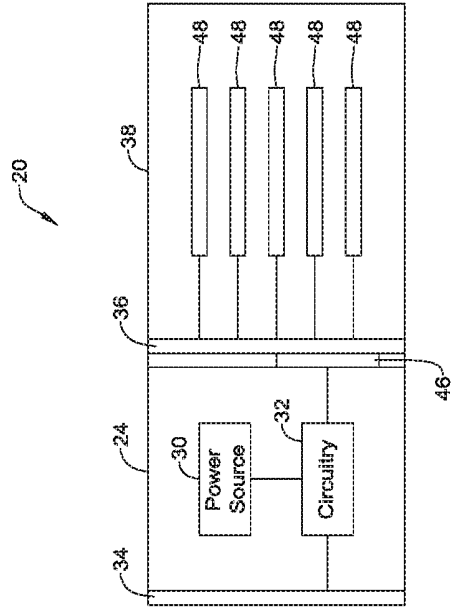


FIG. 5

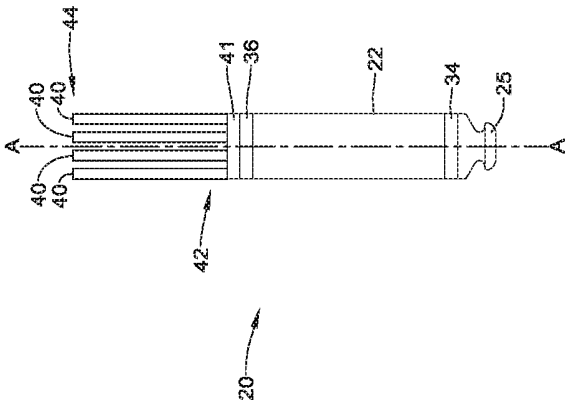


FIG. 6A

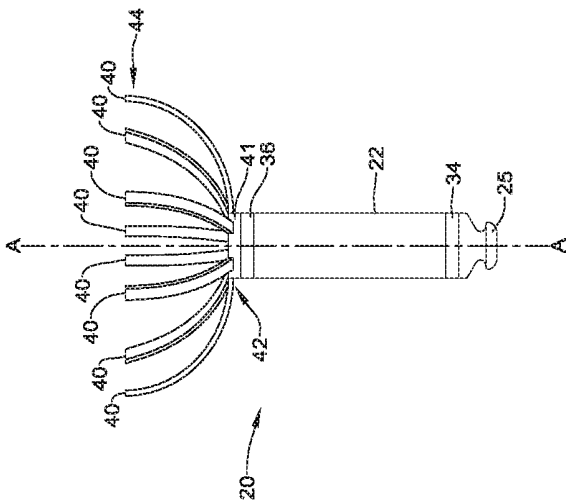


FIG. 6B

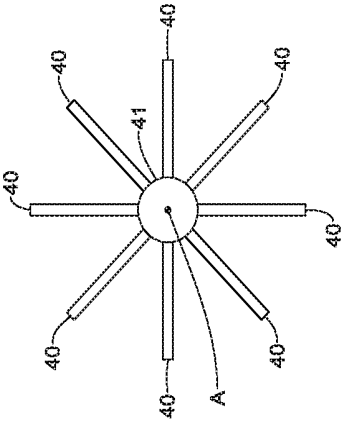


FIG. 6C

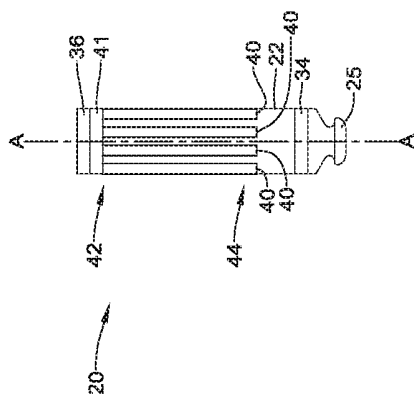


FIG. 7A

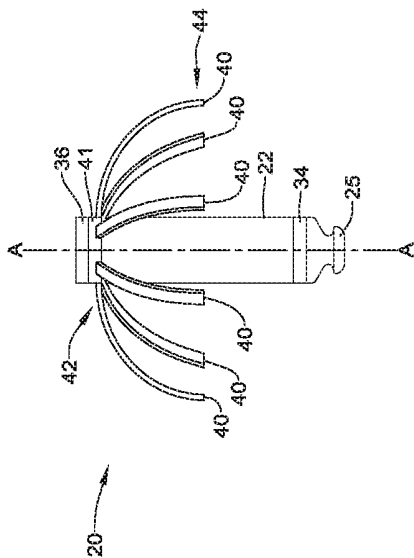


FIG. 7B

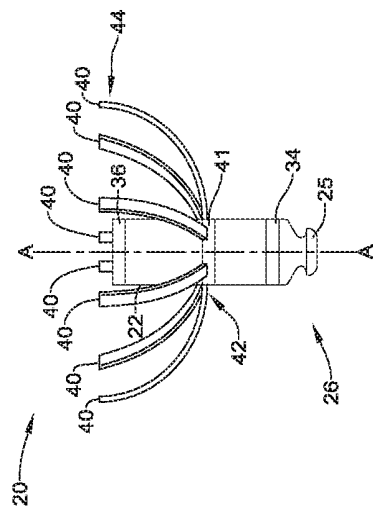


FIG. 8

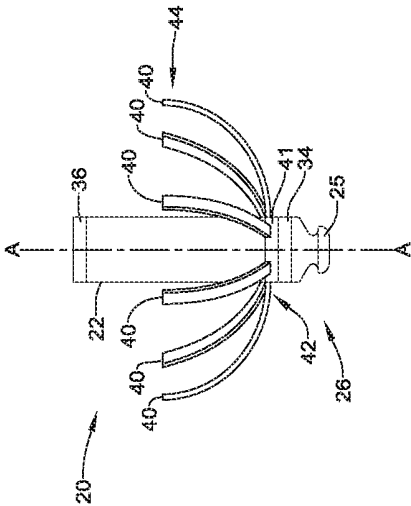


FIG. 9

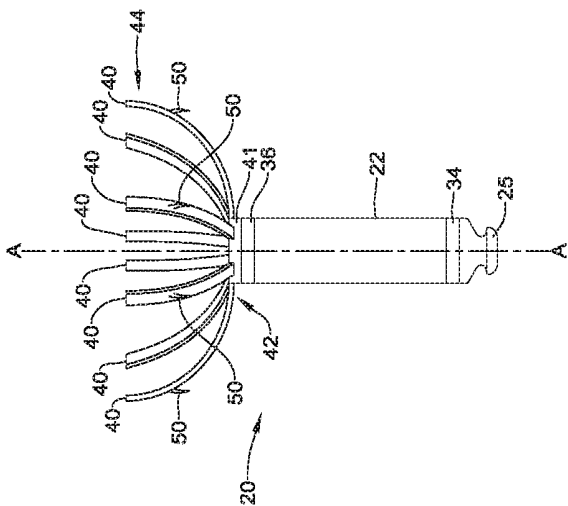


FIG. 10



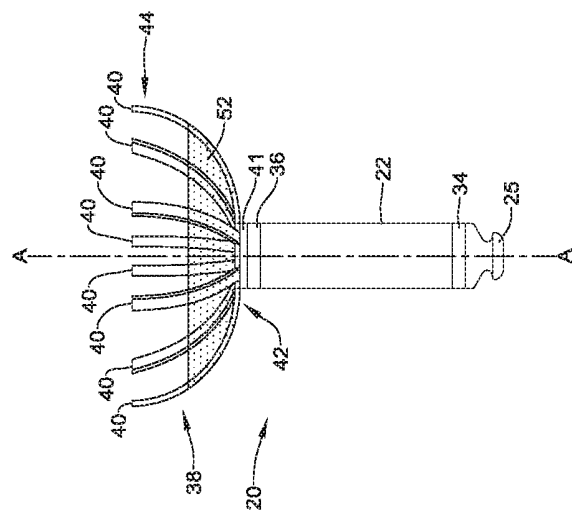


FIG. 11

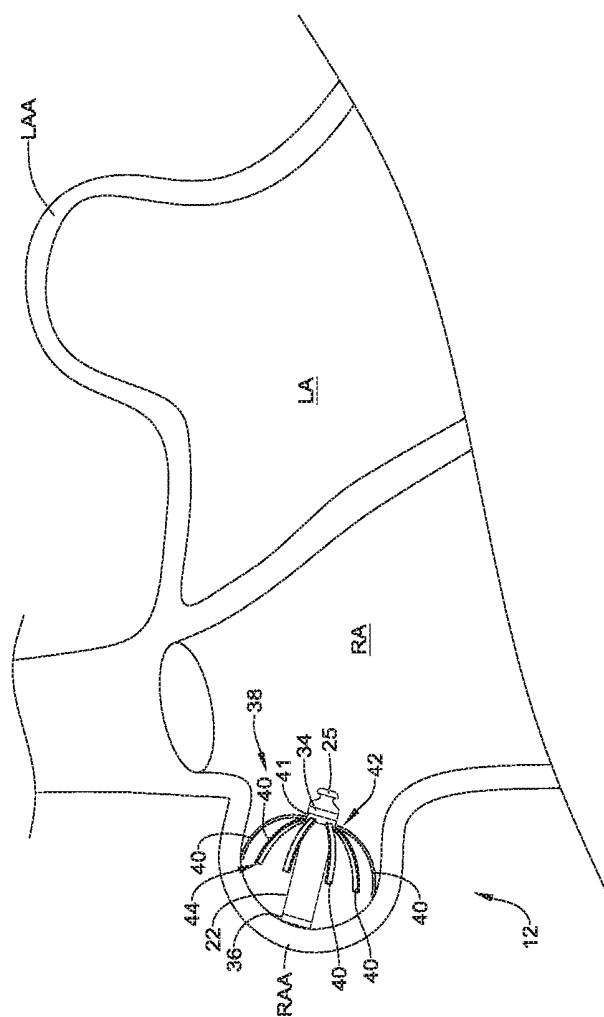

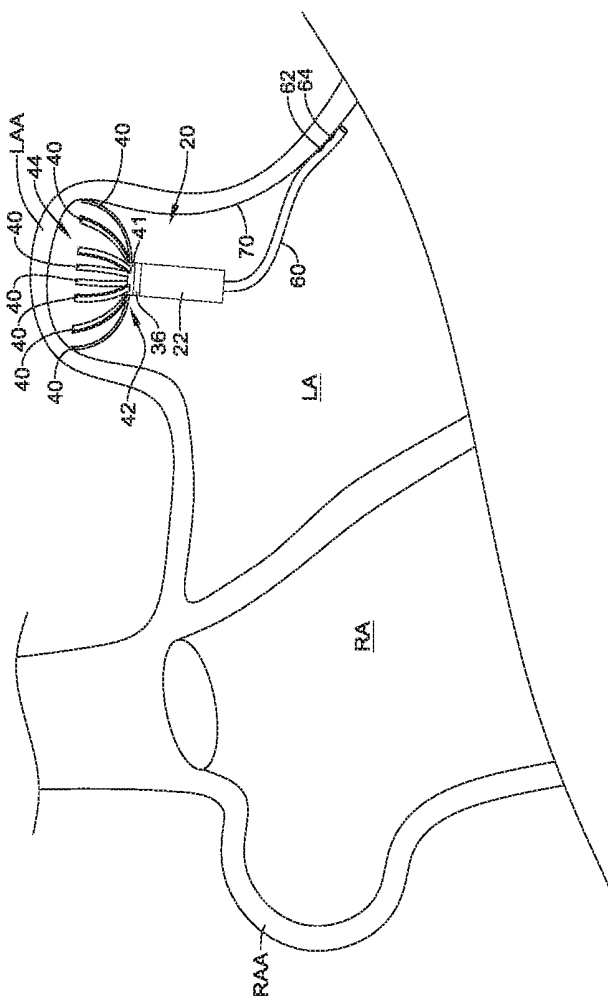

LO
F
G
L

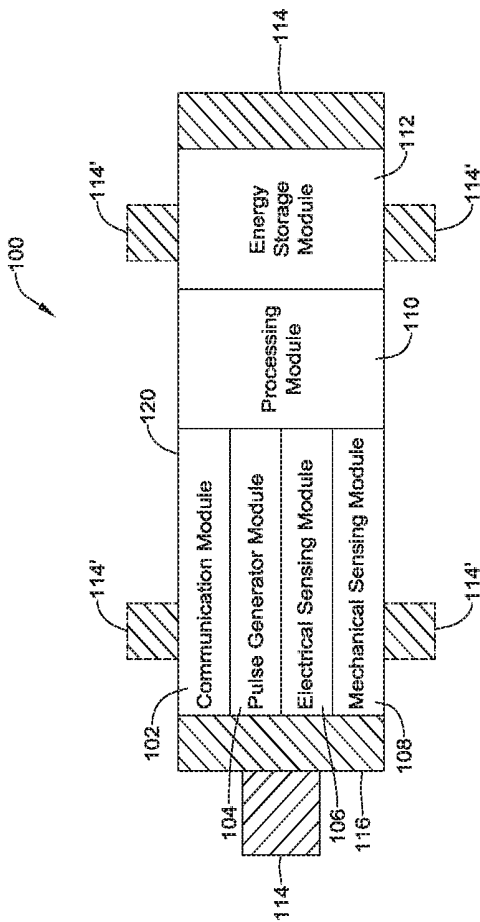


FIG. 16

IMPLANTABLE MEDICAL DEVICE FOR ATRIAL DEPLOYMENT

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Patent Application Ser. No. 62/419,176 filed on Nov. 8, 2016, the disclosure of which is incorporated herein by reference.

TECHNICAL FIELD

[0002] The disclosure relates generally to implantable medical devices, and more particularly to implantable medical devices that can be deployed within or near the patient's heart.

BACKGROUND

[0003] Implantable medical devices are commonly used today to monitor a patient and/or deliver therapy to a patient. For example, implantable sensors are often used to monitor one or more physiological parameters of a patient, such as heart beats, heart sounds, ECG, respiration, etc. In some instances, pacing devices are used to treat patients suffering from various heart conditions that may result in a reduced ability of the heart to deliver sufficient amounts of blood to a patient's body. Such heart conditions may lead to slow, rapid, irregular, and/or inefficient heart contractions. To help alleviate some of these conditions, various medical devices (e.g., pacemakers, defibrillators, etc.) can be implanted in a patient's body. Such devices may monitor and in some cases provide electrical stimulation to the heart to help the heart operate in a more normal, efficient and/or safe manner.

SUMMARY

[0004] This disclosure provides design, delivery and deployment methods, and clinical usage alternatives for medical devices. In one example, an implantable medical device (IMD) such as a leadless cardiac pacemaker (LCP) may include a power source, circuitry operatively coupled to the power source, a housing at least partially enclosing the circuitry, an anode electrode operatively coupled to the circuitry, a cathode electrode operatively coupled to the circuitry and spaced from the anode electrode, and an expandable anchoring member secured relative to the housing. In some cases, the circuitry may be configured to pace a patient's heart and/or sense electrical activity of the patient's heart. The housing may be positioned within an atrium of the patient's heart. The expandable anchoring member may have a collapsed configuration for delivery and an expanded configuration for securing the housing within the atrium of the patient's heart, sometimes with the cathode electrode in engagement with an atrium wall of the patient.

[0005] Alternatively or additionally, the expandable anchoring member may be configured to engage an atrial appendage of the patient's heart in the expanded configuration.

[0006] Alternatively or additionally to any of the embodiments above, the expandable anchoring member may include a plurality of struts that extend out from a central hub in the expanded configuration, wherein the housing may be secured to the central hub.

[0007] Alternatively or additionally to any of the embodiments above, the expandable anchoring member may extend

along a central axis from a first end to a second end, and wherein in the expanded configuration the plurality of struts may extend toward the central axis to the central hub at the first end and out further from the central axis at the second end.

[0008] Alternatively or additionally to any of the embodiments above, the plurality of struts may be biased to expand away from the central axis at the second end when transitioning from the collapsed configuration to the expanded configuration.

[0009] Alternatively or additionally to any of the embodiments above, the LCP may further include a plurality of fixation features supported by one or more of the plurality of struts facing away from the central axis for engaging the patient's heart and to secure the expandable anchoring member and the housing to the patient's heart.

[0010] Alternatively or additionally to any of the embodiments above, the plurality of fixation features may be configured to engage an atrial appendage of the patient's heart as the plurality of struts radially expand from the central axis at the second end of the expandable anchoring member.

[0011] Alternatively or additionally to any of the embodiments above, the plurality of struts may be biased to keep the plurality of fixation features engaged with the patient's heart.

[0012] Alternatively or additionally to any of the embodiments above, the housing may be removably secured to the expandable anchoring member.

[0013] Alternatively or additionally to any of the embodiments above, the power source may be removably coupled relative to the housing, and may be removable relative to the housing while the housing remains secured to the expandable anchoring member.

[0014] Alternatively or additionally to any of the embodiments above, the LCP may further include a mesh secured to the expandable anchoring member, wherein the mesh may be configured to encourage endothelialization over at least part of the expandable anchoring member.

[0015] Alternatively or additionally to any of the embodiments above, the expandable anchoring member may comprise the cathode electrode and may further comprises an interconnect for providing a connection to the cathode electrode, and wherein the circuitry may be operatively coupled to the interconnect and thus the cathode electrode.

[0016] Alternatively or additionally to any of the embodiments above, the expandable anchoring member may comprise a plurality of struts that extend out from a central hub in the expanded configuration, wherein the cathode electrode may be part of or supported by at least one of the plurality of struts.

[0017] Alternatively or additionally to any of the embodiments above, the expandable anchoring member comprises a plurality of circumferentially spaced electrodes configured to engage the atrium of the patient's heart, wherein the plurality of circumferentially spaced electrodes may be operatively coupled to the circuitry.

[0018] Alternatively or additionally to any of the embodiments above, the circuitry may be configured to utilize one or more of the circumferentially spaced electrodes for sensing electrical signals of the patient's heart and/or to utilize one or more of the circumferentially spaced electrodes for pacing the patient's heart.

[0019] In another example of the disclosure, an implantable medical device (IMD) may include a power source, circuitry operatively coupled to the power source, a housing at least partially enclosing the circuitry, an anode electrode operatively coupled to the circuitry, a cathode electrode operatively coupled to the circuitry and spaced from the anode electrode, and an expandable anchoring member secured relative to the housing. The circuitry may be configured to pace a patient's heart and/or sense electrical activity of the patient's heart. The housing may be configured to be positioned within an atrium of the patient's heart. The expandable anchoring member having a collapsed configuration for delivery and an expanded configuration for securing the housing within the atrium of the patient's heart. Further, the expandable anchoring member may extend from a first end to an open second end and may include a plurality of struts connected to a central hub at the first end and extend out to the open second end.

[0020] Alternatively or additionally, the housing may be secured to the central hub.

[0021] Alternatively or additionally to any of the embodiments above, at least part of the housing may be releasably fixed to the expandable anchoring member.

[0022] Alternatively or additionally to any of the embodiments above, the IMD may further include a mesh secured to the expandable anchoring member, wherein the mesh may be configured to encourage endothelialization over at least part of the expandable anchoring member.

[0023] In another example of the disclosure, an IMD may include a housing, an anode electrode fixed relative to the housing, a cathode electrode fixed relative to the housing and spaced from the anode electrode, and an expandable anchoring member secured relative to the housing. The housing may be configured to be positioned within an atrium of a patient's heart. The expandable anchoring member may have a collapsed configuration for delivery and an expanded configuration for securing the housing within the atrium of the patient's heart. Further, the expandable anchoring may comprise a plurality of struts that, in the expanded configuration, may assume a cup shape.

[0024] The above summary of some illustrative embodiments is not intended to describe each disclosed embodiment or every implementation of the present disclosure. The Figures and Description which follow more particularly exemplify these and other illustrative embodiments.

BRIEF DESCRIPTION OF THE FIGURES

[0025] The disclosure may be more completely understood in consideration of the following description in connection with the accompanying drawings, in which:

[0026] FIG. 1 is a schematic illustration of a human heart;

[0027] FIGS. 2A and 2B are schematic diagrams of illustrative implantable medical devices (IMD) that have an expandable anchoring member expandable from a collapsed configuration to an expanded configuration;

[0028] FIGS. 3A and 3B are schematic diagrams of an IMD having a housing separable from an expandable anchoring member;

[0029] FIGS. 4A and 4B are schematic diagrams of an IMD having a power source separable from a housing and an expandable anchoring member;

[0030] FIG. 5 is a schematic illustration of an IMD with one or more electrodes supported by an expandable anchoring member;

[0031] FIG. 6A is a schematic diagram of an illustrative IMD in a collapsed configuration;

[0032] FIG. 6B is a schematic diagram of the illustrative IMD of FIG. 6A in an expanded configuration;

[0033] FIG. 6C is a schematic view of the illustrative IMD of FIG. 6B in the expanded configuration when viewed from the distal end;

[0034] FIG. 7A is a schematic diagram of an illustrative IMD in a collapsed configuration;

[0035] FIG. 7B is a schematic diagram of the illustrative IMD of FIG. 7A in an expanded configuration;

[0036] FIG. 8 is a schematic diagram of an illustrative IMD in an expanded configuration;

[0037] FIG. 9 is a schematic diagram of another illustrative IMD in an expanded configuration;

[0038] FIG. 10 is a schematic diagram of an illustrative IMD with fixation features extending from struts of an expandable anchoring member;

[0039] FIG. 11 is a schematic diagram of an illustrative IMD with a membrane supported by an expandable anchoring member;

[0040] FIG. 12 is a schematic diagram of an illustrative IMD implanted within the right atrial appendage;

[0041] FIG. 13 is a schematic diagram of another illustrative IMD implanted within the right atrial appendage;

[0042] FIG. 14 is a schematic diagram of another illustrative IMD implanted within the right atrial appendage;

[0043] FIG. 15 is a schematic illustration of an IMD implanted within the left atrial appendage, with a lead structure extending into the left atrium; and

[0044] FIG. 16 is a schematic block diagram of an illustrative leadless cardiac pacemaker (LCP), which may be considered as being an example housing in the IMDs of FIGS. 2 through 15.

[0045] While the disclosure is amenable to various modifications and alternative forms, specifics thereof have been shown by way of example in the drawings and will be described in detail. It should be understood, however, that the intention is not to limit the disclosure to the particular embodiments described. On the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the disclosure.

DESCRIPTION

[0046] For the following defined terms, these definitions shall be applied, unless a different definition is given in the claims or elsewhere in this specification.

[0047] All numeric values are herein assumed to be modified by the term "about," whether or not explicitly indicated. The term "about" generally refers to a range of numbers that one of skill in the art would consider equivalent to the recited value (i.e., having the same function or result). In many instances, the terms "about" may include numbers that are rounded to the nearest significant figure.

[0048] The recitation of numerical ranges by endpoints includes all numbers within that range (e.g. 1 to 5 includes 1, 1.5, 2, 2.75, 3, 3.80, 4, and 5).

[0049] As used in this specification and the appended claims, the singular forms "a," "an," and "the" include plural referents unless the content clearly dictates otherwise. As used in this specification and the appended claims, the term "or" is generally employed in its sense including "and/or" unless the content clearly dictates otherwise.

[0050] It is noted that references in the specification to “an embodiment”, “some embodiments”, “other embodiments”, etc., indicate that the embodiment described may include one or more particular features, structures, and/or characteristics. However, such recitations do not necessarily mean that all embodiments include the particular features, structures, and/or characteristics. Additionally, when particular features, structures, and/or characteristics are described in connection with one embodiment, it should be understood that such features, structures, and/or characteristics may also be used in connection with other embodiments whether or not explicitly described unless clearly stated to the contrary.

[0051] The following description should be read with reference to the drawings in which similar structures in different drawings are numbered the same. The drawings, which are not necessarily to scale, depict illustrative embodiments and are not intended to limit the scope of the disclosure.

[0052] FIG. 1 is a schematic illustration of a heart H, illustrating a right atrium RA, a right ventricle RV, a left atrium LA, a left ventricle LV, a right atrial appendage (RAA), and a left atrial appendage (LAA). For simplicity, some of the vasculature around the heart H, such as the aorta, the pulmonary arteries and the pulmonary veins are not shown. However, the superior vena cava (SVC), which returns blood from the upper body to the right atrium RA, and the inferior vena cava (IVC), which returns blood from the lower body to the right atrium RA are shown. The SVC extends to an SVC terminus 10, where the SVC is fluidly coupled with the right atrium RA. The IVC extends to an IVC terminus 12, where the IVC is fluidly coupled with the right atrium RA.

[0053] In some cases, one or more of the right atrium RA and the left atrium LA may include an appendage. Such appendages may be considered to be separate from a respective atrium or may be considered to be part of the respective atrium. A right atrial appendage (RAA) and a left atrial appendage (LAA) is shown in FIG. 1.

[0054] In some cases, it may be desirable to pace a patient's heart and sense electrical signals by providing pacing and/or sensing in or around the right atrium RA in addition to or as alternative to providing pacing in the right ventricle RV, left atrium LA and/or left ventricle LV. This may be particularly so for DDD pacing (Dual pacing locations (e.g., in the atrium and ventricle), Dual sensing locations (e.g., in the atrium and the ventricle), and Dual modes (e.g., inhibiting mode and triggered mode). The right atrium RA may have a thinner wall and/or less volume than the right ventricle RV, left atrium LA and/or left ventricle LV, such that the same form factors and/or the same fixation mechanisms used in the right ventricle RV, left atrium LA and/or left ventricle LV may not be ideal for use in the right atrium RA.

[0055] In some cases, it may be desirable to pace a patient's heart and sense electrical signals by providing pacing and/or sensing in or around the left atrium LA in addition to or as alternative to providing pacing in the right ventricle RV, right atrium RA and/or left ventricle LV. The left atrium LA may have a thinner wall and/or less volume than the right ventricle RV, right atrium RA and/or left ventricle LV, such that the same form factors and/or the same fixation mechanisms used in the right ventricle RV, right atrium RA and/or left ventricle LV may not be ideal for use in the left atrium LA.

[0056] An implantable medical device (IMD) may be implanted within the RAA such that the IMD may be able to sense electrical cardiac activity within and/or around the RAA and/or the right atrium RA. In some instances, as will be discussed, an IMD disposed within the RAA may include a lead structure that extends into the right atrium RA or other portion of the heart H. Alternatively or in addition, an implantable medical device (IMD) may be implanted within the LAA such that the IMD may be able to sense electrical cardiac activity within and/or around the LAA and/or the left atrium LA. In some instances, as will be discussed, an IMD disposed within the LAA may include a lead structure that extends into the left atrium RA or other portion of the heart H.

[0057] FIGS. 2A and 2B are schematic diagrams of an illustrative IMD 20 that may, for example, be implantable within an atrial appendage (e.g., the RAA or the LAA). The illustrative IMD 20 may include a housing 22. In some cases, the housing 22 may include opposing ends (e.g., a first end 24 and a second end 26), with a side wall 28 extending between the opposing ends 24 and 26. The housing 22 may have a length dimension denoted by a dimension D1 and a width dimension that may be normal to the length direction and that is denoted by a dimension D2. In some cases, D1 may be larger than D2. In some instances, D1 is at least twice D2, or at least three times D2, or in some cases D1 is at least four times D2 or more. In other cases, D2 is larger than D1.

[0058] A power source 30 may be disposed within (as shown in FIGS. 2A and 2B) and/or attached to the housing 22. In some cases, the power source 30 may be a battery. In some cases, the power source 30 may be rechargeable, such as a rechargeable battery, a capacitor such as a super-capacitor, and/or any other suitable rechargeable power source.

[0059] Circuitry 32 may be disposed at least partially within the housing 22 and may be operably coupled to the power source 30. The circuitry 32 may be operatively coupled to the power source 30, such that the circuitry 32 may draw power from the power source 30. In some cases, the circuitry 32 may be configured to sense the heart H and/or to sense electrical activity of the heart H via one or more electrodes that are exposed outside of the housing 22. Although not shown, the housing may include one or more sensors, such as an ECG sensor, an accelerometer, a gyro, a pressure sensor, a temperature sensor and/or any other suitable sensor. Moreover, in some cases, the circuitry 32 may include communication circuitry for communicating with one or more remotely located devices, such as a leadless cardiac pacemaker (LCP) located elsewhere the heart (e.g. in a ventricle), a subcutaneous implantable cardiac defibrillator (SICD), a remote programmer or any other suitable device.

[0060] In the example of FIG. 2A-2B, an anode electrode 34 may be fixed relative to the housing 22. In some cases, a cathode electrode 36 may be fixed relative to the housing 22 and may be spaced apart from the anode electrode 34. The anode electrode 34 may be disposed proximate the first end 24 of the housing 22 while the cathode electrode 36 may be disposed proximate the second end 26 of the housing 22, but this is not required in all cases. In some cases, the cathode electrode 36 may be positioned along the side wall 28 and/or may be positioned in one or more other location configured to allow the cathode electrode 36 to be in

engagement with the RAA, right atrium, LAA, or left atrium of a patient's heart when the IMD 20 is implanted. In some cases, the cathode electrode 36 may extend radially outwardly from the housing 22 to facilitate good engagement between the cathode electrode 36 and surrounding tissue. The anode electrode 34 may also be on the side wall 28, or may be at the first end 24 or located elsewhere. The anode electrode 34 and the cathode electrode 36 may each be operably coupled to the circuitry 32 to receive electrical signals from and/or provide electrical signals to the circuitry 32.

[0061] The anode electrode 34 and the cathode electrode 36 may be any type of electrode. In one example, one or more of the electrodes may be a ring electrode, a strip electrode, a flexible electrode, a post electrode and/or may assume any other suitable electrode configuration. In some cases, there may be a plurality of cathode electrodes and/or a plurality of anode electrodes. It is contemplated that the plurality of cathode electrodes may be connected in parallel to provide a distributed cathode electrode. Alternatively, it is contemplated that each of the plurality of cathode electrodes may be selectively connectable to the circuitry 32 by a switching circuit, such that the circuitry 32 can use any one (or set) of the plurality of cathode electrodes as the cathode electrode 36 at any given time.

[0062] In some cases, the housing 22 may include one or more retrieval features, such as a retrieval feature 25. In one example, the retrieval feature 25 may be located at or near the second end 26 of the housing 22, as shown in FIGS. 2A and 2B. Alternatively, the retrieval feature 25 may be located at or near the first end 24, if desired. In some cases, the housing 22 may include no retrieval features, one retrieval feature, two retrieval features, or more than two retrieval features. The retrieval feature(s) 25, if present, may take any desired shape or configuration. In some cases, the retrieval features 25, if present, may take the form of a knob, clasp, hook, or other feature that can be engaged by a snare or other retrieval device. These are just some examples.

[0063] The illustrative IMD 20 of FIGS. 2A-2B may include an expandable anchoring member 38 secured to the housing 22. The housing 22 may be disposed at least partially or entirely within the expandable anchoring member 38 and/or may extend from and/or to an exterior of the expandable anchoring member 38.

[0064] The expandable anchoring member 38 may, for example, have a collapsed or delivery configuration (e.g., as shown in FIG. 2A) to facilitate delivery through the vasculature to a location within the heart H (e.g., within the RA, RAA, LA, LAA). The expandable anchoring member 38 may also have an expanded configuration (e.g., as shown in FIG. 2B) that may locate the IMD 20 within the heart H and secure the IMD 20 in place, with the cathode electrode 36 in engagement and/or in electrical communication with one or more walls of the heart H.

[0065] The expandable anchoring member 38 may include any radially or otherwise expanding structure configured to secure the IMD 20 at a location within the heart H. In one example, a radially expanding expandable anchoring member 38 radially expand to engage walls of the RAA, LAA and/or other walls of the heart.

[0066] As shown in FIGS. 2A and 2B, the illustrative expandable anchoring member 38 may have a first dimension L1 and a second dimension L2, where the second dimension L2 may be substantially perpendicular to the first

dimension L1. In a collapsed configuration, as shown in FIG. 2A, the first dimension L1 of the expandable anchoring member 38 may have a first measure and in an expanded configuration, as shown in FIG. 2B, the first dimension L1 may have a second measure that is less than the first measure. Additionally, in a collapsed configuration, as shown in FIG. 2A, the second dimension L2 of the expandable anchoring member 38 may have a first dimension and in an expanded configuration, as shown in FIG. 2B, the second dimension L2 may have a second measure that may be greater than the first measure.

[0067] Although not required, in the collapsed configuration, a measure of the first dimension L1 may be greater than a measure of the second dimension L2 and in the expanded configuration a measure of the first dimension L1 may be less than a measure of the second dimension L2. Further, a measure of the dimension L2 may be substantially equal to or less than a measure of dimension D2 of the housing 22 to facilitate delivery of the IMD 20 through vasculature of the patient, such inside of a delivery catheter. In other instances (e.g., optionally when the housing 22 is located within the expandable anchoring member 38 and/or other instances), a measure of dimension L2 may be greater than a measure of dimension D2.

[0068] FIGS. 3A and 3B are a schematic representation of an IMD 20 that may have the expandable anchoring member 38 including a hub 41 (e.g., a central hub or other hub). FIG. 3A depicts the housing 22 separated from the hub 41 of the expandable anchoring member 38. FIG. 3B depicts the housing 22 attached to the hub 41 of the expandable anchoring member 38. An ability to detach the housing 22 from the hub 41 of the expandable anchoring member 38 may allow for replacement of the housing 22 and its components to facilitate replacing the housing and/or updating components thereof without having to remove the expandable anchoring member 38 from its implanted location.

[0069] In some cases, one or more expandable members 40 of the expandable anchoring member 38 may extend from the hub 41. The hub 41 may include a substantially rigid support from which the expandable members 40 extend. The hub 41 may be formed from the same or different material as the expandable members 40. Further, the hub 41 may be monolithically formed with the expandable members 40 and/or one or more of the expandable members 40 may be affixed to the hub 41. The expandable members 40 may be affixed to the hub 41 in any suitable manner including, but not limited to, welding, brazing, soldering, claspings, and/or using adhesives.

[0070] In some cases, the housing 22 may be attached to the expandable anchoring member 38. The attachment may be a permanent attachment or a releasable attachment. A permanent attachment may include a weld attachment, braze attachment, solder attachment, and/or other suitable attachments. A releasable attachment may include a threaded attachment, a ball detent attachment, an actuatable attachment, and/or any other suitable attachment that facilitates separation of the housing 22 from the expandable anchoring member 38 after implantation of the IMD 20.

[0071] FIGS. 4A and 4B are schematic representations of an IMD 20 with the power source 30 at or adjacent a proximal end of the IMD 20 (e.g., at or adjacent to the second end 26 of the housing 22). FIG. 4A depicts the power source 30 and retrieval feature 25 separable from a second end 26 of the housing 22 of the IMD 20. FIG. 4B depicts the

power source 30 and retrieval feature 25 attached to the second end 26 of the housing 22. An ability to detach the power source 30 from the housing 22 may allow for replacement of the power source 30 as it depletes over time (e.g., its charge deteriorates or otherwise wears) without having to remove the housing 22 and/or the expandable anchoring member 38.

[0072] In some cases, the power source 30 may be removably attached to the housing 22, where the retrieval feature 25 may be a part of or attached to the power source 30. The power source 30 may be attached to the housing 22 through a threaded connection, a ball detent attachment, an actuable attachment, and/or any other suitable attachment that facilitates separation of the power source 30 from the housing 22 after implantation of the IMD 20. In one example, the retrieval feature 25 may be grasped by a snare or other device and then rotated to disengage threads of the power source 30 from threads of the housing 22. Alternatively, the power source 30 may be fixedly attached to the housing 22.

[0073] Further, in addition to the power source 30 being mechanically attached or connected to the housing 22, the power source 30 may be in electrical communication with the circuitry 32 of the IMD 20. The electrical connection between the power source 30 and the circuitry 32 may be made using electrical contacts. In one example, an attachment mechanism for connecting the power source 30 to the housing 22 may be configured to bring two or more electrically conductive surface of the power source 30 into electrical connection with corresponding electrically conductive surfaces of the housing 22, where the electrically connected surfaces of the housing 22 may be in electrical communication with the circuitry 32, but this is not required.

[0074] FIG. 5 is a schematic illustration of an IMD 20 with one or more electrodes 48 supported by the expandable anchoring member 38. In the example shown, the one or more electrodes 48 may each be supported by the expandable anchoring member 38. In some cases, one or more of the electrodes 48 may function as the cathode electrode of the IMD 20. In some cases, there may be a plurality of cathode electrodes. It is contemplated that two or more of the electrodes 48 may be connected in parallel to provide a distributed cathode electrode. Alternatively, it is contemplated that each of two or more of the electrodes 48 may be selectively connectable to the circuitry 32 by a switching circuit (part of circuitry 32), such that the circuitry 32 can use any one (or set) of the two or more electrodes 48 as the cathode electrode 36 at any given time. As shown in FIG. 5, the cathode electrode 36 may be part of and/or located on and/or supported by the expandable anchoring member 38. This may facilitate having the cathode electrode 36 engage a surface of a patient's heart (e.g., engage an atrium of the heart, which may include an atrial appendage).

[0075] The cathode electrode 36, when part of the expandable anchoring member 38 and/or at other times, may be in electrical communication with (e.g., operably coupled to) the circuitry 32 directly or via an interconnect 46. The interconnect 46 may be part of the hub 41, but this is not required. The interconnect 46 may be any electrically conductive trace or circuit acting as an intermediary between the cathode electrode 36 and the circuitry 32. In one example, the interconnect 46 may include an electrically conductive surface that engages an electrically conductive surface of the housing 22 and/or one or more elements extending from the

housing 22 to mechanically engage and/or attach to the hub 41. The attachment or engagement of the housing 22 with the expandable anchoring member 38 may facilitate operatively coupling the interconnect 46 with circuitry 32.

[0076] One or more of the electrodes 48 may take any configuration on the expandable anchoring member 38. In one example, the one or more electrodes 48 may be a single electrode that may extend circumferentially around the expandable anchoring member 38 to sense electrical signals of a patient in which the IMD 20 is implanted and/or to utilize the electrode 48 for pacing the patient's heart. Alternatively, the one or more electrodes 48 may be located on a single lateral side of the expandable anchoring member 38 for sensing electrical signals of the patient's heart at a specific location and/or to pace the patient's heart at a specific location.

[0077] In another example, the one or more electrodes 48 of the expandable anchoring member 38 may include a plurality of circumferentially spaced electrodes 48 for sensing electrical signals of the patient's heart and/or for pacing the patient's heart. In some cases, the circuitry 32 of the IMD 20 may be configured to utilize one or more of the circumferentially spaced electrodes for sensing electrical signals of the patient's heart, make a determination as to the best locations to provide pacing signals along the circumference of the expandable anchoring member 38 based, at least in part, on the sensed electrical signals, and then initiate pacing at those specific locations according to a desired pacing width and pacing rate. In one example, the circuitry 32 may perform a capture threshold test and identify which one or more of the multiple spaced electrodes 48 has the lowest capture threshold(s), and may then use those electrodes during subsequent pacing of the RAA, RA, LAA or LA. The switching circuit discussed above may selectively connect each (or a set) of the electrodes 48 to the circuitry such that the circuitry 32 can use any one (or set) of the electrodes 48 as the cathode electrode 36 at any given time.

[0078] As discussed above, the expandable anchoring member 38 may include one or more expandable members 40. The expandable members 40 may take on one or more configurations. For example, the expandable members 40 may include struts, an expandable wire mesh, a coiled wired, a balloon, and/or any other suitable configuration that may expand from a collapsed configuration to an expanded configuration. In some cases, the expandable members 40 may extend generally along a longitudinal axis A (e.g., a central axis) from a first end 42 to a second end 44 of the expandable members 40 when in the collapsed configuration, but this is not required.

[0079] The expandable members 40 may be circumferentially spaced from one another and in some cases, the expandable members 40 may extend from the hub 41 (e.g., a central hub), but this is not required. In some cases, the expandable members 40 may be located circumferentially about the longitudinal axis A, such as is shown in FIG. 6A. In a collapsed configuration, the expandable members 40 may, in some cases, extend parallel or substantially parallel to the longitudinal axis A from the first end 42 to the second end 44. In an expanded configuration, the second end 44 of the expandable members 40 and/or portions between the second end 44 and the first end 42 of the expandable members 40 may extend out or away from the longitudinal axis A. In some cases, the first end 42 of the expandable

members 40 may be fixed with respect to the longitudinal axis A, sometimes via the hub 41.

[0080] As shown in FIGS. 6A-6C, in one example, the expandable members 40 of the expandable anchoring member 38 may be or may include a plurality of struts. The expandable members 40 in FIG. 6A may be connected to the hub 41, where the hub is connected to and/or is configured to be connected to the housing 22. FIG. 6A depicts the expandable members 40 in a collapsed configuration. FIG. 6B depicts the expandable members 40 in an expanded configuration forming a closed first end and an open second end (e.g., to form a cup-shape). FIG. 6C depicts the expandable members 40 in an expanded configuration when viewed from a distal end of the IMD 20.

[0081] The struts may include a first end interconnected with other struts via a hub (e.g., a central hub such as hub 41) or other feature, and a second end that is free from engagement with other structures. However, this is not required and both of the first end and the second end of the struts may be interconnected with other struts, hubs, or other features, or neither the first end nor the second end of the struts may be interconnected.

[0082] In some cases, the expandable members 40 are in strut form and may be formed from a monolithic piece of material. For example, the expandable members 40 may be made from a tube of nickel-titanium alloy (e.g., NITINOL), where the expandable members (e.g., struts) may be cut (e.g., laser cut or cut in another manner) and the material thereof may be heat worked such that the expandable members 40 may self-expand when in an unrestricted state (e.g. is pushed out the distal end of a delivery catheter). A first end of the tube may form a collar from which the expandable members 40 may extend to a second end of the tube. The collar may form the hub 41 or may be separate from the hub 41. In some cases, the collar may be affixed or otherwise attached to the hub 41.

[0083] Although the expandable members 40 and/or hub 41 may be made from a metal (e.g., NITINOL or one or more other suitable biocompatible metals), the expandable members 40 and/or hub 41 may be formed, at least in part, from one or more other biocompatible materials. In some cases, at least part of or all of the expandable members 40 and/or hub 41 may be formed from a polymer. In one example, the expandable members 40 and/or hub 41 may be formed, at least in part, from polytetrafluoroethylene (PTFE) and/or other polymer(s). More generally, it is contemplated that the expandable anchoring member 38 may be made from a metal, metal alloy, polymer (some examples of which are disclosed below), a metal-polymer composite, ceramics, combinations thereof, and the like, or other suitable material. Some examples of suitable metals and metal alloys include stainless steel, such as 304V, 304L, and 316LV stainless steel; mild steel; nickel-titanium alloy such as linear-elastic and/or super-elastic nitinol; other nickel alloys such as nickel-chromium-molybdenum alloys (e.g., UNS: N06625 such as INCONEL® 625, UNS: N06022 such as HASTELLOY® C-22®, UNS: N10276 such as HASTELLOY® C276®, other HASTELLOY® alloys, and the like), nickel-copper alloys (e.g., UNS: N04400 such as MONEL® 400, NICKELVAC® 400, NICORROS® 400, and the like), nickel-cobalt-chromium-molybdenum alloys (e.g., UNS: R30035 such as MP35-N® and the like), nickel-molybdenum alloys (e.g., UNS: N10665 such as HASTELLOY® ALLOY B2®), other nickel-chromium alloys, other nickel-

molybdenum alloys, other nickel-cobalt alloys, other nickel-iron alloys, other nickel-copper alloys, other nickel-tungsten or tungsten alloys, and the like; cobalt-chromium alloys; cobalt-chromium-molybdenum alloys (e.g., UNS: R30003 such as ELGILOY®, PHYNOX®, and the like); platinum enriched stainless steel; titanium; combinations thereof; and the like; or any other suitable material.

[0084] Within the family of commercially available nickel-titanium or nitinol alloys, is a category designated “linear elastic” or “non-super-elastic” which, although may be similar in chemistry to conventional shape memory and super elastic varieties, may exhibit distinct and useful mechanical properties. Linear elastic and/or non-super-elastic nitinol may be distinguished from super elastic nitinol in that the linear elastic and/or non-super-elastic nitinol does not display a substantial “superelastic plateau” or “flag region” in its stress/strain curve like super elastic nitinol does. Instead, in the linear elastic and/or non-super-elastic nitinol, as recoverable strain increases, the stress continues to increase in a substantially linear, or a somewhat, but not necessarily entirely linear relationship until plastic deformation begins or at least in a relationship that is more linear than the super elastic plateau and/or flag region that may be seen with super elastic nitinol. Thus, for the purposes of this disclosure linear elastic and/or non-super-elastic nitinol may also be termed “substantially” linear elastic and/or non-super-elastic nitinol.

[0085] In some cases, linear elastic and/or non-super-elastic nitinol may also be distinguishable from super elastic nitinol in that linear elastic and/or non-super-elastic nitinol may accept up to about 2-5% strain while remaining substantially elastic (e.g., before plastically deforming) whereas super elastic nitinol may accept up to about 8% strain before plastically deforming. Both of these materials can be distinguished from other linear elastic materials such as stainless steel (that can also can be distinguished based on its composition), which may accept only about 0.2 to 0.44 percent strain before plastically deforming.

[0086] In some embodiments, the linear elastic and/or non-super-elastic nickel-titanium alloy is an alloy that does not show any martensite/austenite phase changes that are detectable by differential scanning calorimetry (DSC) and dynamic metal thermal analysis (DMTA) analysis over a large temperature range. For example, in some embodiments, there may be no martensite/austenite phase changes detectable by DSC and DMTA analysis in the range of about

[0087] 60 degrees Celsius (° C.) to about 120° C. in the linear elastic and/or non-super-elastic nickel-titanium alloy. The mechanical bending properties of such material may therefore be generally inert to the effect of temperature over this very broad range of temperature. In some embodiments, the mechanical bending properties of the linear elastic and/or non-super-elastic nickel-titanium alloy at ambient or room temperature are substantially the same as the mechanical properties at body temperature, for example, in that they do not display a super-elastic plateau and/or flag region. In other words, across a broad temperature range, the linear elastic and/or non-super-elastic nickel-titanium alloy maintains its linear elastic and/or non-super-elastic characteristics and/or properties.

[0088] In some embodiments, the linear elastic and/or non-super-elastic nickel-titanium alloy may be in the range of about 50 to about 60 weight percent nickel, with the

remainder being essentially titanium. In some embodiments, the composition is in the range of about 54 to about 57 weight percent nickel. One example of a suitable nickel-titanium alloy is FHP-NT alloy commercially available from Furukawa Techno Material Co. of Kanagawa, Japan. Some examples of nickel titanium alloys are disclosed in U.S. Pat. Nos. 5,238,004 and 6,508,803, which are incorporated herein by reference. Other suitable materials may include ULTANIUM™ (available from Neo-Metrics) and GUM METAL™ (available from Toyota). In some other embodiments, a superelastic alloy, for example a superelastic nitinol can be used to achieve desired properties.

[0089] In some cases, an expandable anchoring member such as the expandable anchoring member 38 may be formed of, coated with or otherwise include one or more polymeric materials. Some examples of suitable polymers may include polytetrafluoroethylene (PTFE), ethylene tetrafluoroethylene (ETFE), fluorinated ethylene propylene (FEP), polyoxymethylene (POM, for example, DELRIN® available from DuPont), polyether block ester, polyurethane (for example, Polyurethane 85A), polypropylene (PP), polyvinylchloride (PVC), polyether-ester (for example, ARNITEL® available from DSM Engineering Plastics), ether or ester based copolymers (for example, butylene/poly(alkylene ether) phthalate and/or other polyester elastomers such as HYTREL® available from DuPont), polyamide (for example, DURETHAN® available from Bayer or CRISTAMID® available from Elf Atochem), elastomeric polyamides, block polyamide/ethers, polyether block amide (PEBA, for example available under the trade name PEBAX®), ethylene vinyl acetate copolymers (EVA), silicones, polyethylene (PE), Marlex high-density polyethylene, Marlex low-density polyethylene, linear low density polyethylene (for example REXELL®), polyester, polybutylene terephthalate (PBT), polyethylene terephthalate (PET), polytrimethylene terephthalate, polyethylene naphthalate (PEN), polyetheretherketone (PEEK), polyimide (PI), polyetherimide (PEI), polyphenylene sulfide (PPS), polyphenylene oxide (PPO), poly paraphenylene terephthalamide (for example, KEVLAR®), polysulfone, nylon, nylon-12 (such as GRILAMID® available from EMS American Grilon), perfluoro(propyl vinyl ether) (PFA), ethylene vinyl alcohol, polyolefin, polystyrene, epoxy, vinylidene chloride (PVdC), poly(styrene-*b*-isobutylene-*b*-styrene) (for example, SIBS and/or SIBS 50A), polycarbonates, ionomers, biocompatible polymers, other suitable materials, or mixtures, combinations, copolymers thereof, polymer/metal composites, and the like.

[0090] When the expandable members 40 include struts, there may be any number of struts forming the expandable anchoring member 38. In one example, the expandable anchoring member 38 may include at least one (1) strut, at least two (2) struts, at least five (5) struts, at least ten (10) struts, at least twenty (20) struts, at least forty (40) struts, and/or a greater number of struts. In a further example, there may be ten struts that extend from a first end (e.g., a collar), divide at a location approximately halfway between the first end and a second end of each strut into twenty struts, affix to a neighboring divided strut for a distance, and then the divided struts may rejoin to themselves to form ten second ends. The struts may be interconnected in any manner, including, but not limited to, via connectors, welding, braz-

ing, soldering, braiding, and/or through one or more other connection techniques. In some cases, the struts may be cut from a single tube.

[0091] As shown in FIG. 6A, the struts forming the expandable members 40 are in the collapsed configuration, and are shown fixed to the hub 41, extending away from the housing 22 of the IMD 20, and extending substantially parallel to the longitudinal axis A from the first end 42 to the second end 44. As shown in FIG. 6B, the struts are shown in the expanded configuration, and extend away from the housing 22 of the IMD, extend toward the longitudinal axis A to the hub 41 at the first end 42, and extend out further from the longitudinal axis A at or near the second end 44.

[0092] As shown in FIGS. 7A and 7B, in one example, the expandable members 40 (e.g., struts as shown in FIGS. 7A and 7B) of the expandable anchoring member 38 may be connected to the hub 41, where the hub 41 may be connected to and/or may be configured to be connected to the housing 22 such that the expandable members 40 may extend over the housing 22 of the IMD 20. FIG. 7A depicts the expandable members 40 in a collapsed configuration, extending proximally from the first end 42 of the expandable anchoring member 38 to the second end 44 of the expandable anchoring member 38 and over the housing 22 of the IMD 20, and extending substantially parallel to the longitudinal axis A from the first end 42 to the second end 44. In such configuration, the cathode electrode 36 may extend away from the expandable members 40 (e.g., the cathode electrode 36 may extend distal of the expandable members 40, as shown in FIG. 12 and discussed below). As shown in FIG. 7B, the expandable members 40 are in an expanded configuration forming a closed first end and an open second end (e.g., to form a cup-shape) with the expandable members 40 extending over the housing 22 of the IMD 20, extending toward the longitudinal axis A to the hub 41 at the first end 42, and extending out further from the longitudinal axis A at or near the second end 44.

[0093] In some cases, the expandable members 40 may extend away from the housing 22 of IMD 20 in the collapsed configuration, as shown for example in FIG. 6A, and then in the expanded configuration, extend over the housing 22 of the IMD 20, as shown for example in FIG. 7B. Further, in some cases, the expandable members 40 may extend over or adjacent the housing 22 of IMD 20 in the collapsed configuration, as shown for example in FIG. 7A, and then in the expanded configuration, extend away from the housing 22 of the IMD 20, as shown for example in FIG. 6B. Further, other configurations and combinations of collapsed and expanded configurations are contemplated, where the configurations and combinations of collapsed and expanded configurations facilitated delivery, implantation, and position maintenance of the implanted IMD 20.

[0094] In some cases, the expandable anchoring member 38 may be biased to the expanded configuration and expand away from the longitudinal axis A at the second end 44 when transitioning from the collapsed configuration to the expanded configuration. In some cases, a balloon catheter, a threaded expansion device, or other device may be used to manually drive the expandable anchoring member 38 to the expanded configuration.

[0095] While not required, at least some of the expandable members 40 may include one or more electrodes (e.g., electrodes 48, not shown in FIGS. 6A-7B). The electrodes of the expandable members 40 may be operatively coupled to

the cathode electrode 36, sometimes through a switching circuit. Sometimes, the expandable members 40 are electrically isolated from one another, and each of the expandable members 40 may include an electrically conductive material and may have an exposed portion that forms an electrode 36, while maintaining mechanical properties to engage a patient's heart to fix the IMD 20 in place.

[0096] In some cases, the housing 22 may be secured (e.g., fixedly or releasably secured) to the expandable anchoring member 38 such that the housing 22 may extend from the first end 42 of the expandable anchoring member 38 toward the second end 44 of the expandable anchoring member 38. FIGS. 8 and 9 depict instances where at least part of the housing 22 extends from the first end 42 of the expandable anchoring member 38 toward the second end 44 of the expandable anchoring member 38.

[0097] In the IMDs 20 of FIGS. 8 and 9 and/or other cases, the housing 22 may engage the hub 41 and/or other portions of the expandable anchoring member 38, where at least part of the housing 22 may releasably engage the hub 41 or other portion of the expandable anchoring member 38 and/or at least part of the housing 22 may fixedly engage the housing 22 or other portion of the expandable member 38. The housing 22 may releasably engage the expandable anchoring member 38 with a releasable engagement including, but not limited to, a threaded engagement, a luer lock engagement, a ball-detent engagement, and/or any other releasable engagement. Alternatively or in addition, the housing 22 may fixedly engage the expandable anchoring member 38 through a welding technique, a brazing technique, a soldering technique, and/or any other technique for fixedly engaging two elements to one another. In one example of engaging the housing 22 with the expandable anchoring member 38, the housing 22 may threadably engage the hub 41 to allow for removal of the housing 22 from the expandable anchoring member 38 after implantation of the IMD 20. Alternatively or in addition, at least part of the housing 22 may fixedly engage the hub 41 and at least part of the IMD 20 may be releasable from the housing 22 (e.g., although not shown in FIGS. 8 and 9, the power source 30 may be releasable from the housing 22 as discussed above with respect to FIGS. 4A and 4B) and/or releasable from the expandable anchoring member 30.

[0098] FIG. 8 depicts the housing 22 (e.g., a housing having a shorter length than the housing 22 in FIG. 9, discussed below) than engaging the expandable anchoring member 38 and extending from the first end 42 of the expandable anchoring member 38 toward the second end 44 of the expandable anchoring member 38, where the first end 24 of the housing 22 does not extend beyond ends of the expandable members 40 at the second end 44 of the expandable anchoring member 38. When the first end 24 of the housing 22 does not extend past ends of the expandable members 40 with the expandable anchoring member 38 in an expanded configuration, the expandable members 40 may include electrodes (e.g., electrodes 48, as shown in FIG. 5) that may be in communication with the cathode electrode 36 of the housing 22 and/or that may perform sensing and/or pacing functions of a cathode electrode. Other electrodes in communication with the cathode electrode 36 and/or that may perform sensing and/or pacing functions of a cathode electrode may be utilized.

[0099] FIG. 9 depicts the housing 22 (e.g., an elongated housing as compared to the housing 22 of FIG. 8) engaging

the expandable anchoring member 38 and extending from the first end 42 of the expandable anchoring member 38 toward the second end 44 of the expandable anchoring member 38, where the first end 24 of the housing 22 may extend beyond the second end 44 of the expandable anchoring member 38. When first end 24 of the housing 22 does extend past ends of the expandable members 40 with the expandable anchoring member 38 in an expanded configuration, the IMD 20 may be deployed and/or positioned such that the cathode electrode 36 may engage a heart wall to sense signals from the heart H and/or apply pace signals to the heart H and the expandable anchoring member 38 maintains the engagement between the cathode electrode 36 and the heart wall. Alternatively or in addition, the expandable members 40 may include other electrodes (e.g., electrodes 48, as shown in FIG. 5) that may be in communication with the cathode electrode 36 of the housing 22 and/or that may perform sensing and/or pacing functions of a cathode electrode. Other electrodes in communication with the cathode electrode 36 and/or that may perform sensing and/or pacing functions of a cathode electrode may be utilized.

[0100] In some cases, the expandable anchoring member 38 may include one or more fixation features for engaging a patient's heart and to secure the expandable anchoring member 38 and the housing 22 to the patient's heart H. For example, and as shown in FIG. 10, a fixation feature 50 may be a tine, a wire, and/or other feature extending from the expandable members 40. Illustratively, one or more fixation features 50 may extend from each expandable member 40 such that the fixation features 50 may be circumferentially spaced around the expandable anchoring member 38 to engage the heart H at a plurality of spaced locations. The fixation features 50 may be configured to extend away from the longitudinal axis A, extend in a distal direction, and/or extend in a proximal direction to engage the patient's heart wall (e.g., walls of the RAA or walls of the RA) as the expandable members 40 radially expand from the central axis A-A during deployment of the IMD 20. In some cases, although the expandable members 40 radially expand to secure the IMD 20 at an implant location, the fixation features 50 may engage the wall of the RAA or other portion the heart to provide additional stabilization and/or prevent the IMD 20 from backing out of the RAA once it has been placed. The biased nature of the expandable members 40 may facilitate maintaining engagement between the fixation features 50 and the patient's heart H.

[0101] FIG. 11 depicts the illustrative IMD 20 with the expandable anchoring member 38 in the expanded configuration. The IMD 20 in FIG. 11 includes a membrane 52 covering a portion of the expandable anchoring member 38. The membrane 52 may be applied to the expandable anchoring member 38 such that it covers at least a portion of the expandable members 40 and in some cases, an entire length from the first end 42 to the second end 44 of the expandable members 40. As shown in the example of FIG. 11, the membrane 52 may extend from first end 42 of the expandable members 40 toward the second end 44 of the expandable members 40, but may end prior to reaching the second end 44 of the expandable members 40. In one example, the membrane 52 may end at a location between one-third and two-thirds a distance from the first end 42 to the second end 44 of the expandable members 40. Further, the membrane 52 may cover at least part of an interior surface of the expandable members 40, at least part of an exterior surface of the

expandable members 40, and/or at least part of an interior surface and an exterior surface of the expandable members 40. An exterior surface of the expandable members 40 may be a surface configured to interface with a wall of a patient's heart H and an interior surface may be a surface of the expandable members 40 not configured to interface with a wall of the patient's heart H.

[0102] The membrane 52 may be attached to (e.g., secured to) the expandable members 40 and/or hub 41 in any manner. In one example, the membrane 52 may be attached to the expandable members 40 and/or hub 41 by sewing the membrane 52 to the expandable members 40 and/or hub 41 with thread, by gluing the membrane 52 to the expandable members 40 and/or hub 41 with adhesive, by forming the expandable anchoring member 38 around the membrane 52, and/or through one or more other connection techniques capable of withstanding an environment within a patient's heart.

[0103] The membrane 52 may be formed of any material. In one example, the membrane 52 may be formed of a mesh material. In some cases, the material of the membrane 52 may encourage endothelial cell growth over and/or around at least part of the expandable anchoring member 38. The mesh material may be a metal, a polymer, a fabric, other material, and/or a combination thereof. Some example materials for the membrane 52 may include, but are not limited to, polyethylene terephthalate (PET), polyester, and polyvinyl alcohol. In one example, the membrane 52 may be a mesh membrane formed from a piece of PET knit material that may be heat set to form a concave shape (e.g., a cup-shape or other concave shape) that fits over the first end 42 of the expandable members 40.

[0104] FIG. 12 depicts the illustrative IMD 20 implanted in a patient's RAA. Although FIG. 12 may be described with respect to the IMD 20 being implanted in a patient's RAA, similar concepts may be utilized to implant the IMD 20 in a patient's LAA. As can be seen in FIG. 12, the expandable members 40 may extend distally from the first end 42 of the expandable anchoring member 38 to the second end 44 of the expandable anchoring member 38. The expandable members 40 may engage walls of the RAA to secure the IMD 20 in the heart H of the patient with the first end 42 of the expandable anchoring member 38 adjacent a proximal end of the RAA such that endothelial cell growth may cover a proximal end of the expandable anchoring member 38 and close off the RAA.

[0105] In some cases, the entire IMD 20 may be located in the RAA or, alternatively, at least a portion of the IMD 20 may extend out from the RAA and into the RA. In FIG. 12, the first end 42 of the expandable anchoring member 38 is shown secured to the housing 22, and the second end 44 of the expandable anchoring member 38 extends distally of the distal end of the housing 22 and into the RAA. Further, as can be seen in FIG. 12, the retrieval feature 25 may extend proximally from the housing 22 such that a retrieval device may be able to grasp or otherwise interact with the retrieval feature 25 to remove and/or adjust at least part of the IMD 20.

[0106] FIG. 13 depicts the illustrative IMD 20 implanted in a patient's RAA. Although FIG. 13 is described with respect to the IMD 20 being implanted in a patient's RAA, similar concepts may be utilized to implant the IMD 20 in a patient's LAA. As can be seen in FIG. 13, the expandable members 40 may extend proximally from the first end 42 of

the expandable anchoring member 38 to the second end 44 of the expandable anchoring member 38. The expandable members 40 may engage walls of the RAA to secure the IMD 20 in the heart H of the patient and maintain a positioning of the cathode electrode 36 extending distally of the expandable members against the wall of the RAA. The first end 42 of the expandable anchoring member 38 is shown secured to the housing 22, and the second end 44 of the expandable anchoring member 38 extends proximally of the distal end of the housing 22. In some cases, the entire IMD 20 may be located in the RAA or, alternatively, at least a portion of the IMD 20 may extend out from the RAA and into the RA. As can be seen in FIG. 13, the retrieval feature 25 may extend proximally from the housing 22 such that a retrieval device may be able to grasp or otherwise interact with the retrieval feature 25 to remove and/or adjust at least part of the IMD 20.

[0107] FIG. 14 depicts the illustrative IMD 20 implanted in a patient's RAA. Although FIG. 14 is described with respect to the IMD 20 being implanted in a patient's RAA, similar concepts may be utilized to implant the IMD 20 in a patient's LAA. As can be seen in FIG. 14, the expandable members 40 may extend distally from the first end 42 of the expandable anchoring member 38 to the second end 44 of the expandable anchoring member 38. The expandable members 40 may engage walls of the RAA to secure the IMD 20 in the heart H of the patient with the first end 42 of the expandable anchoring member 38 adjacent a proximal end of the RAA such that endothelial cell growth may cover a proximal end of the expandable anchoring member 38 and close off the RAA.

[0108] In FIG. 14, the first end 42 of the expandable anchoring member 38 is shown secured to the housing 22, and the housing 22 may extend distally of ends of the expandable members 40 at the second end 44 of the expandable anchoring member 38, but this is not required (e.g., see FIG. 8). In such a configuration, however, when the IMD 20 is implanted, the cathode electrode 36 of the housing 22 may engage a wall of the RAA and the expandable anchoring member 38 may maintain engagement of the cathode electrode 36 with a wall of the RAA.

[0109] In some cases, the entire IMD 20 may be located in the RAA or, alternatively, at least a portion of the IMD 20 may extend out from the RAA and into the RA (e.g., see the IMD 20 configurations of FIGS. 8 and 9). Further, as can be seen in FIG. 14, at least the retrieval feature 25 may extend proximally from the housing 22 and/or the expandable anchoring mechanism 38 such that a retrieval device may be able to grasp or otherwise interact with the retrieval feature 25 to remove and/or adjust at least part of the IMD 20.

[0110] FIG. 15 is a schematic diagram of the illustrative IMD 20 implanted within the LAA. Although FIG. 15 is described with respect to the IMD 20 being implanted in a patient's LAA, similar concepts may be utilized to implant the IMD 20 in a patient's RAA. As can be seen in FIG. 14, an expandable members 40 may extend distally from the first end 42 of the expandable anchoring member 38 to the second end 44 of the expandable anchoring member 38. The expandable members 40 may engage walls of the LAA to secure the IMD 20 in the heart H of the patient. The first end 42 of the expandable anchoring member 38 is shown secured to the housing 22, and the second end 44 of the expandable anchoring member 38 is shown extending distally of the distal end of the housing 22. The illustrative IMD

20 in FIG. 15 may include a tail 60 extending from the second end of the housing 22 and into the LA.

[0111] In some cases, the tail 60 may be shaped to provide a bias force against a wall 70 of the LA. While the tail 60 is shown extending into the LA, it will be appreciated that in some cases, the tail 60 may be configured to extend into the LV, RA, and/or RV. In some cases, the tail 60 may be configured to extend into cardiac vasculature such as but not limited to the coronary sinus.

[0112] The tail 60 may include one or more electrodes, such as electrodes 62 and 64 and/or other electrodes. The electrodes 62 and 64 may be configured to engage a wall of the LA, as shown.

[0113] In some cases, the electrodes 62, 64 may be used in combination with the anode electrode 34 and a cathode electrode 36 for pacing within the LA or other portions of the heart H. In some cases, the electrodes 62, 64, and others if present on the tail, may be used in place of the anode electrode 34 and/or the cathode electrode 36 for pacing within the LA or other location in the heart H. In some cases, the cathode electrode 36 may be omitted, and one or more of the electrodes 62, 64 may be used as the cathode along with the anode electrode 34 to pace the atrium. In some cases, the electrodes 62, 64 may be used in combination with or in place of the anode electrode 34 and/or the cathode electrode 36 to sense electrical activity in and/or near the LA.

[0114] In some cases, multiple spaced electrodes 62, 64 may be provided along a length of the tail 60. Circuitry 32 within housing 22 may be configured to select a particular electrode from the multiple spaced electrodes 62, 64 for use as the cathode during subsequent pacing. In some cases, the circuitry 32 may perform a capture threshold test and identify which of the multiple spaced electrodes 62, 64 has the lowest capture threshold, and may then use that electrode during subsequent pacing of the LA. While the IMD 20 is shown implanted in the LAA, it is contemplated that it could likewise be implanted in the RAA and used to pace and/or sense in the RA.

[0115] FIG. 16 is a schematic block diagram of an illustrative leadless cardiac pacemaker (LCP) 100, which may be considered as being an example housing in the IMDs of FIGS. 2 through 15. The LCP 100 may operate to sense physiological signals and parameters and deliver one or more types of electrical stimulation therapy to the heart of the patient. Example electrical stimulation therapy may include bradycardia pacing, rate responsive pacing therapy, cardiac resynchronization therapy (CRT), anti-tachycardia pacing (ATP) therapy and/or the like. As can be seen in FIG. 16, the LCP 100 may be a compact device with all components housed within the LCP 100 or directly on a housing 120. In some instances, the LCP 100 may include one or more of a communication module 102, a pulse generator module 104, an electrical sensing module 106, a mechanical sensing module 108, a processing module 110, an energy storage module 112, and electrodes 114.

[0116] As depicted in FIG. 16, the LCP 100 may include electrodes 114, which can be secured relative to the housing 120 and electrically exposed to tissue and/or blood surrounding the LCP 100. The electrodes 114 may represent the anode electrode 34, the cathode electrode 36 and/or electrodes 48 discussed above. The electrodes 114 may generally conduct electrical signals to and from the LCP 100 and the surrounding tissue and/or blood. Such electrical signals can

include communication signals, electrical stimulation pulses, and intrinsic cardiac electrical signals, to name a few. Intrinsic cardiac electrical signals may include electrical signals generated by the heart and may be represented by an electrocardiogram (ECG). The electrodes 114 may include one or more biocompatible conductive materials such as various metals or alloys that are known to be safe for implantation within a human body. In some instances, the electrodes 114 may be generally disposed on either end of the LCP 100 and may be in electrical communication with one or more of modules the 102, 104, 106, 108, and 110. In embodiments where the electrodes 114 are secured directly to the housing 120, an insulative material may electrically isolate the electrodes 114 from adjacent electrodes, the housing 120, and/or other parts of the LCP 100. In some instances, some or all of the electrodes 114 may be spaced from the housing 120 and may be connected to the housing 120 and/or other components of the LCP 100 through connecting wires, the expandable anchoring member 38, and/or other structure. In some cases, one or more of the electrodes 114 may be placed on a tail (see FIG. 15) that extends out away from the housing 120, such as out into the adjacent heart chamber.

[0117] As shown in FIG. 16, in some embodiments, the LCP 100 may include electrodes 114'. The electrodes 114' may be in addition to the electrodes 114, or may replace one or more of the electrodes 114. The electrodes 114' may be similar to the electrodes 114 except that the electrodes 114' are disposed on the sides of the LCP 100. In some cases, the electrodes 114' may increase the number of electrodes by which the LCP 100 may deliver communication signals and/or electrical stimulation pulses, and/or may sense intrinsic cardiac electrical signals, communication signals, and/or electrical stimulation pulses. While generically shown as being the same size, it will be appreciated that one of the electrodes 114' may, for example, be relatively larger in surface area to be used as a pacing anode electrode while another of the electrodes 114' may be relatively smaller in surface area to be used as a pacing cathode electrode.

[0118] The electrodes 114 and/or 114' may assume any of a variety of sizes and/or shapes, and may be spaced at any of a variety of spacings. For example, the electrodes 114 may have an outer diameter of two to twenty millimeters (mm). In other embodiments, the electrodes 114 and/or 114' may have a diameter of two, three, five, seven millimeters (mm), or any other suitable diameter, dimension and/or shape. Example lengths for the electrodes 114 and/or 114' may include, for example, one, three, five, ten millimeters (mm), or any other suitable length. As used herein, the length is a dimension of the electrodes 114 and/or 114' that extends away from the outer surface of the housing 120. In some cases, the housing includes a protrusion (not shown) that extends away from the side of the housing, where the protrusion carries the anode electrode (e.g. electrode 114 or 114'). The protrusion may help space the anode electrode away from the side of the housing and into engagement with the patient's vasculature. In some instances, at least some of the electrodes 114 and/or 114' may be spaced from one another by a distance of fifteen, twenty, thirty, forty, fifty millimeters (mm), or any other suitable spacing. The electrodes 114 and/or 114' of a single device may have different sizes with respect to each other, and the spacing and/or lengths of the electrodes on the device may or may not be uniform.

[0119] In the illustrative embodiment shown, the communication module 102 may be electrically coupled to the electrodes 114 and/or 114' and may be configured to deliver communication pulses to tissues of the patient for communicating with other devices such as sensors, programmers, other medical devices, and/or the like. Communication signals, as used herein, may be any modulated signal that conveys information to another device, either by itself or in conjunction with one or more other modulated signals. In some embodiments, communication signals may be limited to sub-threshold signals that do not result in capture of the heart yet still convey information. The communication signals may be delivered to another device that is located either external or internal to the patient's body. In some instances, the communication may take the form of distinct communication pulses separated by various amounts of time. In some of these cases, the timing between successive pulses may convey information. The communication module 102 may additionally be configured to sense for communication signals delivered by other devices, which may be located external or internal to the patient's body.

[0120] The communication module 102 may communicate to help accomplish one or more desired functions. Some example functions include delivering sensed data, using communicated data for determining occurrences of events such as arrhythmias, coordinating delivery of electrical stimulation therapy, and/or other functions. In some cases, the LCP 100 may use communication signals to communicate raw information, processed information, messages and/or commands, and/or other data. Raw information may include information such as sensed electrical signals (e.g. a sensed ECG), signals gathered from coupled sensors, and the like. In some embodiments, the processed information may include signals that have been filtered using one or more signal processing techniques. Processed information may also include parameters and/or events that are determined by the LCP 100 and/or another device, such as a determined heart rate, timing of determined heartbeats, timing of other determined events, determinations of threshold crossings, expirations of monitored time periods, accelerometer signals, activity level parameters, blood-oxygen parameters, blood pressure parameters, heart sound parameters, and the like. In some cases, processed information may, for example, be provided by a chemical sensor or an optically interfaced sensor. Messages and/or commands may include instructions or the like directing another device to take action, notifications of imminent actions of the sending device, requests for reading from the receiving device, requests for writing data to the receiving device, information messages, and/or other messages commands.

[0121] In at least some embodiments, the communication module 102 (or the LCP 100) may further include switching circuitry to selectively connect one or more of the electrodes 114 and/or 114' to the communication module 102 in order to select which of the electrodes 114 and/or 114' that the communication module 102 delivers communication pulses with. It is contemplated that the communication module 102 may be communicating with other devices via conducted signals, radio frequency (RF) signals, optical signals, acoustic signals, inductive coupling, and/or any other suitable communication methodology. Where the communication module 102 generates electrical communication signals, the communication module 102 may include one or more capacitor elements and/or other charge storage devices to aid

in generating and delivering communication signals. In the embodiment shown, the communication module 102 may use energy stored in the energy storage module 112 to generate the communication signals. In at least some examples, the communication module 102 may include a switching circuit that is connected to the energy storage module 112 and, with the switching circuitry, may connect the energy storage module 112 to one or more of the electrodes 114/114' to generate the communication signals.

[0122] As shown in FIG. 16, a pulse generator module 104 may be electrically connected to one or more of the electrodes 114 and/or 114'. The pulse generator module 104 may be configured to generate electrical stimulation pulses and deliver the electrical stimulation pulses to tissues of a patient via one or more of the electrodes 114 and/or 114' in order to effectuate one or more electrical stimulation therapies. Electrical stimulation pulses as used herein are meant to encompass any electrical signals that may be delivered to tissue of a patient for purposes of treatment of any type of disease or abnormality. For example, when used to treat heart disease, the pulse generator module 104 may generate electrical stimulation pacing pulses for capturing the heart of the patient, i.e. causing the heart to contract in response to the delivered electrical stimulation pulse. In some of these cases, the LCP 100 may vary the rate at which the pulse generator module 104 generates the electrical stimulation pulses, for example in rate adaptive pacing. In other embodiments, the electrical stimulation pulses may include defibrillation/cardioversion pulses for shocking the heart out of fibrillation or into a normal heart rhythm. In yet other embodiments, the electrical stimulation pulses may include anti-tachycardia pacing (ATP) pulses. It should be understood that these are just some examples. When used to treat other ailments, the pulse generator module 104 may generate electrical stimulation pulses suitable for neurostimulation therapy or the like. The pulse generator module 104 may include one or more capacitor elements and/or other charge storage devices to aid in generating and delivering appropriate electrical stimulation pulses. In at least some embodiments, the pulse generator module 104 may use energy stored in the energy storage module 112 to generate the electrical stimulation pulses. In some particular embodiments, the pulse generator module 104 may include a switching circuit that is connected to the energy storage module 112 and may connect the energy storage module 112 to one or more of the electrodes 114/114' to generate electrical stimulation pulses.

[0123] The LCP 100 may further include an electrical sensing module 106 and a mechanical sensing module 108. The electrical sensing module 106 may be configured to sense intrinsic cardiac electrical signals conducted from the electrodes 114 and/or 114' to the electrical sensing module 106. For example, the electrical sensing module 106 may be electrically connected to one or more of the electrodes 114 and/or 114' and the electrical sensing module 106 may be configured to receive cardiac electrical signals conducted through the electrodes 114 and/or 114' via a sensor amplifier or the like. In some embodiments, the cardiac electrical signals may represent local information from the chamber in which the LCP 100 is implanted. For instance, if the LCP 100 is implanted within an atrium or atrial appendage of the heart, cardiac electrical signals sensed by the LCP 100 through the electrodes 114 and/or 114' may represent atrial cardiac electrical signals. The mechanical sensing module

108 may include, or be electrically connected to, various sensors, such as accelerometers, including multi-axis accelerometers such as two- or three-axis accelerometers, gyroscopes, including multi-axis gyroscopes such as two- or three-axis gyroscopes, blood pressure sensors, heart sound sensors, piezoelectric sensors, blood-oxygen sensors, and/or other sensors which measure one or more physiological parameters of the heart and/or patient. Mechanical sensing module **108**, when present, may gather signals from the sensors indicative of the various physiological parameters. The electrical sensing module **106** and the mechanical sensing module **108** may both be connected to the processing module **110** and may provide signals representative of the sensed cardiac electrical signals and/or physiological signals to the processing module **110**. Although described with respect to FIG. 16 as separate sensing modules, in some embodiments, the electrical sensing module **106** and the mechanical sensing module **108** may be combined into a single module. In at least some examples, the LCP **100** may only include one of the electrical sensing module **106** and the mechanical sensing module **108**. In some cases, any combination of the processing module **110**, the electrical sensing module **106**, the mechanical sensing module **108**, the communication module **102**, the pulse generator module **104** and/or the energy storage module may be considered a controller of the LCP **100**.

[0124] The processing module **110** may be configured to direct the operation of the LCP **100** and may, in some embodiments, be termed a controller. For example, the processing module **110** may be configured to receive cardiac electrical signals from the electrical sensing module **106** and/or physiological signals from the mechanical sensing module **108**. Based on the received signals, the processing module **110** may determine, for example, occurrences and types of arrhythmias and other determinations such as whether the LCP **100** has become dislodged. The processing module **110** may further receive information from the communication module **102**. In some embodiments, the processing module **110** may additionally use such received information to determine occurrences and types of arrhythmias and/or other determinations such as whether the LCP **100** has become dislodged. In still some additional embodiments, the LCP **100** may use the received information instead of the signals received from the electrical sensing module **106** and/or the mechanical sensing module **108**—for instance if the received information is deemed to be more accurate than the signals received from the electrical sensing module **106** and/or the mechanical sensing module **108** or if the electrical sensing module **106** and/or the mechanical sensing module **108** have been disabled or omitted from the LCP **100**.

[0125] After determining an occurrence of an arrhythmia, the processing module **110** may control the pulse generator module **104** to generate electrical stimulation pulses in accordance with one or more electrical stimulation therapies to treat the determined arrhythmia. For example, the processing module **110** may control the pulse generator module **104** to generate pacing pulses with varying parameters and in different sequences to effectuate one or more electrical stimulation therapies. As one example, in controlling the pulse generator module **104** to deliver bradycardia pacing therapy, the processing module **110** may control the pulse generator module **104** to deliver pacing pulses designed to capture the heart of the patient at a regular interval to help

prevent the heart of a patient from falling below a predetermined threshold. In some cases, the rate of pacing may be increased with an increased activity level of the patient (e.g. rate adaptive pacing). For instance, the processing module **110** may monitor one or more physiological parameters of the patient which may indicate a need for an increased heart rate (e.g. due to increased metabolic demand). The processing module **110** may then increase the rate at which the pulse generator module **104** generates electrical stimulation pulses. Adjusting the rate of delivery of the electrical stimulation pulses may increase a comfort level of the patient by more closely matching the rate of delivery of electrical stimulation pulses with the cardiac output need of the patient.

[0126] For ATP therapy, the processing module **110** may control the pulse generator module **104** to deliver pacing pulses at a rate faster than an intrinsic heart rate of a patient in attempt to force the heart to beat in response to the delivered pacing pulses rather than in response to intrinsic cardiac electrical signals. Once the heart is following the pacing pulses, the processing module **110** may control the pulse generator module **104** to reduce the rate of delivered pacing pulses down to a safer level. In CRT, the processing module **110** may control the pulse generator module **104** to deliver pacing pulses in coordination with another device to cause the heart to contract more efficiently. In cases where the pulse generator module **104** is capable of generating defibrillation and/or cardioversion pulses for defibrillation/cardioversion therapy, the processing module **110** may control the pulse generator module **104** to generate such defibrillation and/or cardioversion pulses. In some cases, the processing module **110** may control the pulse generator module **104** to generate electrical stimulation pulses to provide electrical stimulation therapies different than those examples described above.

[0127] Aside from controlling the pulse generator module **104** to generate different types of electrical stimulation pulses and in different sequences, in some embodiments, the processing module **110** may also control the pulse generator module **104** to generate the various electrical stimulation pulses with varying pulse parameters. For example, each electrical stimulation pulse may have a pulse width and a pulse amplitude. The processing module **110** may control the pulse generator module **104** to generate the various electrical stimulation pulses with specific pulse widths and pulse amplitudes. For example, the processing module **110** may cause the pulse generator module **104** to adjust the pulse width and/or the pulse amplitude of electrical stimulation pulses if the electrical stimulation pulses are not effectively capturing the heart. Such control of the specific parameters of the various electrical stimulation pulses may help the LCP **100** provide more effective delivery of electrical stimulation therapy.

[0128] In some embodiments, the processing module **110** may further control the communication module **102** to send information to other devices. For example, the processing module **110** may control the communication module **102** to generate one or more communication signals for communicating with other devices of a system of devices. For instance, the processing module **110** may control the communication module **102** to generate communication signals in particular pulse sequences, where the specific sequences convey different information. The communication module

102 may also receive communication signals for potential action by the processing module **110**.

[0129] In further embodiments, the processing module **110** may control switching circuitry by which the communication module **102** and the pulse generator module **104** deliver communication signals and/or electrical stimulation pulses to tissue of the patient. As described above, both the communication module **102** and the pulse generator module **104** may include circuitry for connecting one or more of the electrodes **114** and/or **114'** (which may correspond to electrodes **34, 36, 48, 62, 64**) to the communication module **102** and/or the pulse generator module **104** so those modules may deliver the communication signals and electrical stimulation pulses to tissue of the patient. The specific combination of one or more electrodes by which the communication module **102** and/or the pulse generator module **104** deliver communication signals and electrical stimulation pulses may influence the reception of communication signals and/or the effectiveness of electrical stimulation pulses. Although it was described that each of the communication module **102** and the pulse generator module **104** may include switching circuitry, in some embodiments, the LCP **100** may have a single switching module connected to the communication module **102**, the pulse generator module **104**, and the electrodes **114** and/or **114'**. In such embodiments, processing module **110** may control the switching module to connect the modules **102/104** and the electrodes **114/114'** as appropriate.

[0130] In some embodiments, the processing module **110** may include a pre-programmed chip, such as a very-large-scale integration (VLSI) chip or an application specific integrated circuit (ASIC). In such embodiments, the chip may be pre-programmed with control logic in order to control the operation of the LCP **100**. By using a pre-programmed chip, the processing module **110** may use less power than other programmable circuits while able to maintain basic functionality, thereby potentially increasing the battery life of the LCP **100**. In other instances, the processing module **110** may include a programmable microprocessor or the like. Such a programmable microprocessor may allow a user to adjust the control logic of the LCP **100** after manufacture, thereby allowing for greater flexibility of the LCP **100** than when using a pre-programmed chip. In still other embodiments, the processing module **110** may not be a single component. For example, the processing module **110** may include multiple components positioned at disparate locations within the LCP **100** in order to perform the various described functions. For example, certain functions may be performed in one component of the processing module **110**, while other functions are performed in a separate component of the processing module **110**.

[0131] The processing module **110**, in additional embodiments, may include a memory circuit and the processing module **110** may store information on and read information from the memory circuit. In other embodiments, the LCP **100** may include a separate memory circuit (not shown) that is in communication with the processing module **110**, such that the processing module **110** may read and write information to and from the separate memory circuit. The memory circuit, whether part of the processing module **110** or separate from the processing module **110**, may be volatile memory, non-volatile memory, or a combination of volatile memory and non-volatile memory.

[0132] The energy storage module **112** may provide a power source to the LCP **100** for its operations. In some embodiments, the energy storage module **112** may be a non-rechargeable lithium-based battery. In other embodiments, the non-rechargeable battery may be made from other suitable materials. In some embodiments, the energy storage module **112** may be considered to be a rechargeable power supply, such as but not limited to, a rechargeable battery. In still other embodiments, the energy storage module **112** may include other types of energy storage devices such as capacitors or super capacitors. In some cases, as will be discussed, the energy storage module **112** may include a rechargeable primary battery and a non-rechargeable secondary battery. In some cases, the primary battery and the second battery, if present, may both be rechargeable. The LCP **100** may be coupled to an expandable anchoring member, such as the expandable anchoring member **38**.

[0133] It should be understood that this disclosure is, in many respects, only illustrative. Changes may be made in details, particularly in matters of shape, size, and arrangement of steps without exceeding the scope of the disclosure. This may include, to the extent that it is appropriate, the use of any of the features of one example embodiment being used in other embodiments.

What is claimed is:

1. A leadless cardiac pacemaker (LCP), the LCP comprising:

a power source;

circuitry operatively coupled to the power source, the circuitry configured to pace a patient's heart and/or sense electrical activity of the patient's heart;

a housing at least partially enclosing the circuitry and configured to be positioned within an atrium of the patient's heart;

an anode electrode operatively coupled to the circuitry;

a cathode electrode operatively coupled to the circuitry, the cathode electrode spaced from the anode electrode; and

an expandable anchoring member secured relative to the housing, the expandable anchoring member having a collapsed configuration for delivery and an expanded configuration for securing the housing within the atrium of the patient's heart, with the cathode electrode in engagement with an atrium wall of the patient's heart.

2. The LCP of claim 1, wherein the expandable anchoring member is configured to engage an atrial appendage of the patient's heart in the expanded configuration.

3. The LCP of claim 1, wherein the expandable anchoring member comprises a plurality of struts that extend out from a central hub in the expanded configuration, wherein the housing is secured to the central hub.

4. The LCP of claim 3, wherein the expandable anchoring member extends along a central axis from a first end to a second end, and wherein in the expanded configuration the plurality of struts extend toward the central axis to the central hub at the first end and out further from the central axis at the second end.

5. The LCP of claim 4, wherein the plurality of struts are biased to expand away from the central axis at the second end when transitioning from the collapsed configuration to the expanded configuration.

6. The LCP of claim 4, further comprising a plurality of fixation features supported by one or more of the plurality of

struts facing away from the central axis for engaging the patient's heart and to secure the expandable anchoring member and the housing to the patient's heart.

7. The LCP of claim 6, wherein the plurality of fixation features are configured to engage an atrial appendage of the patient's heart as the plurality of struts radially expand from the central axis at the second end of the expandable anchoring member.

8. The LCP of claim 7, wherein the plurality of struts are biased to keep the plurality of fixation features engaged with the patient's heart.

9. The LCP of claim 1, wherein the housing is removably secured to the expandable anchoring member.

10. The LCP of claim 10, wherein the power source is removably coupled relative to the housing, and is removable relative to the housing while the housing remains secured to the expandable anchoring member.

11. The LCP of claim 1, further comprising a mesh secured to the expandable anchoring member, wherein the mesh is configured to encourage endothelialization over at least part of the expandable anchoring member.

12. The LCP of claim 1, wherein the expandable anchoring member comprises the cathode electrode and further comprises an interconnect for providing a connection to the cathode electrode, and wherein the circuitry is operatively coupled to the interconnect and thus the cathode electrode.

13. The LCP of claim 12, wherein the expandable anchoring member comprises a plurality of struts that extend out from a central hub in the expanded configuration, wherein the cathode electrode is part of or supported by at least one of the plurality of struts.

14. The LCP of claim 1, wherein the expandable anchoring member comprises a plurality of circumferentially spaced electrodes configured to engage the atrium of the patient's heart, wherein the plurality of circumferentially spaced electrodes are operatively coupled to the circuitry.

15. The LCP of claim 14, wherein the circuitry is configured to utilize one or more of the circumferentially spaced electrodes for sensing electrical signals of the patient's heart and/or to utilize one or more of the circumferentially spaced electrodes for pacing the patient's heart.

16. An implantable medical device (IMD), comprising:
a power source;

circuitry operatively coupled to the power source, the circuitry configured to pace a patient's heart and/or sense electrical activity of the patient's heart;

a housing at least partially enclosing the circuitry and configured to be positioned within an atrium of the patient's heart;

an anode electrode operatively coupled to the circuitry;

a cathode electrode operatively coupled to the circuitry, the cathode electrode spaced from the anode electrode;

an expandable anchoring member secured relative to the housing, the expandable anchoring member having a collapsed configuration for delivery and an expanded configuration for securing the housing within the atrium of the patient's heart; and

wherein the expandable anchoring member extends from a first end to an open second end, and further includes a plurality of struts connected to a central hub at the first end and extend out to the open second end.

17. The IMD of claim 16, wherein the housing is secured to the central hub.

18. The IMD of claim 17, wherein at least part of the housing is releasably fixed to the expandable anchoring member.

19. The IMD of claim 16, further comprising a mesh secured to the expandable anchoring member, wherein the mesh is configured to encourage endothelialization over at least part of the expandable anchoring member.

20. An implantable medical device (IMD), comprising:

a housing configured to be positioned within an atrium of a patient's heart;

an anode electrode fixed relative to the housing;

a cathode electrode fixed relative to the housing, the cathode electrode spaced from the anode electrode;

an expandable anchoring member secured relative to the housing, the expandable anchoring member having a collapsed configuration for delivery and an expanded configuration for securing the housing within the atrium of the patient's heart; and

the expandable anchoring member comprises a plurality of struts that, in the expanded configuration, assume a cup shape.

* * * * *

专利名称(译)	用于心房部署的植入式医疗设备		
公开(公告)号	US20180126179A1	公开(公告)日	2018-05-10
申请号	US15/804768	申请日	2017-11-06
[标]申请(专利权)人(译)	心脏起搏器股份公司		
申请(专利权)人(译)	心脏起搏器，INC.		
当前申请(专利权)人(译)	心脏起搏器，INC.		
[标]发明人	HAASL BENJAMIN J KANE MICHAEL J FOSTER ARTHUR J JOHNSON MICHAEL J MAILE KEITH R SCHMIDT BRIAN L KOOP BRENDAN EARLY		
发明人	HAASL, BENJAMIN J. KANE, MICHAEL J. FOSTER, ARTHUR J. JUFFER, LANCE ERIC JOHNSON, MICHAEL J. MAILE, KEITH R. SCHMIDT, BRIAN L. KOOP, BRENDAN EARLY		
IPC分类号	A61N1/375 A61B5/042 A61B5/00 A61N1/365		
CPC分类号	A61N1/37518 A61B5/0422 A61B5/686 A61N1/365 A61N1/37512 A61N1/3756 A61N1/057 A61N1/059		
优先权	62/419176 2016-11-08 US		
其他公开文献	US10583301		
外部链接	Espacenet USPTO		

摘要(译)

可植入医疗设备 (IMD) 可以部署在患者右心房内靠近患者心脏右心耳的位置，以便使患者的心脏起搏和/或感测患者心脏内的电活动。在某些情况下，IMD可植入右心耳内。IMD可包括可扩展锚定机构，其被配置为将IMD固定在适当位置。

