



US 20170105860A1

(19) **United States**

(12) **Patent Application Publication**
Farrugia et al.

(10) **Pub. No.: US 2017/0105860 A1**
(43) **Pub. Date: Apr. 20, 2017**

(54) **APPARATUS AND METHODS OF INDUCING WEIGHT LOSS USING BLOOD FLOW CONTROL**

Publication Classification

(71) Applicant: **Mayo Foundation for Medical Education and Research**, Rochester, MN (US)

(72) Inventors: **Gianrico Farrugia**, Rochester, MN (US); **Paul A. Friedman**, Rochester, MN (US); **Elizabeth Rajan**, Rochester, MN (US); **Charles J. Bruce**, South Ponte Vedra Beach, FL (US); **Samuel J. Asirvatham**, Rochester, MN (US); **Michael J. Levy**, Rochester, MN (US); **Louis-Michel Wong Kee Song**, Rochester, MN (US); **Juliane Bingener-Casey**, Rochester, MN (US); **Navtej S. Buttar**, Rochester, MN (US)

(51) **Int. Cl.**
A61F 5/00 (2006.01)
A61N 1/36 (2006.01)
A61N 1/05 (2006.01)
A61B 18/18 (2006.01)
A61B 5/00 (2006.01)
A61B 5/026 (2006.01)
A61B 17/12 (2006.01)
A61B 18/14 (2006.01)
A61F 7/12 (2006.01)
A61B 5/03 (2006.01)

(52) **U.S. Cl.**
 CPC *A61F 5/0013* (2013.01); *A61F 7/123* (2013.01); *A61N 1/36007* (2013.01); *A61N 1/0556* (2013.01); *A61B 5/03* (2013.01); *A61B 5/4205* (2013.01); *A61B 5/4238* (2013.01); *A61B 5/026* (2013.01); *A61B 17/12013* (2013.01); *A61B 18/1492* (2013.01); *A61B 18/1815* (2013.01); *A61F 2007/126* (2013.01); *A61B 2018/00613* (2013.01)

(21) Appl. No.: **15/123,094**

(22) PCT Filed: **Mar. 5, 2015**

(86) PCT No.: **PCT/US2015/018965**

§ 371 (c)(1),

(2) Date: **Sep. 1, 2016**

Related U.S. Application Data

(60) Provisional application No. 61/949,024, filed on Mar. 6, 2014.

(57) **ABSTRACT**

Methods and apparatus for inducing weight loss using blood flow control are described herein. The apparatus and methods operate by controlling blood flow to the stomach and/or small bowel.

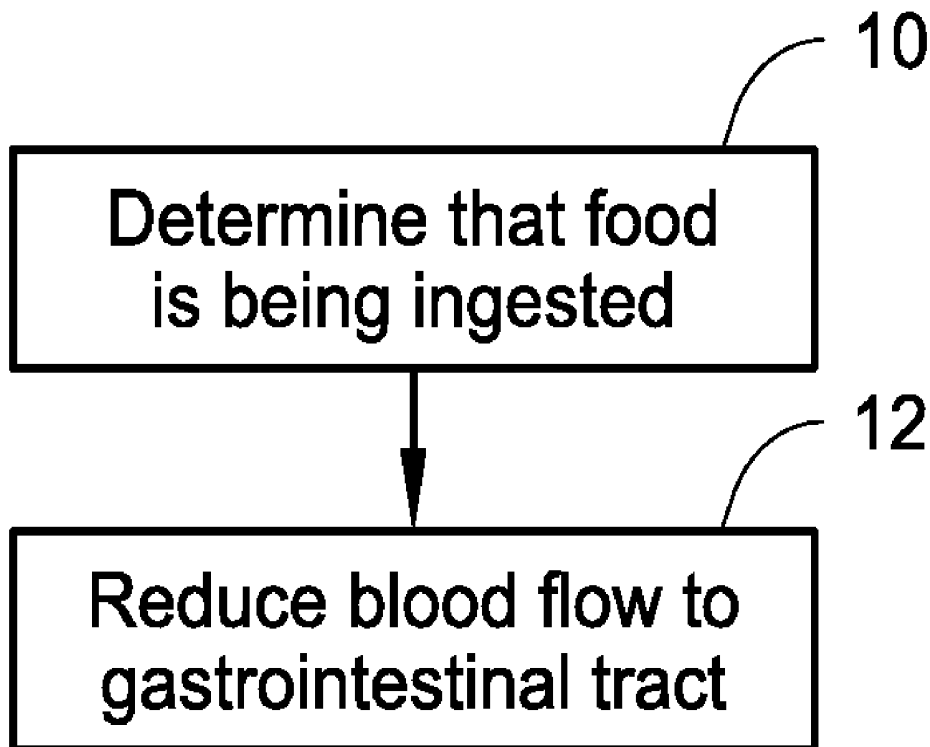


Fig. 1

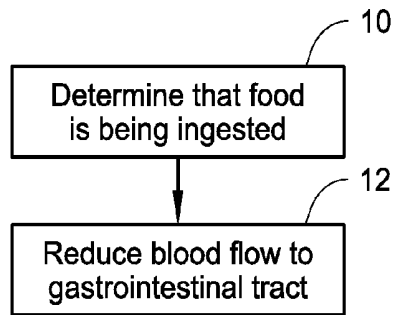


Fig. 2


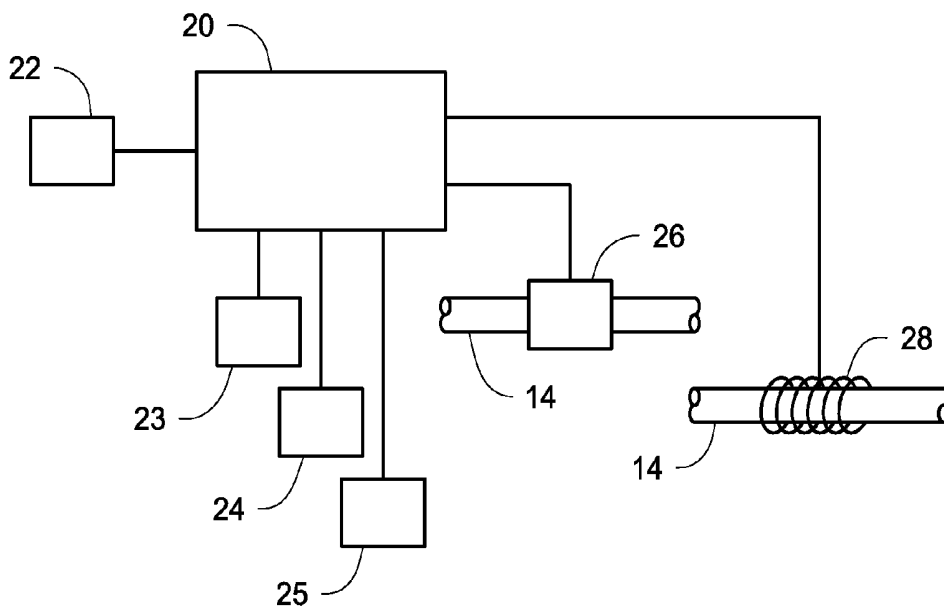


Fig. 3

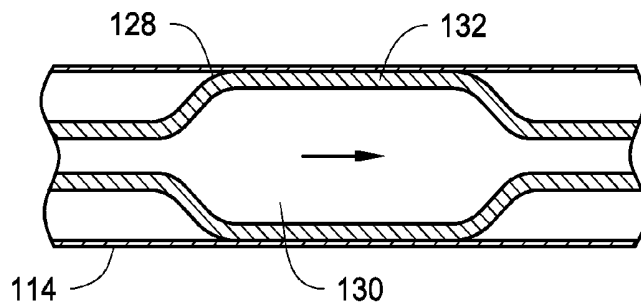

**APPARATUS AND METHODS OF INDUCING
WEIGHT LOSS USING BLOOD FLOW
CONTROL**

RELATED APPLICATION

[0001] The present application claims the benefit under 35 U.S.C. §119(e) of U.S. Provisional Patent Application No. 61/949,024, filed on Mar. 6, 2014 and titled APPARATUS AND METHODS OF INDUCING WEIGHT LOSS USING BLOOD FLOW CONTROL, which is hereby incorporated by reference in its entirety.

[0002] Apparatus and methods of inducing weight loss using blood flow control are described herein. The apparatus and methods operate by controlling blood flow to the stomach and/or small bowel.

[0003] Morbid obesity and its concurrent health risks (including diabetes, heart disease and other ailments) are of near-epidemic proportions in industrialized societies. A wide variety of treatments have been proposed and attempted to treat morbid obesity with a wide variety of efficacy and associated morbidity. These treatments include techniques to reduce stomach volume, alter gastric and intestinal motility, and alter the absorption of nutrients in the small intestine.

[0004] Clearly, obesity is a complex disease having physiologic, social and psychological components which are not fully understood. The complex nature and the enormous societal implication of obesity require a wide variety of treatment options be available to permit a physician to select a most appropriate option for a particular patient.

[0005] Even if all treatments were proven effective, no one treatment can meet the clinical needs presented by a diverse population. For example, bariatric surgeries, such as the Roux-en-Y procedure as will be described, is not considered suitable for only so-called mildly obese patients (e.g., those with a Body Mass Index less than 35).

[0006] Less invasive procedures (such as gastric banding) have reduced surgical risk. Unfortunately, they suffer from reduced efficacy (and they are not without risks). Further, efficacy may be culturally biased. Namely, gastric banding studies show reduced efficacy in North American patients compared to European patients.

[0007] Surgical approaches may include, e.g., minimally invasive surgery, open surgery and endoscopic approaches to gastric volume reduction. Gastric volume reduction procedures include vertical and horizontal gastropasty in which sutures, staples or other fixation devices are used to join opposing surfaces of the stomach to create a reduced volume pouch and thereby reduce caloric intake. Less invasive techniques for restricting the volume of the stomach also include a gastric partition in which the stomach wall is endoscopically cinched together to form a reduced size pouch. Other techniques for reducing gastric volume size include placement of obstructions within the stomach.

[0008] To address deficiencies associated with gastric volume reduction, treatments have been suggested and developed for reducing the amount of nutrient absorption in the small intestine (particularly in the upper and middle portions of the small intestine—the duodenum and jejunum, respectively). Techniques to reduce nutrient absorption (commonly referred to as malabsorption treatments) include drug therapies for reducing lipids absorption.

[0009] Other malabsorption treatments include surgical techniques for rerouting the intestinal system to bypass an extended portion of the small intestine. These include a

so-called jejunoileal bypass. Not commonly used due to unacceptable mortality rates, a jejunoileal bypass typically results in effective weight loss. Other techniques include the gastric bypass (or Roux-en Y) and duodenal switch. As a result, the absorptive length of the small intestine is significantly shortened thereby reducing the amount of nutrients which are absorbed into the body and which support or lead to weight gain. These procedures combine the benefits of gastric volume reduction with malabsorption.

[0010] Less invasive techniques are suggested for placing a band (referred to as LAP bands) around an upper portion of the stomach to act as a belt to reduce the size of the stomach and create a small passageway (a stoma) from a small upper pouch to the remainder of the stomach.

[0011] US Patent Application Publication No. US 2013/0184635 describes a variety of techniques for treating obesity which may include one or more of reducing the rate of stomach emptying, creating a fistula between the stomach and another portion of the gastrointestinal tract to limit nutrient absorption, etc.

[0012] US Patent Application Publication No. US 2013/0096580 describes another approach to obesity treatment which involves occluding a blood vessel to interfere with normal gastrointestinal function.

SUMMARY

[0013] Methods and apparatus for inducing weight loss using blood flow control are described herein. The apparatus and methods operate by controlling blood flow to the stomach and/or small bowel.

[0014] In a first aspect, one or more embodiments of a method of inducing weight loss as described herein may include: making a determination that a patient is ingesting food; and reducing blood flow to the gastrointestinal tract after making the determination that a patient is ingesting food.

[0015] In one or more embodiments of methods according to the first aspect, making a determination that a patient is ingesting food comprises one or more of: sensing distention of the patient's stomach, sensing increased pressure in the patient's stomach, sensing swallowing by the patient, receiving direct feedback from the user, and Doppler flow measurements to measure flow velocity.

[0016] In one or more embodiments of methods according to the first aspect, reducing blood flow to the gastrointestinal tract comprises mechanically constricting one or more blood vessels that supply the stomach and/or small bowel.

[0017] In one or more embodiments of methods according to the first aspect, reducing blood flow to the gastrointestinal tract comprises cooling an exterior surface of one or more blood vessels that supply the stomach and/or small bowel. In one or more embodiments, cooling an exterior surface of one or more blood vessels that supply the stomach and/or small bowel comprises coiling a cooling device around the one or more blood vessels that supply the stomach and/or small bowel.

[0018] In one or more embodiments of methods according to the first aspect, reducing blood flow to the gastrointestinal tract comprises cooling blood flowing through one or more blood vessels supplying blood to the stomach and/or the small bowel. In one or more embodiments, the cooling comprises locating a perfusion balloon in a blood vessel and supplying cooling fluid within the perfusion balloon to

reduce the temperature of blood flowing through the blood vessel past the perfusion balloon.

[0019] In one or more embodiments of methods according to the first aspect, reducing blood flow to the gastrointestinal tract comprises: sensing an increase in blood flow in one or more gastric supply blood vessels; and diverting flow away from the one or more blood vessels that supply the stomach and/or small bowel after sensing the increase in blood flow in the one or more blood vessels that supply the stomach and/or small bowel.

[0020] In one or more embodiments of methods according to the first aspect, reducing blood flow to the gastrointestinal tract comprises eluting a drug to reduce flow through one or more blood vessels that supply the stomach and/or small bowel.

[0021] In one or more embodiments of methods according to the first aspect, reducing blood flow to the gastrointestinal tract comprises expanding one or more blood vessels that do not that supply the stomach and/or small bowel.

[0022] In one or more embodiments of methods according to the first aspect, reducing blood flow to the gastrointestinal tract comprises reducing the flow of blood away from the gastrointestinal tract.

[0023] In one or more embodiments of methods according to the first aspect, reducing blood flow to the gastrointestinal tract comprises cooling one or more of: stomach, small bowel, and nerves associated with the stomach and/or small bowel.

[0024] In a second aspect, one or more embodiments of a method of inducing weight loss as described herein may include reducing blood flow to the gastrointestinal tract by ablating one or more blood vessels that supply the stomach and/or small bowel to limit dilation of the blood vessels to increase flow after the ablating.

[0025] In one or more embodiments of methods according to the second aspect, the ablating is configured to cause fibrosis of the one or more blood vessels that supply the stomach and/or small bowel, wherein the fibrosis limits dilation of the blood vessels to increase flow.

[0026] In a third aspect, one or more embodiments of a method of inducing weight loss as described herein may include reducing blood flow to the gastrointestinal tract by ablating one or more nerves selected from the group of: celiac ganglion, superior mesenteric, inferior mesenteric, and hepatic.

[0027] In one or more embodiments of methods according to the third aspect, the ablating comprises ablating the one or more nerves using one or more of: direct current electroporation, microwave energy, and radio-frequency energy.

[0028] In a fourth aspect, one or more embodiments of a method of inducing weight loss as described herein may include reducing blood flow to the gastrointestinal tract by stimulating one or more peri-arterial nerves to cause vasoconstriction of one or more blood vessels that supply the stomach and/or small bowel.

[0029] In a fifth aspect, one or more embodiments of a method of inducing weight loss as described herein may include reducing blood flow to the gastrointestinal tract by pacing one or more peri-arterial nerves to cause vasoconstriction of one or more blood vessels that supply the stomach and/or small bowel.

[0030] In a sixth aspect, one or more embodiments of a system for inducing weight loss as described herein may include: a controller operably connected to one or more

input devices, wherein the controller is configured to determine that a patient is ingesting food; and one or more blood flow constriction devices operably connected to the controller, the one or more blood flow constriction devices configured to reduce blood flow to the gastrointestinal tract.

[0031] In one or more embodiments of systems according to the sixth aspect, the one or more input devices comprise one or more of: a sensor configured to detect distention and/or increased pressure in a stomach, a sensor configured to detect swallowing, and a sensor configured to detect flow into a stomach.

[0032] In one or more embodiments of systems according to the sixth aspect, the one or more input devices comprise a direct input device actuated by a patient to provide a signal to the controller that food is being ingested.

[0033] In one or more embodiments of systems according to the sixth aspect, the one or more blood flow constriction devices comprises a device configured to mechanically constrict one or more blood vessels that supply the stomach and/or small bowel.

[0034] In one or more embodiments of systems according to the sixth aspect, the one or more blood flow constriction devices comprises a device configured to cool an exterior surface of one or more blood vessels that supply the stomach and/or small bowel. In one or more embodiments, the one or more blood flow constriction devices is coiled around the exterior surface of the one or more blood vessels that supply the stomach and/or small bowel.

[0035] In one or more embodiments of systems according to the sixth aspect, the one or more blood flow constriction devices comprises a perfusion balloon configured to cool blood flowing through a blood vessel in which the perfusion balloon is located.

[0036] As used herein and in the appended claims, the singular forms “a,” “an,” and “the” include plural referents unless the context clearly dictates otherwise. Thus, for example, reference to “a” or “the” component may include one or more of the components and equivalents thereof known to those skilled in the art. Further, the term “and/or” means one or all of the listed elements or a combination of any two or more of the listed elements.

[0037] It is noted that the term “comprises” and variations thereof do not have a limiting meaning where these terms appear in the accompanying description. Moreover, “a,” “an,” “the,” “at least one,” and “one or more” are used interchangeably herein.

[0038] The above summary is not intended to describe each embodiment or every implementation of the obesity treatment apparatus or methods described herein. Rather, a more complete understanding of the invention will become apparent and appreciated by reference to the following Description of Illustrative Embodiments and claims in view of the accompanying figures of the drawing.

BRIEF DESCRIPTION OF THE VIEWS OF THE DRAWING

[0039] FIG. 1 is a flowchart depicting one illustrative embodiment of a method of inducing weight loss as described herein.

[0040] FIG. 2 depicts one illustrative embodiment of an apparatus that may be used to induce weight loss as described herein.

[0041] FIG. 3 depicts one illustrative embodiment of an apparatus and method for cooling blood within a blood vessel as described herein.

DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0042] In the following description of illustrative embodiments, reference is made to the accompanying figures of the drawing which form a part hereof, and in which are shown, by way of illustration, specific embodiments. It is to be understood that other embodiments may be utilized and structural changes may be made without departing from the scope of the present invention.

[0043] On illustrative embodiment of a method of inducing weight loss is depicted in a flowchart in FIG. 1. In one or more embodiments, the method includes (10) making a determination that a patient is ingesting food, followed by (12) reducing blood flow to the gastrointestinal tract after making the determination that a patient is ingesting food. In other words, control over blood flow to the gastrointestinal tract is based on making a determination that a patient is ingesting food.

[0044] That determination, i.e., that a patient is ingesting food can be made by any of a variety of techniques. In one or more embodiments, determining that a patient is ingesting food may be accomplished through a variety of techniques such as, e.g., using a sensor to detect distention of and/or increased pressure in the stomach (using, e.g., pressure sensors, etc.), sensing swallowing by the patient, detecting flow of food into the stomach, detecting changes in luminal fluid (e.g. acidity, bile acid content, fluid volume, solid material), detecting patient activity or movement versus a resting state, detecting gastrointestinal (GI) luminal wall characteristics (e.g. stiffness, thickness), detecting positional changes of recumbency versus standing, etc., and combinations of one or more of these techniques. In one or more alternative embodiments, a patient may provide direct feedback, i.e., an indication that he or she is ingesting food directly as described elsewhere herein. In one or more alternative embodiments, the system can also be selectively and automatically triggered based on time.

[0045] Once a determination is made that a patient is ingesting food, one or more embodiments of the methods described herein may include reducing blood flow to one or more portions of the gastrointestinal tract. Reducing blood flow to one or more portions of the gastrointestinal tract may, in one or more embodiments, slow the passage of food through the gastrointestinal tract. Slowing the passage of food out of the stomach may increase the feelings of satiety experienced by the patient which may, in turn, lead to a reduction in food consumption.

[0046] In one or more embodiments of the methods described herein, reducing blood flow to the gastrointestinal tract may include mechanically constricting one or more blood vessels that supply the stomach and/or small bowel. Although US Patent Application Publication No. US 2013/0096580 describes obesity treatment methods that involve occluding a blood vessel to interfere with normal gastrointestinal function, those methods are static. In other words, those methods do not include restricting blood flow in response to determining that a patient is ingesting food. The various apparatus and techniques for mechanically constricting blood vessels that supply the stomach and/or small bowel described in that reference may, however, be useful in

connection with the methods described herein. Other methods of mechanical constriction may also be used for occluding blood flow, for example, air or fluid filled inflatable cuffs, magnetic devices, a lever- or hinge-based system, vessel retraction toward an anchored structure (e.g. spine), etc.

[0047] In one or more embodiments, flow manipulating devices used to reduce blood flow to the gastrointestinal tract may be placed internally or externally in or around a target vessel. These placements could be, e.g., percutaneous, transmural by traversing intestinal wall, via the vasculature or through a laparoscopic or retroperitoneal approach. In one or more embodiments, the flow manipulating devices could include a stimulation system (electrodes, wires, or pneumatic cuff) that, e.g., stimulates nerves that, in turn, constrict the vessel. In one or more embodiments, the flow manipulating devices could include a stimulation system that stimulates the smooth muscle of the vessel and give rise to constriction. In one or more embodiments, the flow manipulating devices may also be utilized in a non-muscular constriction system made up of conformable metals, metalloids, or engineered materials that result in constriction and apposition when electrically stimulated.

[0048] Another option for one or more embodiments of a flow manipulating device involves the use of a pneumatic compression device with the air compression chamber involving a diaphragm with one surface exposed to the ring around the vessel of interest and the other to an external compression chamber that could, e.g., be placed subcutaneously or within the abdominal cavity. In one or more embodiments, the pneumatic chamber may involve a system where there is no direct air transport, but rather an electronic system that initiates a biochemical reaction that releases one or more gasses (including, e.g., air) to effect compression or decompression.

[0049] In one or more embodiments of the methods described herein, reducing blood flow to the gastrointestinal tract may include cooling an exterior surface of one or more blood vessels that supply the stomach and/or small bowel. Such cooling may, for example, cause the blood vessels to constrict and, thereby, reduce flow. In one or more embodiments, the cooling may be performed by coiling a cooling device around one or more of the blood vessels that supply the stomach and/or small bowel as described in more detail herein. In one or more embodiments of the methods described herein, blood in blood vessels supplying blood to the stomach and/or the small intestine may be selectively directly cooled to restrict flow.

[0050] In one or more embodiments, cooling may be used in ways that do not involve direct cooling of blood. In one or more embodiments, the cooling of nerves could result in reflex vasodilation and, in turn, increase the gradient for flow. Cooling also may simply be used to directly suppress appetite by cooling the blood around the stomach and also increase caloric needs and possibly increase metabolic rate as a result of the body needing to increase temperature in response to the cooling.

[0051] One illustrative embodiment of a system that may be used to induce weight loss in a patient according to one or more of the methods described herein is depicted in FIG. 2. The system includes a controller 20 that is configured to perform the actions described in connection with the methods described herein.

[0052] In one or more embodiments, the controller 20 may be connected to an input device 22 that is configured to

receive input from a user/patient. The input device **22** may be a wireless input device that communicates wirelessly with the controller **20** which may be implanted subcutaneously within the patient. Some potential embodiments of wireless input devices **22** may include, e.g., smart phones, personal computers, dedicated wireless input devices, etc. In one or more alternative embodiments, the input device **22** may be connected to the controller **20** by wired connection with the input device **22** being in the form of a switch, pushbutton, etc. In those embodiments in which the input device **22** is connected to the controller **20** by wired connection, input device **22** may be implanted subcutaneously within the patient.

[0053] In one or more embodiments in which the controller **20** is configured to perform a method that includes a determination that a patient is ingesting food, the system may include one or more sensors configured to detect that a patient is ingesting food. In the illustrative embodiment depicted in FIG. 2, the system may include one or more of: a sensor **23** configured to detect distention of and/or pressure increases in the stomach of a patient, a sensor **24** configured to sense swallowing by a patient, and a sensor **25** configured to detect flow of food into the stomach of a patient. Each of the sensors is operably connected to the controller **20** to provide input signals indicative of the ingestion of food by a patient.

[0054] The system depicted in FIG. 2 also includes an optional blood vessel constriction device **26** configured to constrict blood flow through a blood vessel **14**. The constriction device **26** is operably connected to the controller **20** which is, as described in connection with the methods described herein, configured to operate the constriction device to constrict blood flow through the blood vessel **14**.

[0055] Another optional device which may be provided in a system such as that depicted in FIG. 2 is a cooling device **28** configured to cool blood flowing through a blood vessel **14** as described in connection with one or more of the methods described herein. The cooling device **28** is operably connected to the controller **20** which is, as described in connection with the methods described herein, configured to operate the cooling device to cool blood flowing through the blood vessel **14**. In the depicted illustrative embodiment, the cooling device **28** is in the form of a coiled device coiled around the blood vessel **14**, with coolant passing through the coiled device **28** to remove thermal energy from the blood vessel **14** and, therefore, from the blood passing through the blood vessel **14**.

[0056] In one or more embodiments of the methods described herein, the blood flowing through a blood vessel may be cooled as opposed to cooling the exterior surface of the blood vessel. For example, in one or more embodiments, the cooling may be performed by locating a perfusion balloon in a blood vessel and supplying cooling fluid within the perfusion balloon to reduce the temperature of blood flowing through the blood vessel past the perfusion balloon. One illustrative embodiment of a perfusion balloon used to cool blood flowing through a blood vessel is depicted in FIG. 3. In that figure, blood flows through the blood vessel **114** in which a perfusion balloon **128** is located. The direction of blood flow is indicated by the arrow located within the interior **130** of the perfusion balloon **128**. The perfusion balloon **128** includes an outer jacket **132** through which a cooling fluid flows to remove thermal energy from the blood flowing through the interior **130** of the perfusion

balloon **128**. The cooling fluid flowing through jacket **132** may flow in the same direction as the blood flowing through the interior **130** of the perfusion balloon **128** or in the opposite direction. In one or more embodiments, the perfusion balloon **128** may operate to both mechanically constrict flow through the blood vessel **114** as well as cool the blood flowing through that blood vessel.

[0057] In one or more embodiments of the methods described herein, reducing blood flow to the gastrointestinal tract may include sensing an increase in blood flow in one or more blood vessels that supply the stomach and/or small bowel; and diverting flow away from the one or more blood vessels after sensing (based on, e.g., dynamic change in vessel size, actual vessel caliber, implantable perivascular ultrasound or laser Doppler, electromagnetic intravascular sensor, etc.) the increase in blood flow in the one or more blood vessels thereby decrease the blood flow to the stomach.

[0058] In one or more embodiments of the systems and methods described herein in which Doppler sensing techniques are used to measure velocity of blood flow in a blood vessel, the velocity is related to diameter of the blood vessel. The more a blood vessel is constricted (for a given flow rate), the higher the velocity of blood flowing through that vessel, and the more the blood vessel is dilated, the lower the velocity of blood flowing through the vessel for the same flow rate. Doppler sensing could, in one or more embodiments, be used to make sure that blood flow velocity is set at a certain level. A potential advantage of that approach could include avoiding the need for a separate sensor to detect, e.g., gastric motility, food intake, etc. A potential disadvantage of this approach is that it presupposes that the total amount of blood flow through a blood vessel is constant. However by incorporating vessel diameter measurements, flow rate can be easily calculated. In one or more embodiments of the systems and methods described herein, the Doppler sensor may be advantageously placed in the venous system intravascularly to detect flow either through the vein or from the neighboring artery while an external device could be placed for compression using any of the iterations mentioned herein for the artery. If a sensing device is placed intravascularly, one or more embodiments could be to prepare these sensors with material that prevents blood clotting.

[0059] In one or more embodiments of the systems and methods described herein, warming of the surrounding vessels may be needed to increase blood flow other than to the organ of interest, e.g., the stomach. At the same time, cooling may be desired, as described herein, along the artery (or vein—see below) of interest to control blood flow. To achieve these dual purposes and, at the same time, provide for rapid (e.g., near instantaneous) cooling, one or more embodiments of the systems and methods described herein may use the Peltier/Seebeck effects.

[0060] Using the Seebeck approach would, e.g., be primarily for generating an electrical signal as feedback when the temperature difference is sufficient between the surrounding tissue (warmer) and the periarterial surface (cooler). This temperature difference using a simple Seebeck generator would, in one or more embodiments, give rise to a signal that would, in turn, shut the device off or reduce the rate of thermal control/regulation. In effect, placement of Seebeck generator in such embodiments could function as a detector of blood flow through a vessel and/or into selected

tissue. As the blood flow increased, an electric current (signal) could, in one or more embodiments, be generated as a function of the difference in temperature between the two sides of the element. This temperature change could, therefore, be used in one or more embodiments as an electronic switch or control mechanism as described herein.

[0061] The Peltier component of such a system and/or method would, in one or more embodiments, cause the cooling itself using, e.g., a standard battery-capacitor and generator system or simple power supply that might be implanted (potentially inductively charged nocturnally via a charger under the mattress, etc.). One potential disadvantage of thermoelectric generators is that warming occurs on one surface as cooling occurs on another surface (typically on two opposing surfaces). This phenomenon may be used, in one or more embodiments, to advantage by cooling the vessels and/or tissue that are closest to one surface of the device (to, e.g., limit blood flow) and warming vessels and/or tissue the other (e.g., opposite) surface to cause vasodilation. The result may be, in one or more embodiments, reduced blood flow to the stomach and enhanced early satiety. This effect may be amplified if the device is strategically placed, for example, cooling a blood vessel and/or tissue near one surface of the device to limit blood flow, while warming appropriate nerve bundles near the other surface of the device to modulate nerve traffic. Alternatively, the reverse effects could be employed, e.g., the nerve bundles could be cooled to impede conduction, while the blood vessels and/or other tissues are warmed.

[0062] In one or more embodiments of the methods described herein, reducing blood flow to the gastrointestinal tract comprises eluting a drug (e.g., vasodilators and/or vasoconstricting agents depending on the particular vessel) to reduce flow through one or more blood vessels that supply the stomach and/or small bowel.

[0063] In one or more embodiments, direct electrical stimulation of, e.g., a stent coated with one or more drugs, could give rise to vessel constriction and/or directly promote satiety could be released on receipt of the electrical impulse (e.g., electrical mediation of drug elution).

[0064] In one or more embodiments of the methods described herein, reducing blood flow to the gastrointestinal tract comprises expanding one or more blood vessels that do not supply the stomach and/or small bowel but rather supply other organs, as well as blood vessels (i.e., veins) that drain blood from the GI tract. This diversion will functionally limit the blood flow to the stomach and/or small bowel. One example of such an approach could be timed according to gut distention, where blood goes to the small intestine when food is in the stomach and vice versa. This approach may create a relative deficiency to the area where food needs to be absorbed.

[0065] In one or more embodiments of the methods described herein, reducing blood flow to the gastrointestinal tract comprises reducing the flow of blood away from the gastrointestinal tract. It is theorized that reducing the flow of blood away from the gastrointestinal tract may reduce the rate at which blood is delivered to the gastrointestinal tract.

[0066] In one or more embodiments of the methods described herein, reducing blood flow to the gastrointestinal tract comprises cooling one or more of: stomach, small bowel, and one or more nerves (e.g., vagus) or ganglia (e.g., celiac) associated with the stomach and/or small bowel. In the methods described thus far, inducing weight loss has

been discussed in the context of detecting when a patient is ingesting food and reducing blood flow to one or more portions of the gastrointestinal tract in an effort to induce weight loss. In another approach, one or more embodiments of methods of inducing weight loss may involve reducing blood flow to the gastrointestinal tract by ablating one or more gastric supply blood vessels to limit dilation of the blood vessels to increase flow after the ablating. It is theorized that limiting dilation of the blood vessels will reduce flow that would normally increase after the ingestion of food and during processing of that food within the gastrointestinal tract.

[0067] In one or more embodiments of the systems and methods described herein, the autonomic modulation, either through stimulation blockade or ablation may potentially be used alone to control blood flow. In one or more embodiments, a device could be internal/intravascular (vein or artery) or external with, e.g., a cuff-type electrode around the vascular trunks that would include neural bundles which therefore can be stimulated. In such an embodiment, the sensing arm could be a separate sensor that senses one or more of blood flow, gastric motility, glucose, etc. (although in one or more embodiments, the sensor could be incorporated into the effector arm of the device). In other words, the system/method could be configured to monitor neural traffic in a template that is kept normal for that patient during rest, eating, sleep, etc. When a characteristic trigger associated with food ingestion is sensed, stimulation/blockade will be performed and, in turn, have reflex vascular changes that may promote early satiety.

[0068] In one or more alternative systems/methods, the functioning may not be based on feedback indicative of the patient eating. In one or more embodiments, for example, the system/method may involve baseline phasic stimulation to increase afferent signaling of satiety, as well as, e.g., increasing vascular tone through the efferent autonomic nerves. The same device could, in one or more embodiments, be used also for direct constriction of the vascular smooth muscle.

[0069] In one or more embodiments of systems/methods using ablation, this could be done by a one-time procedure or an implanted device where the ablation is done by the same battery that does the stimulation (DC and DC phasic waveforms). In one or more embodiments, the ablation is not necessarily permanent. It may involve stunning of neurotransmission because of, e.g., reversible electroporation.

[0070] In one or more embodiments of inducing weight loss by ablating one or more blood vessels, the ablating (using, e.g., radiofrequency energy, high intensity ultrasound energy, microwave energy, cryothermal energy, transection, photodynamic therapy (PDT), intravascular sclerosant, etc.) is configured to cause fibrosis of the one or more blood vessels that supply the stomach and/or small bowel, wherein the fibrosis limits dilation of the blood vessels to increase flow.

[0071] In one or more embodiments of the systems and methods described herein, fibrosis could be facilitated on the vascular wall by ablating either internally or externally. The extent of fibrosis may cause no fixed limitation in terms of blood flow (e.g., stenosis is not necessarily caused), but may limit blood flow by stiffening the vessel wall and limiting the vasodilation and promotional blood flow that occurs as a reflex on, e.g., ingesting food.

[0072] In addition to inducing weight loss in methods that involve detecting when a patient is ingesting food and reducing blood flow to one or more portions of the gastrointestinal tract or by ablating one or more blood vessels supplying the gastrointestinal tract, another approach to inducing weight loss as described herein may involve reducing blood flow to the gastrointestinal tract by ablating one or more nerves selected from the group of: celiac ganglion, superior mesenteric, inferior mesenteric, and hepatic.

[0073] In one or more embodiments in which one or more nerves are ablated to induce weight loss, the ablation may be performed using one or more of: direct current electroporation, microwave energy, and radio-frequency energy.

[0074] In addition to inducing weight loss in methods that involve detecting when a patient is ingesting food and reducing blood flow to one or more portions of the gastrointestinal tract, by ablating one or more blood vessels supplying the gastrointestinal tract, or by ablating one or more nerves as described herein, another approach to inducing weight loss as described herein may involve reducing blood flow to the gastrointestinal tract by stimulating one or more peri-arterial nerves to cause vasoconstriction of one or more gastric supply blood vessels. Yet another potential method for inducing weight loss as described herein may include reducing blood flow to the gastrointestinal tract by pacing one or more peri-arterial nerves to cause vasoconstriction of one or more blood vessels that supply the stomach and/or small bowel.

[0075] In one or more embodiments of the systems and methods described herein, stimulation, electroporation, direct radiofrequency energy application, and other thermal approaches, including cooling, of the ganglia (e.g., celiac, mesenteric, hepatic, etc.) could provide indirect effects on satiety by, e.g., changing cellular glucose intake, promoting glycogenolysis, and possibly gluconeogenesis from fat breakdown that may be similar to the effects seen during starvation, exercise, and adrenergic stimulation (via, e.g., the hepatic and related ganglia). These effects may be beneficial and intended/purposeful beyond effects of satiety. In one or more embodiments, improvement of metabolism may indirectly help with obesity, diabetes, possibly hypertension and the metabolic syndrome could potentially be affected through the direct neuroregulatory systems and methods.

[0076] In one or more embodiments of the systems and methods described herein, cooling of tissue may be used for the autonomic nerves to produce electroporation without the use of DC current. In one or more embodiments, this effect could result in increased vascular tone at certain locations and decreased vascular tone in others where blood flow is to be promoted. In some instances, there may be combined effects here with cooling directly affecting the vessel, and providing beneficial effects on the perivascular nerves.

[0077] Disclosure of any patents, patent documents, and publications identified herein are incorporated by reference in their entirety as if each were individually incorporated. To the extent there is a conflict or discrepancy between this document and the disclosure in any such incorporated document, this document will control.

[0078] Illustrative embodiments of the systems and methods are discussed herein some possible variations have been described. These and other variations and modifications in the invention will be apparent to those skilled in the art without departing from the scope of the invention, and it should be understood that this invention is not limited to the

illustrative embodiments set forth herein. Accordingly, the invention is to be limited only by the claims provided below and equivalents thereof. It should also be understood that this invention also may be suitably practiced in the absence of any element not specifically disclosed as necessary herein.

1. A method of inducing weight loss, the method comprising:

making a determination that a patient is ingesting food; and

reducing blood flow to the gastrointestinal tract after making the determination that a patient is ingesting food.

2. A method according to claim 1; wherein making a determination that a patient is ingesting food comprises one or more of: sensing distention of the patient's stomach, sensing increased pressure in the patient's stomach; sensing swallowing by the patient, receiving direct feedback from the user, and Doppler flow measurements to measure flow velocity.

3. A method according to claim 1, wherein reducing blood flow to the gastrointestinal tract comprises mechanically constricting one or more blood vessels that supply the stomach and/or small bowel.

4. A method according to claim 1, wherein reducing blood flow to the gastrointestinal tract comprises cooling an exterior surface of one or more blood vessels that supply the stomach and/or small bowel.

5. A method according to claim 4, wherein cooling an exterior surface of one or more blood vessels that supply the stomach and/or small bowel comprises coiling a cooling device around the one or more blood vessels that supply the stomach and/or small bowel.

6. A method according to claim 1, wherein reducing blood flow to the gastrointestinal tract comprises cooling blood flowing through one or more blood vessels supplying blood to the stomach and/or the small bowel.

7. A method according to claim 6, wherein the cooling comprises locating a perfusion balloon in a blood vessel and supplying cooling fluid within the perfusion balloon to reduce the temperature of blood flowing through the blood vessel past the perfusion balloon.

8. A method according to claim 1, wherein reducing blood flow to the gastrointestinal tract comprises:

sensing an increase in blood flow in one or more gastric supply blood vessels; and

diverting flow away from the one or more blood vessels that supply the stomach and/or small bowel after sensing the increase in blood flow in the one or more blood vessels that supply the stomach and/or small bowel.

9. A method according to claim 1, wherein reducing blood flow to the gastrointestinal tract comprises eluting a drug to reduce flow through one or more blood vessels that supply the stomach and/or small bowel.

10. A method according to claim 1, wherein reducing blood flow to the gastrointestinal tract comprises expanding one or more blood vessels that do not that supply the stomach and/or small bowel.

11. A method according to claim 1, wherein reducing blood flow to the gastrointestinal tract comprises reducing the flow of blood away from the gastrointestinal tract.

12. A method according to claim 1, wherein reducing blood flow to the gastrointestinal tract comprises cooling

one or more of: stomach, small bowel, and nerves associated with the stomach and/or small bowel.

13. A method of inducing weight loss, the method comprising reducing blood flow to the gastrointestinal tract by ablating one or more blood vessels that supply the stomach and/or small bowel to limit dilation of the blood vessels to increase flow after the ablating.

14. A method according to claim 13, wherein the ablating is configured to cause fibrosis of the one or more blood vessels that supply the stomach and/or small bowel, wherein the fibrosis limits dilation of the blood vessels to increase flow.

15.-18. (canceled)

19. A system for inducing weight loss, the system comprising:

a controller operably connected to one or more input devices, wherein the controller is configured to determine that a patient is ingesting food; and one or more blood flow constriction devices operably connected to the controller, the one or more blood flow constriction devices configured to reduce blood flow to the gastrointestinal tract.

20. A system according to claim 19, wherein the one or more input devices comprise one or more of: a sensor

configured to detect distention and/or increased pressure in a stomach, a sensor configured to detect swallowing, and a sensor configured to detect flow into a stomach.

21. A system according to claim 19, wherein the one or more input devices comprise a direct input device actuated by a patient to provide a signal to the controller that food is being ingested.

22. A system according to claim 19, wherein the one or more blood flow constriction devices comprises a device configured to mechanically constrict one or more blood vessels that supply the stomach and/or small bowel.

23. A system according to claim 19, wherein the one or more blood flow constriction devices comprises a device configured to cool an exterior surface of one or more blood vessels that supply the stomach and/or small bowel.

24. A system according to claim 23, wherein the one or more blood flow constriction devices is coiled around the exterior surface of the one or more blood vessels that supply the stomach and/or small bowel.

25. A system according to claim 19, wherein the one or more blood flow constriction devices comprises a perfusion balloon configured to cool blood flowing through a blood vessel in which the perfusion balloon is located.

* * * * *

专利名称(译)	使用血流控制诱导体重减轻的装置和方法		
公开(公告)号	US20170105860A1	公开(公告)日	2017-04-20
申请号	US15/123094	申请日	2015-03-05
[标]申请(专利权)人(译)	梅约医学教育与研究基金会		
申请(专利权)人(译)	梅奥基金会的医学教育和研究		
当前申请(专利权)人(译)	梅奥基金会的医学教育和研究		
[标]发明人	FARRUGIA GIANRICO FRIEDMAN PAUL A RAJAN ELIZABETH BRUCE CHARLES J ASIRVATHAM SAMUEL J LEVY MICHAEL J WONG KEE SONG LOUIS MICHEL BINGENER CASEY JULIANE BUTTAR NAVTEJ S		
发明人	FARRUGIA, GIANRICO FRIEDMAN, PAUL A. RAJAN, ELIZABETH BRUCE, CHARLES J. ASIRVATHAM, SAMUEL J. LEVY, MICHAEL J. WONG KEE SONG, LOUIS-MICHEL BINGENER-CASEY, JULIANE BUTTAR, NAVTEJ S.		
IPC分类号	A61F5/00 A61N1/36 A61N1/05 A61B18/18 A61B5/00 A61B5/026 A61B17/12 A61B18/14 A61F7/12 A61B5/03		
CPC分类号	A61F5/0013 A61B2018/00404 A61N1/36007 A61N1/0556 A61B5/03 A61B5/4205 A61B5/4238 A61B5/026 A61B17/12013 A61B18/1492 A61B18/1815 A61F2007/126 A61B2018/00613 A61B2018/00577 A61B2017/00818 A61F7/123 A61B5/6876 A61B2017/00106 A61B2017/00199 A61B2018/0022 A61B2018/00434 A61B2018/00494 A61B2018/00863 A61B2090/063 A61B2090/064 A61F2005/0016 A61F2007/0261 A61N1/3606		
优先权	61/949024 2014-03-06 US		
其他公开文献	US10123896		
外部链接	Espacenet USPTO		

摘要(译)

本文描述了使用血流控制诱导体重减轻的方法和装置。该装置和方法通过控制到胃和/或小肠的血流来操作。

Determine that food
is being ingested



Reduce blood flow to
gastrointestinal tract