



US 20180058858A1

(19) **United States**

(12) **Patent Application Publication**
BITAN et al.

(10) **Pub. No.: US 2018/0058858 A1**

(43) **Pub. Date: Mar. 1, 2018**

(54) **AUTOMATICALLY CREATING A TERRAIN
MAPPING DATABASE**

G01C 21/10 (2006.01)

G01S 19/42 (2006.01)

G01V 99/00 (2006.01)

(71) Applicant: **Trailze, Ltd., Modiin (IL)**

A61B 5/01 (2006.01)

A61B 5/021 (2006.01)

(72) Inventors: **Ronen BITAN, Modiin (IL); Tal LAVI,
Rehovot (IL)**

A61B 5/0404 (2006.01)

A61B 5/00 (2006.01)

(73) Assignee: **Trailze, Ltd., Modiin (IL)**

(52) **U.S. Cl.**

CPC *G01C 21/20* (2013.01); *G06F 17/30241*

(2013.01); *G01C 21/10* (2013.01); *G01S 19/42*

(2013.01); *A61B 5/6893* (2013.01); *A61B 5/01*

(2013.01); *A61B 5/021* (2013.01); *A61B*

5/0404 (2013.01); *G01V 99/005* (2013.01)

(21) Appl. No.: **15/698,279**

(22) Filed: **Sep. 7, 2017**

Related U.S. Application Data

(63) Continuation of application No. PCT/IB2016/
051305, filed on Mar. 8, 2016.

(60) Provisional application No. 62/131,314, filed on Mar.
11, 2015.

Publication Classification

(51) **Int. Cl.**


G01C 21/20 (2006.01)

G06F 17/30 (2006.01)

(57)

ABSTRACT

A database for mapping off-road terrain of various characteristics in three-dimensional terms, comprising: a plurality of road segment entries, each containing data pertaining to the terrain characteristics of the segment; and a plurality of elbow entries, each containing (x, y, z) coordinates of the elbow and a record for each road segment having the elbow as one of its end points, the record comprising navigation directives for vehicles entering the segment from the elbow.

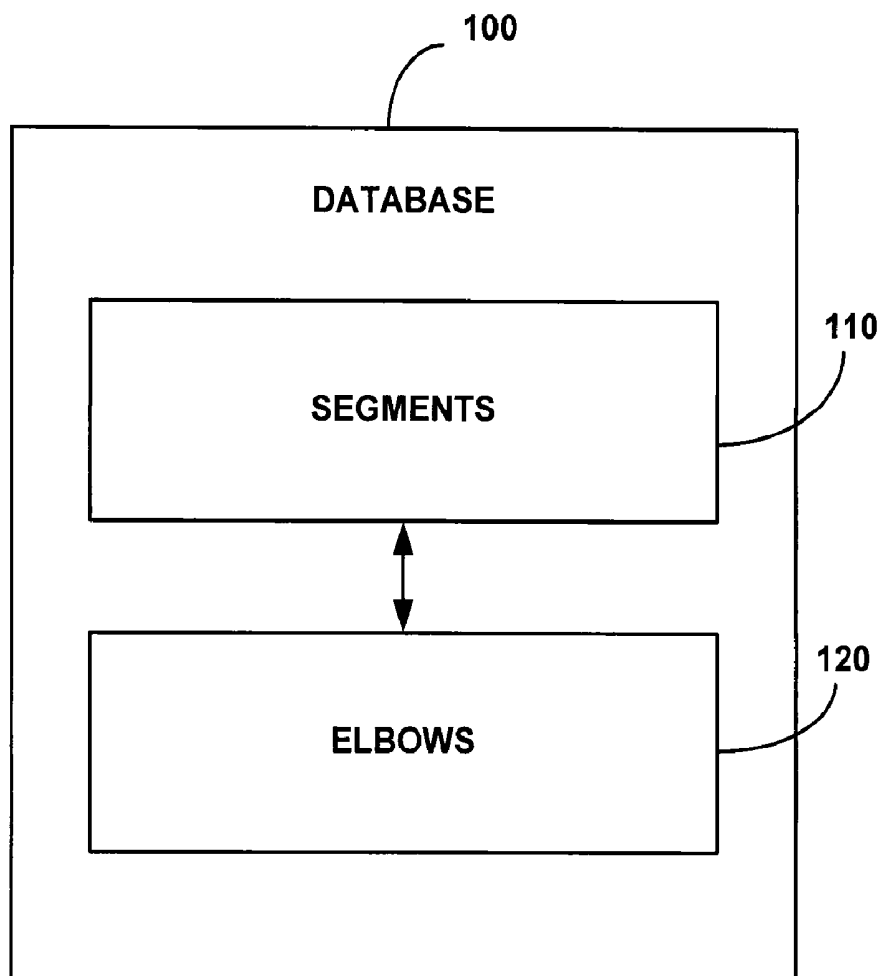

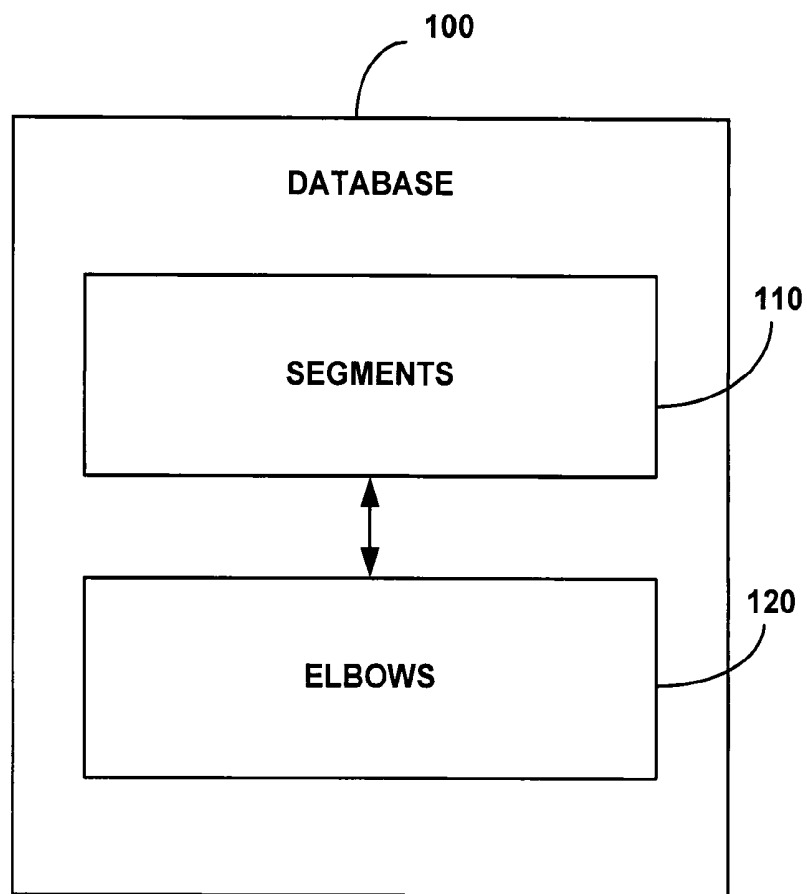


Fig. 1

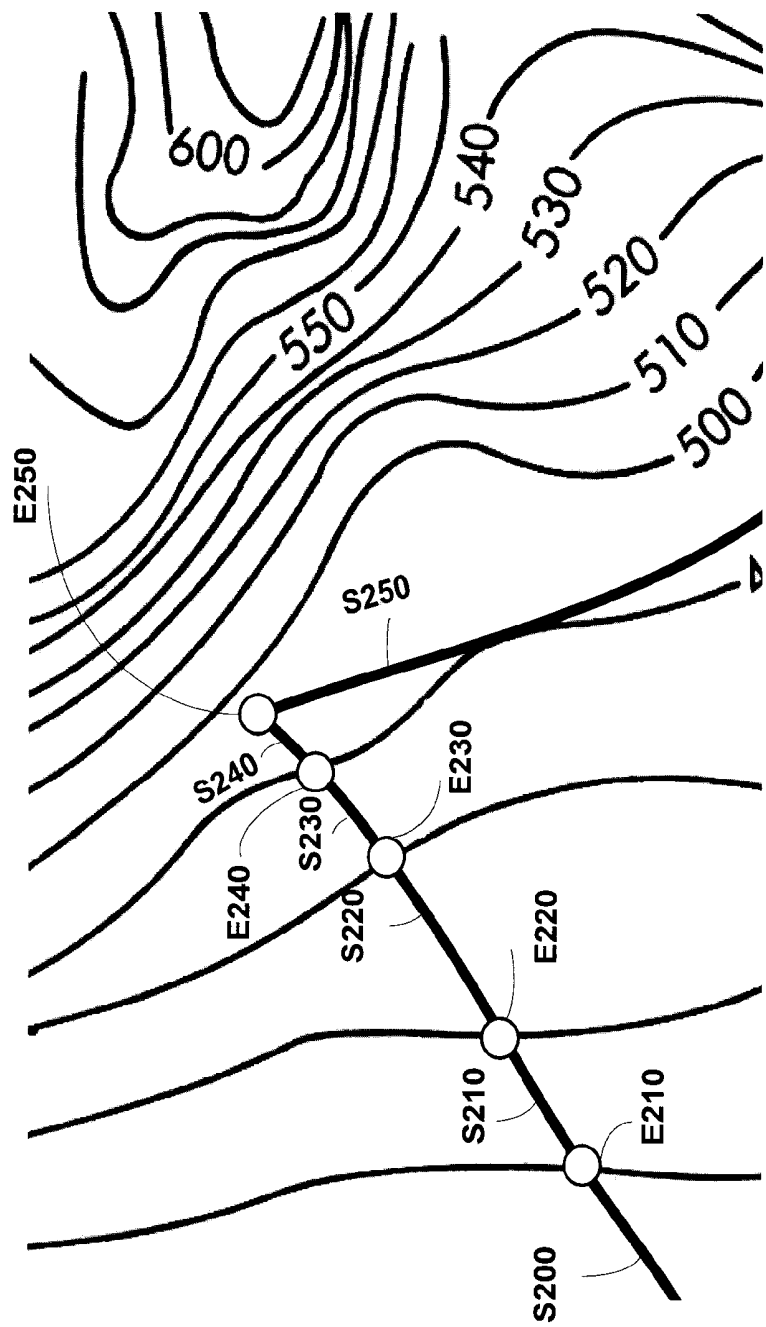


Fig. 2

SEGMENTS		
SEGMENT NO.	ELBOWS	CHARACTERISTICS
S200	E210	Dirt road
S210	E210, E220	Dirt road
S220	E220, E230	Gravel
S230	E230, E240	Gravel
S240	E240, E250	Dirt road
S250	E250	Dirt road

Fig. 3A

ELBOWS			
ELBOW NO.	FROM SEGMENTS	TO SEGMENT	DIRECTIVES
E210	S200	S210	
E220	S210	S220	
E230	S220	S230	
E240	S230	S240	
E250	S240	S250	

Fig. 3B

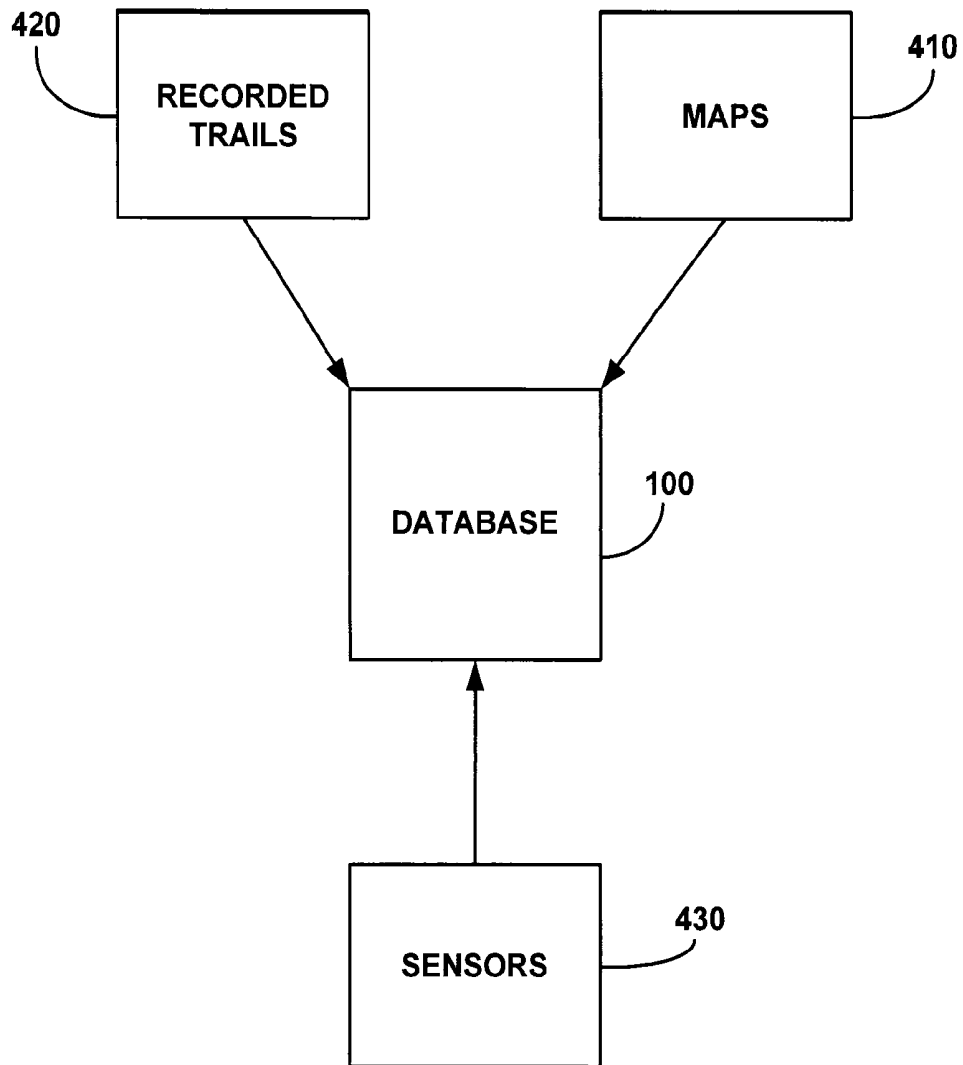


Fig. 4

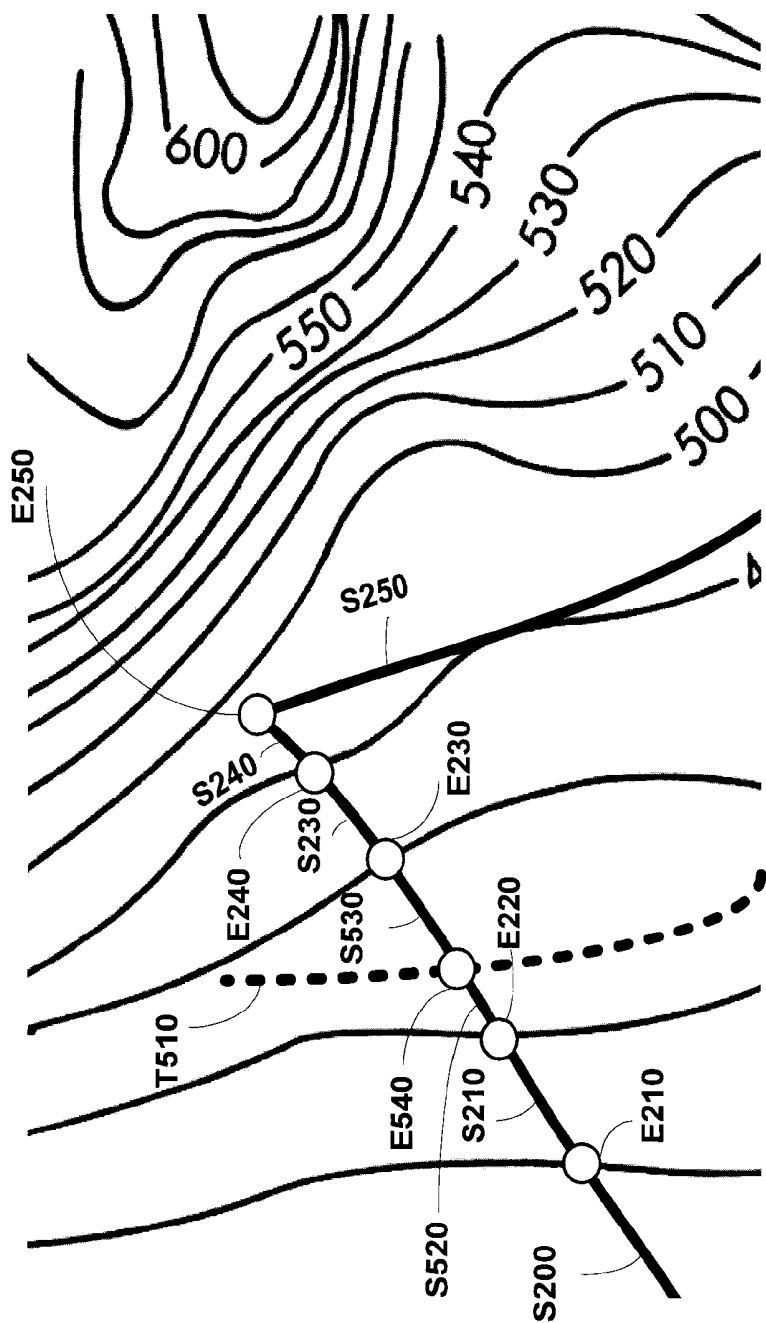


Fig. 5

SEGMENTS		
SEGMENT NO.	ELBOWS	CHARACTERISTICS
S200	E210	Dirt road
S210	E210, E220	Dirt road
S520	E220, E540	Gravel
S530	E540, E230	Gravel
S230	E230, E240	Gravel
S240	E240, E250	Dirt road
S250	E250	Dirt road

Fig. 6A

ELBOWS			
ELBOW NO.	FROM SEGMENTS	TO SEGMENT	DIRECTIVES
E210	S200	S210	
E220	S210	S520	
E540	S520	S530	
E230	S530	S230	
E240	S230	S240	
E250	S240	S250	

Fig. 6B

AUTOMATICALLY CREATING A TERRAIN MAPPING DATABASE

CROSS-REFERENCE TO RELATED PATENT APPLICATIONS

[0001] This application is a continuation of International Application No. PCT/IB2016/051305, filed Mar. 8, 2016. The International Application claims the benefit of U.S. Provisional Application No. 62/131,314, filed Mar. 11, 2015. Both applications are incorporated by reference in their entirety herein.

TECHNOLOGY FIELD

[0002] The present invention relates to navigation, specifically to creating and maintaining an updated database for presenting three-dimensional guidance information to a user traveling by vehicle or pedestrian.

SUMMARY

[0003] According to an aspect of the present invention, there is provided a database for mapping off-road terrain of various characteristics in three-dimensional terms, comprising: a plurality of road segment entries, each containing data pertaining to the terrain characteristics of the segment; and a plurality of elbow entries, each containing (x, y, z) coordinates of the elbow and a record for each road segment having the elbow as one of its end points, the record comprising navigation directives for vehicles entering the segment from the elbow.

[0004] Each one of the road segment entries further comprises pointers to elbow entries of its end points.

[0005] The navigation directives include consideration of the vehicle type.

[0006] The navigation directives include consideration of the road segment that led the vehicle to the elbow.

[0007] The navigation directives include 30 considerations.

[0008] The navigation directives include consideration of user skills.

[0009] The terrain characteristics within each the segment are substantially homogenous and configured to be traversed using a single set of the directives.

[0010] The directives are configured to be defined according to indications selected from the group consisting of: mounting slope, descending slope, sharp turn, rocky terrain, bridge over river, gravel, mud and hiking section.

[0011] The indications are configured to be translated into the directives depending on the type of the vehicles.

[0012] The directives are stored in the database along with references to the appropriate type of the vehicle.

[0013] The terrain characteristics further comprise at least one of sand, gravel and rock.

[0014] The navigation directives for the road segments are configured to be continuously derived from various sensors, cameras and microphones carried or worn by a traveler.

[0015] The sensors are selected from the group consisting of: motion sensors, environmental sensors, position sensors and wearable physiological monitoring sensors.

[0016] The motion sensors are selected from the group consisting of: accelerometers, gravity sensors, gyroscopes and rotational vector sensors.

[0017] The environmental sensors are selected from the group consisting of: barometers, photometers and thermometers.

[0018] The position sensors are selected from the group consisting of: orientation sensors, magnetometers, Global Positioning System (GPS), European Geostationary Navigation Overlay Service (EGNOS) and Global Navigation Satellite System (GLONASS).

[0019] The wearable physiological monitoring sensors are configured to measure physiological parameters selected from the group consisting of: electrocardiogram (ECG), heart rate, blood pressure and body temperature.

[0020] According to another aspect of the present invention, there is provided a method of creating and continuously updating a database for mapping off-road terrain of various characteristics in three-dimensional terms, comprising: defining a plurality of road segment, each road segment defining two bounding elbows, using at least one of maps and recorded trails; for each road segment: defining preliminary terrain characteristics; for each elbow defined by the road segment: defining preliminary navigation directives for vehicles entering the segment from the elbow; and continuously updating the database using at least one of recorded trails and data from sensors carried or worn by travelers.

[0021] The updating comprises updating segment definitions according to recorded trails intersecting existing segments.

[0022] The updating comprises updating segment definitions according to sensors data indicating change in terrain characteristics within existing road segments.

[0023] The sensors are selected from the group consisting of: motion sensors, environmental sensors, position sensors and wearable physiological monitoring sensors.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] For better understanding of the invention and to show how the same may be carried into effect, reference will be made, purely by way of example, to the accompanying drawings.

[0025] With specific reference to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of the preferred embodiments of the present invention only, and are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the invention. In this regard, no attempt is made to show structural details of the invention in more detail than is necessary for a fundamental understanding of the invention, the description taken with the drawings making apparent to those skilled in the art how the several forms of the invention may be embodied in practice. In the accompanying drawings:

[0026] FIG. 1 is a schematic block diagram of the database according to the present invention;

[0027] FIG. 2 is a schematic representation of a partial trails map;

[0028] FIG. 3 shows exemplary database entries describing the partial trails of FIG. 2;

[0029] FIG. 4 is a schematic block diagram showing the various sources contributing to the creation and the on-going updating of the database;

[0030] FIG. 5 shows an example of a segment being divided into two segments; and

[0031] FIGS. 6A and 6B show exemplary database entries describing the segment division of FIG. 5.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0032] The present invention provides a novel database for mapping terrain of various characteristics in three-dimensional terms. The database is constructed automatically in the system by analyzing previously recorded travelers' trails and current feedback from sensors, as will be explained in detail below.

[0033] FIG. 1 is a schematic block diagram of the database 100 according to the present invention, comprising road segments 110 and elbows 120.

[0034] Each road segment entry 110 contains data pertaining to the terrain characteristics of the segment. In a preferred embodiment of the invention the terrain characteristics within each segment are substantially homogeneous and may be traversed using a single set of directives. Each road segment entry may also optionally point to its two bounding elbows (end points). Terrain characteristics may be, for example, sand, gravel, rock, etc.

[0035] Each elbow entry 120 includes (x, y, z) coordinates of the elbow and a record for each road segment having the elbow as one of its end points, the record including navigation directives for vehicles (or pedestrians) entering the segment from the elbow.

[0036] The directives may take into consideration:

[0037] Type of vehicle if any (e.g. 4WD, motorbike, mountain bike, horse, pedestrian etc.)

[0038] The road segment that led the vehicle/user to the elbow and specifically 3D considerations, namely altitude changes between the segments.

[0039] Various skill levels of users in any of the vehicle types.

[0040] FIG. 2 is a schematic representation of a partial 3D trails map described by the exemplary database entries in FIG. 3.

[0041] The database 100 is continuously updated, as will be explained below.

[0042] FIG. 4 is a schematic block diagram showing the various sources contributing to the creation and the on-going updating of the database 100.

[0043] Maps 410—The basic database may be constructed using existing trails databases and/or user generated content or previously selected trails.

[0044] Existing trails databases may comprise various available Digital Elevation Models

[0045] (DEM) such as the NASA DEM, or a database collected by GPS from users which are digital representations of elevations as measured at ground level. Such elevations are calculated using a variety of methods, including stereoscopy, digitized contour data, GPS data, radar signal interpretation or other methods for extracting elevation from a given position. CDEM (Canadian Digital Elevation Model) data sets for a region or a predefined area may be obtained using specific data extraction tools such as found on the web site geogratis.gc.ca.

[0046] Recorded trails 420—Segments and elbows definitions may be continuously updated using recorded routes taken by travelers (e.g. by replaying captured location information). For example, if a recorded trail indicates traversing an existing segment, the segment may be divided into two segments connected by a new elbow. In the

example of FIG. 5, using the partial map of FIG. 2 as a base, a new recorded trail T510 intersecting segment S220 causes the creation of a new elbow E540 which divides the previous segment S220 into two new segments S520 and S530. FIG. 6 shows the resulting updated database.

[0047] Sensors 430—Navigation directives for the various road segments may be continuously derived from various sensors carried or worn by the traveler. The sensors may comprise, for example:

[0048] Motion sensors—that measure acceleration forces and rotational forces along three axes. This category includes accelerometers, gravity sensors, gyroscopes, and rotational vector sensors.

[0049] Environmental sensors—that measure various environmental parameters, such as ambient air temperature and pressure, illumination, and humidity.

[0050] This category includes barometers, photometers, and thermometers.

[0051] Position sensors—that measure the physical position of a device. This category includes orientation sensors and magnetometers, Global Positioning System (GPS), European Geostationary Navigation Overlay Service (EGNOS), Global Navigation Satellite System (GLONASS), and others.

[0052] Wearable physiological monitoring sensors—that measure various physiological parameters of the wearer (traveler) such as, for example, electrocardiogram (ECG), heart rate, blood pressure, body temperature and others.

[0053] Cameras. Microphones.

[0054] The data aggregated from the various sensors is analyzed to determine terrain characteristics and levels of difficulty of trails. This computed data is then translated into directives stored in the elbows database in conjunction with the relevant segments.

[0055] The sensors data may also serve to update segments and elbows definition by identifying different characteristics in various parts of a segment, which may lead to automatically partitioning the segment into two or more segments according to the different terrain characteristics which require different directives.

[0056] Directives given to a traveler about to enter a route segment may indicate, for example, mounting slope, descending slope, sharp turn, rocky terrain, bridge over river, gravel, mud, hiking section etc.

[0057] The various indications will be translated into different directives depending on the type of traveling vehicle. For example, "rocky terrain" may be translated into "shift to 1st gear" for a 4-wheel drive vehicle and into "walk" for a bicycle rider or initiate an alarm message such as "careful: dangerous slope ahead".

[0058] The various directive are stored in the database along with references to the appropriate type of traveling vehicle.

[0059] It will be appreciated by persons skilled in the art that the present invention is not limited to what has been particularly shown and described hereinabove. Rather the scope of the present invention is defined by the appended claims and includes both combinations and sub-combinations of the various features described hereinabove as well as variations and modifications thereof which would occur to persons skilled in the art upon reading the foregoing

description. For example, the database of the present invention may be constructed and used also in conjunction with paved roads, typically in uncharted areas.

1. A database for mapping off-road terrain of various characteristics in three-dimensional terms, comprising:

a plurality of road segment entries, each containing data pertaining to the terrain characteristics of the segment; and

a plurality of elbow entries, each containing (x, y, z) coordinates of the elbow and a record for each road segment having the elbow as one of its end points, the record comprising navigation directives for vehicles entering the segment from the elbow.

2. The database of claim 1, wherein each one of said road segment entries further comprises pointers to elbow entries of its end points.

3. The database of claim 1, wherein said navigation directives include consideration of the vehicle type.

4. The database of claim 1, wherein said navigation directives include consideration of the road segment that led the vehicle to the elbow.

5. The database of claim 1, wherein said navigation directives include 30 considerations.

6. The database of claim 1, wherein said navigation directives include consideration of user skills.

7. The database of claim 1, wherein said terrain characteristics within each said segment are substantially homogeneous and configured to be traversed using a single set of said directives.

8. The database of claim 1, wherein said directives are configured to be defined according to indications selected from the group consisting of:

mounting slope, descending slope, sharp turn, rocky terrain, bridge over river, gravel, mud and hiking section.

9. The database of claim 8, wherein said indications are configured to be translated into said directives depending on the type of said vehicles.

10. The database of claim 1, wherein said directives are stored in said database along with references to the appropriate type of said vehicle.

11. The database of claim 1, wherein said terrain characteristics further comprise at least one of sand, gravel and rock.

12. The database of claim 1, wherein said navigation directives for said road segments are configured to be

continuously derived from various sensors, cameras and microphones carried or worn by a traveler.

13. The database of claim 12, wherein said sensors are selected from the group consisting of: motion sensors, environmental sensors, position sensors and wearable physiological monitoring sensors.

14. The database of claim 13 wherein said motion sensors are selected from the group consisting of: accelerometers, gravity sensors, gyroscopes and rotational vector sensors.

15. The database of claim 13, wherein said environmental sensors are selected from the group consisting of: barometers, photometers and thermometers.

16. The data base of claim 13, wherein said position sensors are selected from the group consisting of: orientation sensors, magnetometers, Global Positioning System (GPS), European Geostationary Navigation Overlay Service (EGNOS) and Global Navigation Satellite System (GLONASS).

17. The data base of claim 13, wherein said wearable physiological monitoring sensors are configured to measure physiological parameters selected from the group consisting of: electrocardiogram (ECG), heart rate, blood pressure and body temperature.

18. A method of creating and continuously updating a database for mapping off-road terrain of various characteristics in three-dimensional terms, comprising:

defining a plurality of road segment, each road segment defining two bounding elbows, using at least one of maps and recorded trails;

for each road segment:

defining preliminary terrain characteristics; for each elbow defined by the road segment:

defining preliminary navigation directives for vehicles entering the segment from the elbow; and

continuously updating the database using at least one of recorded trails and data from sensors carried or worn by travelers.

19. The method of claim 18, wherein said updating comprises updating segment definitions according to recorded trails intersecting existing segments.

20. The method of claim 18, wherein said updating comprises updating segment definitions according to sensors data indicating change in terrain characteristics within existing road segments.

* * * * *

专利名称(译)	自动创建地形映射数据库		
公开(公告)号	US20180058858A1	公开(公告)日	2018-03-01
申请号	US15/698279	申请日	2017-09-07
申请(专利权)人(译)	TRAILZE. , LTD.		
当前申请(专利权)人(译)	TRAILZE. , LTD.		
[标]发明人	BITAN RONEN LAVI TAL		
发明人	BITAN, RONEN LAVI, TAL		
IPC分类号	G01C21/20 G06F17/30 G01C21/10 G01S19/42 G01V99/00 A61B5/01 A61B5/021 A61B5/0404 A61B5/00		
CPC分类号	G01C21/20 G06F17/30241 G01C21/10 G01S19/42 G01V99/005 A61B5/01 A61B5/021 A61B5/0404 A61B5/6893 G01C21/32 G01C21/3697 G09B29/106 G06F16/29		
优先权	62/131314 2015-03-11 US		
其他公开文献	US10718618		
外部链接	Espacenet USPTO		

摘要(译)

一种用于以三维方式映射各种特征的越野地形的数据库，包括：多个路段条目，每个条目包含与该区段的地形特征有关的数据；以及多个肘部入口，每个肘部入口包含肘部的 (x , y , z) 坐标和每个具有肘部作为其端点之一的路段的记录，该记录包括用于从肘部进入该部分的车辆的导航指令。

