


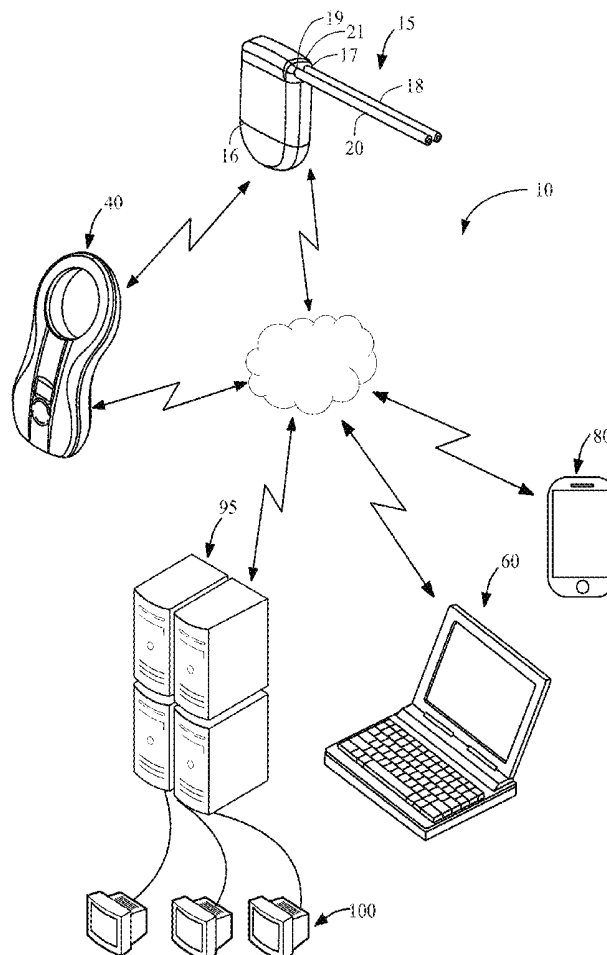

US 20180060520A1

(19) **United States**(12) **Patent Application Publication**  
**DEGEN et al.**(10) **Pub. No.: US 2018/0060520 A1**(43) **Pub. Date: Mar. 1, 2018**(54) **SYSTEMS AND METHODS FOR MANAGING  
AND ANALYZING DATA GENERATED BY  
AN IMPLANTABLE DEVICE***A61B 5/07* (2006.01)*A61M 27/00* (2006.01)(52) **U.S. CL.**CPC ..... *G06F 19/3418* (2013.01); *A61B 5/0402*  
(2013.01); *A61B 5/02055* (2013.01); *A61B*  
*5/0022* (2013.01); *A61B 5/02444* (2013.01);  
*A61B 5/07* (2013.01); *A61M 27/002*  
(2013.01); *A61B 5/0006* (2013.01); *A61B*  
*5/746* (2013.01); *A61B 5/6847* (2013.01)(71) Applicant: **Sequana Medical AG, Zug (CH)**(72) Inventors: **Thomas Werner DEGEN,**  
Birmensdorf (CH); **Stefan**  
**TSCHUMPER,** Wattwil (CH)(73) Assignee: **Sequana Medical AG, Zug (CH)**(21) Appl. No.: **15/684,479**(22) Filed: **Aug. 23, 2017****Related U.S. Application Data**(60) Provisional application No. 62/380,284, filed on Aug.  
26, 2016.**Publication Classification**(51) **Int. Cl.***G06F 19/00* (2006.01)*A61B 5/0402* (2006.01)*A61B 5/0205* (2006.01)*A61B 5/00* (2006.01)(57) **ABSTRACT**

A system is provided including an implantable device configured to be implanted subcutaneously within a patient, a clinician monitoring and control device, an optional patient mobile device, a remote server and/or at least one data analyst device used by a data analyst. The implantable device may communicate with any or all of the monitoring and control device, the mobile device and/or the remote server through the charging device or by establishing a direct wireless connection with each such device. The data analyst device may establish a direct connection with the remote server and also may establish a connection with the monitoring and control device and the mobile device. By analyzing and reviewing the data generated by the implantable device, the data analyst may diagnose a medical condition or indicate a heightened risk of a condition.



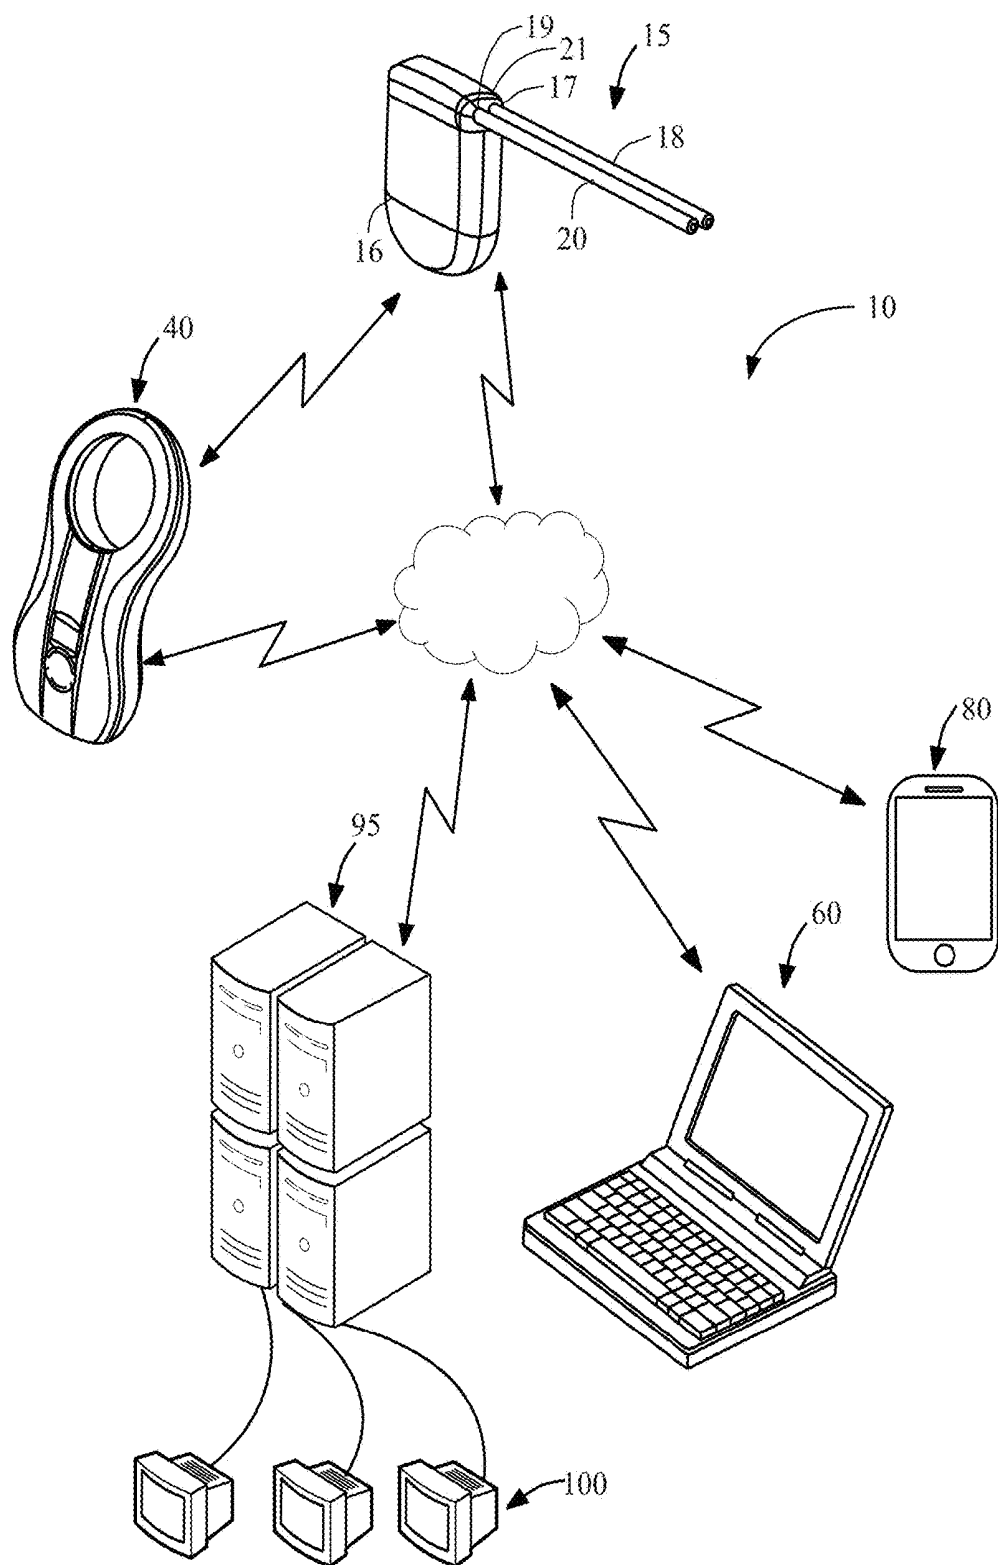


FIG. 1

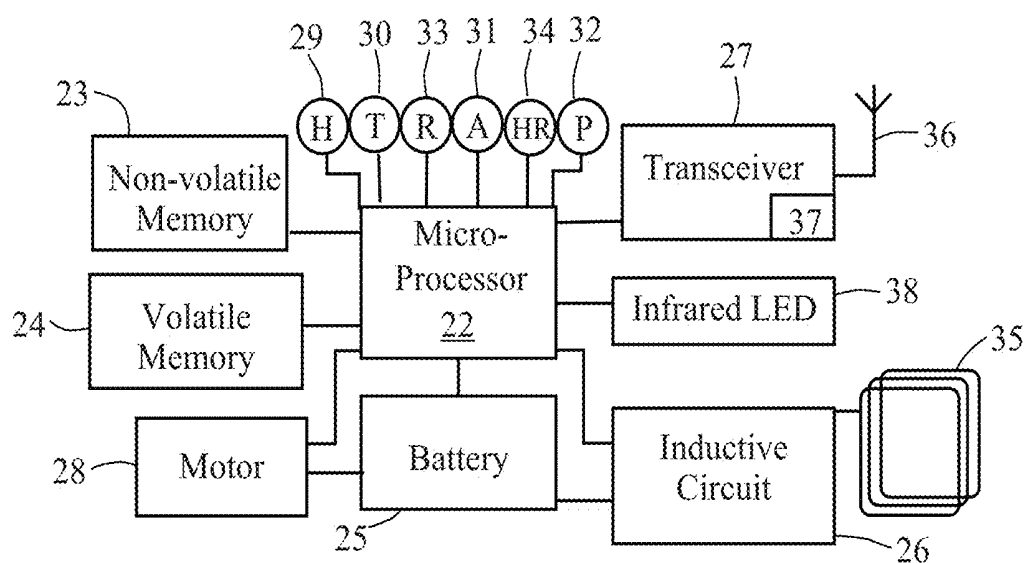


FIG. 2

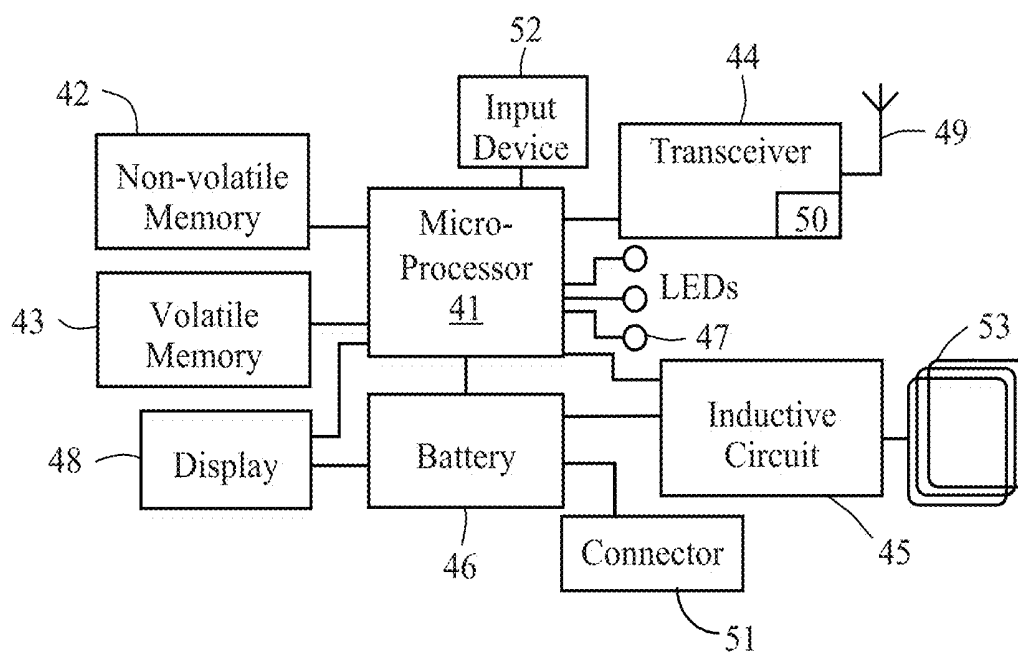


FIG. 3

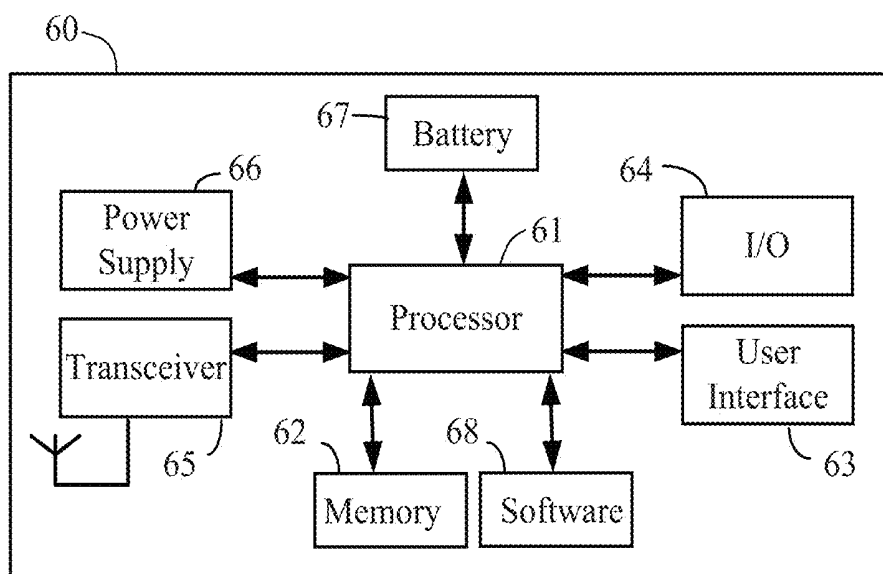


FIG. 4

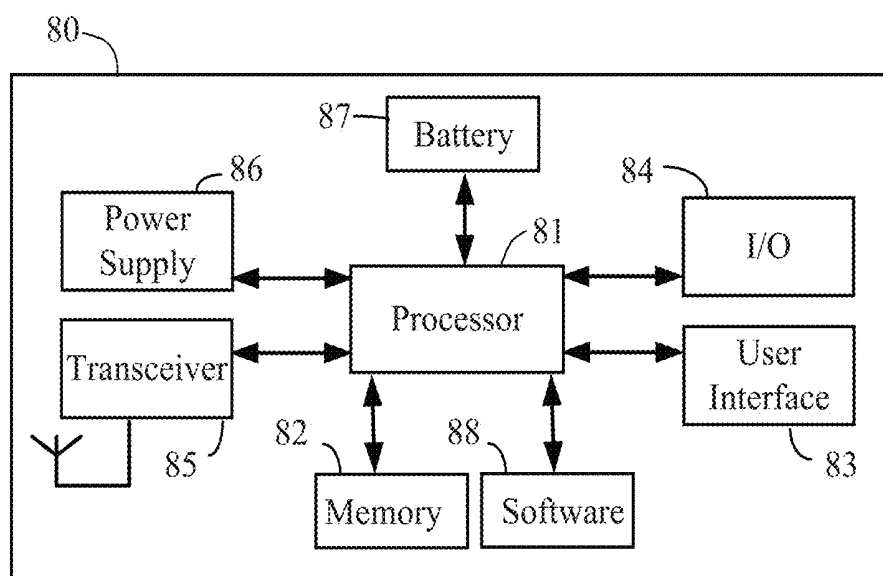


FIG. 5

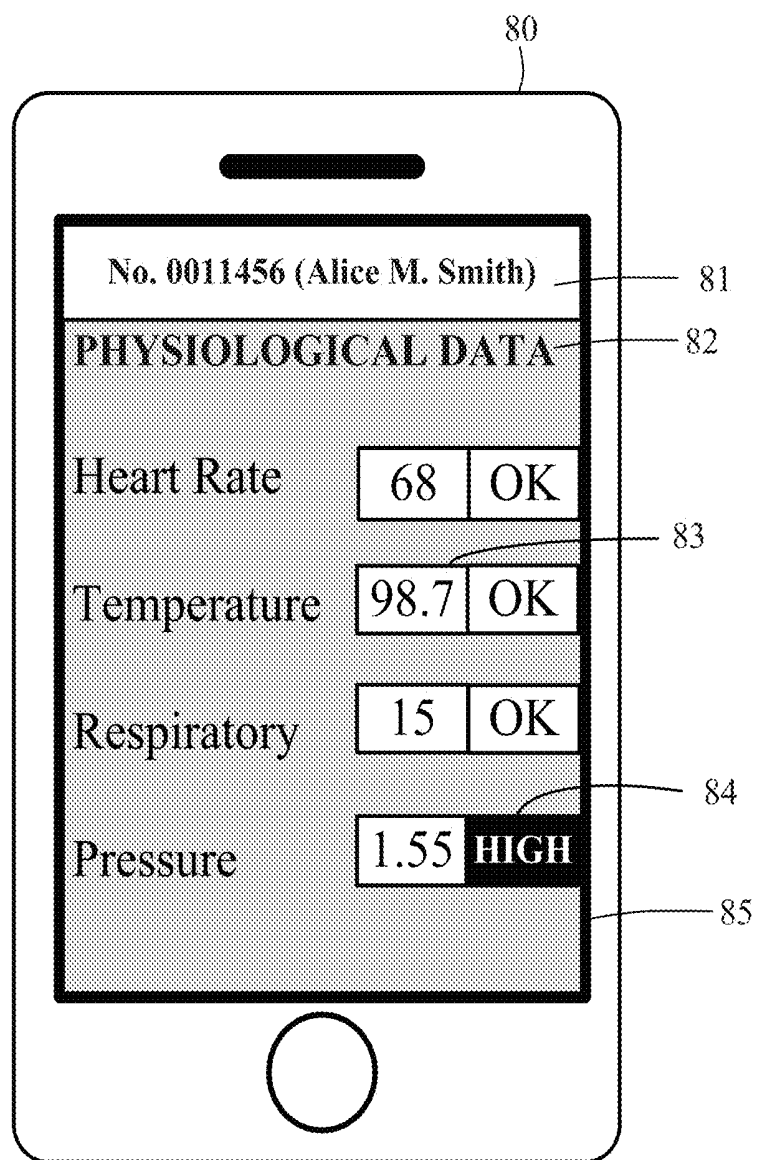


FIG. 6

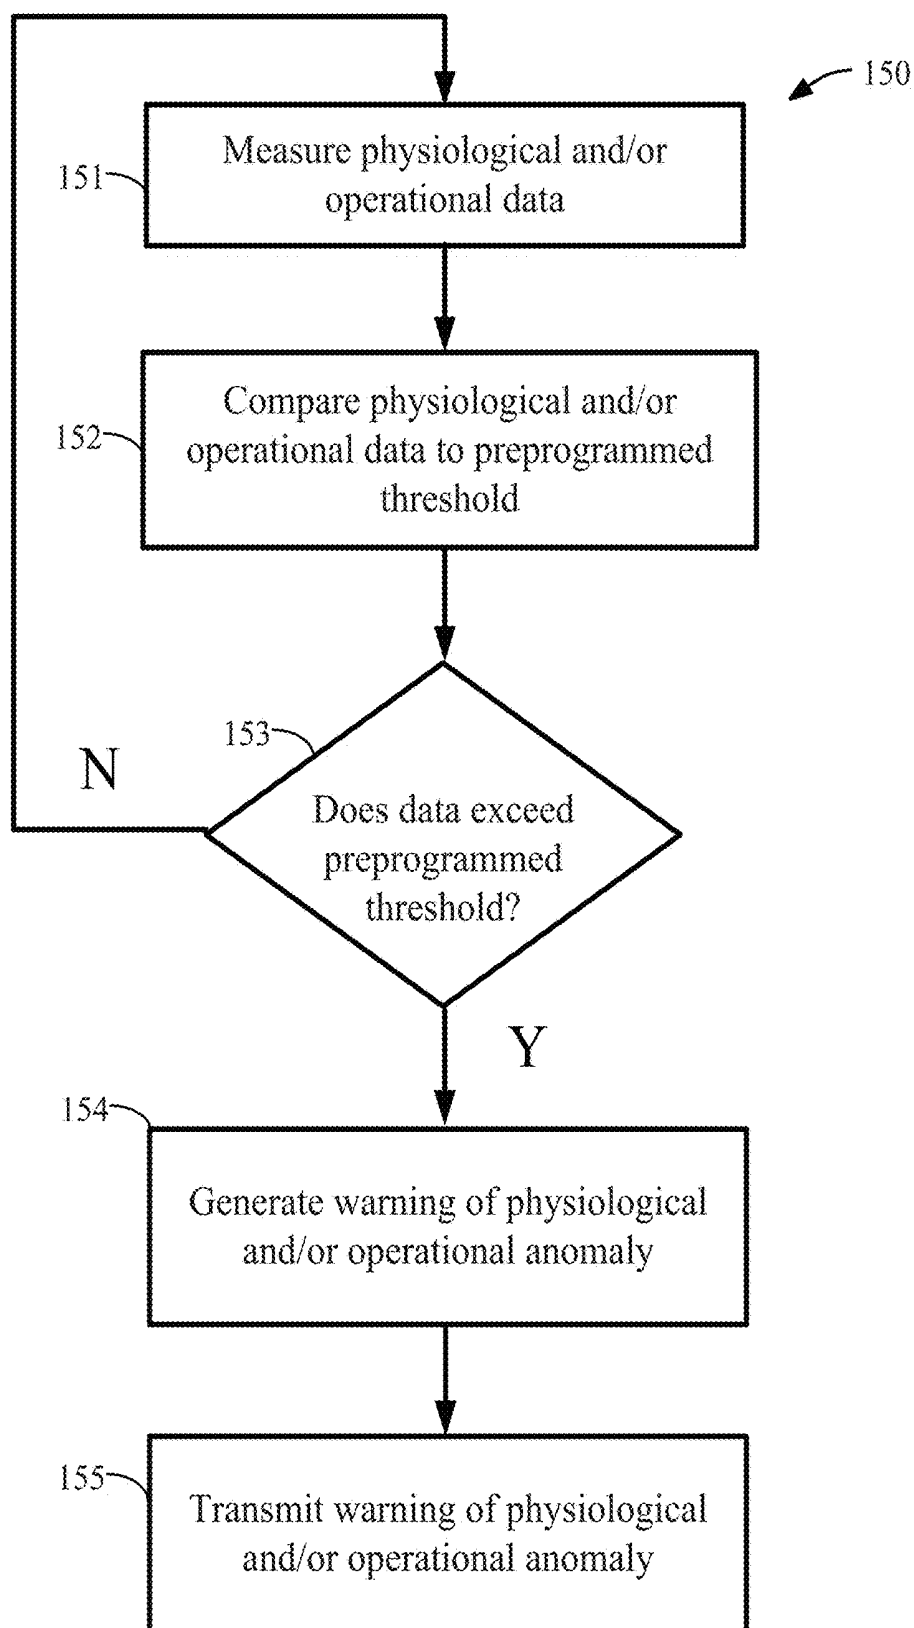


FIG. 7

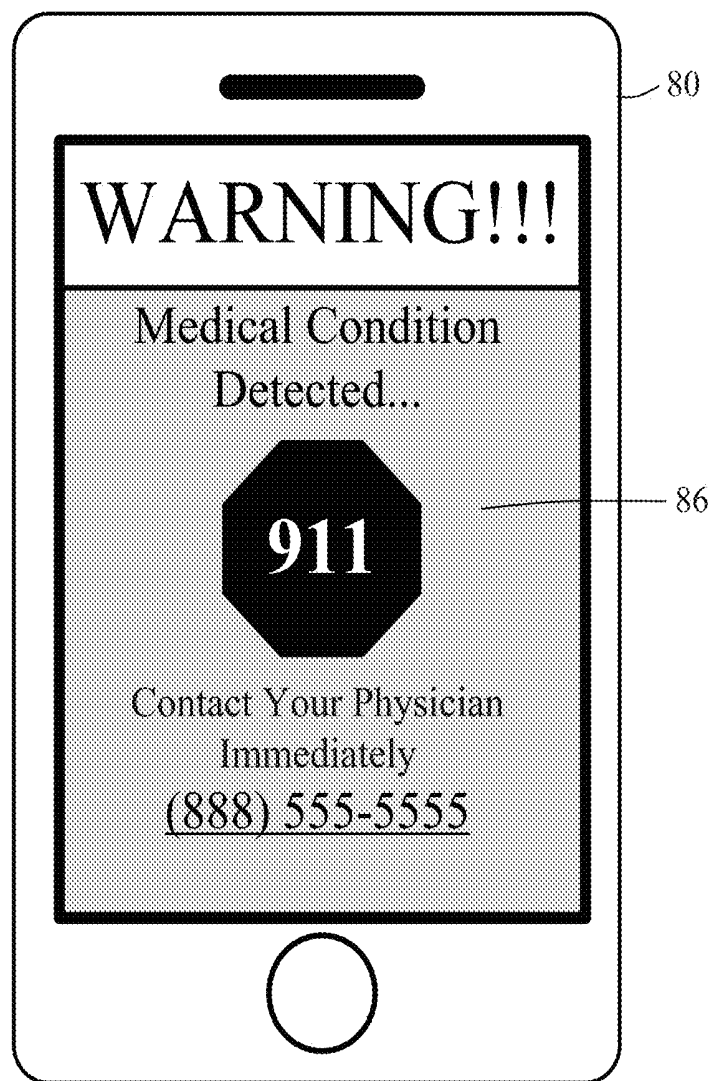


FIG. 8

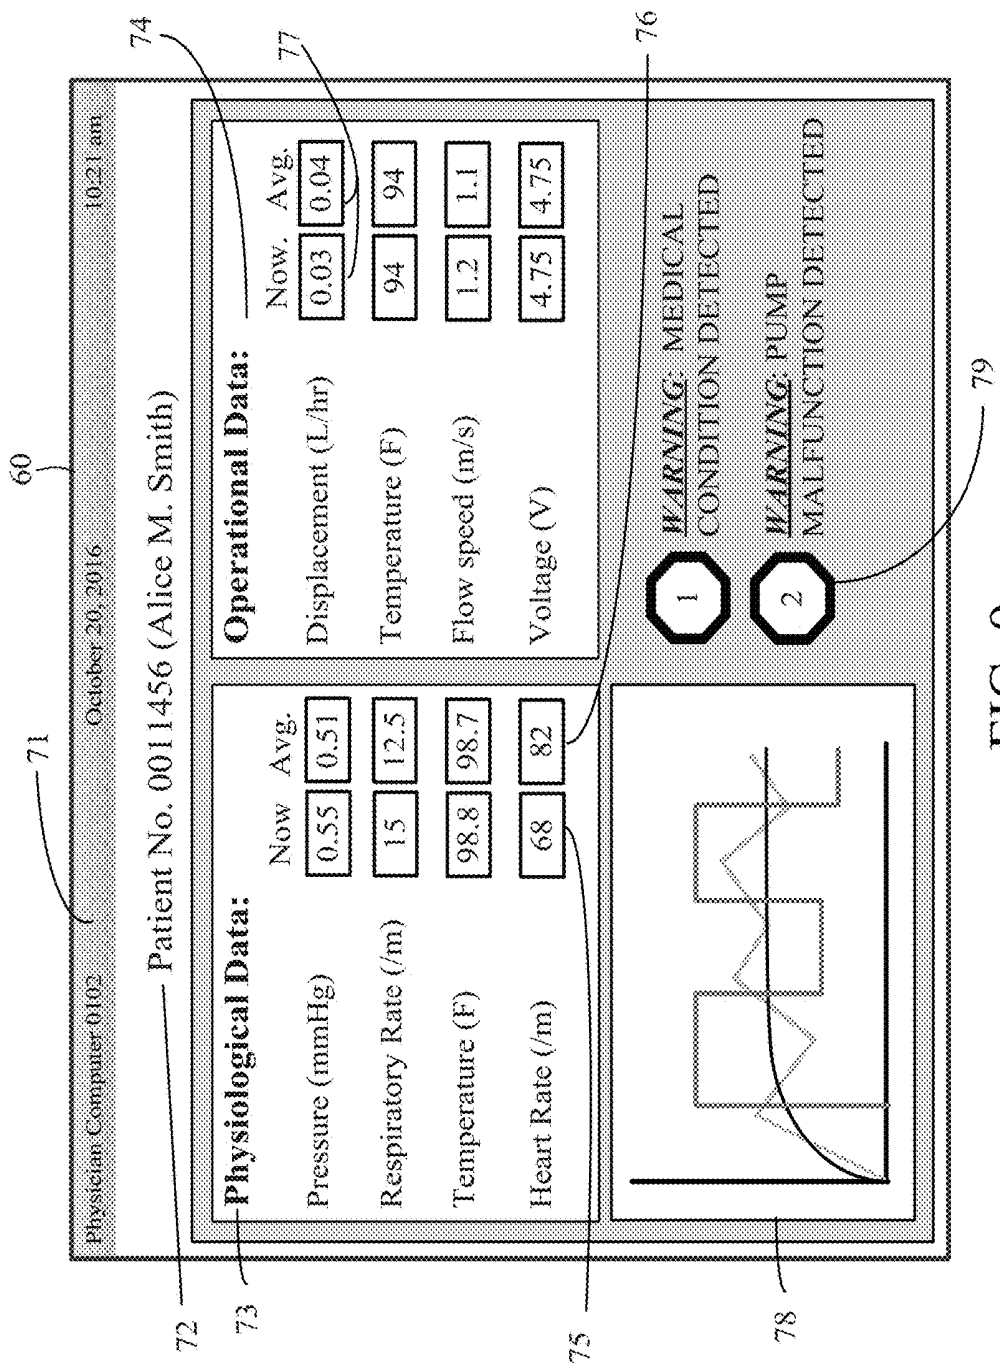


FIG. 9



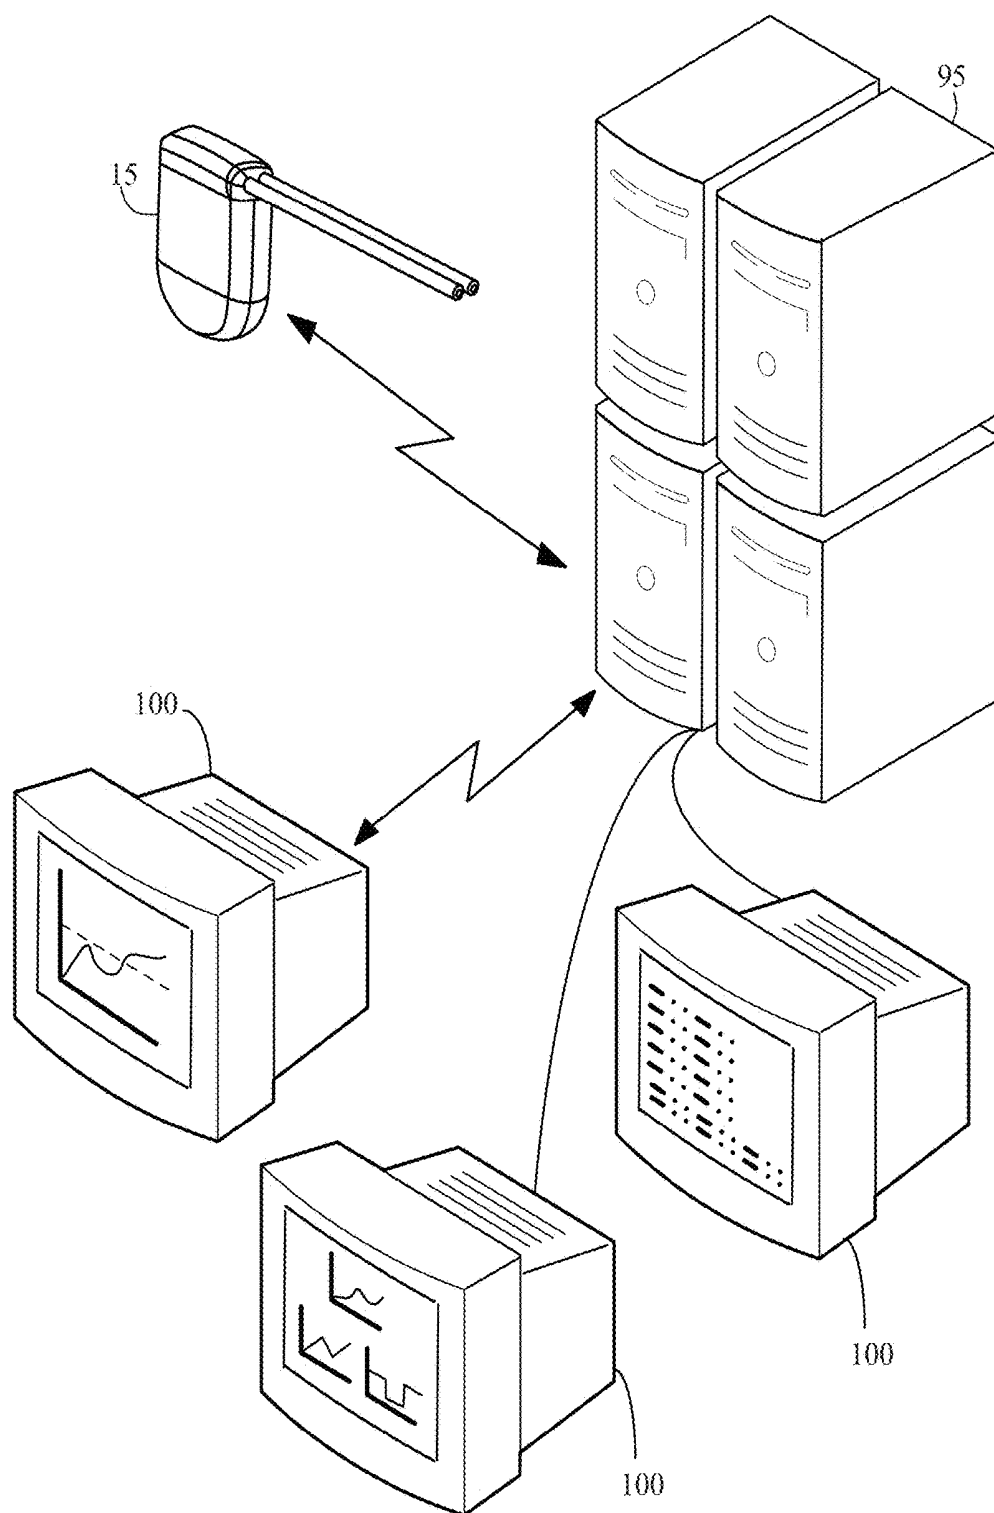


FIG. 10

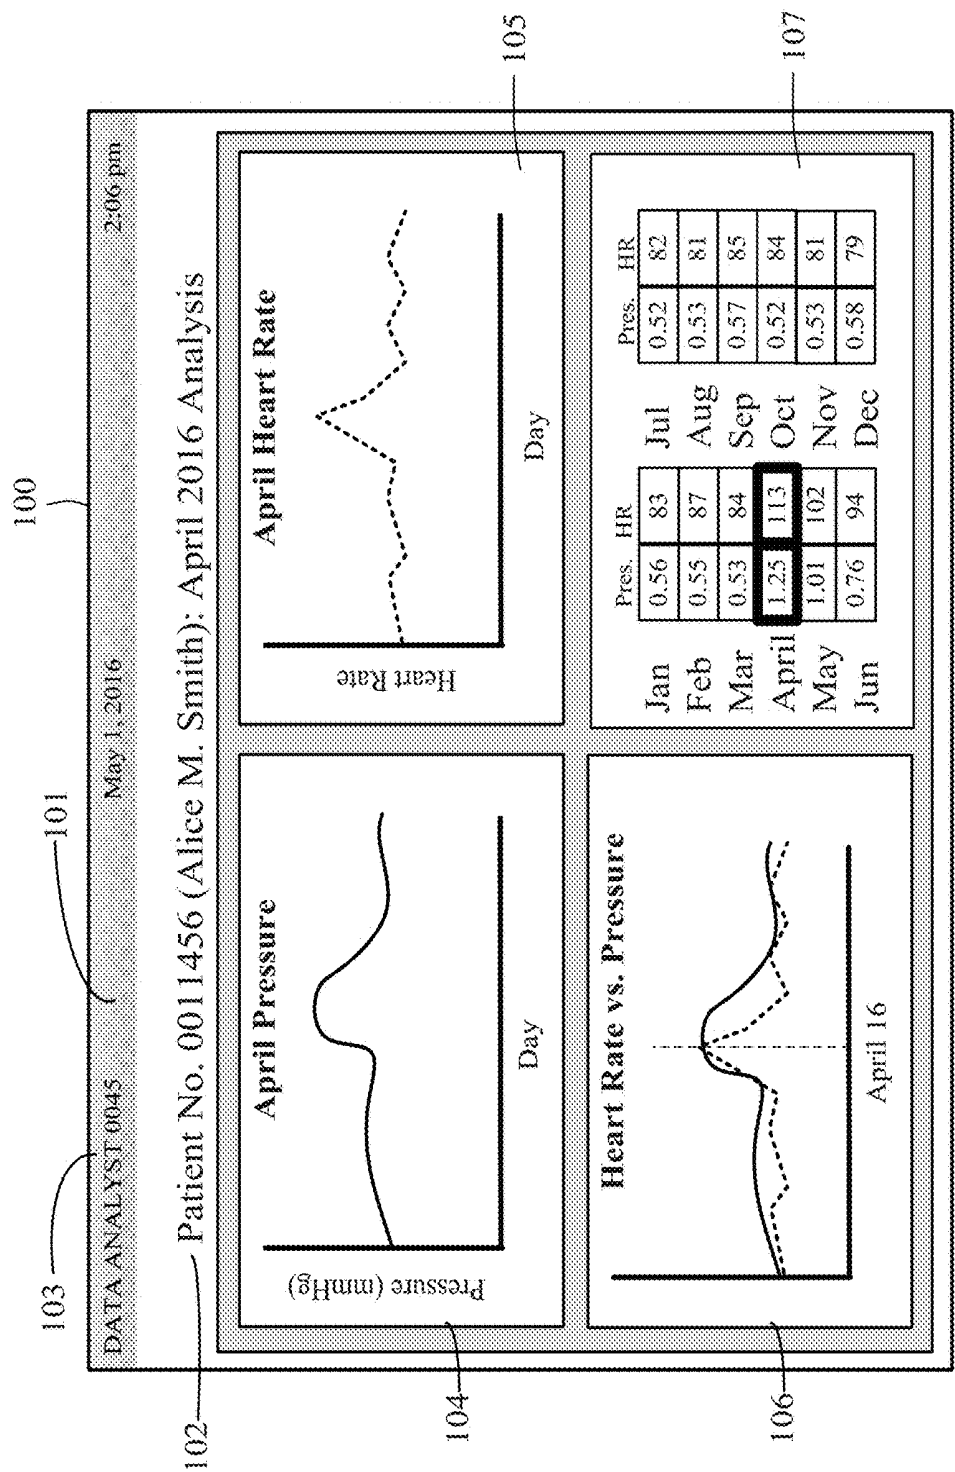


FIG. 11

# SYSTEMS AND METHODS FOR MANAGING AND ANALYZING DATA GENERATED BY AN IMPLANTABLE DEVICE

## CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of the filing date of U.S. Provisional Patent Application No. 62/380,284 filed on Aug. 26, 2016, the disclosure of which is incorporated herein by reference.

## TECHNICAL FIELD

[0002] The present disclosure relates generally to implantable medical devices and more specifically to managing and analyzing data generated by implantable medical devices.

## BACKGROUND

[0003] Physiological data may offer medical experts an understanding of a person's wellbeing far beyond what may be gleaned by observation. For example, measuring a patient's temperature, pulse, pulse strength, respiratory rate, blood oxygen levels, tidal volume, blood pressure and various other physiological parameters may provide medical professionals a better understanding of the current state of a patient's body, vital organs and systems. Physiological data may further include measurements of biomarkers.

[0004] Physiological data also may provide early detection of a medical condition. As is the case with many medical conditions, early detection may be the difference between life and death. In the field of cancer, periodic monitoring of a patient's wellbeing may improve survival and decrease mortality by detecting cancer at an early stage when treatment is more effective. Similarly, early detection of heart disease allows the patient to change or eliminate habits that worsen their condition.

[0005] Even after a medical condition is detected, physiological data remains extremely valuable. By monitoring and analyzing a patient's symptoms and physiological measurements over an appropriate period of time, a better understanding of a patient's wellbeing or medical condition may be achieved. Monitoring a patient's symptoms and physiological measurements over a period of time will allow physicians and medical professionals to better understand the progression of the patient's medical condition and detect additional related and potentially unrelated conditions. Having a record of a patient's symptoms and physiological measurements provides an archive from which the significance and relevance of future changes may be determined.

[0006] Though physiological data may be gathered during hospital stays and office visits, the data gathered represents only glimpse into the patient's physiological wellbeing at that given period of time while the patient is in the hospital or doctor's office. With so few data points, it is difficult to truly understand how these physiological measurements are changing over time and how they relate to events and routines of a patient. Furthermore, the physiological measurements taken during a hospital stay or doctor's office visit are typically limited to non-invasive measurement mechanisms limited to the exterior of one's body. These types of measurements are often incapable of measuring interior parameters used as biomarkers such as temperature, pressure and other fluid parameters within a body cavity. Non-

invasive measurements limited to the exterior of one's body typically do not serve as reliable biomarkers for conditions within the body.

[0007] Several devices have been produced that are directed to gathering specific physiological data outside of a hospital or doctor's office setting. Heart rate monitors are an example of a specific physiological measurement device used outside of the hospital setting. Heart rate monitors are typically worn by patients who have been diagnosed with a heart condition or have recently had a heart attack. Additionally, athletes are known to wear heart rate monitors for fitness purposes. Typically, heart rate monitors measure the heart rate from the exterior of the patient's body in a non-invasive manner. Some heart rate monitors are also capable of communicating to a mobile device allowing the user to view the data at a later time in a reader friendly way.

[0008] Similar in purpose is Medtronic's Reveal LINQ Insertable Cardiac Monitor device which continuously monitors a patient's heart and automatically detects and records abnormal heart rhythms. The system is implanted under the skin in the user's chest and continuously monitors a patient's heart activity in the form of an electrocardiogram (ECG). When a medical event occurs, an extracorporeal recording device is placed in close proximity to the implantable device to record the heart's rhythm during the medical episode.

[0009] Another device designed to gather specific physiological data outside of a hospital or doctor's office setting is Medtronic's Continuous Glucose Monitoring (CGM) system which measures glucose levels in real time and sends alerts to a remote monitor. The alerts include the direction glucose levels are going, early notification of oncoming lows and highs, alerts for lows or highs, and insights into how food, physical activity, medication, and illness impact glucose levels. The system consists of a glucose sensor inserted under the skin that measures glucose levels, a transmitter that sends the glucose information from the sensor to a monitor via wireless radio frequency, and a small external monitor that displays glucose levels on a screen and notifies the user if it detects that glucose is reaching a high or low limit.

[0010] While devices for measuring specific physiological parameters outside of the hospital or doctor's office setting have been developed and commercialized, these devices are only directed to measuring physiological parameters specific to the medical condition being treated or the part of the anatomy in question. Typically these devices are limited to one sensor, only measuring heart rate or glucose levels, for example. For this reason, any analysis of the data generated is often narrow in scope and directed to the medical condition being treated. While the limited data generated is helpful for better understanding that particular medical condition, it offers little to no insight into the body's overall wellbeing and how other parts of the body or systems within the body relate to the medical condition or part of the anatomy in question and therefore is often insufficient to serve as a biomarker.

[0011] Another drawback of these devices is that the monitoring or recording elements of the device are typically physically coupled to the sensing device or required to be in very close proximity to the sensing device. Where the sensing device is physically connected to the monitoring or recording element, this often requires a cable running transcutaneously from an implanted sensor to an external moni-

toring or recording device. The transcutaneous cable is not only painful but also could lead to infection. Additionally, the transcutaneous cable may restrict movement and hinder the user's daily activities.

**[0012]** In U.S. Pat. No. 9,039,652 to Degen, entitled apparatus and methods for treating intracorporeal fluid accumulation, incorporated by reference herein in its entirety, an implantable medical sensing device is configured to generate data and a charging device is configured to download the data. The implantable device disclosed in the Degen patent includes a mechanical gear pump that is configured to be coupled to the bladder and another cavity such as the peritoneal cavity. The implantable device in Degen further describes a plurality of sensors to continually monitor pressure, temperature, humidity, charge status, pump status, patient movement and other environmental and system related parameters. The plurality of sensors may communicate wirelessly with the charging device only when in close proximity. The charging device may then relay this information to a physician's computer.

**[0013]** Devices generally require that the monitoring or recording device be in close proximity to an implantable device. Considering that the implantable device will frequently be out of range of the monitoring and recording device, data may not be uploaded to the monitoring or recording device continuously. Accordingly, the implantable sensing device is required to include complex circuitry and memory for storing data between uploads.

**[0014]** Yet another drawback of these devices is that they often do not generate operational parameters to track the performance of the implanted machinery, such as an insulin pump. For example, while a Continuous Glucose Monitoring system may generate data regarding the patient's glucose levels, such systems do not measure insulin pump parameters, leaving the performance of the pump in question. Such data, if available, could be compared to the performance of the insulin pump to better optimize and understand the pump's effect on the body.

**[0015]** In view of the above-noted drawbacks of previously-known systems, it would be desirable to provide methods and systems for managing and analyzing physiological and operational data generated by an implantable device using a number of other computing devices not necessarily located in close proximity to the implantable device.

#### SUMMARY

**[0016]** The present disclosure overcomes the drawbacks of the previously-known systems having an implantable medical device by providing systems and methods for managing, reviewing and analyzing data generated by an implantable device configured to communicate wirelessly with a variety of communication devices including a remote data analyst device.

**[0017]** In accordance with the principles of the present invention, an exemplary system may include an implantable device to be implanted into a patient, a charging device for charging and/or communicating with the implantable device, a remote server configured to communicate with the implantable device and/or the charging device, a monitoring and control device and optionally, a mobile device, each of which may be in communication with the implantable device, the charging device, and/or the remote server, as well

as each other. The system may further include a data analyst device in communication with at least the remote server.

**[0018]** The implantable device may have a microprocessor, a communication unit, and a plurality of sensors. The implantable device may generate operational data and physiological data and extract biomarkers based on information sensed by one or more sensors of the plurality of sensors. The operational data and physiological data may be processed using the microprocessor and communicated to other devices within the system using the communication unit. The implantable device may communicate with other devices in the system through communications with the charging device. In this manner, the implantable device may communicate operational data and/or physiological data to the charging device and the charging device may then send the data to other devices in the system. In this same way, other devices in the system may send operational parameters and/or instructions to the implantable device by relaying that information through the charging device. The communication unit of the implantable device may communicate with the charging device using any number of well-known wireless communication technologies. The other devices within the system may communicate with the charging device using any number of well-known wireless or wired communication technologies.

**[0019]** Alternatively, the implantable device may communicate directly to other devices within the system, without relaying communications through the charging device, by communicating wirelessly with these other devices. For example, the monitoring and control device and/or a mobile device may receive physiological and/or operational data from the implantable device. Wireless communication may be enabled by any number of well-known wireless communication technologies. In this manner, the implantable device may communicate operational data and/or physiological data to the other devices within the system and similarly the other devices within the system may wirelessly communicate operational parameters and/or instructions to the implantable device.

**[0020]** Whether the charging device is used as a relay or the implantable device communicates directly with the other devices in the system using wireless technology, the remote server may receive physiological and/or operational data. The data analyst device may access and download operational data and/or physiological data including biomarker data from the remote server. The data analyst device may be configured to analyze operational and/or physiological data and generate analyst data. The analyst data may include trends in the data and may compare the operational and/or physiological data to past data received from that individual's implantable device and/or to data from other implantable devices. The data also may be compared to predetermined or calculated thresholds. The analyst data may be communicated to the remote server and saved on the remote server for retrieval by the charging device, the monitoring and control device and/or the mobile device. The data analyst device also may generate a warning message containing a medical diagnosis or indication of a high risk of a medical condition, for example, and communicate the warning message to the charging device, the monitoring and control device, and/or the mobile device.

**[0021]** The implantable device also or alternatively may be programmed to analyze the operational and/or physiological data including biomarker data. For example, the

implantable device may compare operational and/or physiological data to predetermined thresholds programmed into the implantable device. If the operational and/or physiological data exceeds or is otherwise inconsistent with the predetermined threshold, the implantable device may communicate a warning message to one or more of the other devices in the system.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0022] FIG. 1 illustrates an exemplary system of the present disclosure having an implantable device, a charging device, a monitoring and control device, a mobile device, a remote server, and data analyst devices.

[0023] FIG. 2 is a schematic view of the electronic components of an exemplary embodiment of the implantable device.

[0024] FIG. 3 is a schematic view of the electronic components of an exemplary embodiment of the charging device.

[0025] FIG. 4 is a schematic view of the electronic components of an exemplary embodiment of the monitoring and control device.

[0026] FIG. 5 is a schematic view of the electronic components of an exemplary embodiment of the mobile device.

[0027] FIG. 6 illustrates an exemplary embodiment of a mobile graphic user interface displayed on the mobile device.

[0028] FIG. 7 illustrates a flow chart outlining an exemplary process for generating and transmitting a warning of a physiological and/or operational anomaly.

[0029] FIG. 8 illustrates an exemplary embodiment of a warning graphic user interface displayed on the mobile device.

[0030] FIG. 9 illustrates an exemplary embodiment of the physician graphic user interface displayed on the monitoring and control device.

[0031] FIG. 10 illustrates an exemplary embodiment of a communication network established by a monitoring and control device, a remote server and a data analyst devices.

[0032] FIG. 11 illustrates an exemplary embodiment of an analyst graphic user interface displayed on the data analyst device.

#### DETAILED DESCRIPTION

[0033] The system of the present disclosure includes systems and methods for monitoring and analyzing physiological and/or operational data generated by an implantable medical device. In addition to an implantable device, an exemplary system constructed in accordance with the principles of the present invention may include a charging device, a patient's mobile communication device, a physician's monitoring and control device, and one or more remote servers. The one or more remote servers further may be in communication with one or more data analyst devices for accessing the operational and/or physiological data from the remote server and analyzing the operational and/or physiological data. The system may be configured to alert the physician and/or the patient of a medical condition or operational anomaly based on analysis of the physiological and/or operational data.

[0034] Data generated by implantable medical devices may be analyzed to achieve several different objectives, depending on the user group or business model. One goal

may be to improve outcomes for patients with chronic diseases by delivering actionable insights to patients thereby influencing their behavior. Another goal may be to reduce healthcare cost and improve quality of life by enabling home care through provision of safe technical solutions for self-administration and remote monitoring. Another objective may be to improve outcomes, and potentially life expectancy, by delivering actionable insights to physicians based on personalized trend recognition and prediction, enabling early interventions or preventive therapeutical measures. Data generated by implantable devices may also deliver actionable insights to pharmaceutical companies based on biomarkers.

[0035] Data generated by implantable medical devices further ensures authenticity as an implantable device with a unique identifier cannot easily be removed from a patient. The data can be trusted to originate from that specific patient unlike wearable sensors which can easily be swapped between patients. Authenticity may be an important factor for new business models evolving around medical data.

[0036] Referring to FIG. 1, an overview of system 10 of the present disclosure is provided. System 10 may include implantable device 15, external charging device 40, monitoring and control device 60, mobile device 80 and remote server 95 as well as data analyst device 100.

[0037] Implantable device 15 is implanted subcutaneously into the body of a patient and is configured to generate various physiological and/or operational data and communicate physiological and/or operational data to other devices within system 10. As shown in FIG. 1 and discussed in more detail below, implantable device 15 may have low volume sealed biocompatible housing 16 which may house a plurality of sensors for generating physiological and/or operational data and a transceiver for transmitting physiological and/or operational data between implantable device 15 and other devices within system 10.

[0038] Implantable device 15 further may include hardware for treating a medical condition subcutaneously such as a pump. Implantable device 15 may include inlet port 17 coupled to inlet catheter 18 and outlet port 19 coupled to outlet catheter 20. The pump may be an electromechanical pump designed to move fluid from one body cavity to another body cavity, e.g. a first body cavity to a second body cavity. For example, the electromechanical pump may be used for treating ascites by positioning inlet catheter 18 in a patient's peritoneal cavity and outlet catheter 20 through the wall of a patient's bladder. In this manner, the electromechanical pump may move fluid from the peritoneal cavity to the patient's bladder as disclosed in the Degen patent discussed above. It is understood that implantable device 15 alternatively or additionally may include other hardware within the biocompatible housing.

[0039] Referring now to FIG. 2, exemplary functional blocks of implantable device 15 are illustrated. In particular, implantable device 15 may include control circuitry, illustratively microprocessor 22 coupled to nonvolatile memory 23, such as flash memory or electrically erasable programmable read only memory, and volatile memory 24 via data buses.

[0040] Microprocessor 22 may include firmware having instructions stored on non-transitory computer readable medium configured to cause transmission of operational data and/or physiological data to any or all of charging device 40, monitoring and control device 60, mobile device 80 and/or

remote server **95**. Instructions also may cause implantable device **15** to receive operational instructions. Microprocessor **22** may be electrically coupled to battery **25**, inductive circuit **26**, radio transceiver **27**, electric motor **28**, infrared LED **38** and a plurality of sensors, including for example, one or more humidity sensors **29**, one or more temperature sensors **30**, one or more accelerometers **31**, one or more pressure sensors **32**, one or more respiratory rate sensors **33** and one or more heart rate sensors **34**. Other sensors additionally could be included in device **15**, such as flow rate sensors, ECG sensors, pH sensors, and capacity sensors for measuring the amount of a liquid in a given cavity.

**[0041]** Operational data is indicative of the operation of implantable device **15** and/or hardware incorporated into implantable device **15** and may be generated by sensors incorporated into implantable device **15**. Physiological data is indicative of the physiological state of the patient and also may be generated by sensors incorporated into system **10**. For example, one or more humidity sensors **29** may be used to measure the humidity within the implantable device housing; one or more temperature sensors **30** may be used for measuring the temperature in one or more body cavities (e.g., peritoneal cavity, pleural cavity, pericardial cavity, and/or bladder) or region of the body (e.g., abdomen) and/or for measuring the temperature within implantable device **15** housing and/or the temperature of an implantable device component such as battery **25**, one or more accelerometers **31** may be used for determining whether the patient is at rest and/or for sensing the position of a patient, e.g., vertical, horizontal; one or more pressure sensors **32** may be incorporated in implantable device **15** to measure blood pressure and/or the pressure within one or more body cavities (e.g., peritoneal cavity, pleural cavity, pericardial cavity, and/or bladder); one or more respiratory rate sensors **33** may be used to sense the number of breaths taken in a given period of time; and one or more heart rate sensors **34** may be used to sense the rate at which the heart is beating over a given period of time or the heart rate variation. Other sensors such as flow rate sensors, pH sensors and capacity sensors may be used for measuring the flow rate of the pump inlet and the pump outlet from which fluid viscosity may also be derived if the flow measurement is combined with pressure sensor measurements, the acidity of fluids within the body, and the degree to which a cavity is filled with fluid, respectively.

**[0042]** Examples of physiological data may include sensed data associated with the physiology of the patient such as temperature data associated with the one or more body cavities, accelerometer data associated with, for example, heart rate, respiratory rate and/or, pressure data associated with blood pressure and/or the one or more body cavities, respiratory rate data, and heart rate data, flow rate data associated with the one or more body cavities, pH data associated with bodily fluid pumped by the implantable device, and capacity data associated with the one or more body cavities. Physiological data may include biomarker data—measurable data indicative of a biological state or condition. For example, the viscosity of ascites in patients with liver disease may act as a biomarker indicative of an infection. Data gathered from multiple sensors within the patient may be combined to result in an effective biomarker. For example, temperature data in combination with ascites viscosity data may be combined to result an even more reliable indicator of an existing or developing infection. Examples of operational data may include data associated

with the implantable device such as humidity data associated with the implantable device, temperature data associated with the implantable device, pressure data associated with the implantable device, flow rate data associated with the implantable device and may also include data related to the pump such as RPM data, efficiency data, run-time data, etc. In some cases, operational parameters may even serve as an indirect measurement of physiological parameters. For example, measurement of the motor torque of a pump can be used, in combination with other measured parameters, to determine fluid viscosity based on flow resistance.

**[0043]** Inductive circuit **26** may be electrically coupled to coil **35** to receive energy transmitted from charging device **40**. Transceiver **27** may incorporate wireless communication unit **37** and may be coupled to antenna **36**. Wireless communication unit **37** may be communication circuitry, such as a chipset, conforming to one or more wireless telephony/cellular standards such as GSM, LTE, CDMA, and/or other communication standards such as BLUETOOTH™, Bluetooth low energy, ZigBee, IEEE802.15, NFC, any IEEE 802.11 wireless standard such as Wi-Fi or Wi-Fi Direct or any other wireless standard comprising optical, acoustical or conductive intracorporal principles. All of the components depicted in FIG. 2 may be contained within housing **21**, as shown in FIG. 1.

**[0044]** As shown in FIG. 1, charging device **40** may be a hand held device and having an ergonomic housing suitable for being held. As discussed in more detail, charging device **40** may transcutaneously transfer energy using inductive coils in the respective devices to charge battery **25** in implantable device **15**. Charging device **40** also may be in direct communication with implantable device **15** using transceivers and communication units in each device. Charging device **40** may include non-transitory computer readable medium and instructions run on the non-transitory computer readable medium that permits communication with implantable device **15** including transmission of data to implantable device **15**. The instructions also may permit charging device **40** to receive data from implantable device, monitoring and control device **60**, mobile device **80** and data analyst device **100**. Charging device **40** may communicate to implantable device **15** operational instructions, including at least operational parameters, and may receive from implantable device **15** physiological and/or operational data. Operational instructions may control the operation of implantable device **15** and hardware incorporated into implantable device **15**. For example, operational instructions may instruct hardware incorporated into implantable device **15** to operate at specified operational parameters or settings. Operational parameters or settings may include pump displacement settings, pump voltage or current settings, pump flow rate settings, pump RPMs, or any other settings at which hardware incorporated into pump may be set to operate at. Charging device **40** may receive and store the physiological and/or operational data received from implantable device **15**. Charging device **40** may further be in communication with other devices in system **10** such as monitoring and control device **60**, mobile device **80** and remote server **95**.

**[0045]** Referring now to FIG. 3, a schematic diagram of exemplary functional blocks of charging device **40** is described. Charging device **40** may include microprocessor **41** coupled to nonvolatile memory **42** (e.g., either EEPROM or flash memory), volatile memory **43**, radio transceiver **44**,

inductive circuit 45, battery 46, indicator 47 and display 48. Microprocessor 41, non-volatile memory 42 and volatile memory 43, and radio transceiver 44 may be incorporated into a single unit, such as the MPS430 family of microprocessors, available from Texas Instruments Incorporated, Dallas, Tex. Transceiver 44 may be coupled to antenna 49 for sending and receiving information to and from implantable device 15. Transceiver 44 of charging device 40 may include wireless communication unit 50, that may be communication circuitry, such as a chipset, that conforms to one or more wireless telephony/cellular, BLUETOOTH™, Bluetooth low energy, ZigBee, IEEE 802.15, NFC, IEEE 802.11 wireless standards or any other wireless standard comprising optical, acoustical or conductive intracorporal principles, thereby enabling charging device 40 to communicate wirelessly with one or more of implantable device 15, monitoring and control system 60, mobile device 80 and remote server 95. It is further understood that wireless communication unit 50 may be compatible with more than one type of communication standard. Battery 46 may be coupled to connector 51 to charge battery 46 using an external power source. Input device 52, preferably a multi-function button, also may be coupled to microprocessor 41 to enable a patient to input a number of commands into charging device 40. Indicator 47 may comprise a plurality of LEDs that illuminate to indicate the quality of charge achieved between charging device 40 and implantable device 15, and therefore assist in optimizing the positioning of charging device 40 relative to implantable device 15 during recharging.

[0046] Microprocessor 41 also may execute firmware stored in nonvolatile memory 42 that controls communications and/or charging of the implantable device. Microprocessor 41 is configured to transfer and store data, such as physiological data, operational data, and/or event logs, uploaded to charging device 40 from implantable device 15. Microprocessor 41 may include firmware having instructions stored on non-transitory computer readable medium configured for receiving command inputs from monitoring control device 60 and/or mobile device 80 and for transmitting those command inputs to implantable device 15. Microprocessor 41 also may include firmware having instructions stored on non-transitory computer readable medium configured for transmitting command inputs to implantable device 15 using input device 52 incorporated into charging device 40. Microprocessor 41 also may include firmware having instructions stored on non-transitory computer readable medium configured to cause transmission of operational data and/or physiological data to remote server 95. The instructions also may cause communication unit 50 of charging device 40 to communicate with remote server 95 over the internet and/or over via a wireless telephony regime. Furthermore, the instructions may cause the communications between remote server 95 and charging device 40 to be encrypted. Microprocessor 41 may also control and monitor various power operations of charging device 40, including operation of inductive circuit 45 during recharging of the implantable device and displaying the state of the charge, e.g. the charge rate or percentage charged.

[0047] Inductive circuit 45 is coupled to coil 53, and is configured to inductively couple with coil 35 of implantable device 15 to recharge battery 25 of implantable device 15. Energy transfer is accomplished via electromagnetic coupling of coil 53 with coil 35 in the implantable device. As will be appreciated by one of ordinary skill, an alternating

current may be delivered through coil 53, which causes an electromagnetic field to be established around coil 53, which induces an alternating current in coil 35 when coil 53 and 35 are held in close proximity.

[0048] Monitoring and control device 60, shown in FIG. 1, may be a clinician or physician computer used by the clinician or physician to, among other things, set and adjust operational parameters and download event logs as well as retrieve and display physiological and/or operational data generated by implantable device 15 as well analyst data generated by analyst device 65. Monitoring and control device 60 may be any computing device (e.g., personal computer, laptop, tablet, smartphone, etc.) of the clinician and is illustratively a laptop computer. Using monitoring and control device 60, a clinician may review data generated by implantable device 15 and track a patient's health in addition to the performance of hardware incorporated into implantable device 15. A clinician or physician using monitoring and control device 60 may also receive actionable insight and administer treatment or otherwise effectuate changes to improve the patient's condition or wellbeing.

[0049] Referring now to FIG. 4, a schematic diagram of exemplary functional blocks of monitoring and control device 60 is described. Monitoring and control device 60 preferably includes components generally found on a conventional personal computing device, such as processor 61, volatile and/or non-volatile memory 62, user interface 63 such as digital display, input and output components 64 including, for example, a keyboard, a mouse and a USB port, transceiver 65, a power supply port 66, and a battery 67. Transceiver 65 may include wireless communication circuitry conforming to one or more of cellular, BLUETOOTH™, Bluetooth low energy and ZigBee standards, IEEE 802.15, NFC or any IEEE 802.11 wireless standard such as Wi-Fi or Wi-Fi Direct. Furthermore, monitoring and control device 60 may include software 68 that, when run on processor 61, retrieves and displays physiological and/or operational data and, when run on monitoring and control device 60, causes monitoring and control device 60 to communicate operational instructions, including operational parameters, to implantable device 15 and/or charging device 40. The physiological and/or operational data may be transmitted to monitoring and control device 60 from implantable device 15, charging device 40, remote server 95, and/or data analyst device 100.

[0050] As shown in FIG. 1, optional mobile device 80 also may be incorporated in system 10. Mobile device 80 may be a patient mobile communication device and may be used by the patient or a person assisting the patient to, among other things, view physiological and/or operational data. Mobile device 80 may be any mobile communication device (e.g., smartphone, tablet, smartwatch, laptop, etc.) of the user/patient/caregiver and is illustratively a smartphone having a large display. As discussed in more detail below, using mobile device 80, the patient may communicate with implantable device 15, charging device 40, and/or monitoring and control device 60.

[0051] Referring now to FIG. 5, a schematic diagram of exemplary functional blocks of mobile device 80 is described. Mobile device 80 may include components generally found on any modern mobile device such as processor 81, volatile and/or non-volatile memory 82, user interface 83 such as digital display, input and output mechanisms 84 including, for example, a keyboard, touchscreen or a USB

port, transceiver **85**, power supply port **86**, and battery **87**. Transceiver **85** may include a wireless communication circuitry conforming to one or more of cellular standards such as GSM, LTE, CDMA or other communication standards such as BLUETOOTH™, Bluetooth low energy, ZigBee, NFC, any IEEE 802.11 wireless standard such as Wi-Fi or Wi-Fi Direct. For example, transceiver **85** may conform to a cellular standard having SMS text and voice message capability. Furthermore, mobile device **80** may include software **88** having instructions stored on non-transitory computer readable medium that, when run on processor **81**, causes mobile device **80** to communicate with implantable device **15** and/or remote server **95** to retrieve and display physiological data, operational data, and/or analyst data. Software **88** may further be configured to generate instructions that, when run by processor **81**, cause mobile device **80** to communicate operational instructions to implantable device **15** and charging device **40**.

**[0052]** Remote server **95**, as shown in FIG. 1, may receive physiological and/or operational data generated by implantable device **15** and may store the physiological and/or operational data. Remote server **95** may be accessed for retrieval of the physiological and/or operational data as well as any other data generated by implantable device **15** or by other devices such as mobile device **80**, monitoring and control device **60**, and/or data analyst device **100**. Remote server **95** may communicate with other devices in system **10** using any of the known methods of communication discussed above. For example, remote server **95** preferably is connected to the Internet to communicate with any or all of charging device **40**, monitoring and control device **60**, mobile device **80**, and/or data analyst device **100**.

**[0053]** Data analyst device **100**, also shown in FIG. 1, may be used by a data analyst to compile, review and analyze the data generated by implantable device **15** and generate data analysis based on the data generated by implantable device **15**. Data analyst device **100** may include a computer readable medium and instructions stored on the computer readable medium and run on data analyst device that cause the data analyst device to communicate with remote server **95** to receive from remote server **95** operational data and/or physiological data. Additionally, the instructions may cause data analyst device **100** to compile the operational and/or physiological data and generate analyst data. The instructions may also cause data analyst device **100** to communicate with remote server **95** to transmit analyst data to remote server **95**. Data analyst device **100** may make a wired connection with remote server **95** via any suitable LAN or WAN or may communicate wirelessly with remote server **95**. Using data analyst device **100**, the data analysis generated by data analyst device **100** may be transmitted to the remote server **95** and stored on remote server **95** for retrieval by monitoring and control device **60** and/or mobile device **80**.

**[0054]** Data analyst device **100** may be any computing device (e.g., personal computer, laptop, tablet, smartphones, etc.) of the data analyst configured to retrieve physiological and/or operational data and analyze the data for trends and anomalies. The instructions also may cause data analyst device to generate analyst data or aid the data analyst in the generation of analyst data which may include a diagnosis a medical condition and/or an indication a heightened risk of a medical condition. The instructions run on the non-transitory computer readable medium may cause data analyst device **100** to generate a warning message when the

operational data and/or physiological data exceeds preprogrammed thresholds and also may cause data analyst device **100** to communicate the warning message to the patient mobile communication device **80** and/or monitoring and control device **60**. Data analyst device **100** may include components generally found on a conventional personal computing device, such as a processor, volatile and/or non-volatile memory, a user interface such as digital display, a transceiver, a battery and input and output components such as a keyboard, a mouse and a USB port.

**[0055]** There are at least two ways in which implantable device **15** may communicate with system **10**. First, implantable device **15** may be in direct wireless communication with charging device **40** using one or more of any well-known wireless standards such as GSM, LTE, CDMA, BLUETOOTH™, Bluetooth low energy, ZigBee, NFC, or any IEEE 802.11 wireless standard such as Wi-Fi or Wi-Fi Direct or any other wireless standard comprising optical, acoustical or conductive intracorporal principles. In this first configuration, implantable device **15** may communicate with other devices in system **10** by relaying communication through charging device **40**. Charging device **40** may be in either wired or wireless communication with one or more of the devices in system **10** using one or more well-known communication standards including but not limited to GSM, LTE, CDMA, BLUETOOTH™, Bluetooth low energy, ZigBee and any IEEE 802.11 wireless standard such as Wi-Fi or Wi-Fi Direct. For example, charging device **40** may connect with implantable device **15** using Wi-Fi Direct and also may make a connection with a local Wi-Fi router and connect to the internet. Through the Internet, charging device **40** may be in communication with monitoring and control device **60**, mobile device **80**, and/or remote server **95**.

**[0056]** Charging device **40**, monitoring and control device **60** and mobile device **80** may each be configured to run instructions stored on a non-transitory computer readable medium programmed with messaging protocols that allows each device to communicate to one another over the internet. Commands may be communicated to microprocessor **41** of charging device **40** from monitoring and control device **60** and/or mobile device **80** which may subsequently be relayed from charging device **40** to implantable device **15**. In this manner, communicating with charging device **40** through the monitoring and control device **60**, a clinician may communicate with implantable device **15** to set or adjust the operational parameters of implantable device **15**. Upon receiving the command to set or adjust the operational parameters, implantable device **15** will set or adjust the operational parameters according to the instructions from charging device **40**. Alternatively, charging device **40** may communicate with other devices within system **10** using different communication standards discussed above.

**[0057]** Where charging device **40** is used as a relay point between implantable device **15** and other devices of system **10**, information such as physiological and/or operational data may be communicated from implantable device **15** to charging device **40** and then from charging device **40** to remote server **95** for storage on remote server **95**. For example, implantable device **15** may transmit physiological and/or operational data to charging device **40**. Charging device **40** may store the physiological and/or operational data and may run a programmed routine configured to transmit the stored physiological and/or operational data to remote server **95** for remote storage. The programmed



routine may include instructions that permit the charging device to communicate with remote server over the internet or via a wireless telephony regime. The instructions also may cause communications from charging device 40 to be encrypted such that transmission of physiological and/or operational data is encrypted. Alternatively, charging device 40 may transmit the physiological and/or operational data to monitoring and control device 60 and/or mobile device 80 to be stored on the respective devices. In this configuration, monitoring and control device 60 and/or mobile device 80 may run a programmed routine configured to transmit the stored physiological and/or operational data to remote server 95 for remote storage. The programmed routine further may cause monitoring and control device 60 and mobile device 80 to transmit operational parameters and instructions or commands to charging device 40 to be relayed to implantable device 15.

[0058] The second way in which implantable device 15 may communicate with system 10, is by directly communicating with one or more devices in system 10 without the use of a relay device. In this configuration, communication with other devices within system 10 may be established using any of the communication standards discussed above including close range standards, such as BLUETOOTH™, Bluetooth low energy, ZigBee and Wi-Fi, and long range standards such as GSM, LTE, CDMA. It is further understood that implantable device 15 may communicate with different devices within system 10 using different communication standards as implantable device 15 may be configured to communicate using more than one communication standard. Like in the first arrangement, where charging device 40 was used as a relay, clinician may communicate with implantable device 15 to set or adjust the operational parameters of implantable device 15. Upon receiving the command to set or adjust the operational parameters, implantable device 15 will set or adjust the operational parameters according to the instructions from charging device 40.

[0059] For example, implantable device 15 may be in direct wireless communication with monitoring and control device 60 using BLUETOOTH™ or Bluetooth low energy connectivity. Monitoring and control device 60 may include non-transitory computer readable medium programmed with instructions that, when run on monitoring and control device 60 allows monitoring and control device 60 to directly communicate with implantable device 15. In this example, during patient visits, a clinician using monitoring and control device 60 may wirelessly connect to implantable device 15 to download for review, data generated by and stored on implantable device 15. Further, monitoring and control device 60 may transmit operational parameters to implantable device 15 to adjust or set operational parameters of implantable device 15 without using charging device 40 as a relay point. Where implantable device 15 includes a pump, a clinician may adjust operational parameters in the pump such as timing intervals for running the pump. Upon receiving the operational parameters, implantable device 15, e.g. the one or more processors, may adjust operation according to the received operational parameters. While in communication with implantable device 15, the clinician using monitoring and control device 60 also may download operational and/or physiological data stored on implantable device 15. In yet another example, implantable device 15 may support Wi-Fi connectivity and the clinician using monitoring and

control device 60 may directly connect to implantable device 15 even when the clinician and patient are not in the same location.

[0060] Implantable device 15 also may be configured to communicate directly with mobile device 80 and/or remote server 95. Mobile device 80 and remote server 95 may each similarly include a non-transitory computer readable medium programmed with instructions that, when run on mobile device 80 and/or remote server 95 allow mobile device 80 and/or remote server 95, respectively, to directly communicate with implantable device 15. In this configuration, implantable device 15 may transmit data generated from the sensors incorporated in implantable device 15 to remote server 95 so that the sensor data is accessible for review by the data analyst device 100. Mobile device 80 and/or remote server 95 may communicate with implantable device 15 using any of the well-known methods discussed above. For example mobile device 80 and remote server 95 may have Wi-Fi compatibility and communicate with implantable device 20 via the internet. Alternatively, or in addition to, implantable device 20 may be configured to have wireless telephony capabilities and establish a connection to mobile device 80, for example, using LTE.

[0061] Whether implantable device 15 uses charging device 40 to communicate with system 10 or is in direct communication with other devices within system 10, monitoring and control device 60 and/or mobile device 80 may each have non-transitory computer readable medium and may each run instructions on the non-transitory computer readable medium to cause the monitoring and control device 60 and/or mobile device 80 to communicate with the remote server and receive from the remote server operational and/or physiological data. Specifically, monitoring and control device 60 and/or mobile device 80 may interrogate remote server 95 for new data uploaded onto remote server 95, including data generated by implantable device 15 and data generated by data analyst device 100, discussed in more detail below. For example, monitoring and control device 60 and/or mobile device 80 may be configured to manually interrogate remote server 95 to determine if analyst data has been uploaded to remote server 95.

[0062] Alternatively, monitoring and control device 60 and/or mobile device 80 may each include a non-transitory computer readable medium programmed with instructions that, when run on monitoring and control device 60 and/or mobile device 80, cause monitoring and control device 60 or mobile device 80, respectively, to automatically periodically interrogate remote server 95 for new analyst data uploaded to remote server 95 to determine, for example, whether uploaded analyst data includes a diagnosis of a medical condition and/or an indication of a high risk of a medical condition. Monitoring and control device 60 may be configured to transmit an alert to mobile device 80 upon confirmation that the analyst data includes a diagnosis of a medical condition and/or an indication of high risk of a medical condition. Data analyst device 100 and implantable device 15 also may be configured to automatically generate and transmit an alert to monitoring and control device 60 and/or mobile device 80 indicating that data has been transmitted to the server. Preferably communication between implantable device 15, charging device 40, monitoring and control device 60, mobile device 80, remote server 95 and/or data analyst device 100 is encrypted.

[0063] Referring now to FIG. 6, mobile device 80 may include a non-transitory computer readable medium programmed with instructions that, when run, permit mobile device 80 to view data generated by implantable device 15. As shown in FIG. 6, mobile device 80 may be configured to run mobile graphic user interface 85 for displaying patient identifying information 81 and patient data 82 such as physiological and/or operational data. In this manner, the patient using the patient mobile device 80 may view instantaneous or archived data generated by implantable device 15, allowing the patient to monitor his or her physiological wellbeing at all times. Specifically, mobile graphic user interface 85 may display data 83 generated by one or more sensors integrated into implantable device 15. For example, mobile graphic user interface 85 may display temperature data as well as heart rate, heart rate variation, physical activity, respiratory and pressure data generated by the plurality of sensors.

[0064] Mobile graphic user interface 85 also may output parameter status 84. Parameter status 84 may indicate the status of the measured parameter, e.g., whether the measured parameter is LOW, HIGH or OK (normal) for a given patient. For example, parameter status 84 may indicate to the patient how the measured parameter compares to pre-programmed thresholds. If the pressure reading exceeds a pre-programmed threshold, the parameter status will read "HIGH". Similarly, if the pressure reading is below a pre-programmed threshold, the parameter status will read "LOW". The other parameter statuses in FIG. 6 read "OK" indicating that those measurements fall within a normal range between thresholds.

[0065] The data displayed on mobile graphic user interface 85 may be received from remote server 95 when mobile device 80 has established a connection with remote server 95. Alternatively, when mobile device 80 has established a direct connection with implantable device 15, the data displayed on graphic user interface 85 may be transmitted directly from implantable device 15. In yet another example, the data displayed on graphic user interface 85 may be transmitted from charging device 60. The status parameters illustrated in FIG. 6 may be determined by software run on mobile device 80 or may be included in the data received by mobile device 80.

[0066] Referring now to FIG. 7, an exemplary test protocol is illustrated, which is run by implantable device 15 to compare measured data to preprogrammed thresholds to determine if a warning should be generated. Test protocol 150 begins with measuring step 151 where the processor of implantable device 15 directs at least one of the sensors in implantable device 20 to measure physiological and/or operational data. Subsequently, in comparison step 152, the processor executes instructions to compare the measured data to preprogrammed thresholds. The preprogrammed thresholds may be set or updated from operational instructions transmitted to implantable device 15 from other devices within system 10. At decision 153, if the measured physiological and/or operational data is consistent with the preprogrammed threshold range, the implantable device is instructed to once again measure physiological or operational data after waiting a predetermined period of time. If, however, the measured data is outside the preprogrammed threshold range, at warning step 154, the processor executes instructions directing implantable device 15 to generate a warning message. Upon generation of a warning message,

transmission step 155 executes instructions directing implantable device 15 to transmit the warning to at least one or more of mobile device 80, monitoring and control device 60, charging device 40 and remote server 95.

[0067] Referring now to FIG. 8, mobile device 80 is shown running instructions stored on a non-transitory computer readable medium that, when run on mobile device 80, causes the mobile device to communicate a warning message to the patient/caregiver. As explained above and shown in FIG. 7, the warning message may be generated by implantable device 15 and transmitted either directly from implantable device 15 or relayed through charging device 40. Alternatively, the warning may be generated by the data analyst using data analyst device 100 or monitoring and control device 60 where analysis of the data by the data analyst or clinician revealed a problem or otherwise raised concern. Alternatively, mobile device 80 may analyze physiological and/or operational data by comparing the physiological and/or operational data to preprogrammed thresholds and/or input physiological and/or operational data into preprogrammed algorithms and may generate a warning message if necessary, e.g., above or below programmed thresholds and/or outside a programmed threshold range.

[0068] Warning graphic user interface 86 may show actionable insight related to the measured physiological and/or operational data and may show a warning message related to the physiological and/or operational data. Warning graphic user interface 86 may indicate that an anomaly has been detected or may even display the measured parameter compared to the predetermined threshold. For example, analysis from implantable device 15 may detect an irregular heartbeat and upon detection, warning graphic user interface 86 may alert the patient to this anomaly. Warning graphic user interface 86 may further include a direct link to the patient's physician, either by text, email or phone. If it is possible to alleviate the condition by adjusting operational parameters, warning graphic user interface 86 may seek permission from the patient to adjust the operational parameters. Where the warning is issued by data analyst device 100 the warning message also may indicate the type of medical condition that has been detected and/or other actionable insight generated. Warning graphic user interface 86 may further include a link to the data related to the warning and/or analysis of the data. Emergency responders may simultaneously be contacted and informed of the patient's location and condition upon generation of the warning message.

[0069] Where the warning is generated by implantable device 15, mobile device 80 and/or data analyst device 100, a physician or clinician using monitoring and control device 60 may also receive an alert on monitoring and control device 60 regarding the same information displayed on warning graphic user interface 86. The alert may further include data related to the warning, actionable insight and/or a link to access the data, similar to the warning shown in FIG. 9. Where the warning was generated by implantable device 15 or data analyst device 100, the physician may then review the parameters in question and if appropriate send the warning to mobile device 80.

[0070] If it is possible to alleviate the condition by adjusting operational parameters, a request may be sent to the physician or clinician to adjust operational parameters of implantable device 15, and upon receiving permission, command implantable device 15 to adjust operation, either by

communicating the command directly from monitoring and control device 60 to the implantable device or relaying the command through the charging device. Upon receiving the command, implantable device 15 may adjust the operational parameter or parameters. For example, the command may direct the processor of implantable device 15 to pump more or less fluid from one body cavity, e.g., peritoneal, pleural, pericardial, to another body cavity, e.g., bladder, peritoneal cavity, and/or to adjust time intervals between pumping sessions. Implantable device 15 may send a similar alert to any number of devices within the system including data analyst device 100. An alert sent to data analyst device 100 from implantable device 15 may further include the most recent data measured by the implantable device relating to the warning being transmitted, allowing the remote analyst to immediately access and analyze the relevant data.

[0071] Referring now to FIG. 9, monitoring and control device 60 may run instructions stored on a non-transitory computer readable medium programmed to permit monitoring and control device 60 to retrieve and view data generated by implantable device 15 and/or data analyst device 100. The data received by monitoring and control device 60 on data analyst device 100 may provide a clinician or physician actionable insight, i.e. may provide the physician enough information to determine how to act or what measures to take to address a problem or concern. As shown in FIG. 9, graphic user interface 61 provides a user friendly view of the data and permits a clinician to receive relevant information in a short period of time. As explained above, monitoring and control device 60 may receive this data from implantable device 15, charging device 40, mobile device 80, remote server 95 and/or data analyst device 100.

[0072] Clinician graphic user interface 71 shown in FIG. 9 is illustrative of an exemplary clinician graphic user interface. As shown in FIG. 9, clinician graphic user interface 61 may include patient identifier 72 which may include a record locator such as a patient number and/or the patient's name. Clinician graphic user interface 60 may, for example, display data arranged into physiological data box 73 and operational data box 74. Physiological data box 63 may include current physiological measurements 75 generated by implantable device 15 as well as average and/or prior measurements 76 archived by implantable device 15, remote server 95, charging device 40 and/or monitoring and control device 60. For example, physiological data box 73 may display physiological parameters such as the current respiratory rate, current pressure of a body cavity, current temperature of a body cavity or targeted region of a body, current heart rate, or any other current measurement sensed by implantable device 15 indicating the physiological state of the body. Physiological box 73 may also display the physiological parameters such as average respiratory rate, the average pressure of a body cavity, the average temperature of a body cavity or targeted region of a body, the average heart rate, heart rate variability over a period of time or any other average measurement sensed by implantable device 15 indicating the physiological state of the body, as well as one or more previously measured respiratory rates, previously measured pressures of a body cavity, previously measured temperatures of a body cavity or targeted region of a body, previously measured heart rate or any other previously measured parameter sensed by implantable device 15. Illustratively, the current pressure may be 0.55 mmHg while the average pressure may be 0.51 mmHg, the current respi-

ratory rate may be 15 breathes per minute while the average is 12.5, the current temperature may be 98.8 while the average temperature may be 98.7 and the current heart rate may be 68 beats per minute while the average heart rate may be 82 beats per minute.

[0073] Similarly, operational data box 74 may display operational data such as operational measurements 77 which may include displacement, temperature, duration and voltage measurements or any other measurements related to performance of the implantable pump 15 or performance of hardware incorporated into the implantable pump. Operational data box 74, like physiological data box 73, may show current operational measurements of implantable device 15 or measurements archived by implantable device 15, remote server 95, charging device 40 and/or monitoring and control device 60. For example, operational data box 74 may show operational parameters such as the current measurements for the hardware in implantable device 15, e.g., current displacement of an incorporated pump, current temperature of a battery, current flow speed, current voltage measurements, or any other current measurement sensed by implantable device 15 indicative of the operation of implantable device 15 or hardware incorporated in implantable device 15.

[0074] Operational box 74 also or alternatively may show operational parameters such as average displacement or a previously recorded displacement measurements, average temperature or a previously recorded temperature measurements, average flow speed or a previously recorded flow speed measurements, average voltage or a previously recorded voltage measurements or any other average or previously recorded measurement sensed by implantable device 15 indicative of the operation of implantable device 15 or hardware incorporated in implantable device 15. Operational data box 74 may further include operational data measurements such as battery and/or pump temperature, pump RPMs, humidity within the housing of implantable device 15, or any other measurements related to the performance or operation of implantable device 15 or hardware incorporated into implantable device 15.

[0075] Clinician graphic user interface 71 may also show other parameters and data amounting to actionable insight. For example, clinician graphic user interface 71 may include parameters calculated from measured physiological and/or operational parameters such as viscosity of a fluid within a body cavity or burn rate of calories. Actionable insight garnered from measured physiological and/or operational parameters may be generated using algorithms programmed into implantable device 15, monitoring and control device 60, mobile device 80, or data analyst device 100. Alternatively, or in addition to, a data analyst may analyze measured physiological and/or operational parameters on data analyst device 100 and generate actionable insight by comparing data to known trends or correlations.

[0076] Using clinician graphic user interface 71, a clinician or physician may adjust the performance of implantable device 15 by altering operational settings which may also appear in operational data box 74. For example, a clinician may change the desired displacement of the pump to 0.05. This change may be immediately communicated to implantable device 15 either through direct communication between implantable device 15 and monitoring and control device 60 or by using charging device 40 as a relay. Other examples of settings that a clinician or physician may adjust include the timing of pump activation, duration of pumping, or any

other setting that may control the operation of implantable device **15** or hardware incorporated into implantable device **15**.

[0077] Physician graphic user interface **71** may be customizable such that the physician may decide which data to display. The physician may choose to display any combination of archived data and current data. For example, the physician may customize the graphic user interface to display pressure averages over a period of time, e.g., the last six months, or may choose to display pressure highs and lows instead. Alternatively, a physician may customize the graphic user interface to only show select physiological and/or operational data but not others, e.g., the pressure, temperature and heart rate, but not the respiratory rate.

[0078] Clinician graphic user interface **71** also may generate one or more graphic representations of the data generated by implantable device **15**. Graphic representation **78** may be generated by the physician to analyze a given parameter over a certain period of time. Graphic presentation **78** may include a flow chart(s), a pie chart(s), a bar graph(s), etc., representing measured physiological and/or operational data. The physician may choose to compare the patient's respiratory rate against the patient's heart rate for a given period of time to better understand the patient's oxygen saturation levels. As is discussed in more detail below, graphical analysis also may be generated by a dedicated analyst remotely and may be viewed by the clinician on graphic user interface **71**. Similarly, tables and various other well-known data comparison methods may be generated remotely by dedicated analysts at data analyst devices and accessed by the clinician using graphic user interface **71**. Clinician graphic user interface **71** may display additional information such as that shown in U.S. Pat. No. 9,039,652 to Degen, the entire contents of which are incorporated herein by reference.

[0079] Clinician graphic user interface **71** also may communicate various messages such as warnings **79** to the physician. Warnings or alerts may be generated by implantable device **15**, mobile device **80** and/or data analyst device **100**. For example, where implantable device **15** has a pump, clinician graphic user interface **71** may display a warning that the pump experienced a malfunction such as a clog and may even suggest methods for fixing the problem such as reversing flow direction. In another example, monitoring and control device **60** may run instructions stored on a non-transitory computer readable medium programmed to automatically compare physiological parameters and/or operational parameters against predetermined thresholds and to automatically generate a warning when an anomaly is discovered, e.g. when the measured parameters are above or below predetermined thresholds and/or are outside of a predetermined threshold range(s), much like the process shown in steps **152** to **155** in FIG. **7**.

[0080] Clinician graphic user interface **71** may support a messaging protocol established on monitoring and control device **60** and/or mobile device **80**. The messaging protocol may permit a physician or clinician to communicate a message and/or a warning to the patient by transmitting the message and/or warning to mobile device **80**. For example, a physician may notice an unusual physiological and/or operational parameter or trend and may send a message to mobile device **80** to, for example, ask the patient how he or she feels or if he or she is experiencing certain symptoms or discomfort. Using the messaging protocol, the patient may

inform the physician of his current condition using mobile device **80**. If the physician instead notices from the physiological data that the patient is currently experiencing a medical event or is about to experience a medical event, the physician may immediately message the patient with instructions on what to do next. For example, the message may direct the patient to immediately cease all physical activity. Alternatively or additionally, the physician may message emergency services using clinician graphic user interface **71** and inform emergency services of the patient's location and condition.

[0081] Referring now to FIG. **10**, implantable device **15** optionally may be in direct wireless communication with remote server **95** via a LAN or WAN or communicate with remote server **95** additionally via charging device **40**. Remote server **95** is also in communication with one or more data analyst devices **100** via a hard connection or wireless connection. One or more data analyst devices **100** also may be in communication with one another either wirelessly or by wired connection. An analyst using data analyst device **100** may periodically access, download and review on data analyst device **100**, operational and/or physiological data received by remote server **95**. Though data analyst device **100** may be in a different city or even a different country than implantable device **15**, the analyst may access recently generated data from implantable device **15** via the remote server. In addition to receiving and accessing data from remote server **95**, data analyst device **100** may transmit analyst data to remote server **95**. Remote server **95** may store the data transmitted from data analyst devices **100** for retrieval by other devices such as mobile device **80** and/or monitoring and control device **60**.

[0082] Data analyst device **100** also may establish a connection with other devices within the system and retrieve physiological and/or operational data for the other devices. For example, a remote analyst using data analyst device **100** may retrieve physiological data from implantable device **15**, analyze the received physiological data, and transmit data analysis to a remote server **95** for download by other devices in the system. As another example, a remote analyst using data analyst device **100** may retrieve operational data from implantable device **15**, analyze the received operational data, and transmit data analysis to a remote server **95** for download by other devices in the system. As explained above, the data analysis may include actionable insight that may provide a patient, caretaker, physician or clinician enough information to determine how to act or what measures to take to address a problem or concern.

[0083] Referring now to FIG. **11**, analyst graphic user interface **101** is shown displayed on data analyst device **95**. Analyst graphic user interface **101** may include patient identifier **102** which may include a record locator such as a patient identification number and/or the patient's name. Analyst graphic user interface **101** also may include data analyst identifier **103** that indicates the data analyst that generated the analysis. Analyst graphic user interface **101** is used to present the data analyst with an easy to understand representation of select data generated by implantable device **15** such as operational and/or physiological data. Analyst graphic user interface **101** may be completely customizable by the analyst to meet the analyst's needs and analytical approach. For example, analyst graphic user inter-

face **101** may display data in a table format and/or a graphical format or in any other well-known format known for data analysis.

[0084] Using analyst graphic user interface **101**, data analyst may review and analyze data, e.g., operational and/or physiological data generated by implantable device **15**. Analyst also may use both current data and archived data to observe trends, predict trends, identify a medical condition and/or risk of a medical condition and produce actionable insight. Data from multiple patients may be anonymously or non-anonymously compared against each other. For example, data generated from a son's implantable device may be compared to data generated by a father's implantable device to better understand the effects of a hereditary condition where both patients have the same diagnosis. Alternatively, data from multiple patients known to have developed the same condition may be collectively analyzed to search for a trend among the data. Such a trend may help prevent or diagnose the medical condition in others who share the same trend.

[0085] In an exemplary embodiment, a data analyst may detect early warning signs of a heart attack by analyzing data generated by respiratory rate sensors, heart rate sensors, ECG sensors, blood pressure sensors, and/or temperature sensors. The data generated from these sensors may be compared to trends of individuals who have had heart attacks to determine whether a heart attack is imminent or likely. Similarly, using sensors including respiratory rate sensors, heart rate sensors, blood pressure sensors and/or temperature sensors, a data analyst may detect early signs of heart failure.

[0086] Specifically, from the respiratory rate sensor, shortness of breath may be detected in addition to chronic coughing or wheezing; from the blood pressure sensor, high blood pressure may be detected; from the temperature sensor, abnormalities in the patient's temperature may be detected; and from the heart rate sensor, an increased heart rate may be detected. Additionally, a third heart sound known as ventricular gallop or a protodiastolic gallop may also be detected which is an additional indicator of heart failure. Data analyst device **100** may run instructions stored on a non-transitory computer readable medium programmed to automatically compare data generated by implantable device **15** to various trends to determine the risk of a given condition or medical event. If a risk of a medical condition or event is determined to be high, the instructions may also generate a warning of the risk and automatically store the warning on remote server **95** for retrieval by mobile device **80** and/or monitoring and control device **60** and/or may automatically transmit the warning to mobile device **80** and/or monitoring and control device **60**.

[0087] Analyst graphic user interface **101** shown in FIG. 11 is a snapshot illustrating an exemplary embodiment of an analyst's graphic user interface. As shown, analyst graphic user interface **101** may simultaneously display multiple graphical representations of data for comparison. For example, analyst graphic user interface **101** may display graphical representations of a measured pressure **104**, over a period of time. Similarly, graphic user interface **101** also may display a graphical representation of the measured heart rate **105** over the same period of time. By comparing the measured pressure and the measured heart rate on overlaid graphical representation **106**, an analyst may make immediate inferences and conclusions about the relationship

between the two parameters. In this example, it is clear from the overlaid graphical representation that the measured pressure and measured heart rate spiked on the same day, April 16<sup>th</sup>.

[0088] Analyst also may wish to compare certain data to archived data by generating a table. One or more tables may display one or more measured parameters from implantable device **15** over time including select measurements such as highs or lows over a time period. For example, table **107** illustrates the highest pressure measurement and the highest heart rate measurement for each month. In the snapshot shown, for the month of April, the highest pressure measured is 1.25 mmHg and the highest heart rate measured is 113 beats per minute. Analyst graphic user interface **101**, arranged in the manner shown, allows the analyst to compare table **107** to graphic representations **104**, **105** and **106**. It is understood that an analyst may use any number of analytic tools that are well known in the art for analyzing the data generated by the implantable device.

[0089] The data analysis generated by data analyst device **100** may be formatted in any number of well-known ways and transmitted to and stored on remote server **95**. For example, the results may be in the form of a report or a spreadsheet. Alternatively, the analyst may simply save the graphical representations or tables generated on data analyst device **100** to remote server **95**. As explained above, in addition to transmitting the data analysis to remote server **95**, a data analyst using analyst device **100** may transmit the results directly to mobile device **80** and monitoring and control device **60** and may generate an alert and communicate the alert to monitoring and control device **60** and/or mobile device **80** when data has been uploaded to remote server **95**.

[0090] As discussed above and in accordance with the present disclosure, communication between devices in system **10** may be facilitated by a number of well-known techniques. While all devices within system **10** may be in communication with one another, it is understood that some devices may be in communication with less than the number of total devices in the system. For example, some devices of system **10** may be connected to the internet and others may make one-to-one connections to other devices that are connected to the internet using one or more of the well-known methods.

[0091] While various illustrative embodiments of the invention are described above, it will be apparent to one skilled in the art that various changes and modifications may be made therein without departing from the invention. For example, system **10** shown in FIG. 1 may include fewer components than those shown in FIG. 1 or may alternatively include more components such as more than one monitoring and control device or even more than one implantable device. The appended claims are intended to cover all such changes and modifications that fall within the true spirit and scope of the invention.

What is claimed:

1. A system for managing and reviewing data obtained from an implantable device at a data analyst device, the system comprising:

an implantable device comprising a housing containing a first inductive charging circuit, a first microprocessor, a battery, a first communication unit, a pump configured to move fluid from a first body cavity to a second body

cavity, and a plurality of sensors, the implantable device configured to generate operational data and physiological data;

a charging device comprising a second inductive charging circuit, a second microprocessor, and a second communication unit, the charging device configured to wirelessly transfer energy transcutaneously from the second inductive circuit to the first inductive circuit to charge the battery, the charging device programmed to communicate with the implantable device to receive the operational data and the physiological data from the implantable device and to store the operational data and the physiological data on the charging device; and instructions stored on a non-transitory computer readable medium of the charging device configured to cause transmission of the operational data and the physiological data stored on the charging device to a remote server so that the operational data and the physiological data is periodically downloaded from the remote server and reviewed at a data analyst device.

2. The system of claim 1, wherein the instructions stored on the non-transitory computer readable medium of the charging device are configured to cause the charging device to communicate with the remote server via the Internet.

3. The system of claim 1, wherein the instructions stored on the non-transitory computer readable medium of the charging device are configured to cause the charging device to communicate with the remote server via a wireless telephony regime.

4. The system of claim 1, wherein the instructions stored on the non-transitory computer readable medium of the charging device are also configured to cause transmission of operational instructions, including at least operational parameters, to the implantable device.

5. The system of claim 1, wherein the instructions stored on the non-transitory computer readable medium of the charging device are configured to encrypt communications between the charging device and the remote server such that transmission of the operational data and the physiological data is encrypted.

6. The system of claim 1, further comprising a clinician computer comprising a non-transitory computer readable medium and instructions stored on the non-transitory computer readable medium configured to cause the clinician computer to communicate with the remote server and to receive from the remote server the operational data and the physiological data.

7. The system of claim 1, further comprising a patient mobile communication device comprising a non-transitory computer readable medium and also comprising instructions stored on the non-transitory computer readable medium configured to cause the patient mobile communication device to communicate with the remote server and to receive from the remote server the operational data and the physiological data.

8. The system of claim 1, further comprising a clinician computer comprising a non-transitory computer readable medium and instructions stored on the non-transitory computer readable medium configured to cause transmission of operational instructions, including at least operational parameters, from the clinician computer to the charging device.

9. The system of claim 1, wherein the data analyst device further comprises a non-transitory computer readable

medium and instructions stored on the non-transitory computer readable medium configured to cause the data analyst device to communicate with the remote server and to receive from the remote server the operational data and the physiological data.

10. The system of claim 9, wherein the instructions stored on the non-transitory computer readable medium of the data analyst device are further configured to cause the data analyst device to compile the operational data and the physiological data, generate analyst data and transmit the analyst data to the remote server.

11. The system of claim 9, wherein the instructions stored on the non-transitory computer readable medium of the data analyst device will cause the data analyst device to generate a warning message when one or more of the operational data or physiological data exceeds preprogrammed thresholds and communicate the warning message to at least one or more of the patient mobile communication device and the clinician computer.

12. The system of claim 1, wherein the plurality of sensors comprises at least one or more of a heart rate sensor, an ECG sensor, a temperature sensor, or a respiratory sensor and the physiological data comprises at least one of a heart rate, ECG data, a temperature or a respiratory rate.

13. A method of managing an implantable device comprising:

establishing a wireless connection between a clinician computer and an implantable device, the implantable device comprising a housing containing an inductive charging circuit, a microprocessor, a battery, a communication unit, a pump and one or more sensors;

receiving operational parameters at the implantable device from the clinician computer;

adjusting operation of the implantable device according to received operational parameters at the implantable device;

generating sensor data from the one or more sensors in the implantable device; and

transmitting the sensor data to a remote server so that the sensor data is accessible for review by a data analyst device.

14. The method of claim 13, further comprising:

comparing, at the data analyst device, the sensor data to one or more predetermined threshold ranges; and

generating, at the data analyst device, an alert if the sensor data is outside one or more of the predetermined threshold ranges.

15. The method of claim 14, further comprising transmitting the alert from the data analyst device to at least one or more of the remote server, a patient mobile communication device and the clinician computer.

16. The method of claim 13, further comprising:

analyzing, on the data analyst device, the sensor data accessed from the remote server;

generating analyst data on the data analyst device based on the sensor data; and

transmitting the analyst data from the data analyst device to the remote server.

17. The method of claim 16, wherein the generating the analyst data on the data analyst device further comprises generating at least one of a diagnosis of a medical condition, actionable insight and an indication of a heightened risk of a medical condition.

**18.** The method of claim **16**, further comprising accessing, using a clinician computer, the analyst data stored on the remote server.

**19.** The method of claim **17**, further comprising periodically interrogating, by the clinician computer, the remote server to determine whether the analyst data comprises at least one of a diagnosis of a medical condition or an indication of high risk of a medical condition.

**20.** The method of claim **19**, further comprising transmitting an alert to a patient mobile communication device, from the clinician computer, upon confirmation that the analyst data comprises at least one of a diagnosis of a medical condition, an indication of high risk of a medical condition or other actionable insight.

\* \* \* \* \*

|                |                                                                                                                                                                                                                                                                  |         |            |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------|
| 专利名称(译)        | 用于管理和分析由可植入设备生成的数据的系统和方法                                                                                                                                                                                                                                         |         |            |
| 公开(公告)号        | <a href="#">US20180060520A1</a>                                                                                                                                                                                                                                  | 公开(公告)日 | 2018-03-01 |
| 申请号            | US15/684479                                                                                                                                                                                                                                                      | 申请日     | 2017-08-23 |
| [标]申请(专利权)人(译) | SEQUANA医疗                                                                                                                                                                                                                                                        |         |            |
| 申请(专利权)人(译)    | SEQUANA医药股份公司                                                                                                                                                                                                                                                    |         |            |
| 当前申请(专利权)人(译)  | SEQUANA医药股份公司                                                                                                                                                                                                                                                    |         |            |
| [标]发明人         | DEGEN THOMAS WERNER<br>TSCHUMPER STEFAN                                                                                                                                                                                                                          |         |            |
| 发明人            | DEGEN, THOMAS WERNER<br>TSCHUMPER, STEFAN                                                                                                                                                                                                                        |         |            |
| IPC分类号         | G06F19/00 A61B5/0402 A61B5/0205 A61B5/00 A61B5/07 A61M27/00                                                                                                                                                                                                      |         |            |
| CPC分类号         | G16H50/30 G16H10/60 A61B5/0402 A61B5/02055 A61B5/0022 A61B5/6847 A61B5/07 A61M27/002<br>A61B5/0006 A61B5/746 A61B5/02444 A61B5/08 A61M2205/3523 A61M2205/18 A61M2205/3334<br>A61M2205/3368 A61M2205/3365 G06F19/3431 G06F19/345 G06F19/322 G16H50/20 G06F19/3418 |         |            |
| 优先权            | 62/380284 2016-08-26 US                                                                                                                                                                                                                                          |         |            |
| 外部链接           | <a href="#">Espacenet</a> <a href="#">USPTO</a>                                                                                                                                                                                                                  |         |            |

#### 摘要(译)

提供了一种系统，其包括被配置为皮下植入患者体内的可植入装置，临床医生监测和控制装置，可选的患者移动装置，远程服务器和/或由数据分析人员使用的至少一个数据分析装置。可植入设备可以通过充电设备或通过建立与每个这样的设备的直接无线连接来与监视和控制设备，移动设备和/或远程服务器中的任何一个或全部通信。数据分析设备可以建立与远程服务器的直接连接并且还可以建立与监视和控制设备以及移动设备的连接。通过分析和检查由可植入设备生成的数据，数据分析师可以诊断医疗状况或指示患病风险增加。

