

(19)



(11)

EP 2 736 417 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
04.01.2017 Bulletin 2017/01

(51) Int Cl.:
A61B 8/00 ^(2006.01) *H04W 84/12* ^(2009.01)

(21) Application number: **12817598.1**

(86) International application number:
PCT/KR2012/005910

(22) Date of filing: **25.07.2012**

(87) International publication number:
WO 2013/015603 (31.01.2013 Gazette 2013/05)

(54) WIRELESS COMMUNICATION METHOD OF PROBE FOR ULTRASOUND DIAGNOSIS AND APPARATUS THEREFOR

DRAHTLOSES KOMMUNIKATIONSVERFAHREN EINES SCHALLKOPFES FÜR ULTRASCHALLDIAGNOSE UND VORRICHTUNG DAFÜR

PROCÉDÉ DE COMMUNICATION SANS FIL POUR UNE SONDE DE DIAGNOSTIC MÉDICAL ET APPAREIL CORRESPONDANT

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

• **HONG, Soon-jae**
Seongnam-si
Gyeonggi-do 463-010 (KR)

(30) Priority: **25.07.2011 KR 20110073773**

(74) Representative: **Grootscholten, Johannes A.M. et al**
Arnold & Siedsma
Bezuidenhoutseweg 57
2594 AC The Hague (NL)

(43) Date of publication of application:
04.06.2014 Bulletin 2014/23

(60) Divisional application:
16196182.6

(56) References cited:
WO-A2-2008/146204 JP-A- 2007 282 957
KR-A- 20080 090 957 KR-A- 20110 035 969
US-A1- 2010 191 121 US-A1- 2011 105 904
US-A1- 2011 105 904

(73) Proprietor: **Samsung Electronics Co., Ltd.**
Suwon-si, Gyeonggi-do, 443-742 (KR)

(72) Inventors:
• **KIM, Kang-sik**
Seongnam-si
Gyeonggi-do 463-927 (KR)
• **KIM, Jung-jun**
Seoul 137-070 (KR)
• **HAN, Ho-san**
Seoul 156-092 (KR)

• **"WiGig White Paper: Defining the Future of Multi-Gigabit Wireless Communications", WIGIG WHITE PAPER, WIRELESS GIGABIT ALLIANCE, US , 1 July 2010 (2010-07-01), pages 1-5, XP008173868, Retrieved from the Internet: URL: <http://wirelessgigabitalliance.org/>**

EP 2 736 417 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[Technical Field]

[0001] The present invention relates to a method in which a probe apparatus for ultrasound diagnosis transmits an echo signal to an ultrasonic imaging apparatus, and an apparatus for performing the method.

[Background Art]

[0002] Ultrasound diagnostic imaging systems transmit ultrasonic signals from the surface of a human body toward a predetermined region inside the human body and acquire tomographic images of soft-tissue or blood flow by using information obtained from an ultrasonic signal reflected by liquids or tissue inside the human body. Advantages of an ultrasound system are its relatively small size, low cost, real-time display, and the fact that the subject is not exposed to ionizing radiation (e.g., X-rays). Therefore, ultrasound imaging systems are widely used along with other types of image diagnostic devices, such as an X-ray diagnostic device, a computerized tomography (CT) scanner, a magnetic resonance imaging (MRI) device, a nuclear medicine (gamma camera) diagnostic device, etc.

[0003] FIG. 1 illustrates a typical ultrasound diagnostic imaging system 150 as currently in use today, which diagnostic includes a probe 110 for transceiving ultrasonic signals, and an ultrasound diagnostic imaging system body 100, namely, an ultrasonic imaging apparatus 100, to which the probe 110 is connected via a cable 120.

[0004] Reference is made here to prior art publications US-2011/105904, US-2010/191121 and WO-2008/146204 regarding ultrasound diagnostic imaging systems, over which the appended independent claims are novel with respect to the features defined in the characterizing portions thereof, and the WiGig white paper XP-008173868 regarding deployment of a 60 GHz frequency band for data transmission.

[Disclosure]

[Technical Problem]

[0005] In a conventional ultrasound diagnostic imaging system illustrated in Fig. 1, the cable 120 causes much inconvenience to a person using the ultrasound imaging system 150 to perform an ultrasound test, due to the length (usually 1-2m), thickness and weight of the cable 120.

[Technical Solution]

[0006] The present invention provides a method and apparatus for wirelessly transmitting an echo signal to an ultrasonic imaging apparatus without loss.

[Advantageous Effects]

[0007] According to the present invention, the need for a data transmission cable is obviated and operator inconvenience is greatly reduced.

[Beste Mode for Carrying out the Invention]

[0008] According to an aspect of the present invention, there is provided a probe apparatus exhibiting all features of the appended independent probe apparatus related claim.

[0009] The mmWave-based wireless network may be a Personal Basic Service Set (PBSS) that follows the WiGig standard of the Wireless Gigabit Alliance (WGA), and the ultrasonic imaging apparatus operates as a PBSS control point (PCP) of the PBSS.

[0010] The probe apparatus may further include a beam forming unit which performs mmWave beamforming of the signal in the 60 GHz frequency band in order to transmit the data frame to the ultrasonic imaging apparatus.

[0011] The probe apparatus may further comprise a beam forming unit which performs mmWave beamforming with the ultrasonic imaging apparatus.

[0012] According to another aspect of the present invention, there is provided a communication method, an ultrasound diagnostic system, and a computer-readable recording medium having embodied thereon a computer program configured to execute the aforementioned communication method according to respective appended independent claims.

[Description of Drawings]

[0013]

FIG. 1 illustrates a prior art ultrasound diagnostic imaging system;

FIG. 2 illustrates an ultrasound diagnostic imaging system according to an embodiment of the present invention;

FIG. 3 is a flowchart illustrating a communication process of a probe, according to an embodiment of the present invention;

FIG. 4 is a flowchart illustrating a process in which the probe performs pairing with an ultrasonic imaging apparatus, according to an embodiment of the present invention;

FIG. 5 is a flowchart illustrating a pairing process according to an embodiment of the present invention;

FIG. 6 is a flowchart illustrating a pairing process according to another embodiment of the present invention;

FIG. 7 is a flowchart illustrating a pairing process according to another embodiment of the present invention;

FIG. 8 is a flowchart illustrating a pairing process according to another embodiment of the present invention;

FIG. 9 is a flowchart illustrating a pairing process according to another embodiment of the present invention;

FIG. 10 is a flowchart illustrating a process of controlling a link margin, according to an embodiment of the present invention;

FIG. 11 illustrates a format illustrating a link margin response frame according to an embodiment of the present invention; and

FIG. 12 is a block diagram illustrating a structure of a probe apparatus according to an embodiment of the present invention.

[Mode for Invention]

[0014] The following description, with reference to the accompanying drawings, is provided to assist a person of ordinary skill in the art with a comprehensive understanding of exemplary embodiments of the invention. The description includes various specific details to assist in that understanding but these details are to be regarded as merely exemplary. Accordingly, those of ordinary skill in the art will recognize that various changes and modifications of the exemplary embodiments described herein can be made without departing from the spirit of the invention and the scope of the appended claims. Also, descriptions of well-known functions and constructions may be omitted for clarity and simplicity so as not to obscure appreciation of the present invention by a person of ordinary skill with such well-known functions and constructions.

[0015] The terms and words used in the following description and claims are not limited to the bibliographical meanings, but, are merely used by the inventor to enable a clear and consistent understanding of the invention. Accordingly, it should be apparent to those skilled in the art that the following description of exemplary embodiments of the present invention are provided for illustration purposes only and not for the purpose of limiting the invention as defined by the appended claims.

[0016] Expressions such as "at least one of", when preceding a list of elements, refers to at least one of the entire list of elements and is not intended to be limited individual elements of the list.

[0017] It is to be understood that the singular forms "a", "an", and "the" include plural references unless the context clearly dictates otherwise. Thus, for example, reference to "a component surface" typically includes reference to one or more of such surfaces.

[0018] Finally, the term "substantially" typically means that the recited characteristic, parameter, or value need not be achieved exactly, but that deviations or variations, including for example, tolerances, measurement error, measurement accuracy limitations and other factors known to those skilled in the art, may occur in amounts

that do not preclude the effect the characteristic was intended to provide.

[0019] FIG. 2 illustrates an ultrasound diagnostic imaging system 200 according to an embodiment of the present invention, which diagnostic includes an ultrasonic imaging apparatus 210 and a probe 220 including an ultrasonic wave transducer.

[0020] The probe 220 and the ultrasonic imaging apparatus 210 are associated with a same mmWave (millimeter Wave) -based wireless network, and the probe 220 transmits an echo signal received via the transducer portion of the probe, to the ultrasonic imaging apparatus 210 using one or more signal channels in the 60 GHz frequency band. The ultrasonic imaging apparatus 210 generates ultrasonic images in various modes, such as B-mode, color flow, and Doppler, by using the ultrasound echo signal transmitted thereto using the 60 GHz frequency band signal channel, and displays the ultrasonic images.

[0021] The probe 220 generates an ultrasonic signal by applying one or more pulses to an ultrasonic oscillator of a transducer. Once generated, the ultrasonic signal is reflected by a target (such as structures in a human body) and is received as an echo signal by the transducer. The transducer converts the echo signal into an electrical signal, and then requires a high bandwidth communication channel on the order of multiple gigabytes, to wirelessly transmit the electrical signal, and also so as to not interfere with other wireless electronic apparatuses during wireless transmission of the echo signal.

[0022] To this end, according to embodiments of the present invention, an echo signal is wirelessly transmitted via a wireless network that uses millimeter waves. For example, a wireless communication technique based on the WiGig standard of the Wireless Gigabit Alliance (WGA) may be used.

[0023] The WiGig standard is sufficient to transmit an echo signal that has been converted into digital data because the WiGig standard supports data transmission rates up to 7 Gbps, and may steer a signal direction by using the directionality of beams to minimize interference with other systems. The WiGig standard as a local-distance wireless communication standard is also generally suitable for ultrasonic test environments where a probe and an ultrasonic imaging apparatus are close to each other, and using the WiGig standard consumes less power than other wireless communication standards and thus may minimize the weight and size of battery which is to be built into the probe. The dashed line circle in FIG 2 enclosing probe 220 and the ultrasonic imaging apparatus 210 denotes a wireless communication network with which the probe and imaging apparatus communicate with each other, and may be a personal basic service set (PBSS) of the WiGig standard, as explained in more detail below.

[0024] FIG. 3 is a flowchart of a communication process performed by a probe, according to an embodiment of the present invention.

[0025] In operation 301, the probe performs a procedure in order to become associated with a PBSS mmWave-based wireless network. In the PBSS, at least one station needs to operate as a PBSS control point (PCP) that manages the PBSS. However, the probe is limited in its size and weight, and thus it may be preferred that the ultrasonic imaging apparatus 210 may operate as the PCP. Alternatively, both the ultrasonic imaging apparatus and the probe may operate as a station, and another device may operate as the PCP in the PBSS.

[0026] In operation 302, the probe generates a data frame with a format suitable for the mmWave-based wireless network, by using an echo signal received via the transducer.

[0027] In operation 303, the probe transmits the data frame to the ultrasonic imaging apparatus using a signal in a 60 GHz frequency band. The ultrasonic imaging apparatus (such as 210 of FIG 2) receives the data frame, generates therefrom an ultrasonic image via signal processing, and displays the ultrasonic image.

[0028] FIG. 4 is a flowchart of a process in which the probe performs pairing with the ultrasonic imaging apparatus, according to an embodiment of the present invention.

[0029] The PBSS is an ad-hoc structure that performs direct communication between stations without passing through a PCP. Accordingly, the probe and the ultrasonic imaging apparatus need to be subjected to a process of recognizing themselves as peer devices and setting a communication protocol to perform mutual communication. This process is referred to as pairing. A push button configuration (PBC) method may be used to perform pairing between the probe and the ultrasonic imaging apparatus. In other words, when a user pushes pairing buttons included in the probe and the ultrasonic imaging apparatus simultaneously (or within a short time interval therebetween), the probe and the ultrasonic imaging apparatus are paired.

[0030] In operation 401, when a user command for making a pairing request is input, that is, when a pairing button is pressed, the probe receives a mmWave beacon frame (hereinafter, referred to as a beacon frame) of the PBSS not yet associated. Before the user command for making a pairing request is input, the probe is not associated with the PBSS of the ultrasonic imaging apparatus, and thus does not parse a beacon frame broadcast from the PBSS to which the ultrasonic imaging apparatus belongs, but discards it. However, when a user presses the pairing buttons, the probe starts monitoring an externally received beacon frame.

[0031] In operation 402, the probe detects the ultrasonic imaging apparatus which is to be paired with the probe by using first pairing information included in the beacon frame. It is assumed that the ultrasonic imaging apparatus has already belonged to the PBSS, and the ultrasonic imaging apparatus may operate as a PCP or a general station rather than the PCP in the PBSS. When a user presses the pairing button included in the ultra-

sonic imaging apparatus to perform pairing, the PCP of the PBSS broadcasts the first pairing information, representing that the ultrasonic imaging apparatus has requested pairing, via a beacon frame. The first pairing information may include PBC information representing that the pairing button of the ultrasonic imaging apparatus has been pressed, and a medium access control (MAC) address of the ultrasonic imaging apparatus.

[0032] In operation 403, the probe is associated with the PBSS of the ultrasonic imaging apparatus by using Basic Service Set ID (BSSID) included in the beacon frame. Although the probe is associated with the PBSS after determining a peer device (operation 402) in the present embodiment, operation 403 may be performed before operation 402.

[0033] In operation 404, the probe transmits second pairing information to the ultrasonic imaging apparatus. The second pairing information represents that the probe has requested pairing, and may include PBC information representing that the pairing button of the probe has been pressed, and a MAC address of the probe.

[0034] FIG. 5 is a flowchart of a pairing process according to another embodiment of the present invention where it is assumed that both an ultrasonic imaging apparatus 510 and a probe 520 are initially driven, that is, the ultrasonic imaging apparatus 510 did not yet generate any PBSSs and the probe 520 is not yet associated with any PBSSs.

[0035] In a first operation, a pairing button included in the ultrasonic imaging apparatus 510 is pressed by a user.

[0036] In a second operation, the ultrasonic imaging apparatus 510, in response to the user pressing the pairing button, generates a PBSS and becomes operational so as to serve as a PCP of the PBSS.

[0037] In a third operation, the ultrasonic imaging apparatus 510 broadcasts a beacon frame including first pairing information PI_1 . The first pairing information PI_1 may include PBC information representing that the pairing button included in the ultrasonic imaging apparatus 510 has been pressed, and a MAC address of the ultrasonic imaging apparatus 510.

[0038] At this time, even when the probe 520 is turned on and is physically located at a distance capable of receiving a beacon of the ultrasonic imaging apparatus 510, the probe 520 does not parse the beacon frame but discards it because the probe 520 is not yet associated with the PBSS of the ultrasonic imaging apparatus 510. Accordingly, the probe 520 does not react to the beacon frame received in the third operation.

[0039] Although the first pairing information PI_1 is broadcast via the beacon frame in a beacon section in the present embodiment, the ultrasonic imaging apparatus 510 may broadcast the first pairing information PI_1 in a time section other than the beacon section.

[0040] In a fourth operation, a pairing button included in the probe 520 is pressed by the user. Accordingly, the probe 520 starts monitoring externally received beacon

frames without discarding them.

[0041] In a fifth operation, the ultrasonic imaging apparatus 510 re-broadcasts the beacon frame including the first pairing information PI_1 .

[0042] In a sixth operation, the probe 520 recognizes the ultrasonic imaging apparatus 510 as a peer device.

[0043] In a seventh operation, the probe 520 transmits an association request frame requesting association with the PBSS to the ultrasonic imaging apparatus 510.

[0044] In an eighth operation, the ultrasonic imaging apparatus 510 transmits to the probe 520 an association response frame approving the association request of the probe 520.

[0045] In a ninth operation, the probe 520 transmits the first pairing information PI_1 and second pairing information PI_2 to the ultrasonic imaging apparatus 510. The second pairing information PI_2 may include PBC information representing that the pairing button included in the probe 520 has been pressed, and a MAC address of the probe 520.

[0046] In a tenth operation, the ultrasonic imaging apparatus 510 recognizes the probe 520 as a peer device by analyzing the second pairing information PI_2 .

[0047] FIG. 6 is a flowchart of a pairing process according to another embodiment of the present invention where, as in the embodiment of FIG. 5, it is assumed that both an ultrasonic imaging apparatus 610 and a probe 620 are initially driven.

[0048] In a first operation, a pairing button included in the ultrasonic imaging apparatus 610 is pressed by a user.

[0049] In a second operation, the ultrasonic imaging apparatus 610 generates a PBSS and serves as a PCP of the PBSS.

[0050] In a third operation, the ultrasonic imaging apparatus 610 broadcasts a beacon frame including first pairing information PI_1 . The first pairing information PI_1 may include PBC information representing that the pairing button included in the ultrasonic imaging apparatus 610 has been pressed, and a MAC address of the ultrasonic imaging apparatus 610.

[0051] At this time, even when the probe 620 is turned on and is physically located at a distance capable of receiving a beacon of the ultrasonic imaging apparatus 610, the probe 620 does not parse the beacon frame but discards it because the probe 620 is not yet associated with the PBSS of the ultrasonic imaging apparatus 610. Accordingly, the probe 620 does not react to the beacon frame received in the third operation.

[0052] In a fourth operation, a pairing button included in the probe 620 is pressed by the user. Accordingly, the probe 620 starts monitoring externally received beacon frames without discarding them.

[0053] In a fifth operation, the ultrasonic imaging apparatus 610 re-broadcasts the beacon frame including the first pairing information PI_1 .

[0054] In a sixth operation, the probe 620 recognizes the ultrasonic imaging apparatus 610 as a peer device.

[0055] In a seventh operation, the probe 620 transmits the first pairing information PI_1 and second pairing information PI_2 to the ultrasonic imaging apparatus 610. The second pairing information PI_2 may include PBC information representing that the pairing button included in the probe 620 has been pressed, and a MAC address of the probe 620.

[0056] In an eighth operation, the ultrasonic imaging apparatus 610 recognizes the probe 620 as a peer device by analyzing the second pairing information PI_2 .

[0057] In a ninth operation, the probe 620 transmits an association request frame requesting association with the PBSS to the ultrasonic imaging apparatus 610.

[0058] In a tenth operation, the ultrasonic imaging apparatus 610 transmits to the probe 620 an association response frame approving the association request of the probe 620.

[0059] As such, in the embodiment of FIG. 6, in contrast with the embodiment of FIG. 5, the probe 620 is associated with the PBSS after transmitting the second pairing information PI_2 to the ultrasonic imaging apparatus 610.

[0060] FIG. 7 is a flowchart of a pairing process according to another embodiment of the present invention where it is assumed that, while an ultrasonic imaging apparatus 710 is operating as a PCP of a PBSS, a probe 720 is initially driven.

[0061] In a first operation, a pairing button included in the ultrasonic imaging apparatus 710 is pressed by a user.

[0062] In a second operation, the ultrasonic imaging apparatus 710 broadcasts a beacon frame including first pairing information PI_1 . The first pairing information PI_1 may include PBC information representing that the pairing button included in the ultrasonic imaging apparatus 710 has been pressed, and a MAC address of the ultrasonic imaging apparatus 710.

[0063] At this time, even when the probe 720 is turned on and is physically located at a distance capable of receiving a beacon frame of the ultrasonic imaging apparatus 710, the probe 720 does not parse the beacon frame but discards it because the probe 620 is not yet associated with the PBSS of the ultrasonic imaging apparatus 710. Accordingly, the probe 720 does not react to the beacon frame received in the second operation.

[0064] In a third operation, a pairing button included in the probe 720 is pressed by the user. Accordingly, the probe 720 starts monitoring externally received beacon frames without discarding them.

[0065] In a fourth operation, the ultrasonic imaging apparatus 710 re-broadcasts the beacon frame including the first pairing information PI_1 .

[0066] In a fifth operation, the probe 720 recognizes the ultrasonic imaging apparatus 710 as a peer device.

[0067] In a sixth operation, the probe 520 is associated with the PBSS of the ultrasonic imaging apparatus 710.

[0068] In a seventh operation, the probe 520 transmits second pairing information PI_2 to the ultrasonic imaging apparatus 710. The second pairing information PI_2 may

include PBC information representing that the pairing button included in the probe 720 has been pressed, and a MAC address of the probe 720.

[0069] In an eighth operation, the ultrasonic imaging apparatus 710 recognizes the probe 720 as a peer device by analyzing the second pairing information PI_2 .

[0070] FIG. 8 is a flowchart of a pairing process according to another embodiment of the present invention where, similar to the embodiment of FIG. 7, it is assumed that while an ultrasonic imaging apparatus 810 is already operating as a PCP of a PBSS, a probe 820 is initially driven.

[0071] In a first operation, a pairing button included in the ultrasonic imaging apparatus 810 is pressed by a user.

[0072] In a second operation, the ultrasonic imaging apparatus 810 broadcasts a beacon frame including first pairing information PI_1 . The first pairing information PI_1 may include PBC information representing that the pairing button included in the ultrasonic imaging apparatus 810 has been pressed, and a MAC address of the ultrasonic imaging apparatus 810.

[0073] At this time, even when the probe 820 is turned on and is physically located at a distance capable of receiving a beacon frame of the ultrasonic imaging apparatus 810, the probe 820 does not parse the beacon frame but discards it because the probe 820 is not yet associated with the PBSS of the ultrasonic imaging apparatus 810. Accordingly, the probe 820 does not react to the beacon frame received in the second operation.

[0074] In a third operation, a pairing button included in the probe 820 is pressed by the user. Accordingly, the probe 820 starts monitoring externally received beacon frames without discarding them.

[0075] In a fourth operation, the ultrasonic imaging apparatus 810 re-broadcasts the beacon frame including the first pairing information PI_1 .

[0076] In a fifth operation, the probe 820 recognizes the ultrasonic imaging apparatus 810 as a peer device.

[0077] In a sixth operation, the probe 820 is associated with the PBSS of the ultrasonic imaging apparatus 810 and at the same time transmits second pairing information PI_2 to the ultrasonic imaging apparatus 810. In other words, the probe 820 carries the second pairing information PI_2 in an association request frame and transmits the association request frame including the second pairing information PI_2 to the ultrasonic imaging apparatus 810.

[0078] In a seventh operation, the ultrasonic imaging apparatus 810 recognizes the probe 820 as a peer device by analyzing the second pairing information PI_2 .

[0079] FIG. 9 is a flowchart of a pairing process according to another embodiment of the present invention. In the embodiment of FIG. 9, it is assumed that an ultrasonic imaging apparatus 910 is operating as a general station rather than a PCP 920 of a PBSS even when the ultrasonic imaging apparatus 910 already belongs to the PBSS, and that a probe 930 is initially driven.

[0080] In a first operation, a pairing button included in the ultrasonic imaging apparatus 910 is pressed by a user.

[0081] In a second operation, the ultrasonic imaging apparatus 910 transmits to a PCP 920 first pairing information PI_1 representing that the ultrasonic imaging apparatus 910 needs to perform pairing. The first pairing information PI_1 may include PBC information representing that the pairing button included in the ultrasonic imaging apparatus 910 has been pressed, and a MAC address of the ultrasonic imaging apparatus 910.

[0082] In a third operation, the PCP 920 broadcasts a beacon frame including the first pairing information PI_1 . Since the probe 930 is not yet associated with the PBSS, the probe 930 does not parse the beacon frame but discards the same. As described above, the PCP 920 may broadcast the first pairing information PI_1 in a time section other than the beacon section.

[0083] In a fourth operation, a pairing button included in the probe 930 is pressed by the user. Accordingly, the probe 930 starts monitoring externally received beacon frames.

[0084] In a fifth operation, the PCP 920 re-broadcasts the beacon frame including the first pairing information PI_1 .

[0085] In a sixth operation, the probe 930 recognizes the ultrasonic imaging apparatus 910 as a peer device of the probe 930 by referring to the first pairing information PI_1 .

[0086] In a seventh operation, the probe 930 is associated with the PBSS of the PCP 920.

[0087] In an eighth operation, the probe 930 transmits to the PCP 920 second pairing information PI_2 representing that the probe 930 itself is requested by the user to perform pairing. The second pairing information PI_2 may be included in an association request frame that the probe 930 transmits to the PCP 920 while the probe 930 is being associated with the PBSS.

[0088] In a ninth operation, the PCP 920 broadcasts a beacon frame including the first pairing information PI_1 and the second pairing information PI_2 .

[0089] In a tenth operation, in response to the beacon frame including the first pairing information PI_1 and the second pairing information PI_2 , the ultrasonic imaging apparatus 910 recognizes the probe 930 as a peer device of the ultrasonic imaging apparatus 910.

[0090] As such, according to the embodiments of the present invention, pairing between an ultrasonic imaging apparatus and a probe is performed by a user simply pressing buttons included in an ultrasonic imaging apparatus and a probe. Thus the probe portion of an ultrasound imaging system may be simply and easily replaced, if necessary, while the existing ultrasonic imaging apparatus is being used.

[0091] FIG. 10 is a flowchart of a process of controlling a link margin, according to an embodiment of the present invention.

[0092] The link margin is information used to determine

a status of the communication link, and denotes a power level of a reception signal that is required by a current modulation technique. When the value of the link margin is positive, the power of the reception signal is more than necessary. When the value of the link margin is negative, the power of the reception signal is insufficient.

[0093] In operation 1010, a probe forms a communication link with an ultrasonic imaging apparatus via a PBSS. The formation of the communication link denotes completion of preparations for a communication with a peer device, including pairing.

[0094] In operation 1020, the probe receives a link margin response frame including information about the link margin (hereinafter, also referred to as link margin information) from the ultrasonic imaging apparatus, and extracts the link margin information from the link margin response frame. A format of the link margin response frame will be described later with reference to FIG. 11.

[0095] The ultrasonic imaging apparatus calculates the link margin information based on a data frame that the probe transmits in the 60 GHz band, and then informs the probe of the calculated link margin. The link margin response frame may be received every time the probe requests the link margin response frame, or may be transmitted by the ultrasonic imaging apparatus periodically without special requests or whenever the state of a link degrades.

[0096] In operation 1030, the probe adjusts the link margin based on the link margin information. To adjust the link margin, the probe may perform at least one of a change in transmission power, a change in a modulation and coding scheme (MCS), a change in beam forming, and a change in channel frequency within the 60 GHz band.

[0097] FIG. 11 illustrates a format of a link margin response frame 1100 according to an embodiment of the present invention.

[0098] As illustrated in FIG. 11, the link margin response frame 1100 includes a category field 1101, an action field 1102, a transmission number field 1103, a preferred action field 1104, a link margin element field 1105, an unsolicited field 1106, and a data frame ID field 1107.

[0099] The category field 1101 represents what kind of frame the link margin response frame 1100 belongs to. According to the present embodiment, the category field 1101 may indicate that the link margin response frame 1100 is a control frame.

[0100] The action field 1102 indicates that the link margin response frame 1100 is a link margin response frame categorized into a control frame which is the frame type determined by the category field 1101.

[0101] The transmission number field 1103 indicates the number of times the link margin response frame 1100 is transmitted from an ultrasonic imaging apparatus to a probe.

[0102] The preferred action field 1104 indicates one operation that the ultrasonic imaging apparatus requests

from among a change in transmission power, a change in MCS, beam forming, and a channel frequency change. When the link margin response frame 1100 including the preferred action field 1104 is received, the probe may perform the operation indicated by the preferred action field 1104 or may perform an operation for margin adjustment independently without respect to the preferred action field 1104. Although the preferred action field 1104 is illustrated as an independent field of the link margin response frame 1100 in FIG. 11, the preferred action field 1104 may be a subfield of the link margin element field 1105.

[0103] The link margin element field 1105 includes the link margin information and is divided into an element ID field 1108, a length field 1109, a MCS field 1110, and a link margin field 1111.

[0104] The element ID field 1108 indicates that the link margin element field 1105 is a field including the link margin information.

[0105] The length field 1109 indicates a length of the link margin element field 1105.

[0106] The MCS field 1110 indicates an index representing an MCS which is to be changed, when the preferred action field 1104 indicates that the ultrasonic imaging apparatus requests a change in the MCS.

[0107] The link margin field 1111 records information about the link margin calculated by the ultrasonic imaging apparatus.

[0108] The unsolicited field 1106 represents whether the link margin response frame 1100 is received in response to a request frame of the probe. For example, when the link margin response frame 1100 is received in response to a request of the probe, the unsolicited field 1106 may record 0, and otherwise, the unsolicited field 1106 may record a value other than 0. If the probe transmits a link margin request frame (not shown) to the ultrasonic imaging apparatus to request the link margin response frame 1100, the link margin request frame may include at least one of a category field indicating the kind of frame, an action field indicating that the link margin response frame 1100 is a link margin request frame from among frames categorized into the kind of frame indicated by the category field, and a transmission number field representing the number of times the link margin request frame is transmitted.

[0109] The data frame ID field 1107 includes a sequence number of a data frame used when the ultrasonic imaging apparatus calculates the link margin. Through these pieces of information, the probe can recognize a time for calculating the link margin, and thus may adequately control the state of a communication link.

[0110] FIG. 12 is a block diagram of a structure of a probe apparatus 1200 according to another embodiment of the present invention.

[0111] As illustrated in FIG. 12, the probe apparatus 1200 includes a transducer 1201, a receiver beam former 1202, a user interface 1203, and a wireless transceiver module 1250.

[0112] The wireless transceiver module 1250 includes an association performing unit 1251, a frame generation unit 1252, a margin information processing unit 1253, a margin control unit 1254, a beam forming unit 1255, a wireless communication unit 1256, and a link formation unit 1260. The link formation unit 1260 includes a pairing request unit 1261, a peer determination unit 1262, and a beacon monitoring unit 1263. The wireless transceiver module 1250 may further include other various components such as a battery, an analog to digital converter (ADC), and a low noise amplifier (LNA). This will be apparent to one of ordinary skill in the art, thus no further descriptions thereof are provided.

[0113] The transducer 1201 converts an ultrasonic echo signal received from a test target into an electrical signal, and the receiver beam former 1202 gathers multiple channels of echo signals (more specifically, digital data into which the echo signals are converted) received from oscillators arranged in an array or matrix form in the transducer 1201.

[0114] The wireless transceiver module 1250 performs procedures necessary for transmitting an echo signal to an ultrasonic imaging apparatus 1280 in the 60 GHz frequency band. The association performing unit 1251 performs a procedure for associating the probe apparatus 1200 using a mmWave-based wireless network. As described above, the mmWave-based wireless network may be a PBSS that follows the WiGig standard of WGA. When the probe 1200 and the ultrasonic imaging apparatus 1280 perform communications via the PBSS, the ultrasonic imaging apparatus 1280 may operate as a PCP instead of the probe 1200, in order that the size and weight of the probe 1200 can be kept low by not including the components therein which would be necessary to allow the probe to be a PCP.

[0115] The frame generation unit 1252 generates a data frame with a format suitable for the mmWave-based wireless network, by using the echo signal received via the transducer 1201.

[0116] The wireless communication unit 1256 transmits the data frame generated by the frame generation unit 1252 to the ultrasonic imaging apparatus 1280 via the 60 GHz frequency band.

[0117] The beam forming unit 1255 performs mmWave beamforming together with the ultrasonic imaging apparatus 1280. In other words, the beam forming unit 1255 performs procedures necessary for efficiently transmitting and receiving data to and from the ultrasonic imaging apparatus 1280 by using mmWaves, such as by using sector level sweeping and beam refinement techniques, well known to those of ordinary skill in the art.

[0118] The link formation unit 1260 forms a link with the ultrasonic imaging apparatus 1280. When a user command for making a pairing request is received via the user interface 1203, the beacon monitoring unit 1263 receives a mmWave beacon of the PBSS to which the ultrasonic imaging apparatus 1280 belongs. The reception of the user command for making a pairing request

denotes not only physical reception but also requests an operation of parsing and analyzing a received beacon frame.

[0119] Accordingly, the peer determination unit 1262 detects the ultrasonic imaging apparatus 1280 which is to be paired with the probe 1200 by using first pairing information included in the mmWave beacon. The first pairing information represents that the ultrasonic imaging apparatus 1280 has been requested by a user to perform pairing, and may include the MAC address of the ultrasonic imaging apparatus 1280 and PBC information representing that a PBC-type pairing button included in the ultrasonic imaging apparatus 1280 has been pressed.

[0120] The pairing request unit 1261 transmits second pairing information representing that the probe 1200 requests pairing, to the ultrasonic imaging apparatus 1280 via the PBSS. The second pairing information may include the MAC address of the probe 1200 and PBC information representing that a PBC-type pairing button included in the probe 1200 has been pressed.

[0121] The margin information processing unit 1253 extracts information about a link margin of a communication link from the ultrasonic imaging apparatus 1280. The link margin information may be included in a link margin response frame that the ultrasonic imaging apparatus 1280 transmits to the probe 1200 in response to a request of the probe 1200 or periodically without requests or when the state of the communication link degrades.

[0122] The margin control unit 1254 controls the link margin based on the link margin response frame. More specifically, the margin control unit 1254 may adjust the link margin by performing at least one of a change in transmission power, a change in a MCS, a change in beam forming, and a change in a channel frequency within the 60 GHz frequency band.

[0123] The above-described method and apparatus embodiments of the present invention can be realized in hardware or as software or computer code that can be stored in a recording medium such as a CD ROM, an RAM, a floppy disk, a hard disk, a DVD or a magneto-optical disk or downloaded over a network, so that the methods described herein can be rendered in such software using a general purpose computer, or a special processor or in programmable or dedicated hardware, such as an ASIC or FPGA. As would be understood in the art, the computer, the processor or the programmable hardware include memory components, e.g., RAM, ROM, Flash, etc. that may store or receive software or computer code that when accessed and executed by the computer, processor or hardware implement the processing methods described herein.

[0124] While the present invention has been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the scope of the present invention as defined by the following

claims.

Claims

1. A probe apparatus (1200) for ultrasound diagnostic imaging, comprising:

an association performing unit (1251) which is arranged to perform a procedure for associating the probe apparatus with a mmWave-based wireless network;
 an ultrasound transducer (1201), which is arranged to generate at least an echo signal;
 a frame generation unit (1252) which is arranged to generate a data frame with a format suitable for the mmWave-based wireless network, and to include in the data frame the echo signal received from the ultrasound transducer;
 a wireless communication unit 1256 which is arranged to transmit the data frame to an ultrasonic imaging apparatus (1280) over a signal channel via the mmWave-based wireless network,

CHARACTERISED IN THAT

the wireless communication unit (1256) is arranged to transmit the data frame to the ultrasonic imaging apparatus over the signal channel in a 60 GHz frequency band via the mmWave-based wireless network,
 wherein the association performing unit (1251) is arranged to perform a procedure for associating the probe apparatus (1200) and the ultrasound imaging apparatus (1280) by receiving first pairing information representing a pairing request input by a user by pressing a pairing button included in the ultrasonic imaging apparatus (1280), and transmitting second pairing information representing a pairing request input by a user by pressing a pairing button included in the probe apparatus (1200).

2. The probe apparatus of claim 1, wherein the mmWave-based wireless network is a Personal Basic Service Set (PBSS) that follows the WiGig standard of the Wireless Gigabit Alliance (WGA), and the ultrasonic imaging apparatus is arranged to operate as a PBSS control point (PCP) of the PBSS.
3. The probe apparatus of claim 1 or 2, further comprising a beam forming unit (1255) which is arranged to perform mmWave beamforming of the signal in the 60 GHz frequency band to transmit the data frame to the ultrasonic imaging apparatus (1280).
4. The probe apparatus of any preceding claim, further comprising:

a link formation unit which is arranged to form a

communication link with the ultrasonic imaging apparatus in a Personal Basic Service Set (PBSS) that uses mmWaves;

a margin information processing unit (1253) which is arranged to extract information about a link margin of the communication link from a link margin response frame received from the ultrasonic imaging apparatus (1280); and
 a margin control unit (1254) which is arranged to control the probe apparatus (1200) to perform at least one of a change in transmission power of an echo signal, a change in a modulation and coding scheme (MCS) to be applied to the echo signal, a change in beam forming with the ultrasonic imaging apparatus (1280), and a change in channel frequency within a 60 GHz frequency band based on the extracted information received from the margin information processing unit (1253).

5. The probe apparatus of any preceding claim, wherein the margin information processing unit (1253) is arranged to transmit a link margin request frame requesting information about the link margin to the ultrasonic imaging apparatus (1280), and to receive and process the link margin response frame received from the ultrasonic imaging apparatus (1280) in response to the link margin request frame.

6. A communication method of a probe apparatus for ultrasound diagnostic imaging, the communication method comprising:

performing a procedure for associating the probe apparatus with a mmWave-based wireless network ;
 generating an echo signal using a ultrasound transducer;
 generating a data frame with a format suitable for the mmWave-based wireless network, to include in the data frame the echo signal received from the ultrasound transducer of the probe apparatus; and
 transmitting the data frame to an ultrasonic imaging apparatus over a signal channel via the mmWave-based wireless network,

CHARACTERISED BY

transmitting the data frame to the ultrasonic imaging apparatus over the signal channel in a 60 GHz frequency band via the mmWave-based wireless network;
 wherein the procedure for associating the probe apparatus and the ultrasound imaging apparatus comprises receiving first pairing information representing a pairing request input by a user by pressing a pairing button included in the ultrasonic imaging apparatus (402), and transmitting second pairing information

representing a pairing request input by a user by pressing a pairing button included in the probe apparatus (404).

7. The communication method of claim 6, wherein the mmWave-based wireless network is a Personal Basic Service Set (PBSS) that follows the WiGig standard of the Wireless Gigabit Alliance (WGA), and the ultrasonic imaging apparatus operates as a PBSS control point (PCP) of the PBSS, further optionally comprising performing beamforming of a mmWave beacon transmitted to the ultrasonic imaging apparatus.

8. The communication method of claim 6 or 7, further including:

using the mmWave-based wireless network to form a communication link with the ultrasonic imaging apparatus in a Personal Basic Service Set (PBSS) that uses mmWaves for signal transmission;

extracting information about a link margin of the communication link from a link margin response frame received from the ultrasonic imaging apparatus via the communication link; and

performing at least one of a change in transmission power of an echo signal, a change in a modulation and coding scheme (MCS) to be applied to the echo signal, a change in beam forming with the ultrasonic imaging apparatus, and a change in channel frequency within a 60 GHz frequency band, based on the extracted information about link margin.

9. The communication method of claim 8, further comprising including the link margin information in a link margin response frame that the ultrasonic imaging apparatus transmits to the probe via the communication link in response to a request of the probe or periodically without requests or when the state of the communication link degrades.

10. An ultrasound diagnostic system comprising: a probe apparatus (1200), having an ultrasound transducer (1201); and an ultrasound imaging apparatus (1280), wherein:

the probe apparatus (1200), which is associated with a mmWave-based wireless communication network, is arranged to transmit an echo signal received from the ultrasound transducer of the probe apparatus to the ultrasonic imaging apparatus (1280) over a signal channel via the mmWave-based wireless communication network; and

the ultrasonic imaging apparatus (1280) is arranged to generate an ultrasonic image based

on the echo signal received from the probe apparatus via the mmWave-based wireless communication network,

CHARACTERISED IN THAT

the probe apparatus (1200) is arranged to transmit the echo signal received from the ultrasound transducer (1201) of the probe apparatus (1200) to the ultrasonic imaging apparatus (1280) over the signal channel in a 60 GHz frequency band via the mmWave-based wireless communication network, wherein the probe apparatus (1200) is associated with the ultrasonic imaging apparatus (1280) by receiving first pairing information representing a pairing request input by a user by pressing a pairing button included in the ultrasonic imaging apparatus (1280), and transmitting second pairing information representing a pairing request input by a user by pressing a pairing button included in the probe apparatus (1200).

11. The ultrasound diagnostic system of claim 10, wherein the mmWave-based wireless network is a Personal Basic Service Set (PBSS) that follows the WiGig standard of the Wireless Gigabit Alliance (WGA), and the ultrasonic imaging apparatus (1280) operates as a PBSS control point (PCP) of the PBSS, wherein the probe (1200) further optionally comprises a beam forming unit (1255) arranged for beam forming of a mmWave beacon transmitted to the ultrasonic imaging apparatus (1280).

12. The ultrasound diagnostic system of claim 10 or 11, wherein the probe apparatus (1200) comprises:

a link formation unit, which is arranged to form a communication link with the ultrasonic imaging apparatus in a Personal Basic Service Set (PBSS) that uses mmWaves;

a margin information processing unit (1253) which is arranged to extract information about a link margin of the communication link from a link margin response frame received from the ultrasonic imaging apparatus (1280); and

a margin control unit (1254) which is arranged to control the probe apparatus (1200) to perform at least one of a change in transmission power of an echo signal, a change in a modulation and coding scheme (MCS) to be applied to the echo signal, a change in beam forming with the ultrasonic imaging apparatus, and a change in channel frequency within a 60 GHz frequency band based on the extracted information received from the margin information processing unit (1253).

13. The ultrasound diagnostic system of claim 12, wherein the margin information processing unit

(1253) is arranged to transmit a link margin request frame requesting information about the link margin to the ultrasonic imaging apparatus (1200), and to receive and process a link margin response frame received from the ultrasonic imaging apparatus (1280) in response to the transmitted link margin request frame.

14. A computer-readable recording medium having embodied thereon a computer program configured to execute a communication method of a probe apparatus for ultrasound diagnostic imaging to control the probe according to claim 6, to execute the steps of:

performing a procedure for associating the probe apparatus with a mmWave-based wireless network;
 receiving an echo signal through an ultrasound transducer;
 generating a data frame with a format suitable for the mmWave-based wireless network, to include in the data frame the echo signal received from the ultrasound transducer of the probe apparatus; and
 transmitting the data frame to an ultrasonic imaging apparatus over a signal channel via the mmWave-based wireless network,

CHARACTERISED BY

transmitting the data frame to an ultrasonic imaging apparatus over a signal channel in a 60 GHz frequency band via the mmWave-based wireless network,

wherein the procedure for associating the probe apparatus and the ultrasound imaging apparatus is performed by receiving first pairing information representing a pairing request input by a user by pressing a pairing button included in the ultrasonic imaging apparatus (402), and transmitting second pairing information representing a pairing request input by a user by pressing a pairing button included in the probe apparatus (404).

Patentansprüche

1. Schallkopfvorrichtung (1200) für Ultraschallbildgebung, wobei die Vorrichtung umfasst:

eine Einheit (1251) zur Durchführung einer Verknüpfung, die dazu ausgerichtet ist, einen Vorgang zur Verknüpfung der Schallkopfvorrichtung mit einem auf Millimeterwellen basierenden drahtlosen Netzwerk durchzuführen;
 einen Ultraschallwandler (1201), der dazu ausgerichtet ist, wenigstens ein Echosignal zu erzeugen;
 eine Rahmenerzeugungseinheit (1252), die da-

zu ausgerichtet ist, einen Datenrahmen mit einem für das auf Millimeterwellen basierende drahtlose Netzwerk geeigneten Format zu erzeugen, und das von dem Ultraschallwandler gesendete Echosignal in den Datenrahmen einzufügen;

eine drahtlose Kommunikationseinheit (1256), die dazu ausgerichtet ist, den Datenrahmen durch einen Signalkanal über das auf Millimeterwellen basierende drahtlose Netzwerk an eine Ultraschallbildgebungsvorrichtung (1280) zu übertragen,

DADURCH GEKENNZEICHNET, DASS

die drahtlose Kommunikationseinheit (1256) dazu ausgerichtet ist, den Datenrahmen durch den Signalkanal in einem Frequenzband von 60 GHz über das auf Millimeterwellen basierende drahtlose Netzwerk an die Ultraschallbildgebungsvorrichtung zu übertragen,

wobei die Einheit (1251) zur Durchführung einer Verknüpfung dazu ausgerichtet ist, einen Vorgang zur Verknüpfung der Schallkopfvorrichtung (1200) und der Ultraschallbildgebungsvorrichtung (1280) durchzuführen durch den Empfang erster Pairinginformationen, die eine von einem Benutzer durch Drücken eines an der Ultraschallbildgebungsvorrichtung (1280) angeordneten Pairingknopfes ausgeführte Pairing Anfrage repräsentieren, und durch das Übertragen zweiter Pairinginformationen, die eine Pairing Anfrage eines Benutzers durch Drücken eines an der Schallkopfvorrichtung (1200) angeordneten Pairingknopfes repräsentieren.

2. Schallkopfvorrichtung gemäß Anspruch 1, wobei es sich bei dem auf Millimeterwellen basierenden drahtlosen Netzwerk um ein sogenanntes Personal Basic Service Set (PBSS) handelt, das dem WiGig-Standard der Wireless Gigabit Allianz (WGA) entspricht, und wobei die Ultraschallbildgebungsvorrichtung dazu ausgerichtet ist, als ein PBSS-Kontrollpunkt (PCP, PBSS Control Point) des PBSS betrieben zu werden.

3. Schallkopfvorrichtung gemäß Anspruch 1 oder 2, weiterhin umfassend eine Strahlformungseinheit (1255), die dazu ausgerichtet ist, eine Millimeterwellen-Strahlformung des Signals in dem 60 GHz Frequenzband durchzuführen, um den Datenrahmen an die Ultraschallbildgebungsvorrichtung (1280) zu übertragen.

4. Schallkopfvorrichtung gemäß einem der vorangehenden Ansprüche, weiterhin umfassend:

eine Verbindungsbildungseinheit, die dazu ausgerichtet ist, eine Kommunikationsverbindung mit der Ultraschallbildgebungsvorrichtung in ei-

- nem Personal Basic Service Set (PBSS) unter Verwendung von Millimeterwellen zu bilden; eine Reserveinformationsverarbeitungseinheit (1253), die dazu ausgerichtet ist, Informationen über eine Verbindungsreserve der Kommunikationsverbindung aus einem von der Ultraschallbildgebungsanlage (1280) gesendeten Verbindungsreserveantwortrahmen zu extrahieren; und eine Reservesteuerungseinheit (1254), die dazu ausgerichtet ist, die Schallkopfvorrichtung (1200) derart zu steuern, dass diese wenigstens eine der folgenden ausführt: eine Veränderung in der Übertragungsleistung eines Echsignals, eine Veränderung in einem Modulations- und Codierungsschema (MCS), das auf das Echsignal angewendet werden soll, eine Veränderung in der Strahlformung mit der Ultraschallbildgebungsanlage (1280) und eine Veränderung in der Kanalfrequenz innerhalb eines 60 GHz Frequenzbands, basierend auf den von der Reserveinformationsverarbeitungseinheit (1253) gesendeten extrahierten Informationen.
5. Schallkopfvorrichtung gemäß einem der vorangehenden Ansprüche, wobei die Reserveinformationsverarbeitungseinheit (1253) dazu ausgerichtet ist, einen Anforderungsrahmen für eine Verbindungsreserve, in dem Informationen über die Verbindungsreserve angefragt werden, an die Ultraschallbildgebungsanlage (1280) zu übertragen, und den von der Ultraschallbildgebungsanlage (1280) als Reaktion auf den Anforderungsrahmen für eine Verbindungsreserve empfangenen Verbindungsreserveantwortrahmen zu empfangen und zu verarbeiten.
6. Kommunikationsverfahren einer Schallkopfvorrichtung für Ultraschallbildgebung, wobei das Kommunikationsverfahren umfasst:
- Durchführen eines Vorgangs zur Verknüpfung der Schallkopfvorrichtung mit einem auf Millimeterwellen basierendem drahtlosem Netzwerk; Erzeugen eines Echsignals mit Hilfe eines Ultraschallwandlers; Erzeugen eines Datenrahmens mit einem für das auf Millimeterwellen basierende drahtlose Netzwerk geeigneten Format und Einfügen des von dem Ultraschallwandler der Schallkopfvorrichtung gesendeten Echsignals in den Datenrahmen; und Übertragen des Datenrahmens durch einen Signalkanal über das auf Millimeterwellen basierende drahtlose Netzwerk an eine Ultraschallbildgebungsanlage,
- Übertragen des Datenrahmens **durch** den Signalkanal in einem Frequenzband von 60 GHz über das auf Millimeterwellen basierende drahtlose Netzwerk an die Ultraschallbildgebungsanlage, wobei der Vorgang zur Verknüpfung der Schallkopfvorrichtung und der Ultraschallbildgebungsanlage umfasst: das Empfangen erster Pairinginformationen, die eine von einem Benutzer **durch** Drücken eines an der Ultraschallbildgebungsanlage (402) angeordneten Pairingknopfes ausgeführte Pairingangebots repräsentieren, und das Übertragen zweiter Pairinginformationen, die eine von einem Benutzer **durch** Drücken eines an der Schallkopfvorrichtung (404) angeordneten Pairingknopfes ausgeführte Pairingangebots repräsentieren.
7. Kommunikationsverfahren gemäß Anspruch 6, wobei es sich bei dem auf Millimeterwellen basierendem drahtlosen Netzwerk um ein sogenanntes Personal Basic Service Set (PBSS) handelt, das dem WiGig-Standard der Wireless Gigabit Alliance (WGA) entspricht, und die Ultraschallbildgebungsanlage als ein PBSS-Kontrollpunkt (PCP, PBSS Control Point) des PBSS betrieben wird, wobei das Verfahren weiterhin optional das Durchführen einer Strahlformung einer an die Ultraschallbildgebungsanlage übertragenen Millimeterwellenbake umfasst.
8. Kommunikationsverfahren gemäß Anspruch 6 oder 7, weiterhin umfassend:
- Verwenden des auf Millimeterwellen basierendem drahtlosen Netzwerks, um eine Kommunikationsverbindung mit der Ultraschallbildgebungsanlage in einem Personal Basic Service Set (PBSS), das Millimeterwellen für die Signalübertragung verwendet, zu bilden; Extrahieren von Informationen über eine Verbindungsreserve der Kommunikationsverbindung aus einem von der Ultraschallbildgebungsanlage über die Kommunikationsverbindung gesendeten Verbindungsreserveantwortrahmen; und Durchführen von wenigstens einer der folgenden: eine Veränderung in der Übertragungsleistung eines Echsignals, eine Veränderung in einem Modulations- und Codierungsschema (MCS), das auf das Echsignal angewendet werden soll, eine Veränderung in der Strahlformung mit der Ultraschallbildgebungsanlage und eine Veränderung in der Kanalfrequenz innerhalb eines 60 GHz Frequenzbands, basierend auf den extrahierten Informationen über die Verbindungsreserve.
9. Kommunikationsverfahren gemäß Anspruch 8, weiterhin umfassend das Einfügen der Verbindungsreserveinformationen in einen Verbindungsreserve-

GEKENNZEICHNET DURCH

veantwortrahmen, der von der Ultraschallbildgebungs-
 vorrichtung über die Kommunikationsverbin-
 dung an den Schallkopf übertragen wird, als Reak-
 tion auf eine Anforderung des Schallkopfs oder pe-
 riodisch ohne Anforderungen oder wenn der Zu-
 stand der Kommunikationsverbindung sich ver-
 schlechert.

10. Ultraschalldiagnosesystem umfassend eine Schall-
 kopfvorrichtung (1200), die einen Ultraschallwandler
 (1201) und eine Ultraschallbildgebungs-
 vorrichtung (1280) aufweist, wobei:

die Schallkopfvorrichtung (1200), die mit einem
 auf Millimeterwellen basierenden drahtlosen
 Netzwerk verknüpft ist, dazu ausgerichtet ist, ein
 von dem Ultraschallwandler der Schallkopfvor-
 richtung gesendetes Echosignal durch einen Sig-
 nalkanal über das auf Millimeterwellen basie-
 rende drahtlose Kommunikationsnetzwerk an
 eine Ultraschallbildgebungs-
 vorrichtung (1280) zu übertragen; und

die Ultraschallbildgebungs-
 vorrichtung (1280) dazu ausgerichtet ist, ein
 Ultraschallbild basie-
 rend auf dem von der Schallkopfvorrichtung
 über das auf Millimeterwellen basierende draht-
 lose Kommunikationsnetzwerk gesendeten
 Echosignal zu erzeugen,

DADURCH GEKENNZEICHNET, DASS

die Schallkopfvorrichtung (1200) dazu ausgerichtet
 ist, ein von dem Ultraschallwandler (1201) der
 Schallkopfvorrichtung (1200) gesendeten Echosig-
 nal durch den Signalkanal in einem 60 GHz Fre-
 quenzband über das auf Millimeterwellen basieren-
 de drahtlose Kommunikationsnetzwerk an die Ultra-
 schallbildgebungs-
 vorrichtung (1280) zu übertragen, wobei die Schallkopfvorrichtung (1200) mit der Ultra-
 schallbildgebungs-
 vorrichtung (1280) verknüpft
 wird durch Empfangen erster Pairinginformationen,
 die eine von einem Benutzer durch Drücken eines
 an der Ultraschallbildgebungs-
 vorrichtung (1280) ange-
 ordneten Pairingknopfes ausgeführte Pairing-
 anfrage repräsentieren, und durch das Übertragen
 zweiter Pairinginformationen, die eine von einem
 Benutzer durch Drücken eines an der Schallkopfvor-
 richtung (1200) angeordneten Pairingknopfes aus-
 geführte Pairing-
 anfrage repräsentieren.

11. Ultraschalldiagnosesystem gemäß Anspruch 10,
 wobei es sich bei dem auf Millimeterwellen basie-
 renden drahtlosen Netzwerk um ein sogenanntes
 Personal Basic Service Set (PBSS) handelt, das
 dem WiGig-Standard der Wireless Gigabit Allianz
 (WGA) entspricht, und wobei die Ultraschallbildge-
 bungs-
 vorrichtung (1280) als ein PBSS-Kontroll-
 punkt (PCP, PBSS Control Point) des PBSS betrie-
 ben wird, wobei der Schallkopf (1200) weiterhin op-

tional eine Strahlformungseinheit (1255), die zu ei-
 ner Strahlformung einer an die Ultraschallbildge-
 bungs-
 vorrichtung (1280) übertragenen Millimeter-
 wellenbake ausgerichtet ist, umfasst.

12. Ultraschalldiagnosesystem gemäß Anspruch 10
 oder 11, wobei die Schallkopfvorrichtung (1200) um-
 fasst:

eine Verbindungsbildungseinheit, die dazu aus-
 gerichtet ist, eine Kommunikationsverbindung
 mit der Ultraschallbildgebungs-
 vorrichtung in ei-
 nem Personal Basic Service Set (PBSS) unter
 Verwendung von Millimeterwellen zu bilden;

eine Reserveinformationsverarbeitungseinheit
 (1253), die dazu ausgerichtet ist, Informationen
 über eine Verbindungsreserve der Kommunika-
 tionsverbindung aus einem von der Ultraschall-
 bildgebungs-
 vorrichtung (1280) gesendeten
 Verbindungsreserveantwortrahmen zu extra-
 hieren; und

eine Reservesteuerungseinheit (1254), die da-
 zu ausgerichtet ist, die Schallkopfvorrichtung
 (1200) derart zu steuern, dass diese wenigstens
 eine der folgenden ausführt: eine Veränderung
 in der Übertragungsleistung eines Echosignals,
 eine Veränderung in einem Modulations- und
 Codierungsschema (MCS), das auf das Echo-
 signal angewendet werden soll, eine Verände-
 rung in der Strahlformung mit der Ultraschall-
 bildgebungs-
 vorrichtung und eine Veränderung
 in der Kanalfrequenz innerhalb eines 60 GHz
 Frequenzbands, basierend auf den von der
 Reserveinformationsverarbeitungseinheit
 (1253) gesendeten extrahierten Informationen.

13. Ultraschalldiagnosesystem gemäß Anspruch 12,
 wobei die Reserveinformationsverarbeitungseinheit
 (1253) dazu ausgerichtet ist, einen Anforderungs-
 rahmen für eine Verbindungsreserve, in dem Infor-
 mationen über die Verbindungsreserve angefragt
 werden, an die Ultraschallbildgebungs-
 vorrichtung (1280) zu übertragen, und einen von der Ultraschall-
 bildgebungs-
 vorrichtung (1280) als Reaktion auf den
 Anforderungsrahmen für eine Verbindungsreserve
 gesendeten Verbindungsreserveantwortrahmen zu
 empfangen und zu verarbeiten.

14. Computerlesbares Medium, auf dem ein Computer-
 programm eingebettet ist, das dazu konfiguriert ist,
 ein Kommunikationsverfahren einer Schallkopfvor-
 richtung für Ultraschalldiagnosebildung auszu-
 führen, um den Schallkopf gemäß Anspruch 6 derart
 zu steuern, dass dieser die folgenden Schritte aus-
 führt:

Durchführen eines Vorgangs zur Verknüpfung
 der Schallkopfvorrichtung mit einem auf Millime-

terwellen basierenden drahtlosen Netzwerk;
 Empfangen eines Echosignals durch einen Ultraschallwandler;
 Erzeugen eines Datenrahmens mit einem für das auf Millimeterwellen basierende drahtlose Netzwerk geeigneten Format und Einfügen des von dem Ultraschallwandler empfangenen Echosignals in den Datenrahmen; und
 Übertragen des Datenrahmens durch einen Signalkanal über das auf Millimeterwellen basierende drahtlose Netzwerk an eine Ultraschallbildgebungs Vorrichtung,

GEKENNZEICHNET DURCH

Übertragen des Datenrahmens **durch** einen Signalkanal in einem Frequenzband von 60 GHz über das auf Millimeterwellen basierende drahtlose Netzwerk an eine Ultraschallbildgebungs Vorrichtung, wobei die Durchführung der Verknüpfung der Schallkopf Vorrichtung und der durchgeführt wird durch das Empfangen erster Pairinginformationen, die eine von einem Benutzer **durch** Drücken eines an der Ultraschallbildgebungs Vorrichtung (402) angeordneten Pairingknopfes ausgeführte Pairing anfrage repräsentieren, und **durch** das Übertragen zweiter Pairinginformationen, die eine von einem Benutzer **durch** Drücken eines an der Schallkopf Vorrichtung (404) angeordneten Pairingknopfes ausgeführte Pairing anfrage repräsentieren.

Revendications

1. Appareil à sonde (1200) pour échographie de diagnostic, comprenant :

une unité de réalisation d'association (1251), qui est agencée pour réaliser une procédure d'association de l'appareil à sonde avec un réseau sans fil reposant sur les ondes millimétriques ;
 un transducteur à ultrasons (1201), qui est agencé pour produire au moins un signal échographique ;

une unité génératrice de trame (1252), qui est agencée pour produire une trame de données dont le format est adapté au réseau sans fil reposant sur les ondes millimétriques, et pour inclure dans la trame de données le signal échographique reçu en provenance du transducteur à ultrasons ;

une unité de communication sans fil (1256), qui est agencée pour transmettre la trame de données à un appareil échographique (1280) sur une voie de traitement par l'intermédiaire du réseau sans fil reposant sur les ondes millimétriques,

CARACTÉRISÉ EN CE QUE

l'unité de communication sans fil (1256) est agencée pour transmettre la trame de données à l'appareil échographique sur la voie de traitement dans une bande de fréquence de 60 GHz par l'intermédiaire du réseau sans fil reposant sur les ondes millimétriques,

dans lequel l'unité de réalisation d'association (1251) est agencée pour réaliser une procédure d'association de l'appareil à sonde (1200) et de l'appareil échographique (1280) en recevant des premières informations de pairage représentatives d'une demande de pairage passée par un utilisateur en appuyant sur un bouton de pairage prévu sur l'appareil échographique (1280), et en émettant des deuxièmes informations de pairage représentatives d'une demande de pairage passée par un utilisateur en appuyant sur un bouton de pairage prévu sur l'appareil à sonde (1200).

2. Appareil à sonde selon la revendication 1, dans lequel le réseau sans fil reposant sur les ondes millimétriques est un réseau PBSS (Personal Basic Service Set) qui suit la norme WiGig de la Wireless Gigabit Alliance (WGA), et l'appareil échographique est agencé pour servir de point de contrôle PBSS (PCP) du réseau PBSS.

3. Appareil à sonde selon la revendication 1 ou 2, comprenant en outre une unité de formation de faisceau (1255) qui est agencée pour réaliser une formation de faisceau d'ondes millimétriques du signal dans la bande de fréquence de 60 GHz pour transmettre la trame de données à l'appareil échographique (1280).

4. Appareil à sonde selon l'une quelconque des revendications précédentes, comprenant en outre :

une unité formatrice de liaison qui est agencée pour former une liaison de communication avec l'appareil échographique dans un réseau PBSS (Personal Basic Service Set) utilisant les ondes millimétriques ;

une unité de traitement d'informations de marge (1253) qui est agencée pour extraire des informations concernant une marge de liaison propre à la liaison de communication à partir d'une trame de réponse concernant la marge de liaison reçue en provenance de l'appareil échographique (1280) ; et

une unité de commande de marge (1254) qui est agencée pour commander l'appareil à sonde (1200) afin de réaliser au moins une opération parmi une modification de puissance d'émission d'un signal échographique, une modification d'un programme de modulation et de codage (MCS, Modulation and coding scheme) destiné à être appliqué au signal échographique, une

modification de la formation de faisceau avec l'appareil échographique (1280), et une modification de la fréquence de voie dans une bande de fréquence de 60 GHz en fonction des informations extraites reçues en provenance de l'unité de traitement d'informations de marge (1253).

5. Appareil à sonde selon l'une quelconque des revendications précédentes, dans lequel l'unité de traitement d'informations de marge (1253) est agencée pour transmettre à l'appareil échographique (1280) une trame de requête concernant la marge de liaison, qui demande des informations relatives à la marge de liaison, et pour recevoir et traiter la trame de réponse concernant la marge de liaison reçue en provenance de l'appareil échographique (1280) en réponse à la trame de requête concernant la marge de liaison.
6. Procédé de communication pour un appareil à sonde servant à l'échographie de diagnostic, le procédé de communication comprenant :

la réalisation d'une procédure d'association de l'appareil à sonde avec un réseau sans fil reposant sur les ondes millimétriques ;
 la production d'un signal échographique au moyen d'un transducteur à ultrasons ;
 la production d'une trame de données dont le format est adapté au réseau sans fil reposant sur les ondes millimétriques, pour inclure dans la trame de données le signal échographique reçu en provenance du transducteur à ultrasons de l'appareil à sonde ; et
 la transmission de la trame de données à un appareil échographique sur une voie de traitement par l'intermédiaire du réseau sans fil reposant sur les ondes millimétriques,

CARACTÉRISÉ PAR

la transmission de la trame de données à l'appareil échographique sur la voie de traitement dans une bande de fréquence de 60 GHz par l'intermédiaire du réseau sans fil reposant sur les ondes millimétriques ;

dans lequel la procédure d'association de l'appareil à sonde et de l'appareil échographique comprend la réception de premières informations de pairage représentatives d'une demande de pairage passée par un utilisateur en appuyant sur un bouton de pairage prévu sur l'appareil échographique (402), et l'émission de deuxièmes informations de pairage représentatives d'une demande de pairage passée par un utilisateur en appuyant sur un bouton de pairage prévu sur l'appareil à sonde (404).

7. Procédé de communication selon la revendication

6, dans lequel le réseau sans fil reposant sur les ondes millimétriques est un réseau PBSS (Personal Basic Service Set) qui suit la norme WiGig de la Wireless Gigabit Alliance (WGA), et l'appareil échographique sert de point de contrôle PBSS (PCP) du réseau PBSS, le procédé comprenant facultativement en outre la réalisation d'une formation de faisceau d'une balise à ondes millimétriques transmise à l'appareil échographique.

8. Procédé de communication selon la revendication 6 ou 7, comprenant en outre :

l'utilisation du réseau sans fil reposant sur les ondes millimétriques pour former une liaison de communication avec l'appareil échographique dans un réseau PBSS (Personal Basic Service Set) utilisant les ondes millimétriques pour la transmission des signaux ;

l'extraction d'informations concernant une marge de liaison propre à la liaison de communication à partir d'une trame de réponse concernant la marge de liaison reçue en provenance de l'appareil échographique par l'intermédiaire de la liaison de communication ; et

la réalisation d'au moins une opération parmi une modification de puissance d'émission d'un signal échographique, une modification d'un programme de modulation et de codage (MCS) destiné à être appliqué au signal échographique, une modification de la formation de faisceau avec l'appareil échographique, et une modification de la fréquence de voie dans une bande de fréquence de 60 GHz, en fonction des informations extraites concernant la marge de liaison.

9. Procédé de communication selon la revendication 8, comprenant en outre l'inclusion des informations relatives à la marge de liaison dans une trame de réponse concernant la marge de liaison que l'appareil échographique transmet à la sonde par l'intermédiaire de la liaison de communication en réponse à une requête de la sonde ou périodiquement sans requête ou lorsque l'état de la liaison de communication se dégrade.

10. Système de diagnostic par ultrasons comprenant : un appareil à sonde (1200), présentant un transducteur à ultrasons (1201) et un appareil échographique (1280), dans lequel :

l'appareil à sonde (1200), qui est associé à un réseau de communication sans fil reposant sur les ondes millimétriques, est agencé pour transmettre un signal échographique, reçu en provenance du transducteur à ultrasons de l'appareil à sonde, à l'appareil échographique (1280) sur

une voie de traitement par l'intermédiaire du réseau de communication sans fil reposant sur les ondes millimétriques ; et
 l'appareil échographique (1280) est agencé pour produire une image échographique fondée sur le signal échographique reçu en provenance de l'appareil à sonde par l'intermédiaire du réseau de communication sans fil reposant sur les ondes millimétriques,

CARACTÉRISÉ EN CE QUE

l'appareil à sonde (1200) est agencé pour transmettre le signal échographique reçu en provenance du transducteur à ultrasons (1201) de l'appareil à sonde (1200) à l'appareil échographique (1280) sur la voie de traitement dans une bande de fréquence de 60 GHz par l'intermédiaire du réseau de communication sans fil reposant sur les ondes millimétriques, dans lequel l'appareil à sonde (1200) est associé à l'appareil échographique (1280) en recevant des premières informations de pairage représentatives d'une demande de pairage passée par un utilisateur en appuyant sur un bouton de pairage prévu sur l'appareil échographique (1280), et en émettant des deuxièmes informations de pairage représentatives d'une demande de pairage passée par un utilisateur en appuyant sur un bouton de pairage prévu sur l'appareil à sonde (1200).

11. Système de diagnostic par ultrasons selon la revendication 10, dans lequel le réseau sans fil reposant sur les ondes millimétriques est un réseau PBSS (Personal Basic Service Set) qui suit la norme WiGig de la Wireless Gigabit Alliance (WGA), et l'appareil échographique (1280) sert de point de contrôle PBSS (PCP) du réseau PBSS, la sonde (1200) comprenant en outre facultativement une unité de formation de faisceau (1255) agencée pour former un faisceau d'une balise à ondes millimétriques transmise à l'appareil échographique (1280).
12. Système de diagnostic par ultrasons selon la revendication 10 ou 11, dans lequel l'appareil à sonde (1200) comprend :

une unité formatrice de lien, qui est agencée pour former une liaison de communication avec l'appareil échographique dans un réseau PBSS (Personal Basic Service Set) utilisant les ondes millimétriques ;
 une unité de traitement d'informations de marge (1253) qui est agencée pour extraire des informations concernant une marge de liaison propre à la liaison de communication à partir d'une trame de réponse concernant la marge de liaison reçue en provenance de l'appareil échographique (1280) ; et
 une unité de commande de marge (1254) qui

est agencée pour commander l'appareil à sonde (1200) afin de réaliser au moins une opération parmi une modification de puissance d'émission d'un signal échographique, une modification d'un programme de modulation et de codage (MCS) destiné à être appliqué au signal échographique, une modification de la formation de faisceau avec l'appareil échographique, et une modification de la fréquence de voie dans une bande de fréquence de 60 GHz en fonction des informations extraites reçues en provenance de l'unité de traitement d'informations de marge (1253).

13. Système de diagnostic par ultrasons selon la revendication 12, dans lequel l'unité de traitement d'informations de marge (1253) est agencée pour transmettre à l'appareil échographique (1280) une trame de requête concernant la marge de liaison, qui demande des informations relatives à la marge de liaison, et pour recevoir et traiter une trame de réponse concernant la marge de liaison reçue en provenance de l'appareil échographique (1280) en réponse à la trame de requête concernant la marge de liaison transmise.

14. Support d'enregistrement lisible par voie informatique intégrant un programme informatique configuré pour mettre en oeuvre un procédé de communication pour un appareil à sonde servant à une échographie de diagnostic afin de commander la sonde selon la revendication 6, pour exécuter les étapes consistant à :

réaliser une procédure d'association de l'appareil à sonde avec un réseau sans fil reposant sur les ondes millimétriques ;
 recevoir un signal échographique par l'intermédiaire d'un transducteur à ultrasons ;
 produire une trame de données dont le format est adapté au réseau sans fil reposant sur les ondes millimétriques, pour inclure dans la trame de données le signal échographique reçu en provenance du transducteur à ultrasons de l'appareil à sonde ; et
 transmettre la trame de données à un appareil échographique sur une voie de traitement par l'intermédiaire du réseau sans fil reposant sur les ondes millimétriques,

CARACTÉRISÉ PAR

la transmission de la trame de données à un appareil échographique sur une voie de traitement dans une bande de fréquence de 60 GHz par l'intermédiaire du réseau sans fil reposant sur les ondes millimétriques,
 dans lequel la procédure d'association de l'appareil à sonde et de l'appareil échographique s'effectue

grâce à la réception de premières informations de pairage représentatives d'une demande de pairage passée par un utilisateur en appuyant sur un bouton de pairage prévu sur l'appareil échographique (402), et à l'émission de deuxièmes informations de pairage représentatives d'une demande de pairage pas-
sée par un utilisateur en appuyant sur un bouton de pairage prévu sur l'appareil à sonde (404).

5

10

15

20

25

30

35


40

45


50

55


[Fig. 1]

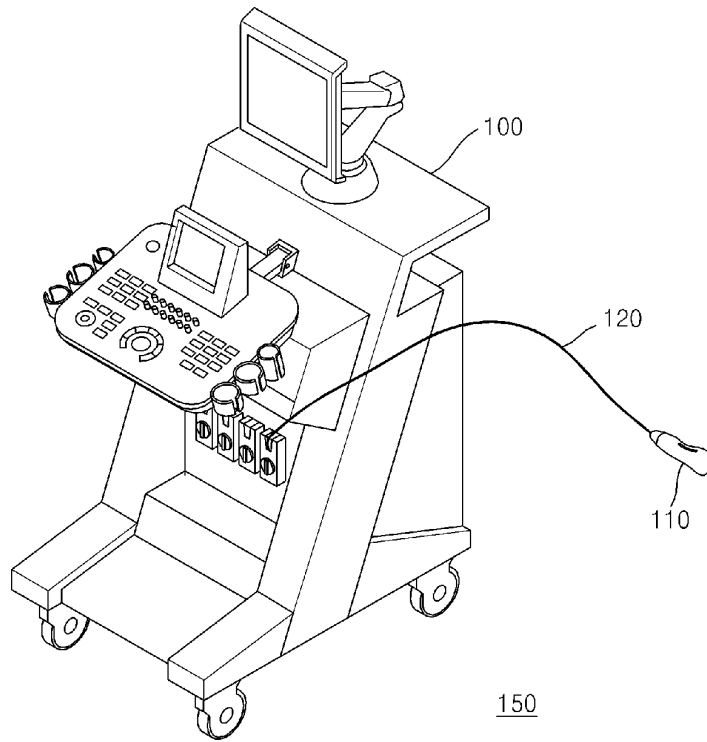


[Fig. 2]

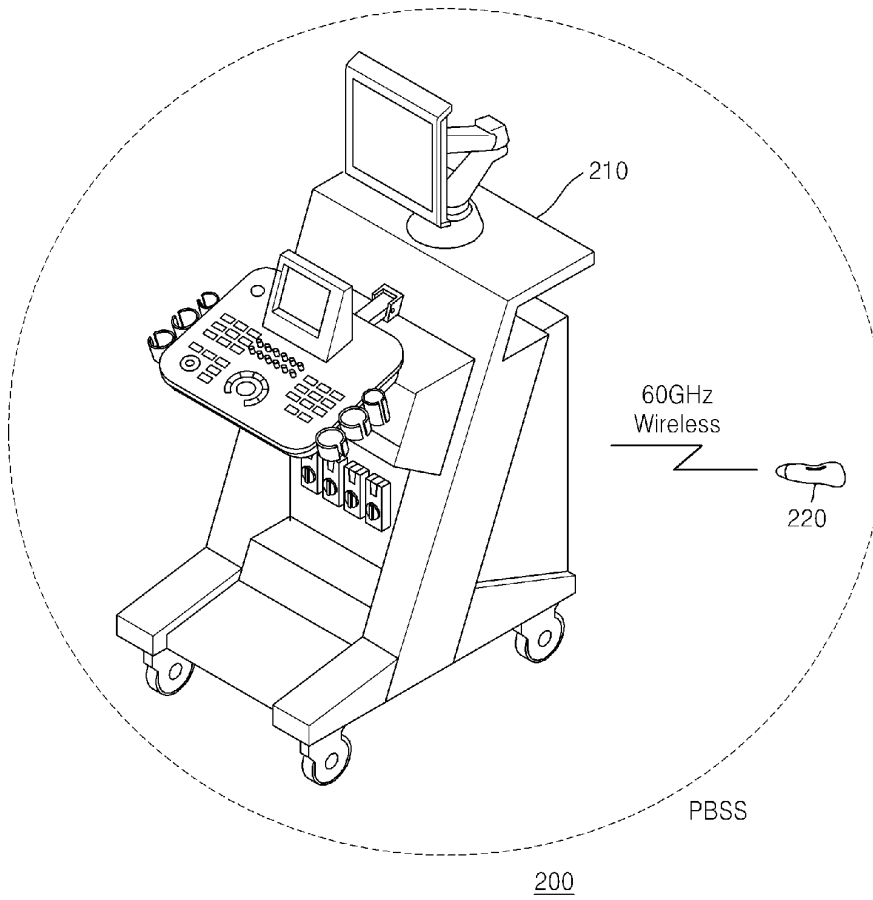


[Fig. 3]

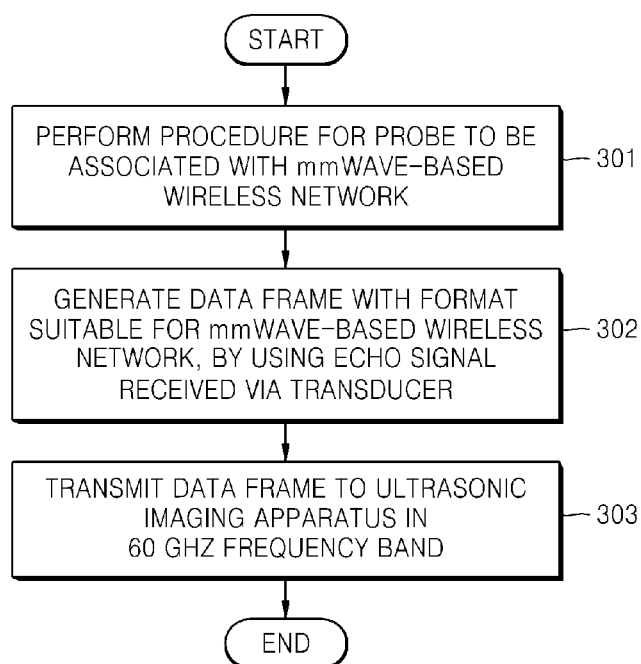


[Fig. 4]

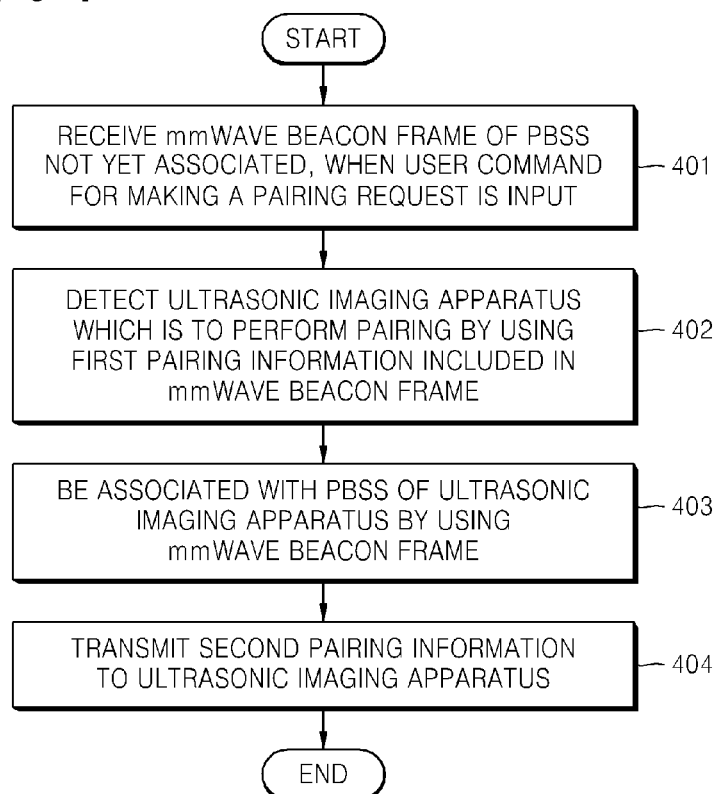


[Fig. 5]

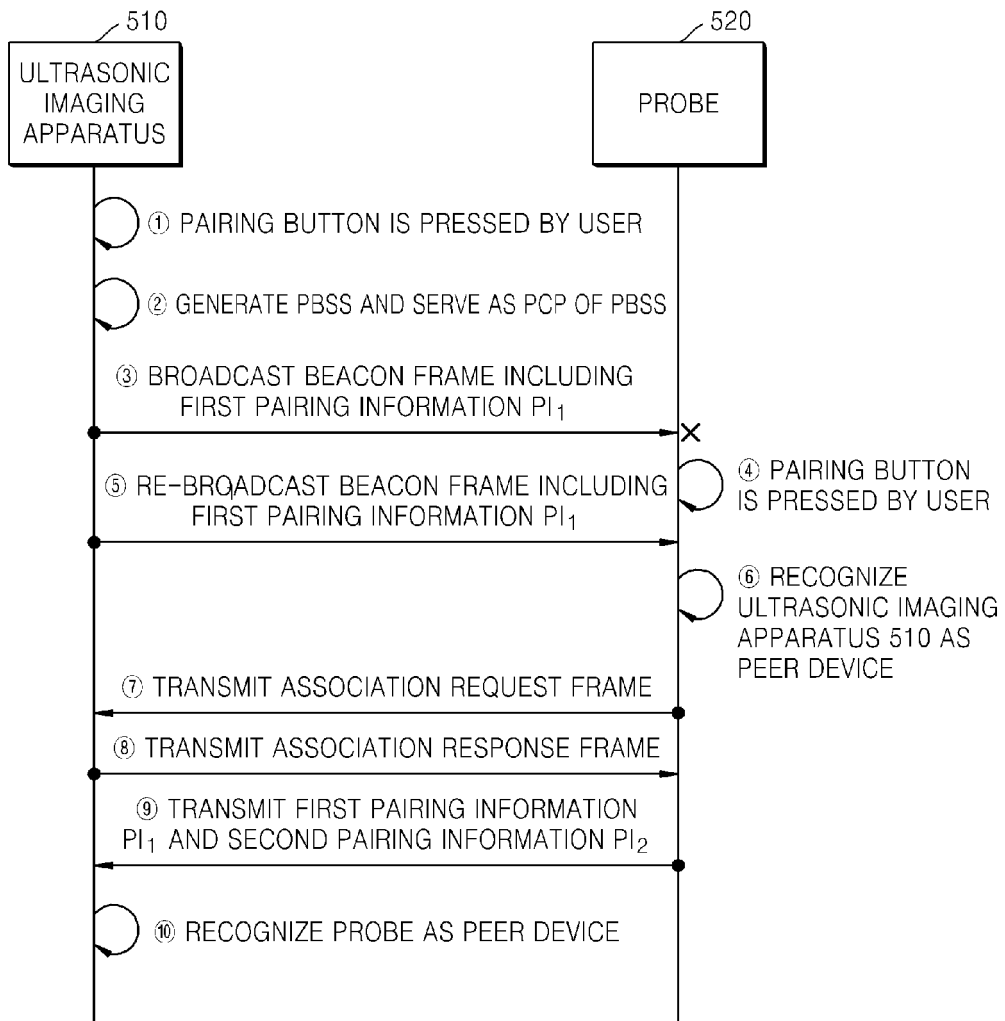


[Fig. 6]

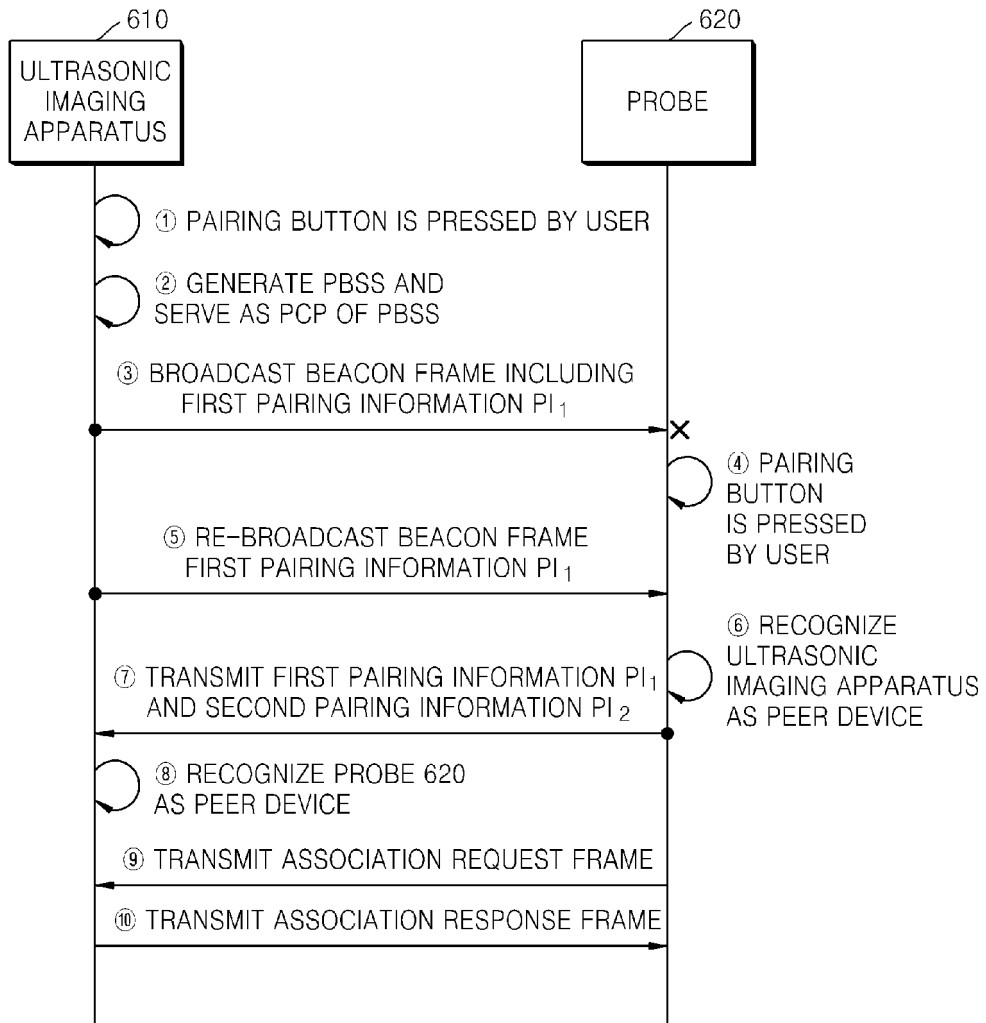


[Fig. 7]

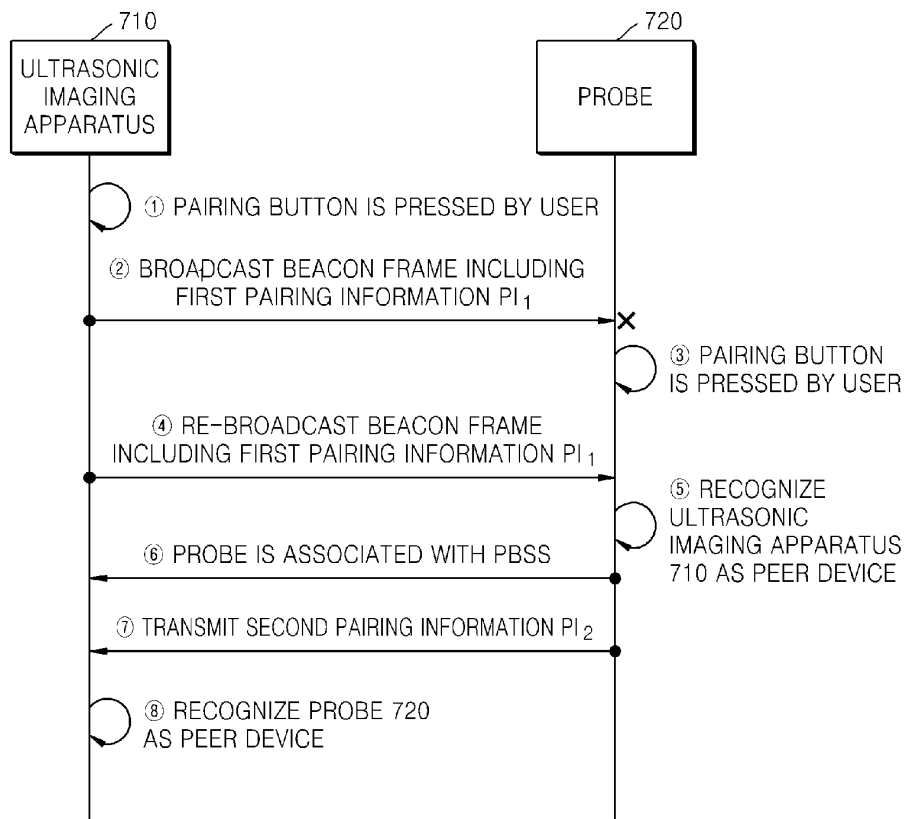


[Fig. 8]

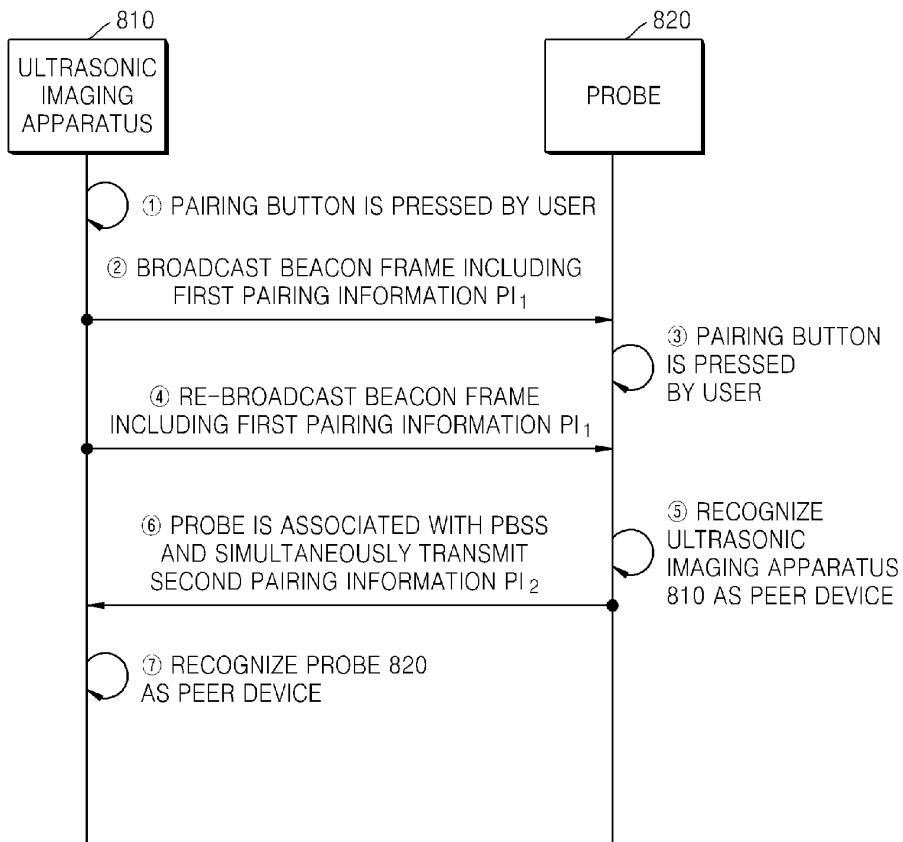

[Fig. 9]

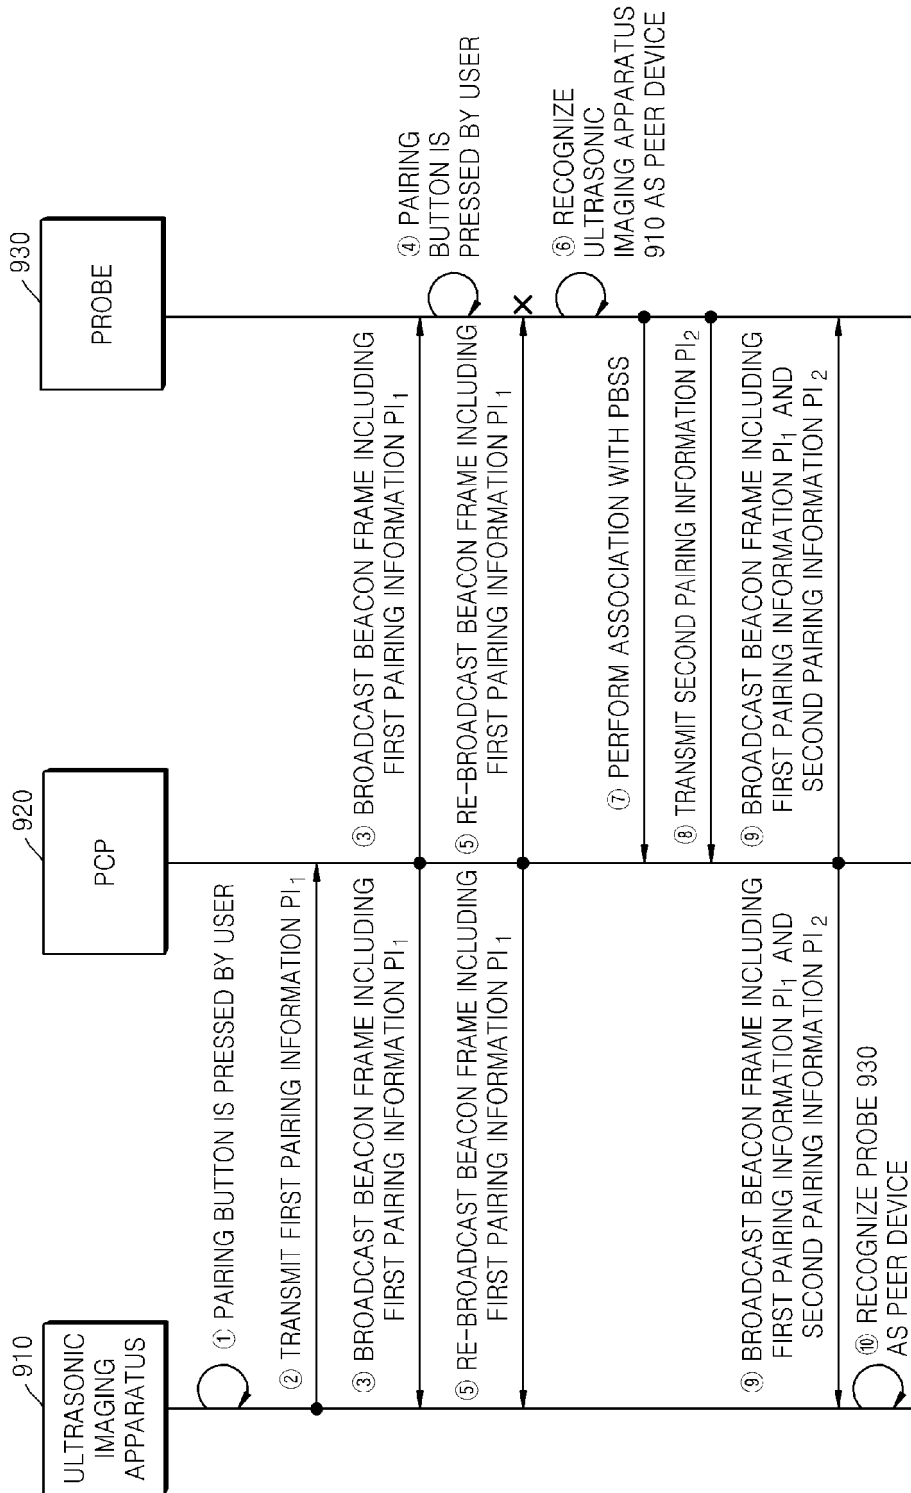

[Fig. 10]

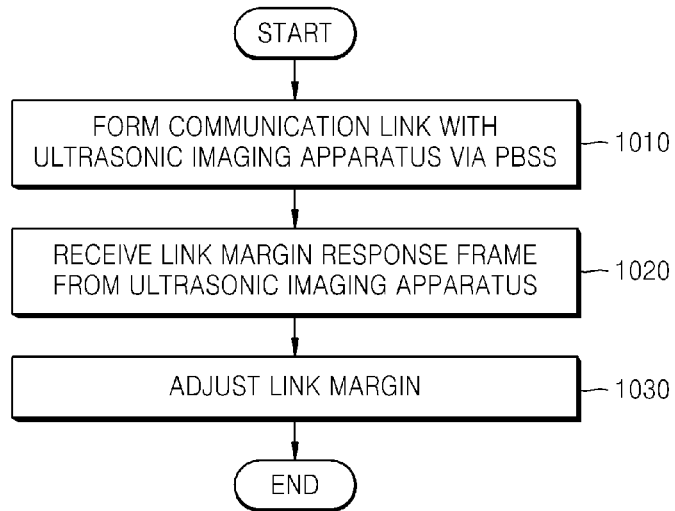


[Fig. 11]

1100

	1101	1102	1103	1104	1105	1106	1107
	CATEGORY	ACTION	TRANSMISSION NUMBER	PREFERRED ACTION	LINK MARGIN ELEMENT	UNSOLICITED	DATA FRAME ID
OCTETS:	1	1	1	1	6	1	2

	1108	1109	1110	1111
	ELEMENT ID	LENGTH	MCS	LINK MARGIN
OCTETS:	1	1	1	1
				...
				4

[Fig. 12]

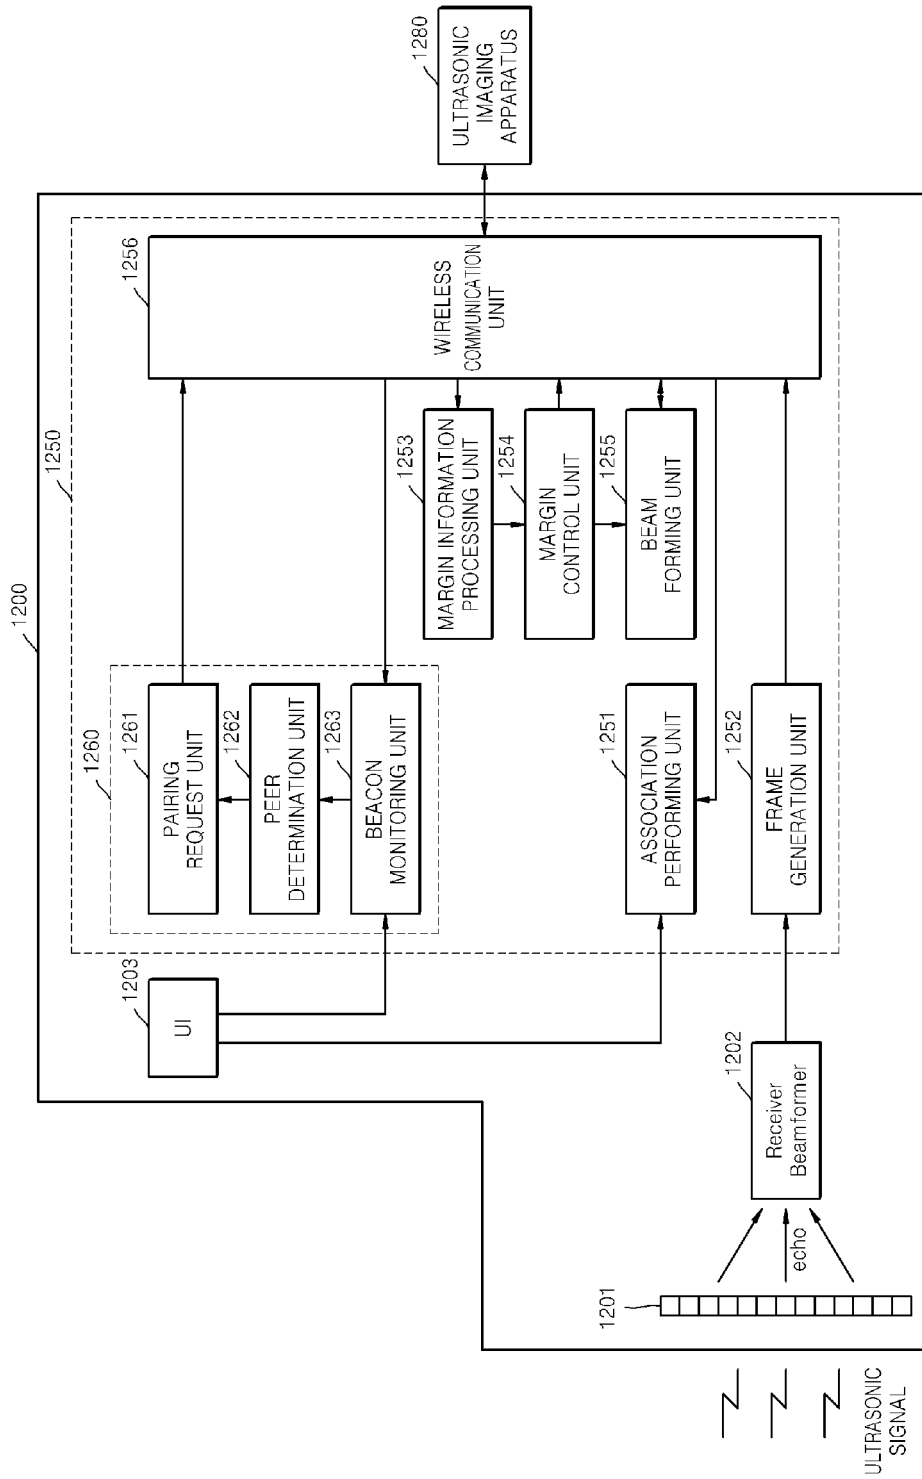

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2011105904 A [0004]
- US 2010191121 A [0004]
- WO 2008146204 A [0004]

专利名称(译)	用于超声诊断的探头的无线通信方法及其设备		
公开(公告)号	EP2736417B1	公开(公告)日	2017-01-04
申请号	EP2012817598	申请日	2012-07-25
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	KIM KANG SIK KIM JUNG JUN HAN HO SAN HONG SOON JAE		
发明人	KIM, KANG-SIK KIM, JUNG-JUN HAN, HO-SAN HONG, SOON-JAE		
IPC分类号	A61B8/00 H04W84/12		
CPC分类号	A61B8/4405 A61B8/4472 H04W84/12		
优先权	1020110073773 2011-07-25 KR		
其他公开文献	EP2736417A4 EP2736417A1		
外部链接	Espacenet		

摘要(译)

用于超声诊断成像的探头装置与基于mmWave的个人基本服务装置 (PBSS) 相关联, 执行与超声成像装置的配对, 并且将经由探头的换能器部分接收的回波信号发送到使用超声成像装置的超声成像装置。信号信道在60GHz频带内, 从而不需要数据传输电缆, 大大减少了操作员的不便。

[Fig. 2]

