



(11)

EP 2 138 100 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**08.10.2014 Bulletin 2014/41**

(51) Int Cl.:  
**A61B 8/00 (2006.01)**

**G06F 1/16 (2006.01)**

(21) Application number: **09162937.8**

(22) Date of filing: **17.06.2009**

**(54) Portable ultrasonic diagnostic apparatus**

Tragbare Ultraschalldiagnosevorrichtung  
Appareil de diagnostic ultrasonique portable

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL  
PT RO SE SI SK TR**

- **Kim, Jae-Gyoung**  
143-203, Seoul (KR)
- **Lee, Sun Ki**  
135-080, Seoul (KR)
- **Song, Young Seuk**  
121-260, Seoul (KR)

(30) Priority: **25.06.2008 KR 20080060384**

(74) Representative: **Schmid, Wolfgang**  
**Lorenz & Kollegen**  
**Patentanwälte Partnerschaftsgesellschaft mbB**  
**Alte Ulmer Strasse 2**  
**89522 Heidenheim (DE)**

(43) Date of publication of application:  
**30.12.2009 Bulletin 2009/53**

(73) Proprietor: **MEDISON CO., LTD.**  
**Kangwon-do 250-870 (KR)**

(72) Inventors:

- **Shin, Soo-Hwan**  
137-061, Seoul (KR)
- **Song, Mi Ran**  
130-050, Seoul (KR)

(56) References cited:

<b>EP-A- 1 186 985</b>	<b>JP-A- 2005 196 502</b>
<b>JP-A- 2008 126 015</b>	<b>NL-C2- 1 028 493</b>
<b>US-A1- 2003 052 787</b>	<b>US-A1- 2006 082 957</b>

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### 1. Field of the Invention

**[0001]** The present invention relates to an ultrasonic diagnostic apparatus and, more particularly, to a portable ultrasonic diagnostic apparatus.

### 2. Description of the Related Art

**[0002]** Ultrasonic systems are one of the most widely applied and important diagnostic apparatus. In particular, since the ultrasonic system has characteristics of being non-invasive and non-destructive with respect to a target body, it has been widely used in the medical field. In recent years, a high performance ultrasonic system has been developed to generate two dimensional or three-dimensional interior images of the target body.

**[0003]** Since such an ultrasonic system has a very large size and a heavy weight, it must be secured to a particular location. Further, even in the case of a small size ultrasonic system, it generally has a weight of 10 kg or more, which makes it difficult to move or carry such a small size ultrasonic system. In order to overcome such disadvantages of the ultrasonic system, portable ultrasonic systems have been developed in the related art.

**[0004]** Fig. 1 is a perspective view of a conventional ultrasonic diagnostic apparatus. Referring to Fig. 1, a conventional ultrasonic diagnostic apparatus 10 includes a body 11, a control panel 12, a display unit 13, and a probe 14.

**[0005]** The body 11 constitutes an outer appearance of the ultrasonic diagnostic apparatus 10 and is driven by power supplied from a battery received therein or from an external power supply. The body 11 is connected to the probe 14 that scans ultrasonic waves and converts the reflected ultrasonic waves into electrical signals, and is provided therein with an electronic circuit that can process analog or digital signals used for ultrasonic diagnosis.

**[0006]** The control panel 12 is disposed on the body 11 and includes a plurality of input units for performing an ultrasonic image pick-up function, a control function, a menu selection function, a measurement and annotation function, and the like.

**[0007]** The display unit 13 receives and displays data and images processed by and sent from the body 11.

**[0008]** The probe 14 includes at least one transducer (not shown). The transducer sends an ultrasonic signal to a target body and receives the ultrasonic signal reflected therefrom.

**[0009]** Such a conventional portable ultrasonic diagnostic apparatus 10 can be reduced in size and weight to be carried easily.

**[0010]** However, since it is inconvenient for an operator to carry such a conventional portable ultrasonic diagnostic apparatus, it is necessary for the operator to have a bag for receiving and carrying the ultrasonic diagnostic apparatus.

**[0011]** Further, since the display unit is secured to the rear side of the body of the conventional portable ultrasonic diagnostic apparatus, it is necessary for an operator to incline his or her body or head to accurately observe an image displayed on a front side of the display unit, thereby causing user inconvenience. Therefore, there is a need for an improved portable ultrasonic diagnostic apparatus.

**[0012]** The ultrasonic diagnostic system disclosed in JP 2008-126015 comprises a main body housing equipped with a movable wheel, an operation device equipped with a group of operation switches, and a movable arm to connect the main body housing and the operation device. The main body housing includes an inclined plane backwardly inclined from its front surface to the upper surface. The movable arm movably supports the operation device at the upper part of the inclined plane by keeping a position of the operation device, from a first position to be set within a projected area of the main body housing through the upper part of the inclined plane as a pathway at a lower part of the inclined plane, and through an elevating mechanism part to move so as to be at a second position throwing a part out of the main body housing at least. JP 2008-126015 further discloses all features of the preamble of claim 1.

## SUMMARY OF THE INVENTION

**[0013]** The present invention is conceived to solve the above and other problems of the conventional system as described above, and an aspect of the present invention is to provide a portable ultrasonic diagnostic apparatus that can be conveniently carried by an operator and has an improved structure eliminating operator inconvenience, such as the operator having to incline their head or body during the use of the diagnostic apparatus and the like.

**[0014]** This object is achieved by claim 1.

## 40 BRIEF DESCRIPTION OF THE DRAWINGS

**[0015]** The above and other features and advantages of the present invention will become apparent from the following description of exemplary embodiments given in conjunction with the accompanying drawings, in which:

- Fig. 1 is a perspective view of a conventional portable ultrasonic diagnostic apparatus;
- Fig. 2 is a perspective view of a portable ultrasonic diagnostic apparatus according to a first embodiment of the present invention;
- Fig. 3 is a side view of the portable ultrasonic diagnostic apparatus shown in Fig. 2;
- Fig. 4 is a perspective view illustrating a folded state of the portable ultrasonic diagnostic apparatus shown in Fig. 2;
- Fig. 5 is a perspective view illustrating a rotating state of the portable ultrasonic diagnostic apparatus

shown in Fig. 2;

Fig. 6 is a perspective view of the portable ultrasonic diagnostic apparatus shown in Fig. 2, in which an assistant device is coupled to the portable ultrasonic diagnostic apparatus;

Fig. 7 is a plan view of a portable ultrasonic diagnostic apparatus according to a second embodiment of the present invention; and

Fig. 8 is a plan view of a portable ultrasonic diagnostic apparatus according to a third embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

**[0016]** Exemplary embodiments of the present invention will be described in detail with reference to the accompanying drawings hereinafter. For convenience of description, the drawings are not to precise scale and may be exaggerated in thickness of lines or size of components for descriptive convenience and clarity only. Furthermore, terms used herein are defined by taking functions of the present invention into account and can be changed according to the custom or intention of users or operators. Therefore, definition of the terms should be made according to overall disclosures set forth herein.

**[0017]** Fig. 2 is a perspective view of a portable ultrasonic diagnostic apparatus according to a first embodiment of the present invention, Fig. 3 is a side view of the portable ultrasonic diagnostic apparatus shown in Fig. 2, Fig. 4 is a perspective view illustrating a folded state of the portable ultrasonic diagnostic apparatus shown in Fig. 2, and Fig. 5 is a perspective view illustrating a rotating state of the portable ultrasonic diagnostic apparatus shown in Fig. 2.

**[0018]** Referring to Figs. 2 to 5, the portable ultrasonic diagnostic apparatus 100 according to the first embodiment includes a body part 110, a handle 120, and a display unit 130.

**[0019]** The body part 110 constitutes an outer appearance of the ultrasonic diagnostic apparatus 100, and includes a body 112 and a pedestal 114.

**[0020]** The body 112 includes a beam former for transmit-focusing ultrasonic signals transmitted through a probe (not shown) and for receive-focusing ultrasonic signals received through the probe, a data creator for creating frame data based on the signals output from the beam former, a processor for generating a two-dimensional or three-dimensional interior image of a target body based on the frame data, a storage for storing data, a plurality of operating keys (reference number omitted) for driving the diagnostic apparatus 100 or for selecting functions thereof.

**[0021]** The pedestal 114 is disposed outside the body 112. The pedestal 114 is coupled to the handle 120. The pedestal 114 is provided with a coupling part 113 to which the handle 120 is rotatably coupled. The coupling part 113 has a curved through-hole shape such that the handle 120 can be inserted into and can penetrate the cou-

pling part 113.

**[0022]** The handle 120 is coupled to the body part 110. The handle 120 has a curved shape, and preferably a circular shape. The handle 120 is inserted into the coupling part 113 configured to have the curved through-hole shape corresponding to the shape of the handle 120, so that the handle 120 is rotatably coupled to the pedestal 114.

**[0023]** Although the handle 120 is provided on the body part 110 to rotate 360 degrees, the handle 120 is rotated at a restricted angle since it is coupled to the display unit 130 described below.

**[0024]** The handle 120 can be rotated according to manipulation of an operator. For easy rotation of the handle 120, the body part 110 is configured to protrude below the handle 120.

**[0025]** Further, for more easy rotation of the handle 120, the coupling part 113 may be provided with a rolling member 115 that guides the rotation of the handle 120.

**[0026]** Examples of the rolling member 115 include a ball bearing, a roller, and the like.

**[0027]** The display unit 130 is coupled to the handle 120. The display unit 130 serves to receive and display data and images processed by and sent from the body 112, and is electrically connected to the body 112 through a cable (not shown). Here, the cable connected to the display unit 130 can be connected to the body 112 through the handle 120.

**[0028]** The display unit 130 is coupled to the handle 120 to rotate up or down around the handle 120, so that the display unit 130 can rotate toward the body part 110 to cover the body part 110. The display unit 130 may be fixedly or separably coupled to the handle 120.

**[0029]** Next, operation and effects of the portable ultrasonic diagnostic apparatus 100 according to this embodiment will be described.

**[0030]** For the portable ultrasonic diagnostic apparatus 100 according to this embodiment, the handle 120 is used as a gripper when an operator carries the apparatus 100. In other words, when the operator carries the apparatus 100, the display unit 130 is rotated toward the body part 110 to allow the portable ultrasonic diagnostic apparatus 100 to be folded, and the handle 120 is gripped by the operator for carrying the apparatus 100. In this case, the handle 120 acts as the gripper of the apparatus 100.

**[0031]** Since the handle 120 has a curved shape, it improves close contact feelings with an operator's palm, so that the operator does not experience palm fatigue even after extended use.

**[0032]** The pedestal 114 is provided with a securing part 116 that restricts rotation of the handle 120. The securing part 116 is configured to selectively restrict the rotation of the handle 120 according to manipulation of the operator. When carrying the ultrasonic diagnostic apparatus 100, the operator can stably carry the apparatus 100 by securing the rotation of the handle 120 by means of the securing part 116 to prevent the apparatus from shaking.

**[0032]** The securing part 116 may be formed in a variety of shapes. For example, the securing part 116 may be configured to restrict the rotation of the handle 120 by means of frictional interaction with the handle 120, or may be configured to restrict the rotation of the handle 120 by means of interaction with a plurality of protrusions formed on the handle 120. A detailed configuration of the securing part 116 can be variously realized by a person having ordinary knowledge in the art, and a detailed description thereof will be omitted herein.

**[0033]** The body part 110 may further include a track ball 118. The track ball 118 is disposed on a location relatively apart from the display unit 130 on the body part 110. For the portable ultrasonic diagnostic apparatus 100 of this embodiment, the handle 120 serves to support the operator's hand when the operator manipulates the track ball 118 or operating keys around the track ball 118. Accordingly, the portable ultrasonic diagnostic apparatus 100 of this embodiment can improve user convenience and reduce hand fatigue.

**[0034]** Further, for the portable ultrasonic diagnostic apparatus 100 of this embodiment, since the handle 120 is rotatably disposed on the body part 110, the display unit 130 coupled to the handle 120 can be rotated by the rotation of the handle 120.

**[0035]** When the operator rotates the handle 120, the display unit 130 rotates along with the handle 120 so that an angle of view of the display unit 130 also rotates. Thus, the operator can rotate the angle of view of the display unit 130 by rotating the handle 120.

**[0036]** With the handle 120 and the display unit 130 configured as described above, the portable ultrasonic diagnostic apparatus 100 of this embodiment enables the operator to view an image displayed on the front side of the display unit 130 simply by manipulating the handle 120 without inclining his or her body or head, even in the event where the operator carries out diagnosis on a patient with the body part 110 of the apparatus located in a diagonal direction with respect to the operator.

**[0037]** Fig. 6 is a perspective view of the portable ultrasonic diagnostic apparatus shown in Fig. 2, in which an assistant device is attached to the apparatus.

**[0038]** In Fig. 6, the portable ultrasonic diagnostic apparatus of this embodiment may further include an assistant device 140. The assistant device 140 may be, but is not limited to, an assistant display, Echo-Printer, a probe holder, a camera, and the like. The assistant device 140 is detachably coupled to the handle 120.

**[0039]** In addition to the aforementioned gripper function and the function of rotating the display unit 130, the handle 120 provides an attaching space for the assistant device 140. Accordingly, the portable ultrasonic diagnostic apparatus 100 of this embodiment allows an operator to attach the assistant device 140 and other accessories to the handle 120, so that the assistant device 140 and other accessories can be used or accommodated in the apparatus as needed.

**[0040]** Fig. 7 is a plan view of a portable ultrasonic di-

agnostic apparatus according to a non-claimed arrangement, and Fig. 8 is a plan view of a portable ultrasonic diagnostic apparatus according to another embodiment of the present invention.

**[0041]** In these drawings, the display unit is not shown for descriptive convenience. Further, the same or similar configurations to those of the aforementioned embodiment are denoted by the same reference numerals, and detailed descriptions thereof are omitted herein.

**[0042]** First, referring to Fig. 7, the portable ultrasonic diagnostic apparatus according to the non-claimed arrangement includes a handle 220 detachably coupled to a body part 210.

**[0043]** The handle 220 includes a first handle 222 detachably coupled to one side of a pedestal 214 and a second handle 224 detachably coupled to the other side of the pedestal 214. Further, a coupling part 213 of the pedestal 214 is provided at opposite sides of the coupling part 213 with first fastening parts 219, and the first and second handles 222 and 224 are provided with second fastening parts 225, respectively.

**[0044]** In this non-claimed arrangement, the first fastening parts 219 are formed in a groove shape and the second fastening parts 225 are formed in a protrusion shape. However, it should be noted that the present invention is not limited thereto and can be modified to a variety of shapes. For example, the first fastening part 219 may be formed in a protrusion shape and the second fastening part 225 may be formed in a groove shape.

**[0045]** According to this non-claimed arrangement, the first and second handles 222 and 224 can be detachably coupled to both sides of the pedestal 214 by detachably fastening the second fastening part 225 to the first fastening part 219.

**[0046]** With this configuration of the handle 220, the portable ultrasonic diagnostic apparatus 200 of this non-claimed arrangement can be reduced in volume by separating the handle 220, if needed, thereby providing an advantage of easy custody.

**[0047]** Referring to Fig. 8, the portable ultrasonic diagnostic apparatus 300 of another embodiment includes a handle 320 detachably coupled to a body part 110.

**[0048]** The handle 320 includes a plurality of coupling pieces 322. The respective coupling pieces 322 are inserted into a coupling part 113 of a pedestal 114 and are separably coupled to each other to constitute the handle 320. In this embodiment, the handle 320 is shown as being constituted by three coupling pieces 322, but the present invention is not limited thereto.

**[0049]** Thus, the handle 320 can be detachably coupled to the body part 110 and can be rotated thereon. With this configuration of the handle 320, the portable ultrasonic diagnostic apparatus 300 has features given by the configuration of the handle that can be rotated on the body part, and by the configuration of the handle that can be separated to several pieces.

**[0050]** As apparent from the above description, the portable ultrasonic diagnostic apparatus according to the

present invention includes a handle having a curved shape to improve close contact feelings with an operator's palm, so that the operator does not experience palm fatigue even after extended use.

**[0051]** Further, for the portable ultrasonic diagnostic apparatus of the invention, when an operator carries out diagnosis on a patient with a body part of the ultrasonic diagnostic apparatus located in a diagonal direction with respect to the operator, the operator can view a display unit of the apparatus by a simple operation of rotating the handle, thereby enhancing operating efficiency.

**[0052]** In addition, for the portable ultrasonic diagnostic apparatus of the invention, when the operator manipulates a track ball or an operation key around the track ball, the handle supports the operator's hand, thereby improving conveniences in use while reducing hand fatigue.

**[0053]** Moreover, the portable ultrasonic diagnostic apparatus of the invention is configured to allow an assistant device and other accessories to be attached to the handle such that the assistant device and other accessories can be employed by the operator or can be received in the apparatus.

## Claims

1. A portable ultrasonic diagnostic apparatus, comprising:

a body part (110) which constitutes an outer appearance of the portable ultrasonic diagnostic apparatus (100; 300);  
 a handle (120; 320) coupled to the body part (110), the handle being adapted to be used as a gripper carrying the portable ultrasonic diagnostic apparatus (100; 300) and having a curved shape; the portable ultrasonic diagnostic apparatus further comprising  
 a display unit (130) coupled to the handle to rotate up or down around the handle (120; 320), so that the display unit (130) can rotate toward the body part (110) to cover the body part (110), wherein the body part (110) protrudes below the handle (120; 320) and comprises a body (112) disposed inside the handle (120; 320) and a pedestal (114) disposed outside the body (112) and coupled to the handle (120; 320), and  
 wherein the pedestal (114) comprises a coupling part (113) to which the handle (120; 320) is rotatably coupled, and a securing part (116) to restrict rotation of the handle (120; 320),  
**characterized in that** the curved shape of the handle (120; 320) is a circular shape, wherein the handle (120; 320) is inserted into the coupling part (113), the coupling part having a curved through-hole shape corresponding to the shape of the handle (120; 320), so that the han-

dle (120; 320) is rotatably coupled to the pedestal (114).

2. The portable ultrasonic diagnostic apparatus according to claim 1, wherein the coupling part (113) comprises a rolling member (115) to guide rotation of the handle (120; 320).
3. The portable ultrasonic diagnostic apparatus according to claim 1, wherein the handle (320) comprises a plurality of coupling pieces (322) capable of being separably coupled to each other.
4. The portable ultrasonic diagnostic apparatus according to claim 1, wherein the handle (320) is detachably coupled to the body part (110).
5. The portable ultrasonic diagnostic apparatus according to any one of claims 1 to 4, wherein the body part (110) further comprises a track ball (118).
6. The portable ultrasonic diagnostic apparatus according to any one of claims 1 to 4, further comprising:

an assistant device (140) detachably coupled to the handle (120; 320).

## Patentansprüche

1. Tragbare Ultraschalldiagnosevorrichtung, welche Folgendes aufweist:

ein Gehäuseteil (110), das eine äußere Form der tragbaren Ultraschalldiagnosevorrichtung (100;300) bildet;  
 einen Handgriff (120;320), der mit dem Gehäuseteil (110) verbunden ist, wobei der Handgriff als ein Griff zum Tragen der tragbaren Ultraschalldiagnosevorrichtung (100;300) verwendet wird und eine gekrümmte Form aufweist;  
 wobei die tragbare Ultraschalldiagnosevorrichtung (100;300) des Weiteren Folgendes aufweist:

eine Anzeigeeinheit (130), die mit dem Handgriff verbunden und nach oben oder unten um den Handgriff (120;320) rotierbar ist, so dass die Anzeigeeinheit (130) in Richtung des Gehäuseteils (110) rotieren kann, um das Gehäuseteil (110) abzudecken, wobei das Gehäuseteil (110) unter dem Handgriff (120;320) hervorragt und ein Gehäuse (112), das innerhalb des Handgriffs (120;320) angeordnet ist, und einen Sockel (114) aufweist, der außerhalb des Gehäu-

ses (112) angeordnet und mit dem Handgriff (120;320) verbunden ist, und wobei der Sockel (114) ein Verbindungsteil (113), mit welchem der Handgriff (120;320) drehbar verbunden ist, und ein Sicherungs-teil (116) aufweist, um die Rotation des Handgriffs (120;320) zu begrenzen, 5

**dadurch gekennzeichnet, dass**

die gekrümmte Form des Handgriffs (120;320) 10 eine Kreisform ist, wobei der Handgriff (120;320) in das Verbindungsteil (113) eingeführt ist, wobei das Verbindungsteil die Form einer gekrümmten Durchgangsbohrung entsprechend der Form des Handgriffs (120;320) aufweist, so dass der Handgriff (120;320) drehbar mit dem Sockel (114) verbunden ist. 15

2. Tragbare Ultraschalldiagnosevorrichtung nach Anspruch 1, wobei das Verbindungsteil (113) ein Rollenelement (115) aufweist, um die Rotation des Handgriffs (120;320) zu führen. 20
3. Tragbare Ultraschalldiagnosevorrichtung nach Anspruch 1, wobei der Handgriff (320) eine Vielzahl von Verbindungsstücken (322) aufweist, die einzeln miteinander verbindbar sind. 25
4. Tragbare Ultraschalldiagnosevorrichtung nach Anspruch 1, wobei der Handgriff (320) abnehmbar an dem Gehäuseteil (110) angebracht ist. 30
5. Tragbare Ultraschalldiagnosevorrichtung nach einem der Ansprüche 1 bis 4, wobei das Gehäuseteil (110) des Weiteren eine Steuerkugel (118) aufweist. 35
6. Tragbare Ultraschalldiagnosevorrichtung nach einem der Ansprüche 1 bis 4, welche des Weiteren Folgendes aufweist:  
eine Assistenzeinrichtung (140), die abnehmbar mit dem Handgriff (120;320) verbunden ist. 40

**Revendications**

1. Appareil de diagnostic ultrasonique portable comportant:

un élément de corps (110) qui définit une apparence extérieure de l'appareil portable de diagnostic ultrasonique (100; 300); 50 une poignée (120, 320) couplée à l'élément de corps (110), la poignée étant adaptée pour être utilisée comme élément de maintien pour porter l'appareil portable de diagnostic ultrasonique (100; 300) et ayant une forme incurvée; une unité d'affichage (130) couplée à ladite poi- 55

gnée, pouvant être tournée vers le haut et vers le bas autour de ladite poignée (120; 320), de telle manière que l'unité d'affichage puisse tourner vers l'élément de corps (110) pour couvrir l'élément de corps (110), dans lequel l'élément de corps (110) est protubérant sous la poignée (120, 320) et comporte un corps (112) disposé dans la poignée (120, 320) et un piédestal (114) disposé à l'extérieur du corps (112), et couplé à la poignée (120, 320), et dans lequel le piédestal (114) comporte une pièce de couplage (113) à laquelle la poignée (120, 320) est couplée en rotation et une pièce de sécurité (116) pour limiter la rotation de la poignée (120, 320),

**caractérisé en ce que** la forme incurvée de la poignée (120, 320) est une forme circulaire, dans laquelle la poignée (120, 320) est insérée dans la pièce de couplage (113), une ouverture traversante incurvée correspondant à la forme de la pièce de couplage de la poignée (120, 320), de sorte que la poignée (120, 320) soit couplée en rotation par rapport au piédestal (114).

2. Appareil de diagnostic ultrasonique portable selon la revendication 1, dans lequel la pièce de couplage (113) comporte un organe roulant (115) pour guider la rotation de la poignée (120, 320).
3. Appareil de diagnostic ultrasonique portable selon la revendication 1, dans lequel la poignée (320) comporte une pluralité de pièces de couplage (322) capables d'être couplées séparément les unes avec les autres.
4. Appareil de diagnostic ultrasonique portable selon la revendication 1, dans lequel la poignée (320) est couplée de façon détachable à l'élément de corps (110).
5. Appareil de diagnostic ultrasonique portable selon l'une quelconque des revendications 1 à 4, dans lequel la partie corps (110) comporte en outre une balle de commande (118).
6. Appareil de diagnostic ultrasonique portable selon l'une quelconque des revendications 1 à 4, comportant:

un dispositif d'assistance (140) couplé de façon amovible à la poignée (120, 320).

FIG. 1

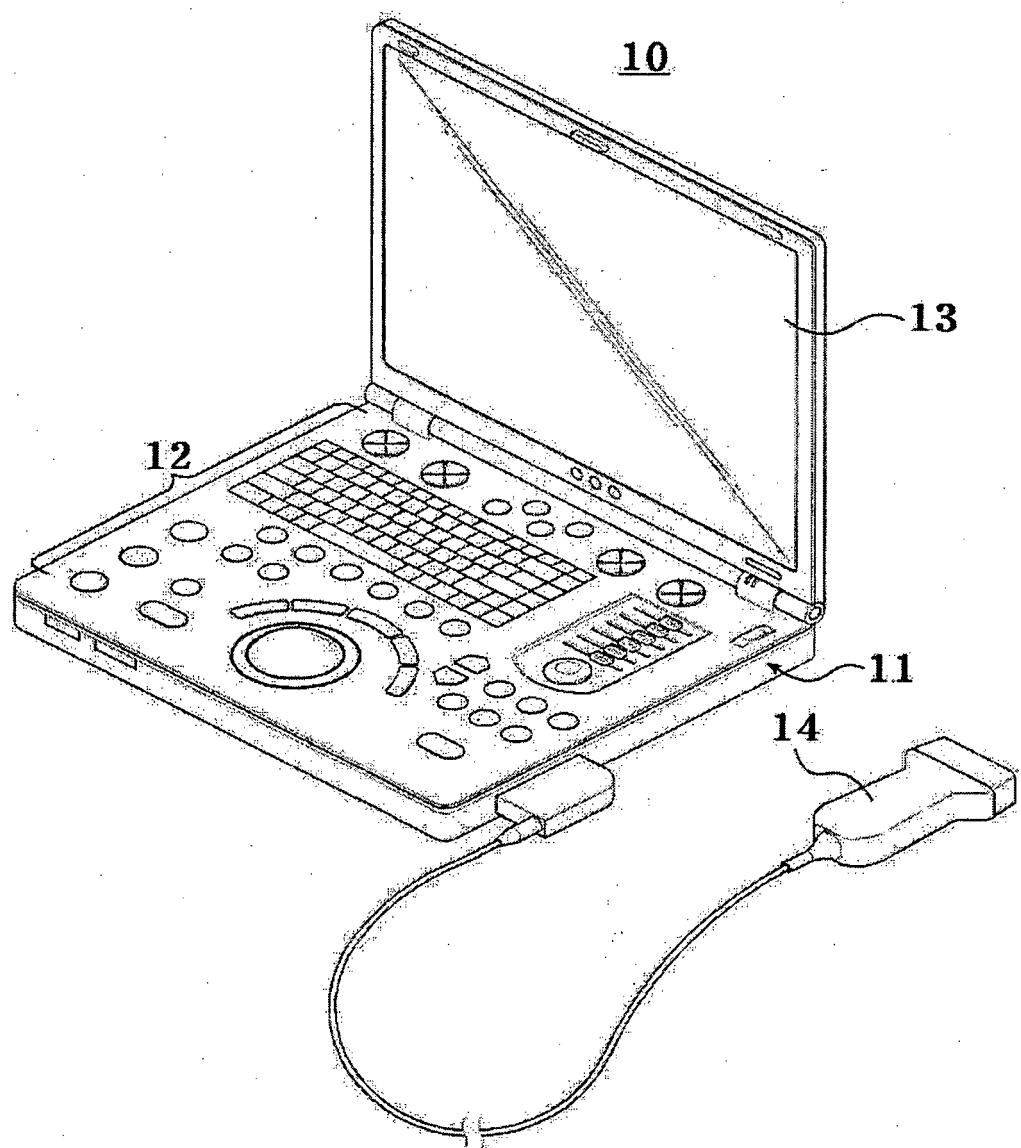


FIG. 2

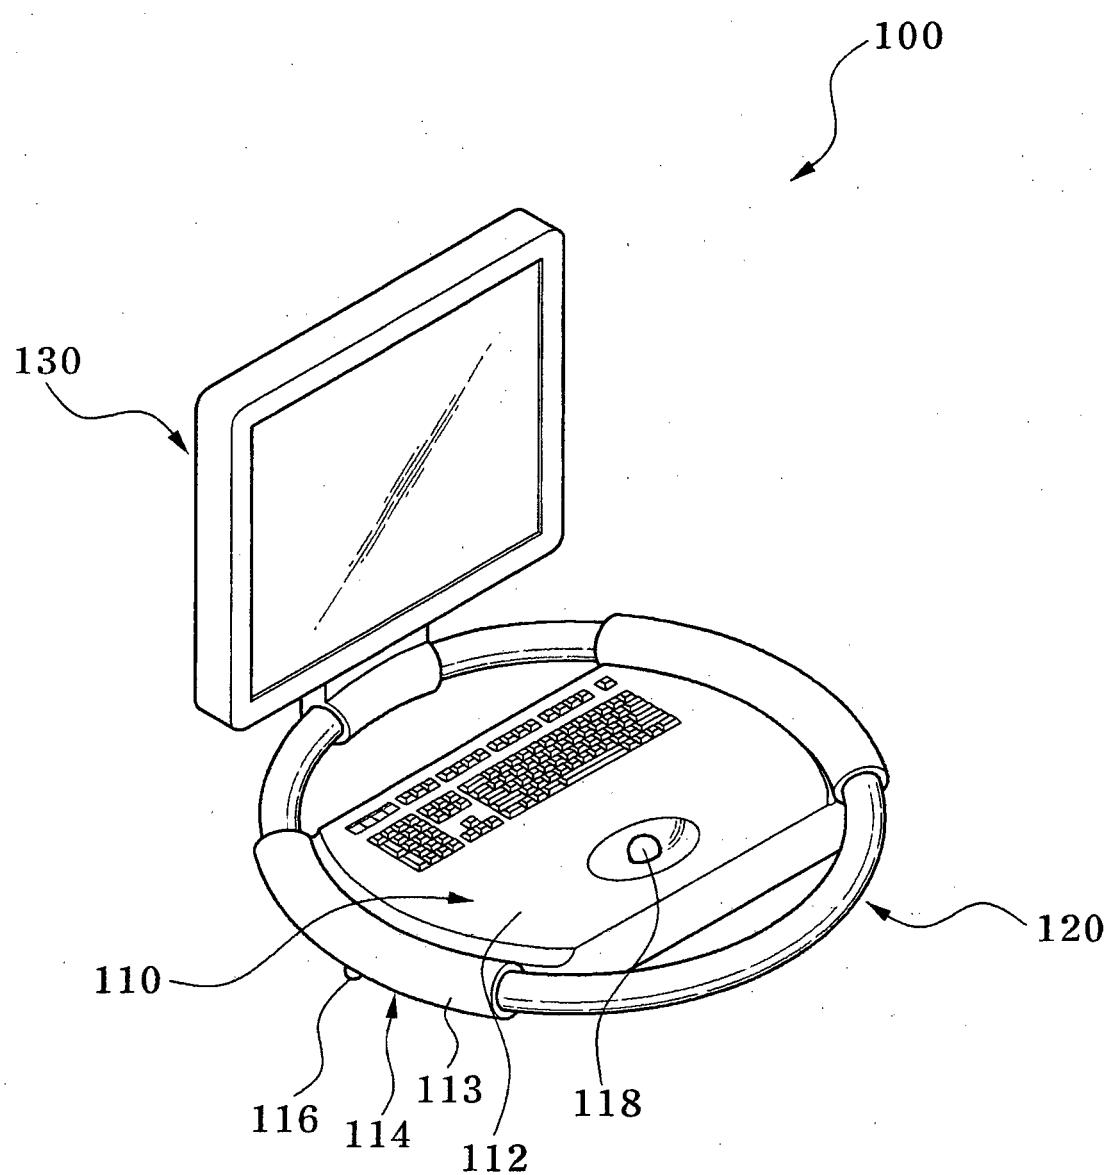


FIG. 3

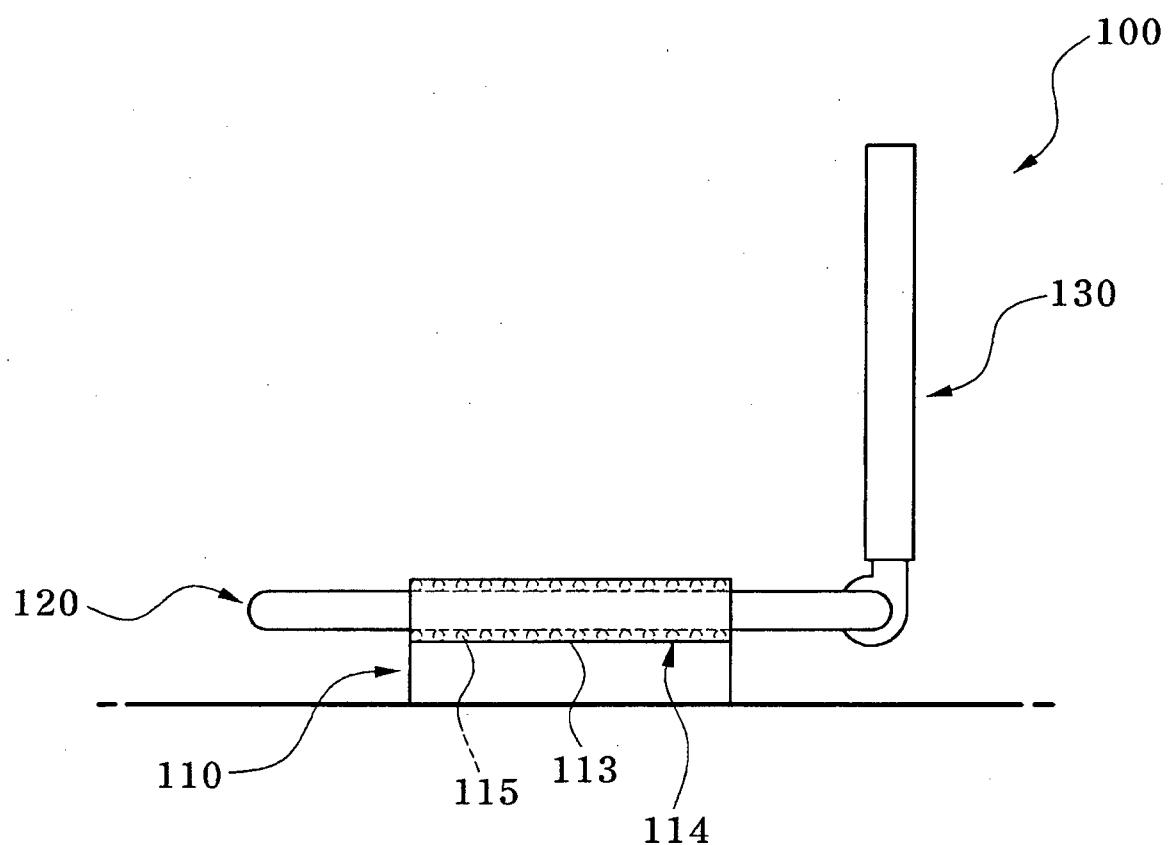


FIG. 4

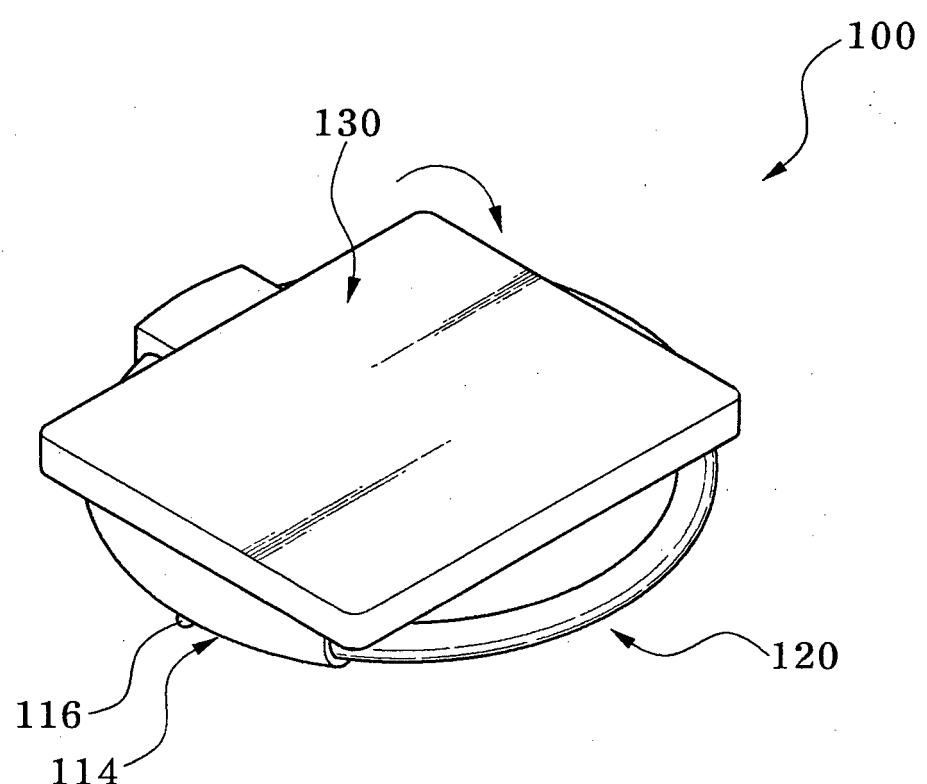


FIG. 5

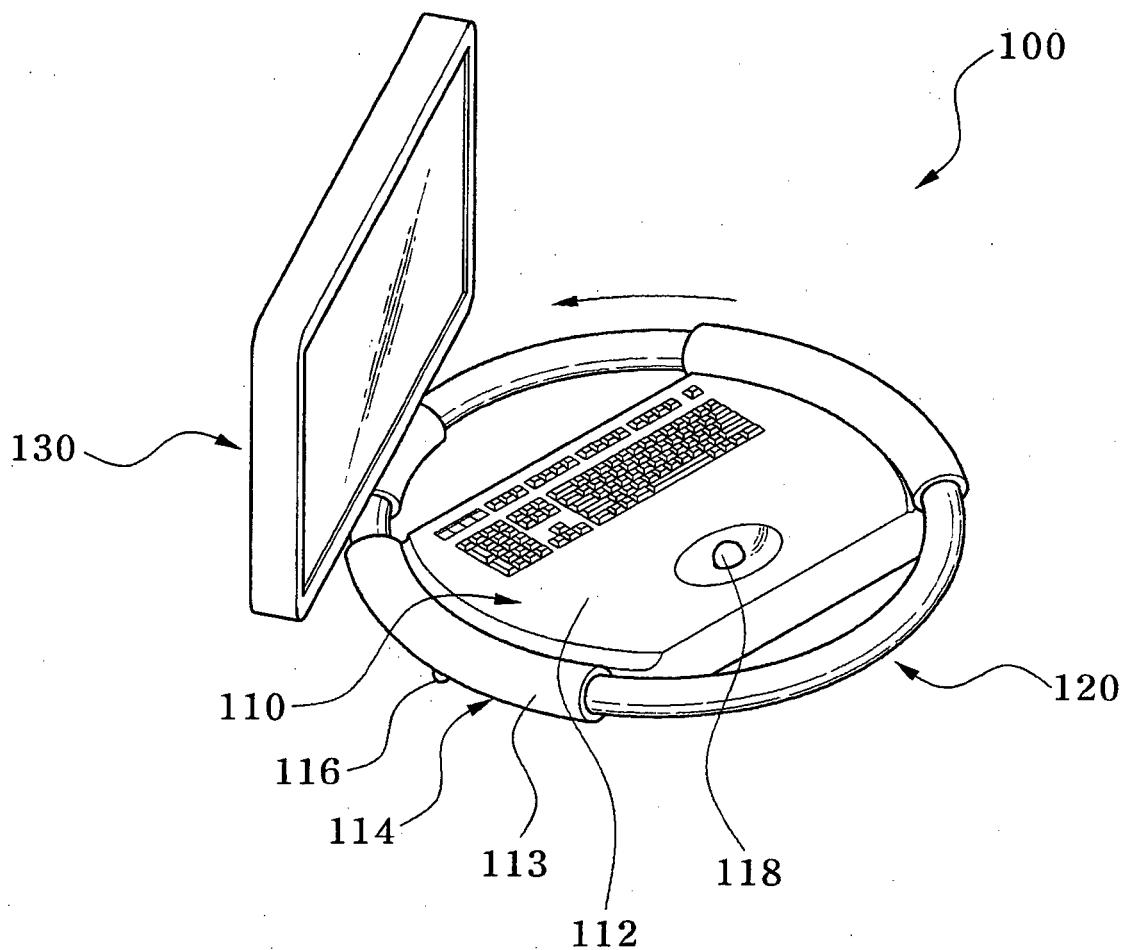


FIG. 6

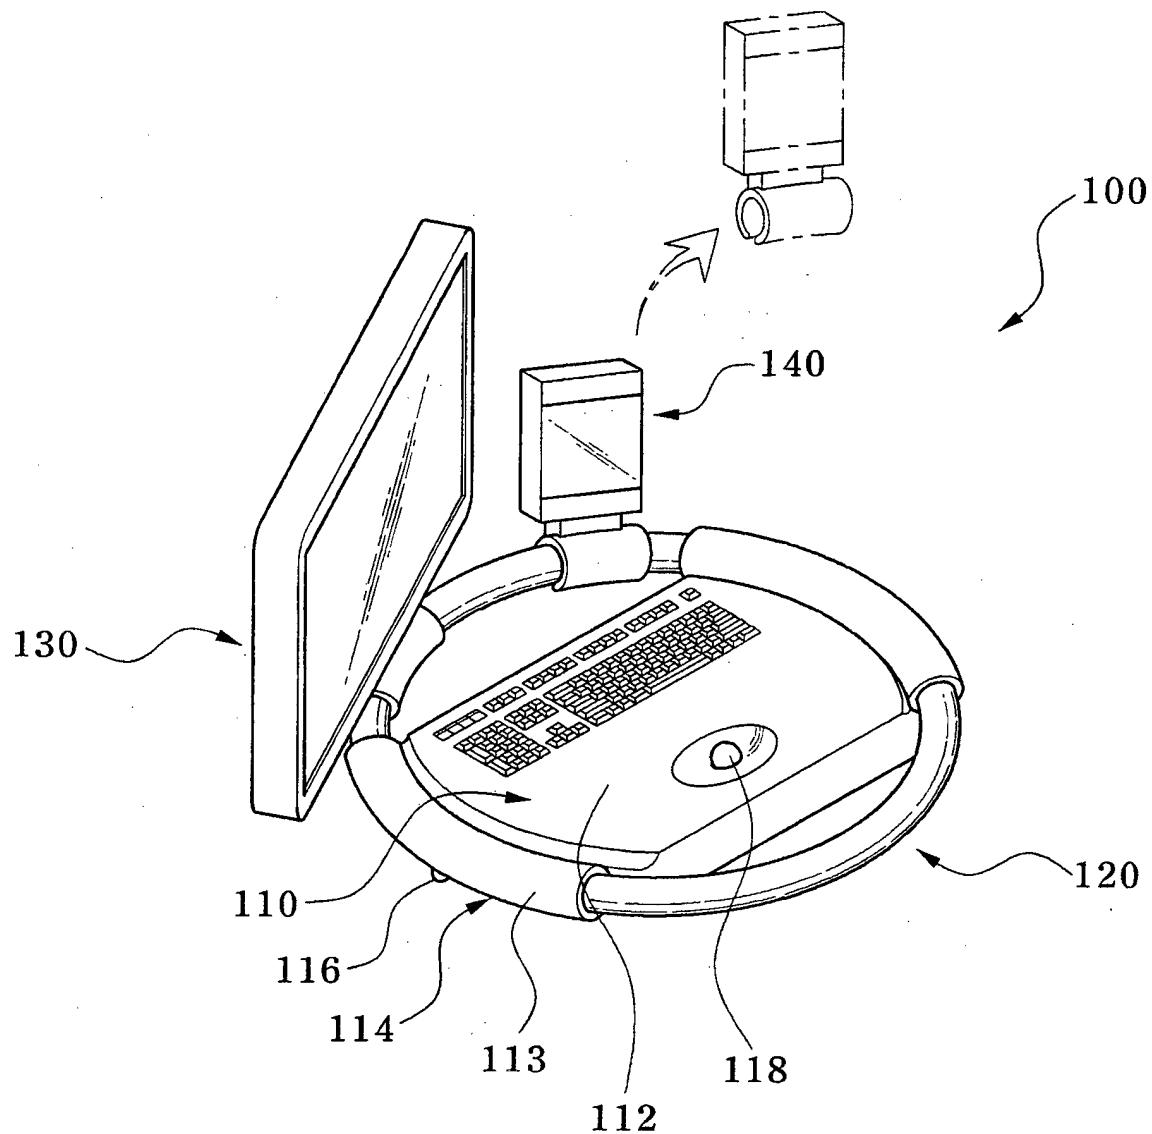


FIG. 7


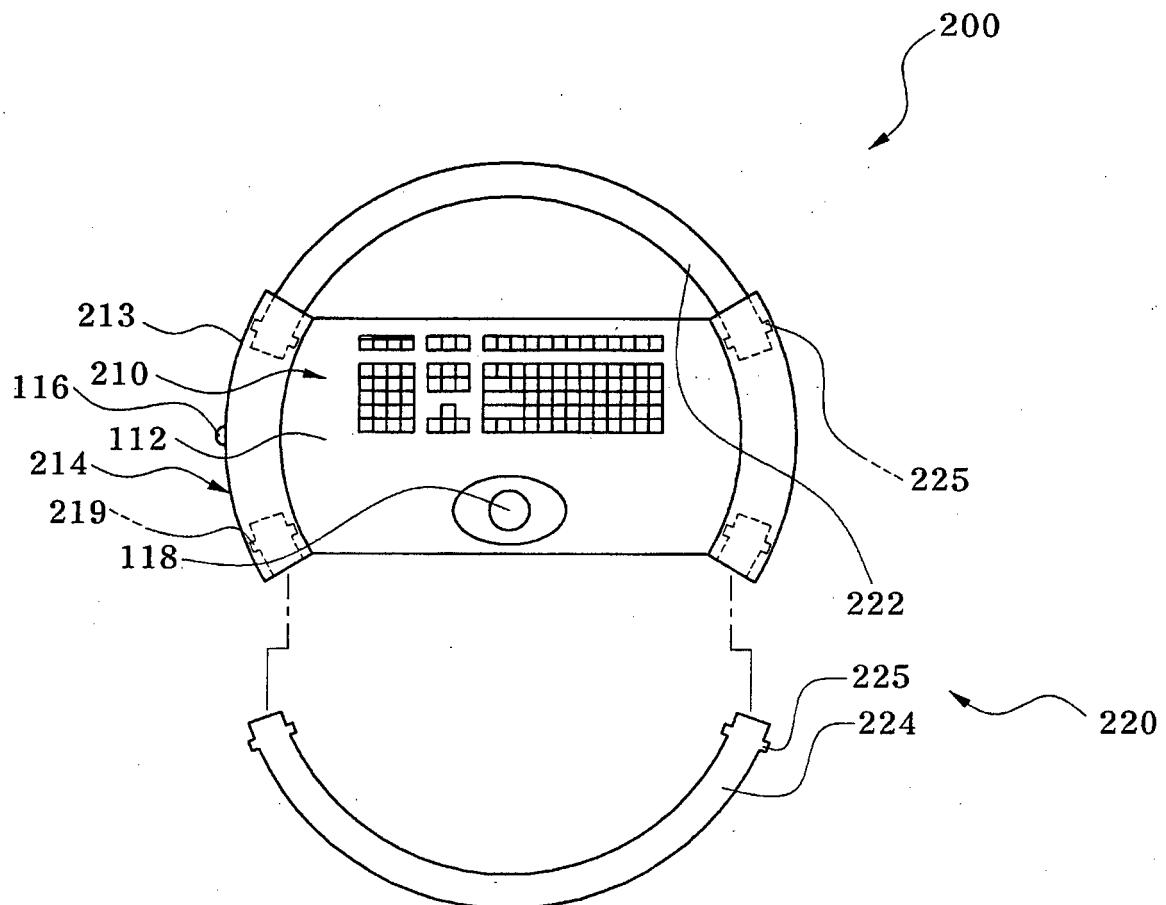


FIG. 8

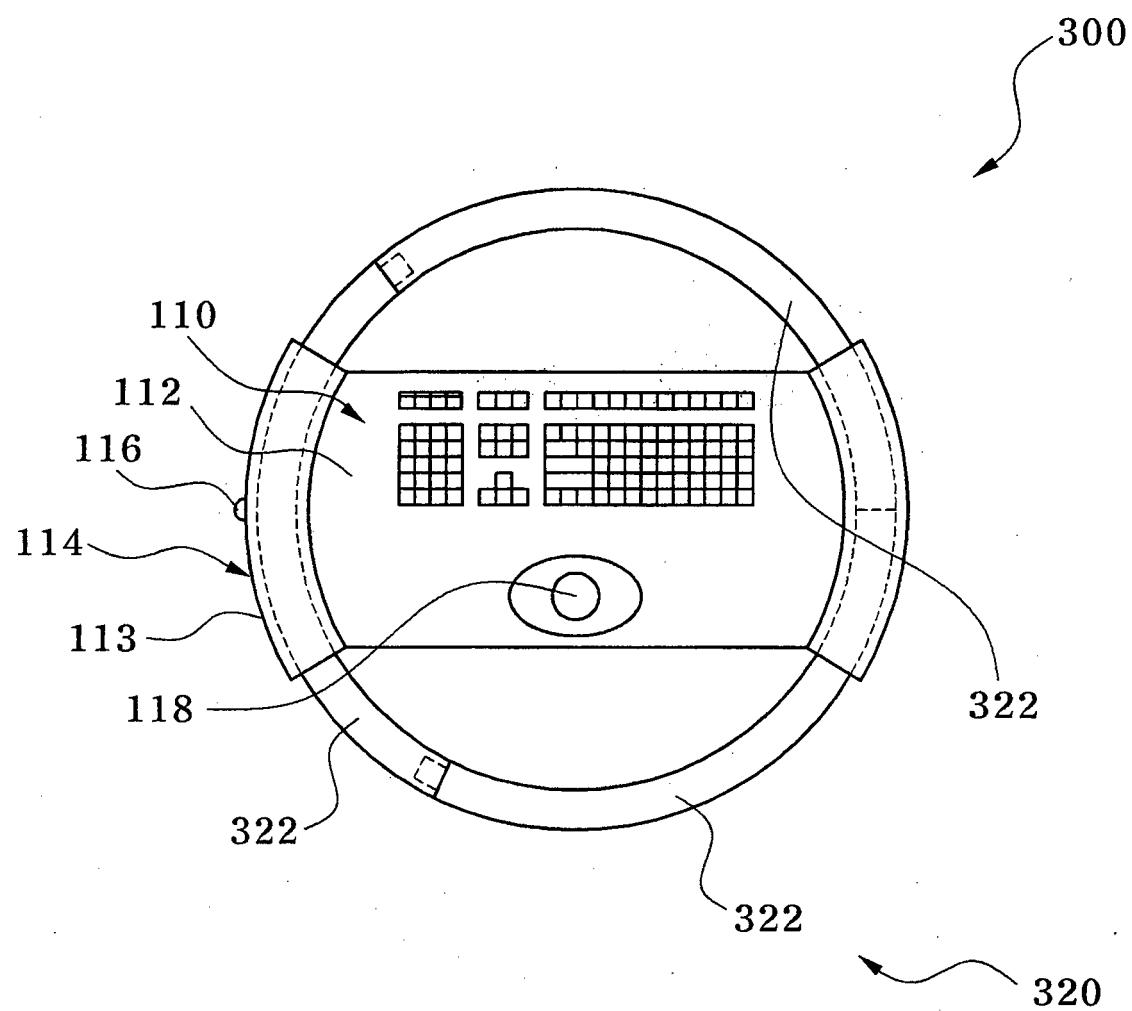

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 2008126015 A [0012]

专利名称(译)	便携式超声诊断仪		
公开(公告)号	<a href="#">EP2138100B1</a>	公开(公告)日	2014-10-08
申请号	EP2009162937	申请日	2009-06-17
申请(专利权)人(译)	MEDISON CO. , LTD.		
当前申请(专利权)人(译)	三星MEDISON CO. , LTD.		
[标]发明人	SHIN SOO HWAN SONG MI RAN KIM JAE GYOUNG LEE SUN KI SONG YOUNG SEUK		
发明人	SHIN, SOO-HWAN SONG, MI RAN KIM, JAE-GYOUNG LEE, SUN KI SONG, YOUNG SEUK		
IPC分类号	A61B8/00 G06F1/16		
CPC分类号	A61B8/4427 A61B8/462 A61B2560/0431 G06F1/1615 G06F1/1656 G06F1/1684		
代理机构(译)	SCHMID , WOLFGANG		
优先权	1020080060384 2008-06-25 KR		
其他公开文献	EP2138100A1 EP2138100B8		
外部链接	<a href="#">Espacenet</a>		

## 摘要(译)

本文公开了一种便携式超声诊断设备。超声诊断设备 ( 100; 200; 300 ) 包括主体部分 ( 110; 210 )，连接到主体部分 ( 110; 210 ) 并具有弯曲形状的手柄 ( 120; 220; 320 )，以及显示单元 ( 130; 230 ) 连接到手柄 ( 120; 220; 320 )。手柄 ( 120; 220; 320 ) 具有弯曲的形状以改善与操作者的手掌的紧密接触感，使得操作者即使在长时间使用后也不会经历手掌疲劳。

FIG. 1

