



(11) **EP 1 707 124 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
13.02.2013 Bulletin 2013/07

(51) Int Cl.:
G01S 15/89 ^(2006.01) **G01S 7/52** ^(2006.01)
A61B 8/08 ^(2006.01)

(21) Application number: **06006394.8**

(22) Date of filing: **28.03.2006**

(54) **Ultrasonic apparatus for diagnosing bone diseases**

Ultraschallgerät zur Diagnose von Knochenerkrankungen

Dispositif de diagnostic à ultrasons de maladies osseuses

(84) Designated Contracting States:
CH DE FR GB IT LI

(30) Priority: **31.03.2005 JP 2005103031**

(43) Date of publication of application:
04.10.2006 Bulletin 2006/40

(73) Proprietors:
• **Hitachi Aloka Medical, Ltd.**
Mitaka-shi
Tokyo 181-8622 (JP)
• **The University of Tokyo**
Bunkyo-ku,
Tokyo 113-8654 (JP)

(72) Inventors:
• **Harada, Akimitsu**
Mitaka-shi
Tokyo 181-8622 (JP)

- **Sakai, Ryoichi**
Mitaka-shi
Tokyo 181-8622 (JP)
- **Nakamura, Kozo**
Bunkyo-ku
Tokyo 113-8654 (JP)
- **Ohnishi, Isao**
Bunkyo-ku
Tokyo 113-8654 (JP)

(74) Representative: **Heim, Hans-Karl et al**
Weber & Heim
Patentanwälte
Irmgardstrasse 3
81479 München (DE)

(56) References cited:
WO-A-02/24075 JP-A- 2004 298 205
US-A- 5 902 240

EP 1 707 124 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND

5 (Technical Field)

[0001] The present invention relates to an ultrasonic diagnostic apparatus and in particular to an ultrasonic diagnostic apparatus which is used for diagnosis of hard tissue such as bone.

10 (Related Art)

[0002] Easy quantitative measurement of mechanical characteristics such as bone strength is desired for diagnosing bone metabolic diseases such as osteoporosis, judging fracture risk, and quantitatively diagnosing bone union after treatment of bone fracture.

15 **[0003]** The evaluation of bone formation and bone union depends largely on X-ray photography, but quantitatively diagnosing bone strength by means of X-ray photography is very difficult. As a conventional method of measuring bone strength there is known a strength test of a sample bone of a measurement target. However, this method requires an extraction operation for obtaining a sample bone, and thus, the method is invasive. A method of measuring an amount of bone and a bone density has employed devices such as X-ray CT and DXA (dual-energy x-ray absorptiometry).
20 However, these devices are merely means for measuring the amount of bone and cannot provide an evaluation of bone strength. Moreover, in view that tissue is irradiated with X-rays in these methods, these methods cannot be considered non-invasive.

[0004] Other attempts to quantitatively evaluate bone strength include a strain gauge method in which a strain gauge is mounted on an external fixtator and the strain of the external fixtator is measured; a vibration wave method in which
25 a vibration is applied to a bone from the outside and a characteristic frequency is evaluated; and an acoustic emission method in which acoustic waves generated by a bone which has reached yield stress are detected. These methods, however, have various problems in that a limitation is imposed on the treatment to which these methods can be applied, that the bone is subjected to invasion, and that evaluation precision is insufficient.

[0005] In view of the above circumstances, the inventors of the present application have proposed an ultrasonic
30 diagnostic apparatus for noninvasively and quantitatively evaluating the mechanical characteristics of bone (Japanese Patent Laid-Open Publication No. 2004-298205).

[0006] The ultrasonic diagnostic apparatus described in Japanese Patent Laid-Open Publication No. 2004-298205 forms a plurality of ultrasonic beams on a bone, obtains a plurality of echo signals corresponding to the individual
35 ultrasonic beams to specify a surface point corresponding to the bone surface for each echo signal, and generates shape data of the bone surface on the basis of the plurality of surface points obtained from the plurality of echo signals. Moreover, a mechanical characteristic of the bone is evaluated on the basis of a change in the shape data when an external load is applied to the bone. Thus, the apparatus is an epoch-making technology capable of noninvasively and quantitatively evaluating the mechanical characteristics of a bone in a living organism from the shape data of the bone surface on the basis of the echo signals.

40 **[0007]** The inventors of the present application have further improved the epoch-making technology described in Japanese Patent Laid-Open Publication No. 2004-298205 and have studied a method of more appropriately evaluating the mechanical characteristics and the like of hard tissue such as bone.

[0008] This prior art technology uses one ultrasonic probe to receive data about the dynamic characteristic of a bone. Therefore the front surface part of the bone is analyzed.

45 **[0009]** US-A-5 902 240 discloses an osteoporosis diagnostic apparatus which is provided with a two-dimensional ultrasonic transducer array. The ultrasonic transducer array emits and receives ultrasonic waves in the direction of a bone. Based on the received waves it is computed the acoustic impedance of the bone to check for the presence of osteoporosis. The preamble of claim 1 is based on this document.

50 SUMMARY

[0010] The present invention has been conceived in view of the above circumstances and provides an ultrasonic diagnostic apparatus which enables highly accurate diagnosis of hard tissue such as bone.

[0011] To achieve the above object, an ultrasonic diagnostic apparatus according to claim 1 is provided.

55 **[0012]** The plurality of transducer units are arranged, for example, in the shape of a lattice. Therefore, the surface points corresponding to the surface of the hard tissue can be obtained two-dimensionally, and it becomes possible to obtain two-dimensional form data regarding the hard tissue surface. The form data regarding the hard tissue surface are, for example, data such as the shape, position, orientation, and the like of the hard tissue surface. According to the

above structure, the obtained form data regarding the hard tissue surface are two-dimensional, making it suitable for observation of, for example, a state of bone union, and the hard tissue such as bone can be diagnosed with higher precision.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Embodiments of the present invention will be described in detail with reference to the following figures, wherein:

Fig. 1 is a block diagram showing an overall structure of an ultrasonic diagnostic apparatus according to the present invention;

Fig. 2 is a diagram schematically showing an echo signal of a bone surface;

Fig. 3 is a diagram for explaining a bone fracture model used to calculate form data;

Fig. 4 is a diagram for explaining one of two probes and a surface of a corresponding bone fragment;

Fig. 5 is a diagram showing two probes and surfaces of corresponding bone fragments; and

Fig. 6 is a diagram for explaining form data which can be obtained by means of two probes.

DETAILED DESCRIPTION

[0014] Embodiments of the present invention will now be described by reference to the figures.

[0015] Fig. 1 shows a preferred embodiment of the ultrasonic diagnostic apparatus according to the present invention. Fig. 1 is a block diagram showing overall structure of the apparatus.

[0016] In this embodiment, a probe 10a and a probe 10b are ultrasonic probes used while in contact with a surface of the body of a subject 50. Alternatively, an ultrasonic probe which is inserted into the subject may be used. The probe 10a and the probe 10b each transmit and receive a plurality of ultrasonic beams 40 to and from a bone (reference numerals 52a, 52b, 54) within the body of the subject 50. The bone is formed of two bone fragments 52a, 52b with a fractured portion 54 therebetween. The bone to be observed in this embodiment is, for example, the tibia. Of course, a bone other than the tibia or hard tissue other than bone may be observed. Also, the probe 10a and the probe 10b are mutually fixed by way of a probe connector 11. Specifically, relative positions and orientations between the probe 10a and the probe 10b are fixed.

[0017] In this embodiment, an ultrasonic wave is transmitted/received to/from the bone fragment 52a by the probe 10a, and an ultrasonic wave is transmitted/received to/from the bone fragment 52b by the probe 10b. The probe 10a and the probe 10b are provided with a plurality of transducers which are arranged two-dimensionally. In this embodiment, each of the probe 10a and the probe 10b is provided with a group of transducers which have a total of nine transducers arranged in the shape of a lattice, three in the vertical and horizontal directions, respectively. The arranged state of the nine transducers will be described later with reference to Fig. 4.

[0018] A transceiver unit 12 forms the plurality of ultrasonic beams 40 transmitted and received by the probe 10a and the probe 10b on the basis of the control effected by a transmission/reception control unit 14 and obtains a plurality of echo signals corresponding to the individual ultrasonic beams 40. The ultrasonic beams 40 are formed for each transducer. In this embodiment, three ultrasonic beams 40 are formed for the probe 10a, and three ultrasonic beams 40 are formed for the probe 10b. In this case, the probe 10a and the probe 10b each use three among the nine transducers to form the three ultrasonic beams 40 corresponding to the three transducers.

[0019] Fig. 1 shows only the ultrasonic beams 40 required for calculation of form data regarding the bone surface, but, for example, at least either the probe 10a or the probe 10b may be provided with a transmission/reception function for forming an ultrasonic image such as a B mode image or a three-dimensional image to obtain echo data, which is required for the ultrasonic image, by the transceiver unit 12 and to form image data according to the obtained echo data by an ultrasonic image formation unit 18. In this case, the formed image data are sent to a display image formation unit 28, and an ultrasonic image (a B mode image, a three-dimensional image or the like) corresponding to the image data is shown on a display 30.

[0020] The echo signal for calculating form data obtained in the transceiver unit 12, or the echo signal obtained from the ultrasonic beams 40 shown in Fig. 1, is output to an echo tracking processor unit 20. The echo tracking processor unit 20 performs a so-called echo tracking process in which bone surface sections are extracted from echo signals corresponding to the individual probe 10a and probe 10b to thereby perform tracking. For the echo tracking process, for example, a technique detailed in Japanese Patent Laid-Open Publication No. 2001-309918 is used.

[0021] For the echo tracking process, for example, an examiner inputs an instruction related to transmission/reception of the ultrasonic wave through an operation panel 16 to the transmission/reception control unit 14, and the transmission/reception control unit 14 controls the transceiver unit 12 on the basis of the instruction from the examiner. The ultrasonic beams 40 for obtaining tracking echo signals are transmitted to a diagnosis site on the bone surface according to the instruction from the examiner. In the transmission/reception of the ultrasonic wave, a strong reflected wave is obtained

from the bone surface. Therefore, the echo signals obtained from within the body of the diagnosis target (subject) are obtained as having large amplitude in a portion corresponding to the bone surface.

[0022] Fig. 2 is a diagram schematically showing a bone surface section of an echo signal. As shown in Fig. 2, each echo signal includes a range 60 within which the echo signal has a large amplitude corresponding to the bone surface. When the bone surface section is considered simply as a portion having a large amplitude, it is unclear as to which portion within the range 60 corresponds to the surface section and, as a result, there is an error approximately equal to the range 60. In the echo tracking process, a zero-cross point 62 is detected as a representative of each echo signal, and the detected zero-cross point 62 is tracked so as to significantly increase the precision of the bone surface position.

[0023] The zero-cross point 62 is detected as a time, within a tracking gate period 64, at which the polarity of the echo signal is inverted from positive to negative or from negative to positive. In Fig. 2, the zero-cross point 62 is a time at which the polarity of the echo signal is inverted from positive to negative. When the zero-cross point 62 is detected, a new tracking gate is set with the detected zero-cross point 62 as its center. In the echo signal obtained next, a zero-cross point 62 is detected within the newly set tracking gate period 64. In this manner, a zero-cross point 62 is tracked as the surface point for each echo signal. The surface point is tracked continuously from the measuring time before the load is applied until the measuring time after the load is applied through a process in which the load is applied.

[0024] Referring again to Fig. 1, the surface point is tracked by the echo tracking processor unit 20 for each echo signal; namely, for echo signals of three ultrasonic beams 40 corresponding to the probe 10a and for echo signals of three ultrasonic beams 40 corresponding to the probe 10b. As a result, three bone surface points of the bone fragment 52a and three bone surface points of the bone fragment 52b are extracted.

[0025] By reference to the extracted bone surface points, a bone surface position calculation unit 22 calculates position data on each of the bone fragment 52a and the bone fragment 52b. Meanwhile, by reference to the extracted bone surface points, a bone surface orientation calculation unit 24 calculates orientation(direction) data regarding each of the bone fragment 52a and the bone fragment 52b.

[0026] By reference to Fig. 3 through Fig. 5, a principle of calculating the form data (position data and orientation data) which are calculated by the bone surface position calculation unit 22 and the bone surface orientation calculation unit 24 will be described. In the following description, the reference numerals shown in Fig. 1 are assigned to the corresponding portions.

[0027] Fig. 3 is a diagram for explaining a bone fracture model used to calculate form data in this embodiment. In this embodiment, a composite model of a rigid body and a viscoelastic body is used as the bone fracture model. When the two bone fragments 52a, 52b (existing bones) having the fractured portion 54 ("callus" in the process of bone healing) therebetween receive a load such as a weight, they change, for example, from a state indicated by a solid line to a state indicated by a broken line in Fig. 3. Deformation of the two bone fragments 52a, 52b due to the load is very small, whereas deformation of the fractured portion 54 due to the load is relatively large. Accordingly, there is used a composite model which comprises the two bone fragments 52a, 52b formed of a rigid body and the fractured portion 54 formed of a viscoelastic body.

[0028] When the bone fragments 52a, 52b are assumed to be rigid bodies, the displacement of each bone fragment can be considered a translation component of a general reference position (e.g., displacement of a center-of-gravity point of the bone fragment) of the bone fragments as a whole and a rotation component around the reference position. When both the translation component and the rotation component are considered to be in a three-dimensional space, degrees of freedom of the translation component and the rotation component become 6 degrees of freedom in total. In other words, the bone fracture model shown in Fig. 3 has a degree of freedom (DOF) of 6 for each bone fragment.

[0029] In the bone fracture model shown in Fig. 3, with each of the probe 10a and the probe 10b taken as a reference, the direction of the ultrasonic beams 40 is designated a y axis, and an arrangement direction, which is substantially perpendicular to a longitudinal axis of the bone in the arrangement directions of the transducers which are arranged in the shape of a lattice, is taken as an x axis. Also, in the arrangement directions of the transducers arranged in the shape of a lattice, an arrangement direction which is perpendicular to the x axis is taken as a z axis. These x, y, and z axes are orthogonal to one another (the relation of arrangement of the three axes is also shown in Fig. 1). The probe 10a and the probe 10b are in contact with the surface of the subject such that the z axis is substantially aligned with the longitudinal axis of the bone. The above bone fracture model and coordinate system are used to describe a principle of calculating the form data.

[0030] Fig. 4 is a diagram showing one of the two probes and a surface of its corresponding bone fragment. In other words, Fig. 4 corresponds to the probe 10a and the surface of the bone fragment 52a in Fig. 1, or the probe 10b and the surface of the bone fragment 52b. In Fig. 4, a probe 10 and a surface 52' of the bone fragment will be described.

[0031] The probe 10 has a group of transducers in which nine transducers 70 are arranged in the shape of a lattice. In other words, a total of nine transducers 70, three in each of the x-axis direction and the z-axis direction, are arranged in the shape of a lattice. The individual transducers 70 form the ultrasonic beams in the y-axis direction.

[0032] A spatial coordinate of an i-th transducer 70 is designated $P_i(x_i, y_i, z_i)$. A plurality of transducers 70 are disposed in the same xz plane, and a center-of-gravity point of the plurality of transducers 70 is defined as the origin of the xz

plane. In other words, coordinate values x_G and z_G in the xz plane of the center-of-gravity point of the plurality of transducers 70 are defined as indicated by the following expression.

【Expression 1】

$$\begin{aligned}x_G &= \frac{1}{M} \sum_i^M \dot{x}_i = 0 \\z_G &= \frac{1}{M} \sum_i^M z_i = 0\end{aligned}$$

[0033] Here, M denotes a quantity of the transducers 70 and is 9 (M=9) in this embodiment.

[0034] When a distance to position $B_i(X_i, Y_i, Z_i)$ of the surface 52' of the bone fragment measured by the i -th transducer 70 is taken as d_i , the following relation is established.

【Expression 2】

$$\begin{aligned} X_i &= x_i \\ Y_i &= y_i + d_i, \quad i = 1, 2, \dots, M \\ Z_i &= z_i \end{aligned}$$

[0035] The center-of-gravity point of the measured value of the bone surface position by M transducers 70 is calculated by the following expression, and it is determined as the center-of-gravity point of the bone surface.

【Expression 3】

$$Y_G = \frac{1}{M} \sum_i^M Y_i$$

$$X_G = Z_G = 0$$

[0036] Then, under the assumption that a movement (translational displacement) of the center-of-gravity point of the bone surface is limited to the direction of the ultrasonic beams; namely, the y-axis direction, a degree of freedom of the bone fragment becomes 4 degrees of freedom including 1 degree of freedom in translation and 3 degrees of freedom in rotation. Also, the surface 52' of the bone fragment is assumed to be a plane within a range to be observed. When the normal vector of the plane is denoted vector n , and its direction cosine is denoted by $(\cos \alpha, \cos \beta, \cos \gamma)$, the following relation is established with position $B_i(X_i, Y_i, Z_i)$ of the surface 52' of the bone fragment.

【Expression 4】

$$\cos \alpha \cdot X_i + \cos \beta \cdot (Y_i - Y_0) + \cos \gamma \cdot Z_i = 0; \quad i = 1, 2, \dots, M$$

[0037] Here, X_i and Z_i are determined in a stage of designing the probe 10 in a geometrical arrangement of the transducers 70 and are known at the time of measurement. Moreover, Y_i can be measured with high precision by the echo tracking process in this embodiment, and center-of-gravity point Y_G is determined from expression 3. In other words, three values of angles α , β , γ become unknown numbers. Therefore, the number of measured data points of the position $B_i(X_i, Y_i, Z_i)$ of the surface 52' of the bone fragment is determined to be three ($M=3$), so that, in principle, three values of the angles α , β , γ are determined. The three transducers 70 for obtaining the three measured data points are desirably three transducers 70 which are not arranged on the same straight line. The number of measured data may be larger than three, and the three values of the angles α , β , γ may be determined by a least-squares method or the like.

[0038] According to the above method, the bone surface position calculation unit 22 calculates a y coordinate value Y_G of the center-of-gravity point of the bone surface, and the bone surface orientation calculation unit 24 calculates the orientation (angles α, β, γ) of the bone surface.

[0039] In addition, in this embodiment, an external action (load) is applied to the bone by stamping or the like, and a change in center-of-gravity point of the bone surface and a change in orientation of the bone surface are measured. In other words, the center-of-gravity point of the bone surface is assumed to be Y_G , and the orientation of the bone surface is assumed to be angles α, β, γ before the application of the load, and after the application of the load, the center-of-gravity point of the bone surface is assumed to be Y'_G , and the orientation of the bone surface is assumed to be angles α', β', γ' . From the above values, a translational displacement component (position displacement data) and a rotational displacement component (orientation displacement data) are calculated as indicated by the following expression.

【Expression 5】

TRANSLATIONAL
DISPLACEMENT COMPONENT: $\Delta Y_G = Y'_G - Y_G$

ROTATIONAL
DISPLACEMENT ELEMENT: $\Delta \alpha = \alpha' - \alpha$
 $\Delta \beta = \beta' - \beta$
 $\Delta \gamma = \gamma' - \gamma$

[0040] Instead of the translational displacement component and the rotational displacement component, a change in normal vector defined by the following expression may be determined from the normal vector (vector n) of the bone surface before the application of the load and the normal vector (vector n') of the bone surface after the application of the load.

【Expression 6】

$$\Delta \vec{n} = \vec{n}' - \vec{n}$$

$$= (\cos \vec{\alpha}' - \cos \vec{\alpha}, \cos \vec{\beta}' - \cos \vec{\beta}, \cos \vec{\gamma}' - \cos \vec{\gamma})$$

$$\vec{n}' = \text{VECTOR } n', \vec{n} : \text{VECTOR } n$$

[0041] Additionally, data which can be obtained through the two probes can be compared in this embodiment.

[0042] Fig. 5 is a diagram showing two probes and surfaces of the corresponding bone fragments. Specifically, the figure shows a bone fragment surface 52a' on a proximal side and the corresponding probe 10a (proximal side probe), and a bone fragment surface 52b' on a distal side and the corresponding probe 10b (distal side probe). The two bone fragments with the fractured portion 54 therebetween are measured.

[0043] In Fig. 5, the bone fracture model and the coordinate system shown in Fig. 3 are used. In other words, a composite model of a rigid body and a viscoelastic body are used as the bone fracture model, and an xyz orthogonal coordinate system having the probe as its origin is used. The two probes 10a and probe 10b are fixed by means of a rigid body or the like such that their z-axes are aligned with each other and are taped to a surface of the body of a patient.

[0044] For the bone fragment surface 52a' and the bone fragment surface 52b', the y coordinate value Y_G of the center-of-gravity point of the bone surface and the orientation (angles α, β, γ) of the bone surface are calculated by the calculation technique described with reference to Fig. 4. A difference between the states before and after the application of the load is calculated as the translational displacement component and the rotational displacement component. In addition, comparison data (difference between the proximal side and the distal side) of the two bone fragments of the bone fragment surface 52a' and the bone fragment surface 52b' are determined in Fig. 5.

[0045] Fig. 6 is a diagram explaining form data which can be obtained through the two probes shown in Fig. 5, showing a table including the form data. The table of Fig. 6 will be described with the reference numerals of Fig. 5 assigned to the corresponding portions.

[0046] In data related to the bone (bone fragment 52a) on the proximal side obtained through the probe 10a, the translation component Y_p before the application of the load corresponds to the center-of-gravity point Y_G which can be obtained for the bone fragment 52a from expression 3. Rotation components $\alpha_p, \beta_p, \gamma_p$ before the application of the load

correspond to the angles α , β , γ obtained for the bone fragment 52a from expression 4. The translation component and the rotation component can also be obtained after the application of the load, and they are translation component Y'_p after the application of the load and rotation components α'_p , β'_p , γ'_p after the application of the load. In addition, translational displacement component ΔY_p is calculated as a difference in translation component before and after the application of the load, and rotational displacement components $\Delta\alpha_p$, $\Delta\beta_p$, $\Delta\gamma_p$ are calculated as a difference in rotation component before and after the application of the load. Instead of the translational displacement component and the rotational displacement component, a change in normal vector may be obtained from normal vector (vector np) of the bone surface before and after the application of the load.

[0047] For the bone (bone fragment 52b) on the distal side obtained through the probe 10b, the same data as that related to the bone (bone fragment 52a) on the proximal side can be obtained. In other words, the translation component and the rotation component before the application of the load, the translation component and the rotation component after the application of the load, the translational displacement component, and the rotational displacement component are determined. These distal side data are appended with a subscript d.

[0048] In Fig. 6, a difference between the proximal side and the distal side is determined as comparison data of two bone fragments. In other words, there are determined a difference δY between the proximal side and the distal side of the translation component before the application of the load, differences $\delta\alpha$, $\delta\beta$, $\delta\gamma$ between the proximal side and the distal side of the rotation component before the application of the load, a difference $\delta Y'$ between the proximal side and the distal side of the translation component after the application of the load, differences $\delta\alpha'$, $\delta\beta'$, $\delta\gamma'$ between the proximal side and the distal side of the rotation component after the application of the load, a difference $\delta\Delta Y$ between the proximal side and the distal side of the translational displacement component, and differences $\delta\Delta\alpha$, $\delta\Delta\beta$, $\delta\Delta\gamma$ between the proximal side and the distal side of the rotational displacement component.

[0049] Thus, comparison data of the surfaces (surface 52a' and surface 52b') of the two bone fragments having the fractured portion 54 therebetween is obtained and used as data effective for the comprehensive high-precision diagnosis of the entire bone including the two bone fragments having the fractured portion 54 therebetween.

[0050] For example, in a case where a tibia is measured, a walking excise (stepping exercise) can be used as a load to be applied to the bone. Various data before the application of the load shown in Fig. 6 are determined before walking, and then various data after the application of the load are determined after lapse of a prescribed time (e.g., about one minute) after walking. In this case, changes in the translational displacement component and the rotational displacement component before and after the application of the load are used as quantitative data of, for example, bone plastic deformation.

[0051] Thus, the data obtained through the two probes can be compared in this embodiment.

[0052] Referring again to Fig. 1, when form data (data shown in Fig. 6) related to the bone are obtained in the bone surface position calculation unit 22 and the bone surface orientation calculation unit 24, these form data are output to a mechanical characteristic index calculation unit 26.

[0053] The mechanical characteristic index calculation unit 26 calculates an index value of the mechanical characteristics of the bone on the basis of the form data related to the bone obtained from the bone surface position calculation unit 22 and the bone surface orientation calculation unit 24 and the measured value of the load applied to the bone obtained from a load measurement device 32. For example, hysteresis characteristics of the bone and the like are determined from the measured values of the load obtained from the load measurement device 32 and the translational displacement component and rotational displacement component obtained for the individual measured value of the load. In addition, evaluated values of viscoelasticity and the like of the bone may be calculated from the determined hysteresis characteristics and the like. The load measurement device 32 is suitably a force plate or the like for the walking exercise.

[0054] The display image formation unit 28 forms a display image on the basis of an ultrasonic image formed by the ultrasonic image formation unit 18 and an index value determined by the mechanical characteristic index calculation unit 26 and shows it on the display 30. For example, the ultrasonic image and the index value are alternately shown according to an instruction by the examiner. The ultrasonic image and the index value may be shown at the same time. As the index value, the form data (in part or all) shown in Fig. 6 may be shown on the display 30.

[0055] As described above, the index value of the mechanical characteristics of the bone obtained according to the form data is expected to be an important index for quantitative evaluation and the like of bone union. For example, in a case where it is judged from the index value that plastic deformation is very large, the bone is considered to be in the initial stage of a healing process. Therefore, the load for promotion of the bone union is restricted. Meanwhile, in a case where it is judged from the index value that plastic deformation is small, a relatively heavy load may be recommended for promotion of the bone union. In other words, the form data become very effective data when the patient is given an instruction about a degree of load. Where the plastic deformation is small, a larger load may be applied to judge the plastic deformation.

[0056] The form data and the index value which can be obtained by the ultrasonic diagnostic apparatus of this embodiment make significant contributions as objective and reliable base data for diagnosis in judgment of effects of an agent on an increase in the bone strength, removal of a fixtator/implant, and the like.

[0057] An embodiment of the present invention has been described above, but the invention may have the following embodiments.

[0058] In a desired aspect, the form data generator unit generates orientation data indicating an orientation of the hard tissue surface on the basis of the plurality of surface points obtained two-dimensionally as the form data. In a desired aspect, an external action is applied to the hard tissue, and the form data generator unit generates position displacement data indicating a change in general position of the hard tissue surface involved in the external action, and orientation displacement data indicating a change in orientation of the hard tissue surface involved in the external action as the form data.

[0059] In a desired aspect, the surface point specifying unit uses a tracking gate which is set for ultrasonic beams formed for the individual transducer units, extracts as a surface point a representative point of an echo signal within a tracking gate period, and performs tracking of the extracted surface point. In a desired aspect, the plurality of transducer units include three transducer units which are not arranged on the same straight line, and the form data generator unit determines on the basis of three surface points obtained from the three transducer units a coordinate of a center-of-gravity position of the three surface points as the position data, and further determines a normal vector of a plane including the three surface points as the orientation data.

[0060] The first probe and the second probe are mutually fixed, and the form data generator unit generates comparison data between form data of the first bone fragment and form data of the second bone fragment. In a preferable embodiment, an external action is applied to the two bone fragments, and the form data generator unit determines first displacement data indicating a change in form data of the first bone fragment involved in the external action, and second displacement data indicating a change in form data of the second bone fragment involved in the external action. In a preferable embodiment, the form data generator unit generates displacement comparison data by comparing the first displacement data and the second displacement data.

[0061] In a preferable embodiment, the form data generator unit generates, as form data of the first bone fragment, position data indicating a general position of the surface of the first bone fragment on the basis of the plurality of surface points obtained through the first probe, and generates, as form data of the second bone fragment, position data indicating a general position of the surface of the second bone fragment on the basis of the plurality of surface points obtained through the second probe.

[0062] In a preferable aspect, an external action is applied to the two bone fragments, and the form data generator unit determines first displacement data indicating a change in position data of the first bone fragment involved in the external action, and second displacement data indicating a change in position data of the second bone fragment involved in the external action. In a preferable aspect, the form data generator unit generates displacement comparison data by comparing the first displacement data and the second displacement data.

[0063] In a preferable aspect, the form data generator unit generates, as form data of the first bone fragment, orientation data indicating an orientation of a surface of the first bone fragment on the basis of the plurality of surface points obtained through the first probe, and generates, as form data of the second bone fragment, orientation data indicating an orientation of a surface of the second bone fragment on the basis of the plurality of surface points obtained through the second probe.

[0064] In a preferable aspect, an external action is applied to the two bone fragments, and the form data generator unit determines first displacement data indicating a change in orientation data of the first bone fragment involved in the external action, and second displacement data indicating a change in orientation data of the second bone fragment involved in the external action. In a preferable aspect, the form data generator unit generates displacement comparison data by comparing the first displacement data and the second displacement data.

[0065] It should be noted that embodiments of the present invention described above are provided for illustration only and do not limit the scope of the present invention.

Claims

1. An ultrasonic diagnostic apparatus, comprising:

- a first probe (109) which is provided with a plurality of transducers for transmission/reception of an ultrasonic wave to/from a first bone fragment and has the plurality of transducers arranged two-dimensionally;
- a transceiver unit (12) which obtains an echo signal for each transducer from the plurality of transducers of the first probe;
- a surface point specifying unit (20) which specifies a surface point corresponding to a surface of a bone for the each echo signal for the first bone fragment; and
- a form data generator unit (22, 24) which generates form data of a surface of the first bone fragment on the basis of the plurality of surface points obtained two-dimensionally from echo signals of the plurality of transducers of the first probe;

characterised in

that the ultrasonic diagnostic apparatus further comprises a second probe (106) which is provided with a plurality of transducers for transmission/reception of an ultrasonic wave to/from a second bone fragment and has the plurality of transducers arranged two-dimensionally;

that the first and the second bone fragment are two bone fragments with a fractured portion therebetween;

that the transceiver unit further obtains an echo signal for each transducer from the plurality of transducers of the second probe;

that the surface point specifying unit further specifies a surface point corresponding to a surface of a bone for the echo signal for the second bone fragment;

that the form data generator unit further generates form data of a surface of the second bone fragment on the basis of the plurality of surface points obtained two-dimensionally from echo signals of the plurality of transducers of the second probe;

that the form data generator unit generates comparison data between form data of the first bone fragment and form data of the second bone fragment and

that the first and the second probe are mutually fixed by way of a probe connector (11) and are spaced apart from each other.

2. The ultrasonic diagnostic apparatus according to claim 1, wherein:

the form data generator unit is adapted to determine when an external action is applied to the two bone fragments (54a, 54b) first displacement data indicating a change in form data of the first bone fragment (54a) involved in the external action, and second displacement data indicating a change in form data of the second bone fragment (54b) involved in the external action.

3. The ultrasonic diagnostic apparatus according to claim 2, wherein:

the form data generator unit generates displacement comparison data by comparing the first displacement data and the second displacement data.

4. The ultrasonic diagnostic apparatus according to claim 1, wherein:

the form data generator unit generates, as form data of the first bone fragment (54a), position data indicating a general position of the surface of the first bone fragment (54a) on the basis of the plurality of surface points obtained through the first probe (10a), and generates, as form data of the second bone fragment (54b), position data indicating a general position of the surface of the second bone fragment (54b) on the basis of the plurality of surface points obtained from the second probe (10b).

5. The ultrasonic diagnostic apparatus according to claim 4, wherein:

the form data generator unit is adapted to determine when an external action is applied to the two bone fragments (54a, 54b) first displacement data indicating a change in position data of the first bone fragment (54a) involved in the external action, and second displacement data indicating a change in position data of the second bone fragment (54b) involved in the external action.

6. The ultrasonic diagnostic apparatus according to claim 5, wherein:

the form data generator unit generates displacement comparison data by comparing the first displacement data and the second displacement data.

7. The ultrasonic diagnostic apparatus according to claim 1, wherein:

the form data generator unit generates, as form data of the first bone fragment (54a), orientation data indicating an orientation of a surface of the first bone fragment (54a) on the basis of the plurality of surface points obtained through the first probe (10a), and generates, as form data of the second bone fragment (54b), orientation data indicating an orientation of a surface of the second bone fragment (54b) on the basis of the plurality of surface points obtained through the second probe (10b).

8. The ultrasonic diagnostic apparatus according to claim 7, wherein:

the form data generator unit is adapted to determine an external action is applied to the two bone fragments (54a, 54b) first displacement data indicating a change in orientation data of the first bone fragment (54a) involved in the external action, and second displacement data indicating a change in orientation data of the second bone fragment (54b) involved in the external action.

9. The ultrasonic diagnostic apparatus according to claim 8, wherein:

the form data generator unit generates displacement comparison data by comparing the first displacement data and the second displacement data.

Patentansprüche

1. Ultraschalldiagnosegerät mit:

einer ersten Messsonde (10a), die mit einer Mehrzahl von Umwandlern zur Übertragung/Empfang einer Ultraschallwelle zu/von einem ersten Knochenfragment versehen ist und die Mehrzahl an Umwandlern aufweist, die zweidimensional angeordnet sind;

einer Empfängereinheit (12), die ein Echosignal für jeden Umwandler von der Mehrzahl der ersten Messsonde erhält;

einer Oberflächenpunktspezifizierungseinheit (20), die einen Oberflächenpunkt spezifiziert, entsprechend einer Oberfläche eines Knochens für jedes Echosignal für das erste Knochenfragment; und

einer Formdatenerzeugereinheit (22, 24), die Formdaten von einer Oberfläche des ersten Knochenfragments erzeugt, auf der Basis der Mehrzahl von Oberflächenpunkten, die zweidimensional von Echosignalen der Mehrzahl von Umwandlern der ersten Messsonde erhalten sind;

dadurch gekennzeichnet,

dass das Ultraschalldiagnosegerät ferner eine zweite Messsonde (10b) aufweist, die mit einer Mehrzahl von Umwandlern zur Übertragung/Empfang einer Ultraschallwelle zu/von einem zweiten Knochenfragment versehen ist und die Mehrzahl von zweidimensional angeordneten Umwandlern aufweist;

dass das erste und das zweite Knochenfragment zwei Knochenfragmente mit einem dazwischen gebrochenen Abschnitt sind;

dass die Empfängereinheit ferner ein Echosignal für jeden Umwandler von der Mehrzahl an Umwandlern der zweiten Messsonde erhält;

dass die Oberflächenpunktspezifizierungseinheit ferner einen Oberflächenpunkt entsprechend einer Oberfläche eines Knochens für das Echosignal für das zweite Knochenfragment spezifiziert;

dass die Formdatenerzeugereinheit ferner Formdaten einer Oberfläche des zweiten Knochenfragments auf der Basis der Mehrzahl von Oberflächenpunkten erzeugt, die zweidimensional von Echosignalen der Mehrzahl von Umwandlern der zweiten Messsonde erhalten sind;

dass die Formdatenerzeugereinheit Vergleichsdaten zwischen Formdaten des ersten Knochenfragmentes und Formdaten des zweiten Datenfragmentes erzeugt, und

dass die erste und die zweite Messsonde wechselweise durch einen Messsondenverbinder (11) befestigt sind und voneinander beabstandet sind.

2. Ultraschalldiagnosegerät nach Anspruch 1, wobei:

die Formdatenerzeugereinheit angepasst ist, um zu bestimmen, wenn eine externe Handlung an die zwei Knochenfragmente (54a, 54b) angelegt wird,

und erste Versetzungsdaten eine Änderung der Formdaten des ersten Knochenfragmentes (54a) anzeigen, das in die externe Handlung involviert ist und zweite Versetzungsdaten eine Änderung der Formdaten des zweiten Knochenfragmentes (54b) angeben, das in die externe Handlung involviert ist.

3. Ultraschalldiagnosegerät nach Anspruch 2, wobei:

die Formdatenerzeugereinheit Versetzungsvergleichsdaten durch Vergleich der ersten Versetzungsdaten und der zweiten Versetzungsdaten erzeugt.

4. Ultraschalldiagnosegerät nach Anspruch 1,
wobei:

die Formdatenerzeugereinheit als Formdaten des ersten Knochenfragmentes (54a) Positionsdaten erzeugt, die eine allgemeine Position der Oberfläche des ersten Knochenfragmentes (54a) auf der Basis der Mehrzahl von Oberflächenpunkten angeben, die durch die erste Messsonde (10a) erhalten werden und als Formdaten des zweiten Knochenfragmentes (54b) Positionsdaten erzeugt, die eine allgemeine Position der Oberfläche des zweiten Knochenfragmentes (54b) auf der Basis der Mehrzahl von Oberflächenpunkten, die von der zweiten Messsonde (10b) erhalten werden, angeben.

5. Ultraschalldiagnosegerät nach Anspruch 4,
wobei:

die Formdatenerzeugereinheit angepasst ist, um zu bestimmen, wenn eine externe Handlung an die zwei Knochenfragmente (54a, 54b) angelegt ist, und erste Versetzungsdaten eine Änderung in den Positionsdaten des ersten Knochenfragmentes (54a) angeben, das in die externe Handlung involviert ist, und zweite Versetzungsdaten eine Änderung in den Positionsdaten des zweiten Knochenfragmentes (54b) angeben, das in die externe Handlung involviert ist.

6. Ultraschalldiagnosegerät nach Anspruch 5,
wobei:

die Formdatenerzeugereinheit Versetzungsvergleichsdaten durch Vergleichen der ersten Versetzungsdaten und der zweiten Versetzungsdaten erzeugt.

7. Ultraschalldiagnosegerät nach Anspruch 1,
wobei:

die Formdatenerzeugereinheit als Formdaten des ersten Knochenfragmentes (54a) Orientierungsdaten erzeugt, die eine Orientierung einer Oberfläche des ersten Knochenfragmentes (54a) auf der Basis der Mehrzahl von Oberflächenpunkten angeben, die durch die erste Messsonde (10a) erhalten wird, und als Formdaten des zweiten Knochenfragmentes (54b) Orientierungsdaten erzeugt, die eine Orientierung einer Oberfläche des zweiten Knochenfragmentes (54b) auf der Basis der Mehrzahl von Oberflächenpunkten, die durch die zweite Messsonde (10b) erhalten wird, angeben.

8. Ultraschalldiagnosegerät nach Anspruch 7,
wobei:

die Formdatenerzeugereinheit angepasst ist, um eine externe Handlung zu bestimmen, die an die zwei Knochenfragmente (54a, 54b) angelegt ist, und erste Versetzungsdaten eine Änderung in den Orientierungsdaten des ersten Knochenfragmentes (54a) angeben, das in die externe Handlung involviert ist, und zweite Versetzungsdaten eine Änderung in den Orientierungsdaten des zweiten Knochenfragmentes (54b) angeben, das in die externe Handlung involviert ist.

9. Ultraschalldiagnosegerät nach Anspruch 8,
wobei:

die Formdatenerzeugereinheit Versetzungsvergleichsdaten durch Vergleichen der ersten Versetzungsdaten und der zweiten Versetzungsdaten erzeugt.

Revendications

1. Appareil de diagnostic à ultrasons, comprenant :

une première sonde (10a) qui est équipée d'une pluralité de transducteurs pour l'émission/réception d'une onde ultrasonore vers/depuis un premier segment d'os et dont la pluralité de transducteurs sont disposés de manière

bidimensionnelle ;

une unité (12) émettrice-réceptrice qui obtient un signal d'écho pour chaque transducteur de la pluralité de transducteurs de la première sonde ;

une unité (20) de désignation d'un point de surface qui désigne un point de surface correspondant à une surface d'un os pour chacun des signaux d'écho pour le premier segment d'os ; et

une unité (22, 24) génératrice de données de forme qui génère des données de forme d'une surface du premier segment d'os sur la base de la pluralité de points de surface obtenus de manière bi-dimensionnelle des signaux d'écho de la pluralité de transducteurs de la première sonde ;

caractérisé en ce que l'appareil de diagnostic à ultrasons comprend en outre une deuxième sonde (10b) qui est équipée d'une pluralité de transducteurs pour l'émission/réception d'une onde ultrasonore vers/depuis un deuxième segment d'os et qui a une pluralité de transducteurs disposés de manière bidimensionnelle ;

en ce que le premier et le deuxième segments d'os sont deux segments d'os avec entre eux une portion fracturée ;

en ce que l'unité émettrice-réceptrice obtient un signal d'écho pour chaque transducteur de la pluralité de transducteurs de la deuxième sonde ;

en ce que l'unité de désignation d'un point de surface désigne en outre un point de surface correspondant à une surface d'un os pour le signal d'écho pour le deuxième segment d'os ;

en ce que l'unité génératrice de données de forme génère en outre des données de forme d'une surface du deuxième segment d'os sur la base de la pluralité de points de surface obtenus de manière bidimensionnelle de signaux d'écho de la pluralité de transducteurs de la deuxième sonde ;

en ce que l'unité génératrice de données de forme génère des données de comparaison entre des données de forme du premier segment d'os et des données de forme du deuxième segment d'os, et

en ce que la première et la deuxième sonde sont fixées dans une relation mutuelle au moyen d'un connecteur (11) de sondes et sont situées à distance l'une de l'autre.

2. Appareil de diagnostic à ultrasons selon la revendication 1, dans lequel :

l'unité génératrice de données de forme est apte à déterminer, quand une action extérieure est appliquée aux deux segments d'os (54a, 54b), des premières données de déplacement indiquant un changement dans les données de forme du premier segment (54a) d'os impliqué dans l'action extérieure, et des deuxièmes données de déplacement indiquant un changement dans les données de forme du deuxième segment (54b) d'os impliqué dans l'action extérieure.

3. Appareil de diagnostic à ultrasons selon la revendication 2, dans lequel :

l'unité génératrice de données de forme génère des données de comparaison de déplacement en comparant les premières données de déplacement et les deuxièmes données de déplacement.

4. Appareil de diagnostic à ultrasons selon la revendication 1, dans lequel :

l'unité génératrice de données de forme génère, en tant que données de forme du premier segment d'os (54a), des données de position indiquant une position générale de la surface du premier segment d'os (54a) sur la base de la pluralité de points de surface obtenus via la première sonde (10a), et génère, en tant que données de forme du deuxième segment d'os (54b), des données de position indiquant une position générale de la surface du deuxième segment d'os (54b) sur la base de la pluralité de points de surface obtenus via la deuxième sonde (10b).

5. Appareil de diagnostic à ultrasons selon la revendication 4, dans lequel :

l'unité génératrice de données de forme est apte à déterminer, quand une action extérieure est appliquée aux deux segments d'os (54a, 54b), des premières données de déplacement indiquant un changement dans les données de position du premier segment d'os (54a) impliqué dans l'action extérieure, et des deuxièmes données de déplacement indiquant un changement dans les données de position du deuxième segment d'os (54b) impliqué dans l'action extérieure.

6. Appareil de diagnostic à ultrasons selon la revendication 5, dans lequel :

l'unité génératrice de données de forme génère des données de comparaison de déplacement en comparant

les premières données de déplacement et les deuxièmes données de déplacement.

7. Appareil de diagnostic à ultrasons selon la revendication 1, dans lequel :

5 l'unité génératrice de données de forme génère, en tant que données de forme du premier segment d'os (54a), des données d'orientation indiquant une orientation d'une surface du premier segment d'os (54a) sur la base de la pluralité de points de surface obtenus via la première sonde (10a), et génère, en tant que données de forme du deuxième segment d'os (54b), des données d'orientation indiquant une orientation d'une surface du deuxième segment d'os (54b) sur la base de la pluralité de points de surface obtenus via la deuxième sonde (10b).

10

8. Appareil de diagnostic à ultrasons selon la revendication 7, dans lequel :

l'unité génératrice de données de forme est apte à déterminer, quand une action extérieure est appliquée aux deux segments d'os (54a, 54b), des premières données de déplacement indiquant un changement dans les données d'orientation du premier segment d'os (54a) impliqué dans l'action extérieure, et des deuxièmes données de déplacement indiquant un changement dans les données d'orientation du deuxième segment d'os (54b) impliqué dans l'action extérieure.

15

9. Appareil de diagnostic à ultrasons selon la revendication 8, dans lequel :

20

l'unité génératrice de données de forme génère des données de comparaison de déplacement en comparant les premières données de déplacement et les deuxièmes données de déplacement.

25

30

35

40

45

50

55

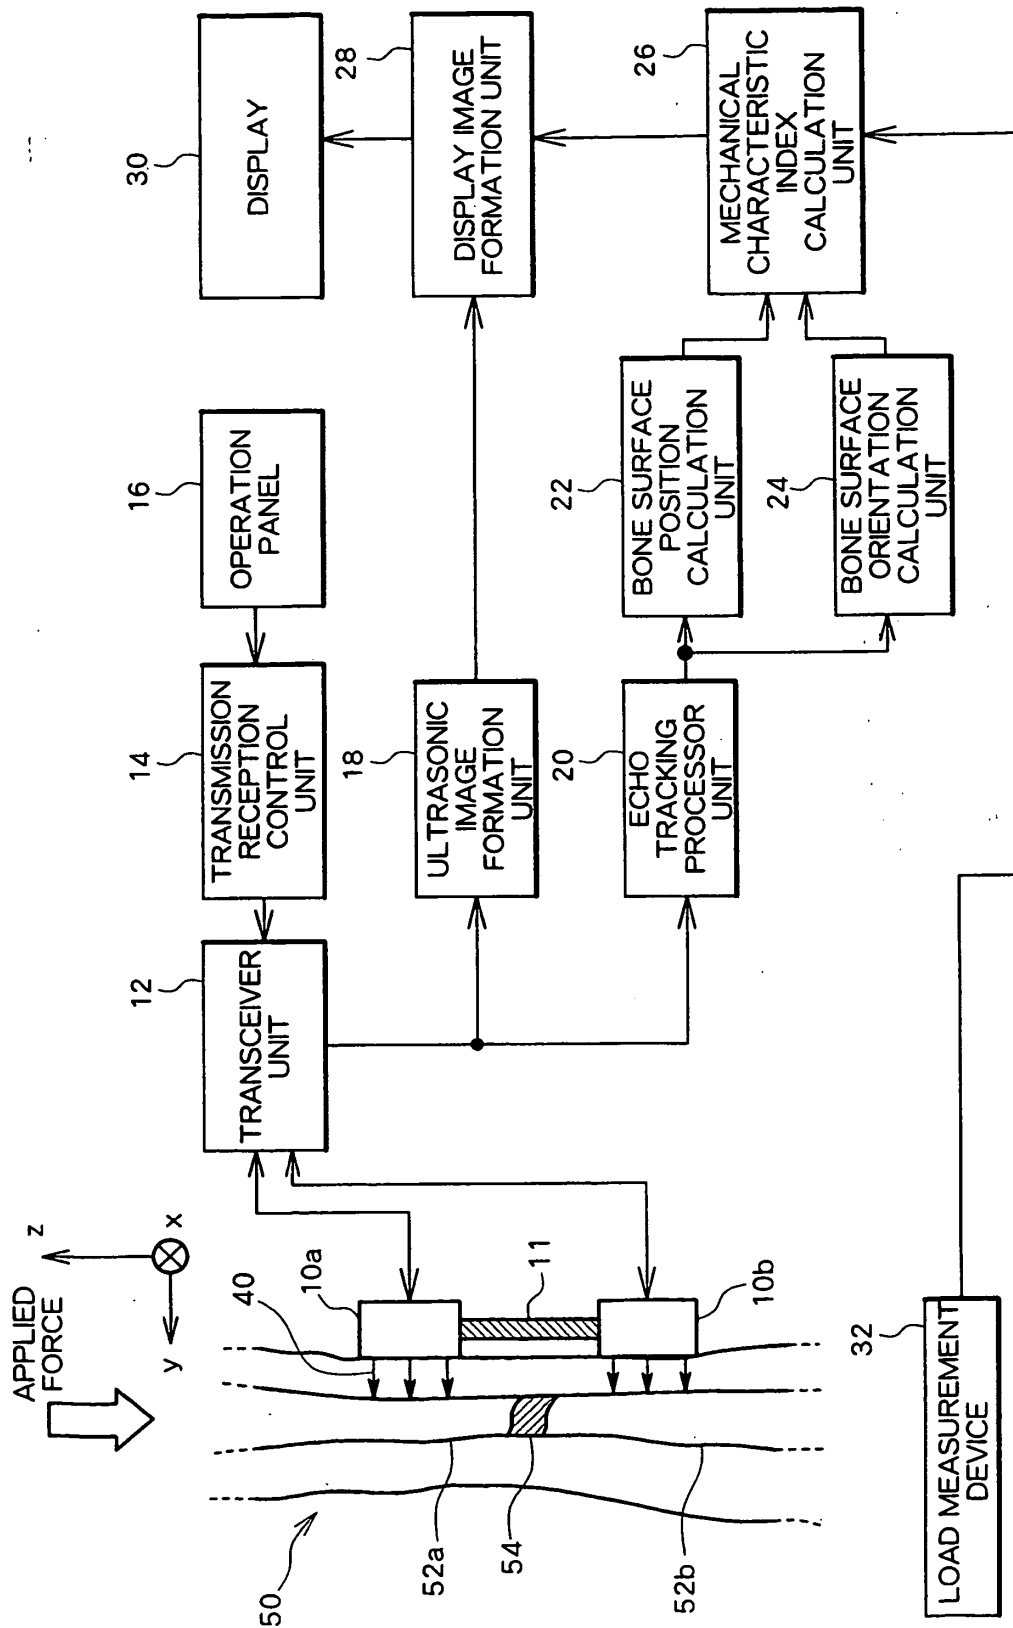


Fig. 1

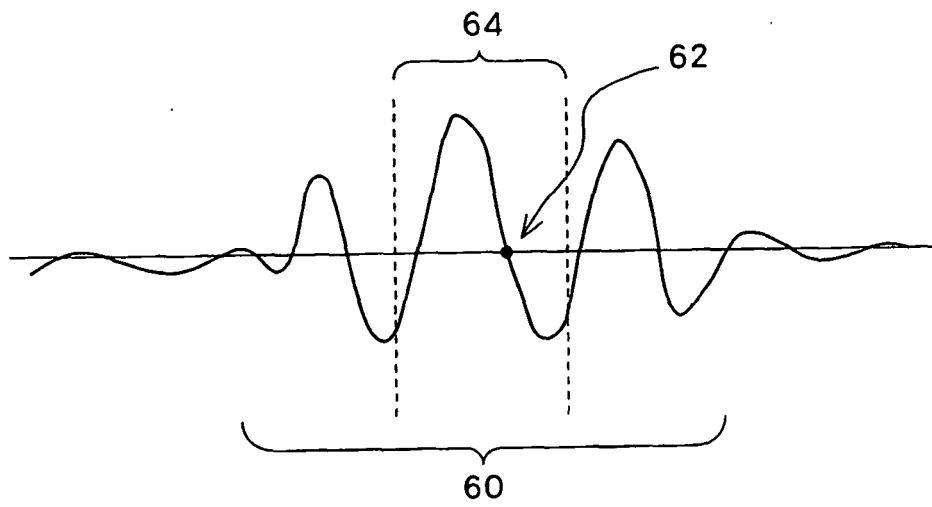


Fig. 2

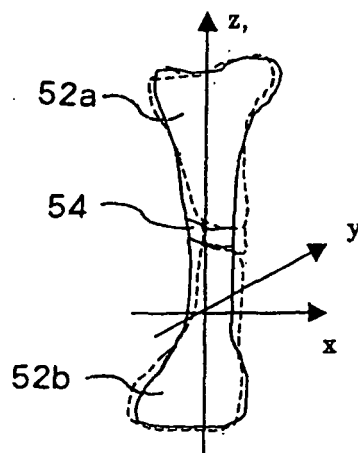


Fig. 3

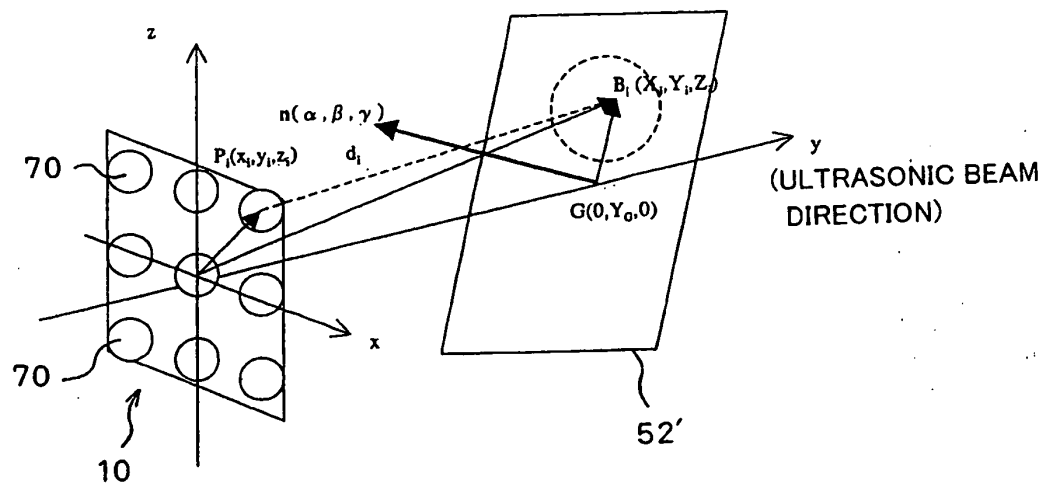


Fig. 4

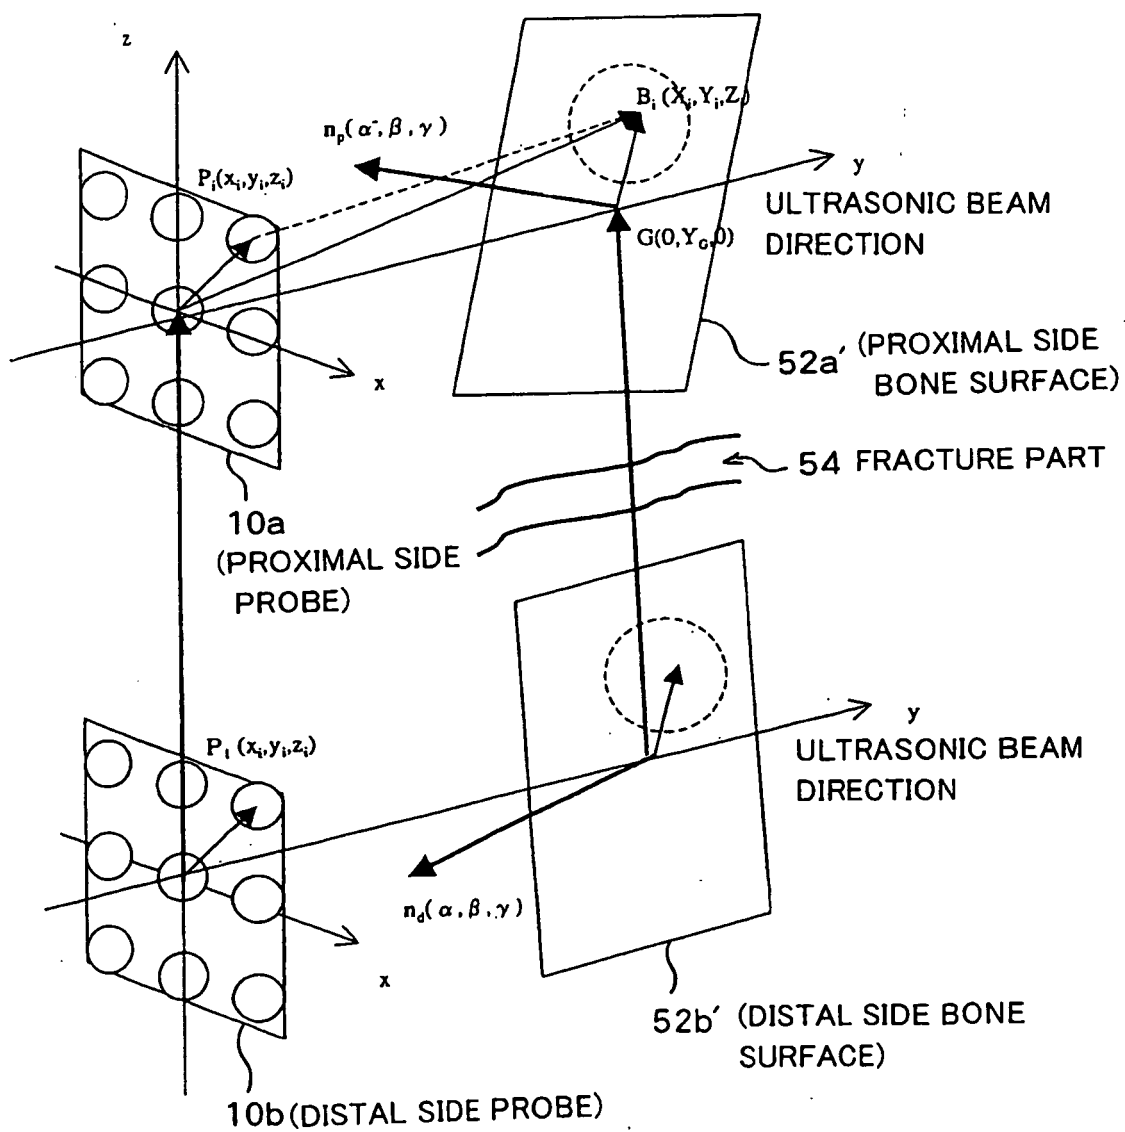


Fig. 5

	BEFORE LOADING: TRANSLATION COMPONENT	BEFORE LOADING: ROTATION COMPONENT	AFTER LOADING: TRANSLATION COMPONENT	AFTER LOADING: ROTATION COMPONENT	CHANGE BEFORE AND AFTER LOADING: TRANSLATIONAL DISPLACEMENT COMPONENT	CHANGE BEFORE AND AFTER LOADING: ROTATION DISPLACEMENT COMPONENT
PROXIMAL SIDE (BONE FRACTURE 52a)	Y_p	$\alpha_p, \beta_p, \gamma_p$	Y'_p	$\alpha'_p, \beta'_p, \gamma'_p$	$\Delta Y_p = Y'_p - Y_p$	$\Delta \alpha_p = \alpha'_p - \alpha_p$ $\Delta \beta_p = \beta'_p - \beta_p$ $\Delta \gamma_p = \gamma'_p - \gamma_p$
DISTAL SIDE (BONE FRACTURE 52b)	Y_d	$\alpha_d, \beta_d, \gamma_d$	Y'_d	$\alpha'_d, \beta'_d, \gamma'_d$	$\Delta Y_d = Y'_d - Y_d$	$\Delta \alpha_d = \alpha'_d - \alpha_d$ $\Delta \beta_d = \beta'_d - \beta_d$ $\Delta \gamma_d = \gamma'_d - \gamma_d$
DIFFERENCE BETWEEN PROXIMAL SIDE AND DISTAL SIDE	$\delta Y = Y_p - Y_d$	$\delta \alpha = \alpha_p - \alpha_d$ $\delta \beta = \beta_p - \beta_d$ $\delta \gamma = \gamma_p - \gamma_d$	$\delta Y' = Y'_p - Y'_d$	$\delta \alpha' = \alpha'_p - \alpha'_d$ $\delta \beta' = \beta'_p - \beta'_d$ $\delta \gamma' = \gamma'_p - \gamma'_d$	$\delta \Delta Y = \Delta Y_p - \Delta Y_d$	$\delta \Delta \alpha = \Delta \alpha_p - \Delta \alpha_d$ $\delta \Delta \beta = \Delta \beta_p - \Delta \beta_d$ $\delta \Delta \gamma = \Delta \gamma_p - \Delta \gamma_d$

Fig. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2004298205 A [0005] [0006] [0007]
- US 5902240 A [0009]
- JP 2001309918 A [0020]

专利名称(译)	用于诊断骨疾病的超声波设备		
公开(公告)号	EP1707124B1	公开(公告)日	2013-02-13
申请号	EP2006006394	申请日	2006-03-28
[标]申请(专利权)人(译)	日立阿洛卡医疗株式会社 国立大学法人 东京大学		
申请(专利权)人(译)	ALOKA CO. , LTD. 东京大学		
当前申请(专利权)人(译)	东京大学 日立ALOKA MEDICAL. , LTD.		
[标]发明人	HARADA AKIMITSU SAKAI RYOICHI NAKAMURA KOZO OHNISHI ISAO		
发明人	HARADA, AKIMITSU SAKAI, RYOICHI NAKAMURA, KOZO OHNISHI, ISAO		
IPC分类号	G01S15/89 G01S7/52 A61B8/08		
CPC分类号	A61B8/0875 A61B5/6843 A61B8/485 A61B2562/0204 A61B2562/046 G01S7/52017 G01S15/8925		
优先权	2005103031 2005-03-31 JP		
其他公开文献	EP1707124A3 EP1707124A2		
外部链接	Espacenet		

摘要(译)

根据本发明的超声波诊断装置包括多个换能器单元，这些换能器单元二维地布置成向/从硬组织发送/接收超声波 (40) ;收发器单元 (12) ，用于从多个换能器单元接收每个换能器单元的回波信号;表面点指定单元，用于为每个回波信号指定与硬组织的表面相对应的表面点;形状数据生成单元，基于从多个换能器单元的回波信号二维地获得的多个表面点，生成硬组织表面的形状数据。

[Expression 1]

$$x_G = \frac{1}{M} \sum_1^M x_i = 0$$
$$z_G = \frac{1}{M} \sum_1^M z_i = 0$$