

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 August 2002 (15.08.2002)

PCT

(10) International Publication Number
WO 02/063606 A1

(51) International Patent Classification⁷: **G10K 11/32**, B06B 1/06, A61B 8/08

(72) Inventor: **GAUCHET, Maurice, G.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: PCT/IB02/00322

(74) Agent: **LOTTIN, Claudine**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(22) International Filing Date: 31 January 2002 (31.01.2002)

(81) Designated State (national): JP.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

01400353.7 9 February 2001 (09.02.2001) EP

Published:

— with international search report

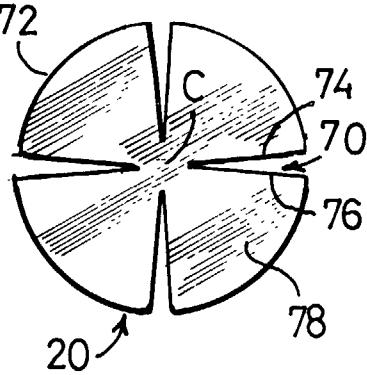
(71) Applicant: **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]**; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



(54) Title: ULTRASOUND TRANSDUCER AND METHOD OF MANUFACTURING AN ULTRASOUND TRANSDUCER

WO 02/063606 A1



(57) Abstract: The invention proposes a method of manufacturing an ultrasound transducer (60), which method includes a step of forming a plate in the form of a disc of a composite piezoelectric material into a hollow spherical cap, characterized in that the step of forming is preceded by a step of cutting which consists in the formation of at least one slit (70) which has a radial orientation and extends from the peripheral edge (72) of the disc (20) towards its center (C) in such a manner that, after the step of forming, the two facing, oppositely situated free edges (74, 76) which bound the slit (70) are substantially in contact with one another so as to minimize the internal stresses in the cap which are caused notably by its deformation. The invention also proposes a transducer obtained by means of such a method.

ULTRASOUND TRANSDUCER AND METHOD OF MANUFACTURING AN ULTRASOUND TRANSDUCER

The invention relates to a method of manufacturing an ultrasound transducer, which method includes a step of forming a plate which is shaped as a disc of a composite piezoelectric material into a hollow spherical cap.

Ultrasound transducers are used notably in the medical field. There are 5 numerous applications for such transducers.

There are ultrasound transducers which operate with low powers, that is, of the order of a few hundreds of milliwatts for imaging, as well as so-called ultrasound power transducers which are capable, for example, of destroying tumors within the human body by raising the temperature; such transducers are powered by currents of the order of from one 10 watt to some hundreds of watts.

Generally speaking, ultrasound transducers enable a given quantity of energy to be focused in a small zone which is referred to as the focal spot which has the shape of an ellipsoid. The focal spot corresponds to the zone of convergence of the ultrasonic radiation produced by the transducer. Generally speaking, the radiation propagates in a direction 15 normal to the surface whereto it is applied. The radiation together forms a so-termed ultrasound beam. Thus, the ultrasound beam is generally oriented in the direction which corresponds to the symmetry axis of the spherical cap. Each transducer has a focal distance which corresponds to the distance between the focal spot and the apex of the spherical cap of the transducer. The focal distance of a transducer is determined in principle by its geometry, 20 that is, notably by the radius of curvature of the spherical cap. Thus, with each specific geometry of the transducer there is associated a given focal distance which is referred to as the geometrical focal distance of the transducer. The shape of the focal spot is more elongate in the direction of the major axis of the ellipsoid as the focal distance is larger.

The ultrasound transducers are made of a piezoelectric material, that is, a 25 material which is deformed when subjected to electric current pulses. The deformations of the material produce radiation in the range of ultrasound vibrations, which radiation propagates in water or liquids and converges towards the focal spot in which it causes notably a rise of temperature. In the case of ultrasound power transducers this rise in

temperature suffices to burn tissue of the human body, notably tumors which may be malignant or non-malignant.

In order to optimize the treatment, it is important that the focal distance of the transducer used is short. Indeed, this enables the dimensions of the focal spot to be reduced, 5 thus enhancing the precision of the treatment. On the other hand, when a tumor is situated at a small distance from the external surface of the skin of the patient, the transducer can then be arranged in the vicinity of the external surface of the skin. This volume of the device is thus reduced and the coupling between the transducer and the skin facilitated, thus optimizing the penetration of the energy into the body of the patient. The focal distance can be varied 10 slightly by means of an electronic device which enables dephasing of the vibrations for given zones of the transducer so as to increase or decrease the focal distance of the transducer in relation to its geometrical focal distance. Variation of the focal distance enables displacement of the focal spot in order to enlarge the zone of treatment, that is, without displacement of the transducer. The thickness of the spherical cap determines the frequency of the ultrasound 15 radiation.

A method of realizing a transducer in the form of a spherical cap is already known from the publication "Feasibility of Using Ultrasound Phased Arrays for MRI Monitored Non-Invasive Surgery" by Kullervo HYNYNEN et al., in IEEE Transactions on Ultrasonics, Ferroelectrics, and Frequency Control, vol. 43, 20 No. 6, November 1996. This method utilizes a solid piezoelectric material in which a spherical cap of the desired dimensions is formed, notably a cap having the radius and thickness desired so as to obtain a given geometrical focal distance and radiation frequency. Subsequently, each spherical surface of the cap is covered with an electrode. When fed with an electric current, the 25 electrodes enable the piezoelectric material to vibrate. Such a method is very expensive, because it requires a large quantity of piezoelectric material as well as exact machining operations. Moreover, the electronic device cannot be adapted so as to induce the dephasing of vibrations for given zones, so that the possibility of changing the focal distance of the transducer is lost.

30 It is also known to utilize composite piezoelectric materials which consist of a material which is formed by small elements of a piezoelectric material which are embedded in a matrix of an insulating material such as a polymer material. A disc of composite piezoelectric material is then formed, each surface of said disc being covered with an electrode which is realized by

metallization in vacuum. When fed with an electric current, the electrodes enable the piezoelectric material to vibrate. The electrode on the rear surface of the disc consists of the juxtaposition of rings of a conductive material which are realized by photoengraving and chemical etching. The disc is 5 thermodeformable because it consists of the polymer material. Thus, a hollow spherical cap is formed by deforming the disc under the influence of heat; this results in a shape having the desired radius of curvature.

10 However, the formation of the disc into a hollow spherical cap induces large mechanical stresses in the composite piezoelectric material, which stresses are larger as the radius of curvature of the ultrasound transducer is smaller.

15 During the operation of the transducer, the vibration at very high frequencies (of the order of from one to several MHz) of the piezoelectric elements also causes mechanical stresses inside the material.

20 The sum of the mechanical stresses must remain below the rupture strength limit of the composite piezoelectric material during use of the ultrasound transducer.

25 Thus, a method of this kind has its limitations when an ultrasound transducer having a small radius of curvature is to be realized. Indeed, for operation of an ultrasound transducer of a diameter of 100 mm and a thickness of approximately 1 mm at 1.5 MHz, the minimum radius of curvature which can be realized is of the order of 130 mm.

30 In order to solve these problems, the invention proposes a method of manufacturing an ultrasound transducer which includes a step of forming a plate which is shaped as a disc of a composite piezoelectric material into a hollow spherical cap as claimed in claim 1.

The invention also proposes an ultrasound transducer which is shaped as a hollow spherical cap manufactured by means of the above method.

30

The characteristics and advantages of the invention will be described in detail hereinafter with reference to the attached diagrammatic drawings; therein:

Fig. 1 is a perspective view of a disc of a composite piezoelectric material;

Fig. 2 is a partial radial cross-sectional view at an enlarged scale and in perspective of the disc shown in the foregoing Figure;

5 Fig. 3 is a sectional view of the device for forming the disc into a hollow spherical cap, realized in conformity with the present state of the art;

Fig. 4 is a perspective view of an ultrasound transducer realized by means of a method according to the present state of the art;

10 Fig. 5 is a partial sectional view at an increased scale, taken along the line 5-5 in the foregoing Figure;

Fig. 6 is a diagrammatic front view of a disc of a composite piezoelectric material after a step of cutting radial orientation slits in accordance with the invention;

15 Figs. 7 and 8 are views similar to those of the foregoing Figure in which the slits are realized in conformity with alternative versions of the invention;

20 Fig. 9 is a perspective diagrammatic view of a disc of a composite piezoelectric material after a step of cutting radial orientation slits which extend as far as the center of the disc so as to separate it into several distinct portions;

Fig. 10 is a perspective diagrammatic view of a hollow spherical cap realized by means of the method in accordance with the invention;

Fig. 11 is a diagrammatic view which shows an ultrasound transducer realized by means of the method of the invention;

25 Fig. 12 is a partial sectional view at an increased scale, taken along the line 12-12 in the foregoing Figure.

Elements which are identical or similar will be denoted by the same reference numerals hereinafter.

Fig. 1 shows a disc 20 of a composite piezoelectric material. A material of this kind is formed by piezoelectric elements 22 which are shown in detail in Fig. 2 and are embedded in a material 24 which is electrically insulating such as epoxy resin. In the present example, the diameter and the thickness of the disc 20 are of the order of 120 mm and 2 mm,

respectively. The piezoelectric elements 22 extend through the disc 20 in the axial direction and have a substantially square transverse cross-section whose sides amount to approximately 100 micrometers. They are regularly distributed in the material 24. Each of the two faces of the disc 20 is provided with an electrode 42, 44 which is realized by means of a 5 known method as described above.

A hollow spherical cap 26 is realized by deformation of the disc 20. To this end, the disc 20 and its electrodes 42, 44 is arranged, as shown in Fig. 3, between two dies, that is, a lower die 30 and an upper die 42, of a forming device 28. The facing surfaces 34 and 36 of the lower die 30 and the upper die 32 define the spherical shape of the concave 10 surface 38 and the convex surface 40 of the spherical cap 26. Thus, when the disc 20 is arranged between the two dies 30 and 32, the disc 20 is formed into a spherical cap 26 by bringing these two dies together in the axial direction.

The electrode 42, being deposited on the entire concave surface 38, is connected, by way of a conductive element 46, to the positive terminal of a current generator 15 48. The electrode 44, provided on the convex surface 40, in this case consists of the juxtaposition of rings of a conductive material, two of which are denoted by the reference numerals 50 and 52. In practice the electrode 44 is formed, for example, by fourteen rings. The rings 50, 52 are separated from one another by a hollow ring 54 which is shown in detail 20 in Fig. 5. The ring 54 in an alternative version may be filled with an electrically insulating material, such as polyurethane varnish, in order to provide electrical insulation between the rings 50 and 52. Each ring 50, 52 is connected to the current generator via conductive elements 56 and 58 as shown in Fig. 4. The device thus realized forms an ultrasound transducer 60.

During the operation of the ultrasound transducer 60, the current generator 48 25 feeds the rings 50 and 52, causing vibration of the piezoelectric elements 22 with which they are in contact. When all rings of the electrode 44 are fed with a current of the same phase and amplitude, the focal spot is situated at the geometrical focal distance of the ultrasound transducer 60.

The current generator 48 may also supply the conductive elements 56 and 58 30 with currents of different phase and amplitude. This enables notably variation of the focal distance of the focal spot.

A device of this kind enables the realization of ultrasound transducers 60 with a large radius of curvature. Thus, it enables the realization of transducers which have a large focal distance.

However, such a method is inadequate when smaller geometrical focal distances are desired so as to treat tumors situated at a small distance from the surface of the skin of the patient and to enhance the precision of treatment.

Actually, in order to reduce the focal distance it is necessary to reduce the 5 radius of curvature of the ultrasound transducer 60. However, the step of forming the disc 20 into a spherical cap 26 induces large stresses inside the composite piezoelectric material. For a given diameter of the transducer 60, the stresses are higher as the radius of curvature is smaller. This phenomenon is due to the greater deformation of the disc 20 of the composite piezoelectric material.

10 Actually, a first disc of a predetermined diameter is necessary so as to obtain a first spherical cap of a first diameter and a first radius of curvature. Similarly, in order to obtain a second spherical cap of a second diameter which is equal to the first diameter and a second radius of curvature which is larger than the first radius of curvature, it is necessary to form a second disc of the composite piezoelectric material which has a diameter larger than 15 the predetermined diameter.

During the formation of the spherical cap, the peripheral length of the disc is reduced. The reduction of the peripheral length of the second disc is greater than the reduction of the peripheral length of the first disc. Consequently, the formation of the second spherical cap induces stresses, notably compressive stresses, which are greater than those 20 introduced by the formation of the first spherical cap. When the radius of curvature of the spherical cap 26 is reduced below a predetermined value, which may be dependent on the diameter of the cap 26 and on its thickness, the stresses induced in the composite piezoelectric material of the cap 26 are too large and are liable to cause a rupture or malfunctioning of the transducer 60.

25 Actually, the sum of the stresses induced by the forming operation and the stresses produced by vibration of the piezoelectric elements 22 may cause fissures in the composite piezoelectric material, which fissures cause malfunctioning and/or rupture of the transducer 60. The sum of the stresses induced and the stresses produced by vibration of the piezoelectric elements 22 may also cause deformations of the spherical cap 26 which may 30 lead to malfunctioning of the transducer 60.

In order to solve this problem, in accordance with the invention the step of forming the disc 20 of the composite piezoelectric material into a spherical cap 26 during the manufacture of the ultrasound transducer 60 is preceded by a cutting step which consists in the formation of at least one slit 70 which has a radial orientation and extends from the

peripheral edge 72 of the disc 20 towards its center C in such a manner that, after the step of forming, the two oppositely situated, facing free edges 74, 76 which bound the slit 70 are substantially in contact with one another so as to minimize the internal stresses in the cap 26 which are caused notably by its deformation.

5 The Figs. 6 to 8 show discs 20 of a composite piezoelectric material in which a number of slits 70 greater than one has been formed. In the example shown in the Figs. 6 to 8, four slits 70 have been formed in conformity with three versions of the invention.

10 The slits 70 are preferably angularly distributed in a regular fashion so that they define substantially identical angular sectors 78. The slits 70 extend radially partly along radii of the disc 20. This enables a strong reduction of the stresses induced in the cap 26, however, while keeping the disc 20 in one piece, thus facilitating its positioning and retention 15 in the forming device 28.

15 In conformity with Fig. 6 the oppositely situated free edges 74, 76 extend parallel to one another. They may be situated a few millimeters apart. Thus, the slits 70 of the discs 20 can be realized in the form of a saw cut whose thickness corresponds to the distance separating the free edges 74, 76.

20 In conformity with the version which is shown in Fig. 7, the oppositely situated, facing free edges 74, 76 have a radial orientation such that the corresponding slits 70 form a V whose apex is oriented towards the center C of the disc 20. The slits 70 can be realized by cutting by means of a water jet or by means of a wire saw, for example, a diamond type.

25 In accordance with Fig. 8, the oppositely situated free edges 74, 76 are curved and convex, their convexity being opposed. The exact shape of the oppositely situated free edges 74, 76 can be determined with precision by calculation on the basis of equations which are representative of the deformation of the disc 20 into a hollow spherical cap by way of approximative methods which consist notably in the determination of the width of the slits 70 for each specific diameter of the disc 20.

30 In conformity with a further version as shown in Fig. 9, the slits 70 extend radially as far as the center C of the disc 20 in such a manner that the angular sectors 78 are separated. This enables a further reduction of the internal stresses in the cap 26 which are caused by its deformation. In the example of Fig. 9, angular sectors 78 are separated into four distinct portions.

The free edges 74, 76 approach one another during the step of forming. The deformations also occur in the zones situated in the vicinity of the recessed radial end of the

slits 70, that is, in such a manner that the cap 26 does not comprise any opening. In this stage various solutions are feasible.

5 The first solution consists in bringing the free edges 74, 76 into contact with one another. Upon cooling, the composite piezoelectric material hardens, thus forming the hollow spherical cap 26 and fixing its dimensions.

10 Another solution is to inject an adhesive into the space between the free edges 74, 76. The adhesive thus makes it possible to keep the free edges 74, 76 together and to solidify the hollow spherical cap 26 formed. Hardening of the composite piezoelectric material and curing of the adhesive prevent shifting of an angular sector 78 relative to the adjoining angular sectors 78.

15 Fig. 10 is a perspective view of a hollow spherical cap 26 realized by way of the method in accordance with the invention. In conformity with the method used, the electrode 44 may be formed by closed rings 50, 52 or by rings 50, 52 which have been cut into several angular sectors (in this case four sectors) which correspond to the angular sectors 78. Indeed, as the electrode 44 is realized on the plate 20 before the formation of the cap 26, the cutting of the slits 70 implies cutting of the rings 50 and 52, thus forming ring sectors 50a, 52a, 50b, 52b, 50c, After the formation of the cap 26, the free ends of the ring sectors 50a, 52a ... are no longer in contact with the free ends of the adjoining ring sectors.

20 This enables the realization of two types of ultrasonic transducer.

25 The realization of the first type of ultrasonic transducer 60 consists in electrically connecting the free ends of the ring sectors to the free ends of the facing ring sectors 50a, 52a ... in such a manner that electrical continuity is ensured for each ring 50, 52. Thus, each ring 50, 52 of a conductive material can be connected to a current generator 48 via a conductive element 56, 58, respectively, each of which is fed with a current of different phase and/or amplitude. When the phase and/or the amplitude of the current applied to the various rings 50, 52 by the generator 48 differs, the focal distance of the ultrasound transducer 60 is modified.

30 The realization of the second type of ultrasound transducer 60, as shown in Fig. 11, consists in ensuring that the free ends of the ring sectors 50a, 52a ... are not in contact with the free ends of the facing ring sectors 50b, 52b To this end, it is advantageous when the adhesive injected into the slits 70 so as to enhance the rigidity of the spherical cap 26 is an electrically insulating adhesive. Each ring 50, 52 is thus formed by four ring sectors 50a, 52a ... which are electrically insulated from one another by a band of adhesive 80 which is shown in detail in Fig. 12. In this case each ring sector 50a, 52a ... is

connected to the current generator via an associated conductive element 56a, 58a, 56b, The generator 48 can supply each ring sector 50a, 52a, ... with a current of different phase and/or amplitude.

Application of the current difference between the rings 50, 52 thus enables
5 variation of the focal distance of the transducer 60. When the current difference is applied
between each ring sector 50a, 52a, ..., that is, when all ring sectors 50a, 52a situated in an
angular sector 78 are fed with identical currents and when the ring sectors situated in the
individual angular sectors 78 are different, the orientation of the ultrasound beam can be
changed. Thus, the focal spot can be displaced without changing the position and the
10 orientation of the transducer 60.

In accordance with Fig. 11, the part of the electrode 44 which is situated at the apex of the cap 26 may be a disc 82 of an electrically conductive material which is fed via a conductive element 84. The realization of the electrode 44 of the transducer 60 can thus be simplified.

15 In conformity with a preferred embodiment, for example, for an ultrasound transducer of a diameter of 80 mm, a radius of curvature of 60 mm and a thickness of 1 mm, the spherical cap 26 is realized on the basis of a disc which has a diameter of approximately 85 mm and is provided with eight radial slits 70 which are angularly distributed in a regular fashion. The electrode which is situated on the convex surface of such an ultrasound
20 transducer then comprises 14 rings of a conductive material. Each ring is divided into eight angular sectors. In this case the width of each slit 70 at the area of the peripheral edge 72 is of the order of 2.4 mm. A transducer of this kind can be used as an ultrasound transducer of a power of approximately 200 watts, for example, for the treatment of tumors situated near the skin of the patient, for example, breast tumors. It is to be noted that when use is made of a
25 disc comprising eight radial slits 70, the distribution of the deformation during the formation of the spherical cap 26 will be better, that is, in comparison with a disc comprising only four radial slits 70.

CLAIMS:

1. A method of manufacturing an ultrasound transducer (60), which method includes a step of forming a plate which is shaped as a disc (20) of a composite piezoelectric material into a hollow spherical cap (26), characterized in that the step of forming is preceded by a cutting step which consists in the formation of at least one slit (70) which has a radial orientation and extends from the peripheral edge (72) of the disc (20) towards its center (C) in such a manner that, after the step of forming, the two facing, oppositely situated free edges (74, 76) which bound the slit (70) are substantially in contact with one another so as to minimize the internal stresses in the cap (26) which are caused notably by its deformation.
5
- 10 2. A method of manufacturing as claimed in the preceding claim, characterized in that at least one slit extends radially partly along a radius of the disc.
- 15 3. A method of manufacturing as claimed in one of the claims 1 or 2, characterized in that at least one slit (70) extends radially as far as the center (C) of the disc (20).
- 20 4. A method of manufacturing as claimed in the preceding claim, characterized in that at least two slits (70) extend radially as far as the center (C) of the disc (20) in such a manner that the disc is separated into at least two distinct portions.
- 25 5. A method of manufacturing as claimed in any one of the preceding claims, characterized in that the facing, oppositely situated free edges (74, 76) have a radial orientation in such a manner that the corresponding slit (70) forms a V whose apex is oriented towards the center (C) of the disc (20).
6. A method of manufacturing as claimed in the preceding claim, characterized in that the oppositely situated free edges (74, 76) are curved and convex, their convexity being opposed.

7. A method of manufacturing as claimed in any one of the preceding claims, characterized in that the disc (20) comprises a series of slits (70) which are angularly distributed in a regular fashion so as to define substantially identical angular sectors (78).

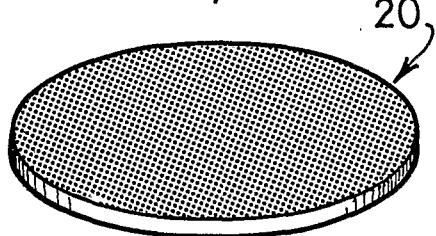
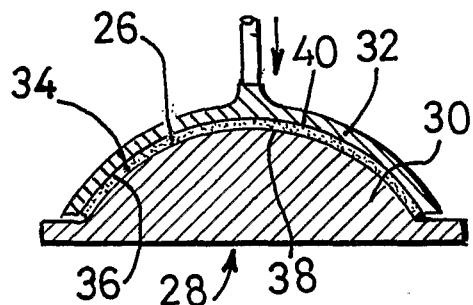
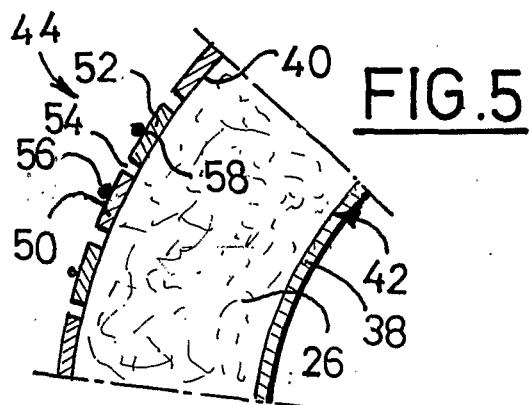
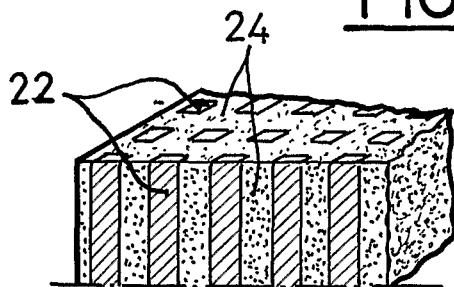
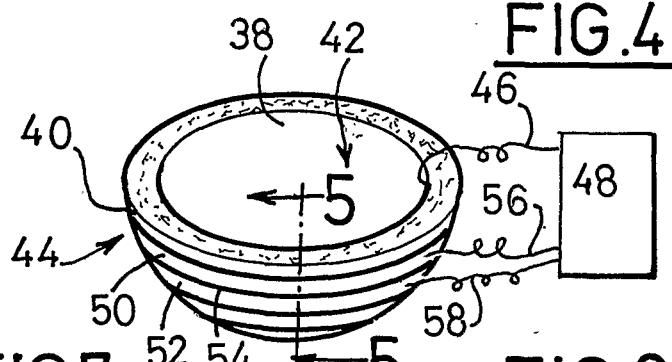
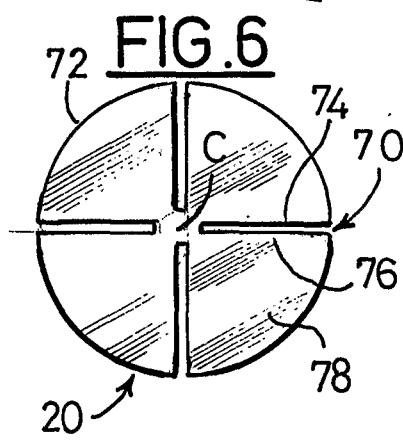
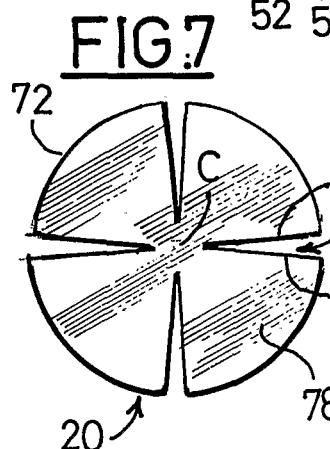
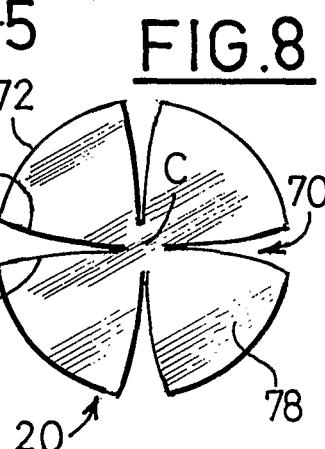
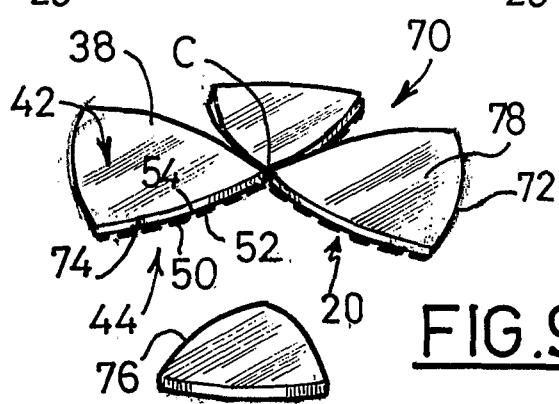

5 8. A method as claimed in any one of the preceding claims, characterized in that adhesive is introduced into the slit (70) in such a manner that, after the step of forming, the oppositely situated free edges (74, 76) are glued to one another.

9. A method as claimed in the preceding claim, characterized in that the adhesive
10 is an electrically insulating adhesive.

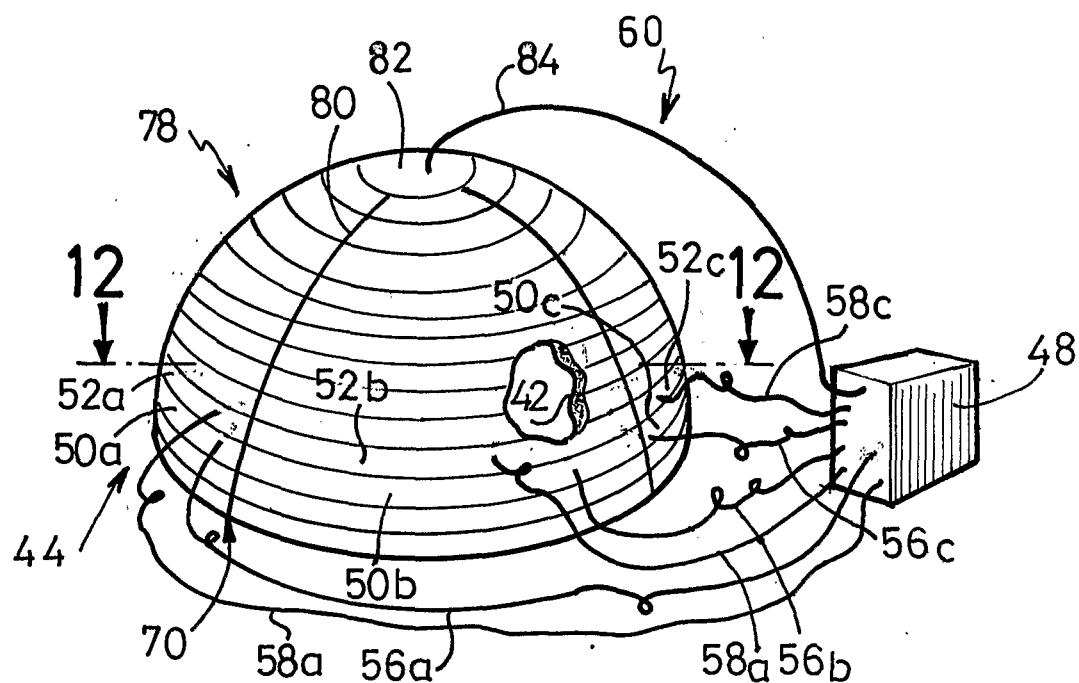
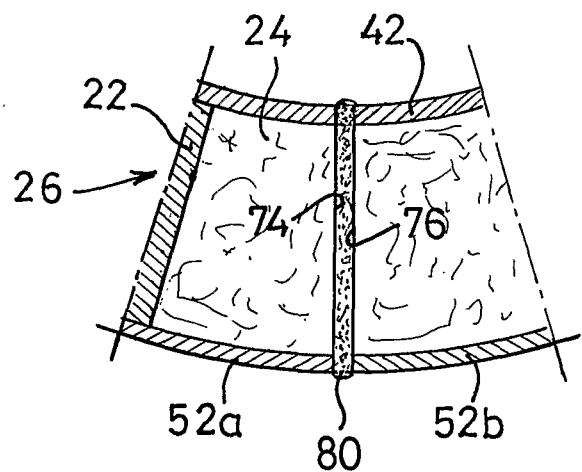
10. A method of manufacturing as claimed in any one of the preceding claims, characterized in that during the step of forming the composite piezoelectric material is heated so as to soften it, after which it is cooled so as to fix its dimensions.

15 11. An ultrasound transducer (60) in the form of a hollow spherical cap (26), manufactured in conformity with any one of the preceding claims, characterized in that it comprises at least one slit (70) having a radial orientation.

1/2

FIG.1FIG.3FIG.2FIG.5FIG.4FIG.6FIG.7FIG.8FIG.9FIG.10

2/2

FIG.11FIG.12

INTERNATIONAL SEARCH REPORT

Intel Application No
PCT/IB 02/00322A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G10K11/32 B06B1/06 A61B8/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G10K B06B A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 732 535 A (EHRLICH S) 8 May 1973 (1973-05-08) column 2, line 21 - line 29 column 2, line 34 - line 36 column 3, line 33 - line 53 claim 6; figures 2A,3,4 ---	1-7,11
A	US 4 888 746 A (WURSTER HELMUT ET AL) 19 December 1989 (1989-12-19) column 2, line 23 - line 46 column 3, line 57 -column 4, line 26 column 5, line 10 - line 13 figure 1 ---	1-4,11
A	JP 01 293850 A (MATSUSHITA ELECTRIC IND CO LTD) 27 November 1989 (1989-11-27) abstract ---	1 -/-

 Further documents are listed in the continuation of box C. Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

23 April 2002

06/05/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Schneiderbauer, K

INTERNATIONAL SEARCH REPORT

Inte al Application No
PCT/IB 02/00322

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>FJIELD T ET AL: "Experimental verification of the sectored annular phased array for MRI guided ultrasound surgery" ULTRASONICS SYMPOSIUM, 1996. PROCEEDINGS., 1996 IEEE SAN ANTONIO, TX, USA 3-6 NOV. 1996, NEW YORK, NY, USA, IEEE, US, 3 November 1996 (1996-11-03), pages 1273-1276, XP010217669 ISBN: 0-7803-3615-1 page 1273 -page 1274; figure 1 -----</p>	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/IB 02/00322

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 3732535	A 08-05-1973	NONE		
US 4888746	A 19-12-1989	DE	3732131 A1	06-04-1989
		DE	3851930 D1	01-12-1994
		EP	0308644 A2	29-03-1989
JP 01293850	A 27-11-1989	NONE		

专利名称(译)	超声换能器和制造超声换能器的方法		
公开(公告)号	EP1360685A1	公开(公告)日	2003-11-12
申请号	EP2002716249	申请日	2002-01-31
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	皇家飞利浦电子N.V.		
当前申请(专利权)人(译)	皇家飞利浦电子N.V.		
[标]发明人	GAUCHET MAURICE G		
发明人	GAUCHET, MAURICE, G.		
IPC分类号	G01N29/24 A61B8/00 A61B8/08 A61F7/00 A61N7/02 B06B1/06 G10K11/32 H04R17/00 H04R31/00		
CPC分类号	A61B8/4483 A61B8/00 A61N7/02 B06B1/0637 Y10T29/42 Y10T29/49005 Y10T29/4908 Y10T29/49796		
代理机构(译)	LOTTIN , CLAUDINE		
优先权	2001400353 2001-02-09 EP		
其他公开文献	EP1360685B1		
外部链接	Espacenet		

摘要(译)

本发明提出一种制造超声换能器 (60) 的方法 , 该方法包括将复合压电材料盘形成的板形成空心球形帽的步骤 , 其特征在于 , 形成步骤之前是切割步骤 , 其包括形成至少一个狭缝 (70) , 该狭缝具有径向取向并且从盘 (20) 的外周边缘 (72) 朝向其中心 (C) 延伸 , 使得在之后在形成的步骤中 , 限定狭缝 (70) 的两个面对的 , 相对设置的自由边缘 (74,76) 基本上彼此接触 , 以便最小化盖子中由于其变形而引起的内应力。本发明还提出了一种通过这种方法获得的换能器。