



(11) **EP 1 296 136 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
20.01.2010 Bulletin 2010/03

(51) Int Cl.:
G01N 29/24 ^(2006.01) **B06B 1/06** ^(2006.01)
G10K 11/02 ^(2006.01) **B29C 35/08** ^(2006.01)
A61B 8/14 ^(2006.01)

(21) Application number: **02010157.2**

(22) Date of filing: **13.05.2002**

(54) **Method for fabrication an ultrasonic search unit with acoustic matching layer**

Herstellungsverfahren für eine Ultraschallwandler einheit mit akustischer Anpassungsschicht

Procédé de fabrication d'une unité de recherche ultrasonore avec une couche d'adaptation acoustique

(84) Designated Contracting States:
DE

(30) Priority: **19.09.2001 JP 2001285456**

(43) Date of publication of application:
26.03.2003 Bulletin 2003/13

(73) Proprietor: **Panasonic Corporation**
Kadoma-shi
Osaka 571-8501 (JP)

(72) Inventors:
• **Fujii, Kiyoshi**
Yokohama-shi,
Kanagawa 240-0053 (JP)
• **Koishihara, Yasushi**
Kanagawa 224-0001 (JP)

(74) Representative: **Vossius & Partner**
Siebertstrasse 4
81675 München (DE)

(56) References cited:
US-A- 4 523 122 US-A- 5 974 884

- **PATENT ABSTRACTS OF JAPAN** vol. 015, no. 238 (C-0841), 19 June 1991 (1991-06-19) -& JP 03 073137 A (OLYMPUS OPTICAL CO LTD), 28 March 1991 (1991-03-28)
- **PATENT ABSTRACTS OF JAPAN** vol. 017, no. 285 (C-1066), 2 June 1993 (1993-06-02) -& JP 05 015530 A (TOSHIBA CORP), 26 January 1993 (1993-01-26)
- **PATENT ABSTRACTS OF JAPAN** vol. 2000, no. 19, 5 June 2001 (2001-06-05) -& JP 2001 045596 A (OLYMPUS OPTICAL CO LTD), 16 February 2001 (2001-02-16)

EP 1 296 136 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a method for producing an ultrasonic search unit used for an ultrasonic diagnostic apparatus that scans an ultrasonic wave electrically or mechanically to display an ultrasonic diagnostic image.

[0002] Conventionally, regarding an ultrasonic search unit of the above-mentioned type, the configuration described in "Revised Medical ultrasonic equipment handbook (p. 42, FIG. 2.39), edited by Electronic Industries Association of Japan, April 1985: issued by Corona Publishing Co., Ltd." is known. Hereinafter, a conventional ultrasonic search unit will be described.

[0003] Figures 7A and 7B schematically illustrate a configuration of a piezoelectric plate and acoustic matching layers of a conventional ultrasonic search unit and a method for producing the same. A piezoelectric plate 21 shown in Figures 7A and 7B converts an electric signal sent from an ultrasonic diagnostic apparatus (not shown) to a mechanical vibration. In order to transmit an ultrasonic signal sent from the piezoelectric plate 21 to a living body as a subject to be measured with good efficiency, a first acoustic matching layer 22 and a second acoustic matching layer 23 are bonded to the front surface of the piezoelectric plate 21 with adhesive layers 24. Figure 7A shows an exploded view before the first acoustic matching layer 22, the second acoustic matching layer 23, and the piezoelectric plate 21 are bonded to each other. Figure 7B shows a state where these components are bonded to each other with the adhesive layers 24.

[0004] An integrated configuration of the piezoelectric plate 21 and the acoustic matching layers 22 and 23 generally is called an acoustic element. An acoustic element of a conventional ultrasonic search unit converts an electric signal sent from an ultrasonic diagnostic apparatus into a mechanical vibration, using the piezoelectric plate 21. The mechanical vibration of the piezoelectric plate 21 is sent to a human body via the acoustic matching layers 22 and 23. An ultrasonic signal reflected from boundaries of respective tissues in the human body is converted into an electric signal by the piezoelectric plate 21 through a path opposite to that from the piezoelectric plate 21 to the human body. Thus, a tomogram of the human body is displayed on a display screen of the ultrasonic diagnostic apparatus.

[0005] JP7(1995)-12239 B describes an ultrasonic search unit using light-curable resin. The invention disclosed therein relates to a method for coating divided groove portions of an array-type ultrasonic search unit with light-curable resin, and does not relate to an acoustic matching layer or a method for producing the same.

[0006] JP5(1993)-15530 A describes that a light-curable resin is used as an acoustic matching layer, UV-transparent glass powder is mixed in the resin, and the resin is cured with UV-light.

[0007] In the above-mentioned conventional ultrasonic search units, it is difficult to form an acoustic matching

layer with a desired thickness, which is made of a material having an acoustic impedance with an intermediate value between the acoustic impedance of the piezoelectric plate and that of the living body, for the purpose of transmitting a vibration of the piezoelectric plate to the living body with good efficiency,

[0008] More specifically, in the conventional configuration, in order to produce an ultrasonic search unit with a small variation in acoustic characteristics and high acoustic performance, it is required to provide an acoustic matching layer with a desired thickness, which necessitates the management of a treatment operation and a thickness with high precision by polishing or the like. Furthermore, in general, at least one acoustic matching layer previously formed is bonded with an adhesive, and the acoustic matching layer is bonded to the entire surface of the piezoelectric plate with an adhesive. Therefore, even if the acoustic matching layer is treated with high precision, air bubbles in the adhesive layer and a variation in thickness of the adhesive layer may cause a variation in characteristics and degradation of the entire ultrasonic search unit.

[0009] US 5, 974, 884 discloses a method for forming an acoustic matching layer by irradiating an optical hardening resin in a resin bath with laser light.

[0010] JP 03-73137 discloses a method for manufacturing an ultrasonic vibrator. First, a piezoelectric element is immersed in a liquid of ultraviolet curable resin. A first matching layer is formed on the piezoelectric element by adjusting the level of the piezoelectric element in the liquid and then irradiating ultraviolet rays. The piezoelectric element having the first matching layer thereon is then immersed in the liquid in which a mixture is mixed. A second matching layer is formed on the first matching layer in a similar manner. The piezoelectric element having the first and second matching layers thereon is then immersed in the liquid in which another mixture is mixed. A third matching layer is formed on the second matching layer in a similar manner.

[0011] Therefore, with the foregoing in mind, it is an object of the present invention to provide a method for producing an ultrasonic search unit in which an acoustic matching layer with a required thickness can be formed with good precision without being bonded, whereby a variation in characteristics and degradation of the ultrasonic search unit are unlikely to occur due to the variation in thickness of adhesive layers. and the air bubbles mixed in the adhesive layers.

[0012] It is another object of the present invention to provide a method for producing an ultrasonic search unit having an acoustic matching layer in which an acoustic impedance can be changed easily from the acoustic impedance of a piezoelectric plate to that of a living body gradually so that a vibration of the piezoelectric plate can be transmitted to the living body with better efficiency.

[0013] These objects are achieved with the features of the claims.

[0014] These and other objects and advantages of the

present invention will become apparent to those skilled in the art upon reading and understanding the following detailed description with reference to the accompanying figures.

[0015] Figure 1A schematically illustrates an ultrasonic search unit of Reference Example 1. Figure 1B schematically illustrates a method for forming an acoustic matching layer of the ultrasonic search unit by optical forming.

[0016] Figure 2 illustrates a method for forming an acoustic matching layer directly on a piezoelectric plate in Reference Example 1.

[0017] Figure 3 illustrates a method for forming a gradually-changing acoustic matching layer of an ultrasonic search unit of Reference Example 2.

[0018] Figures 4A to 4C illustrate a method for forming a gradually-changing acoustic matching layer by transferring an ultrasonic search unit of Reference Example 3 to subsequent tanks successively.

[0019] Figures 5A to 5C illustrate a method for forming a gradually-changing acoustic matching layer by transferring an ultrasonic search unit of Reference Example 4 to subsequent tanks successively.

[0020] Figures 6A to 6C illustrate a method for forming a gradually-changing acoustic matching layer by transferring an ultrasonic search unit of Reference Example 5 to subsequent tanks successively.

[0021] Figure 7A is an exploded view illustrating the state before conventional acoustic matching layers are bonded, and Figure 7B illustrates a bonded state of the conventional acoustic matching layers.

[0022] According to the method of the present invention, the acoustic matching layer is formed of a cured layer obtained by curing a liquid resin for optical forming supplied to a tank with laser light, thereby curing the resin to a predetermined shape. Because of this, an acoustic matching layer with a desired thickness, high thickness precision, and less characteristics can be obtained easily.

[0023] Furthermore, an amount of a filler in a lower layer is set to be relatively high, and an amount of a filler in a surface layer is set to be relatively low by using a settling speed of the filler mixed in the resin, whereby an acoustic impedance is changed in a thickness direction.

[0024] In the ultrasonic search unit produced according to the present invention, the acoustic matching layer is formed of cured layers of a light-curable resin stacked on a piezoelectric element. According to this configuration, the acoustic matching layer can be formed on the piezoelectric plate without being bonded thereto. Therefore, air bubbles are unlikely to be generated as a result of the use of an adhesive, which enables the acoustic matching layer with less variation in characteristics to be formed easily.

[0025] In the ultrasonic search unit, the acoustic matching layer is formed with an arbitrary filler mixed in the light-curable resin. According to this configuration, the acoustic matching layer with an appropriate acoustic impedance required for transmitting/receiving an ultra-

sonic wave with good efficiency can be formed easily.

[0026] Furthermore, in the ultrasonic search unit, it is preferable that an acoustic impedance in the acoustic matching layer is changed successively in a thickness direction. Because of this, an ultrasonic signal of the piezoelectric plate can be transmitted/received with better efficiency.

[0027] When the acoustic impedance in the acoustic matching layer is changed successively by stacking a plurality of layers having different contents of a filler successively, an ultrasonic signal transmitted/received by the piezoelectric plate can be transmitted with good efficiency in accordance with an individual difference or a site of a subject to be measured.

[0028] Furthermore, it is preferable that at least one selected from the group consisting of tungsten, ferrite, and alumina is mixed in the light-curable resin as a filler. Because of this, an acoustic matching layer having an intermediate value of the acoustic impedance of a piezoelectric element and that of a human body can be formed easily, and an ultrasonic signal can be transmitted/received with good efficiency. Herein, ferrite refers to a particular crystal structure of iron (Fe).

[0029] Furthermore it is preferable that a filler in an amount of 0 mass% to 2000 mass% is mixed in the resin.

[0030] Furthermore, it is preferable that a resin layer constituting the acoustic matching layer is formed of a plurality of layers, a density of the resin layer in a lower layer is set to be high, and a density of the resin layer in a surface layer is set to be low, whereby an acoustic impedance is changed in a thickness direction.

[0031] Furthermore, it is preferable that the density of the resin layer is controlled by changing at least one selected from the group consisting of an added amount of a filler, an average particle size thereof, and a density thereof.

[0032] When the acoustic matching layer is formed of a light-curable resin mixed with a mixture of fillers with at least two different particle sizes or a filler with a particle size changing in a layer direction, an acoustic matching layer with an appropriate acoustic impedance required for transmitting/receiving an ultrasonic wave with good efficiency can be formed easily, and an ultrasonic signal of the piezoelectric plate can be transmitted/received with good efficiency.

[0033] When the acoustic matching layer is formed of a light-curable resin mixed with a mixture of fillers with at least two different densities or a filler with a density changing in a layer direction, an ultrasonic signal of the piezoelectric plate can be transmitted/received with good efficiency.

[0034] Hereinafter, the present invention will be described with reference to examples as reference and an illustrative embodiment together with the drawings.

Reference Example 1

[0035] As shown in Figure 1A, an ultrasonic search

unit 20 of Reference Example 1 includes a piezoelectric plate 1 for transmitting/receiving an ultrasonic wave, an acoustic matching layer (gradually-changing matching layer) 4 for transmitting/receiving an ultrasonic wave with good efficiency, a backing material 10 for holding the piezoelectric plate 1 and suppressing an efficiency loss due to the backward leakage of an ultrasonic wave, an acoustic lens 11 for allowing an ultrasonic wave to converge at any position of a subject (not shown) to be measured with good efficiency, an electrode wiring material 12, a cable (not shown), and a connector (not shown). Among them, the acoustic matching layer 4 is formed by curing a part of a liquid curable resin for optical forming (hereinafter, referred to as a "liquid light-curable resin") by a method generally called optical forming, as described later.

[0036] A method for curing a part of a liquid light-curable resin 2 will be described with reference to Figure 1B. A tank 6 is filled with the liquid light-curable resin 2. An upper surface (work support surface) 7a of a vertical movement platform 7 is lowered from the liquid surface of the liquid light-curable resin 2 by a distance corresponding to a predetermined thickness to be cured. By irradiating laser light (hereinafter, referred to as a "laser") 3 such as a UV-laser or an Ar laser emitted from a laser radiator 8 at this position, a site of the liquid light-curable resin 2 irradiated with the laser 3 can be cured.

[0037] The laser 3 is radiated to the liquid light-curable resin 2 on the work support surface 7a of the vertical movement platform 7 spot-wise or in a wide range under the condition that a region other than a required portion is masked, while an irradiation position is being controlled with an irradiation position control unit (not shown) such as a digital scan mirror or a movement unit (not shown) of the laser radiator 8. Irradiation is conducted for a predetermined period of time, whereby a thin cured layer in a predetermined shape can be formed on the work support surface 7a of the vertical movement platform 7.

[0038] The thin cured layer is lowered successively by the vertical movement platform 7 at a predetermined speed, and the laser 3 is radiated at a predetermined timing. Layers are stacked successively in this manner to form cured layers with a desired thickness.

[0039] Herein, the liquid light-curable resin 2 is composed of a photopolymerizable oligomer, a reactive diluent, a photopolymerization initiator, and the like. The liquid light-curable resin 2 has a property that only a portion irradiated with light is cured, and is mixed with a photopolymerization assistant, an additive, and the like, if required. The photopolymerizable oligomer is classified into those cured by radical polymerization such as a urethane acrylate type, an epoxy acrylate type, an ester acrylate type, and an acrylate type, and those cured by cation polymerization such as an epoxy type and a vinyl ether type. Which type of resin is used is determined based on a reaction speed, contraction strain, size precision, heat resistance, strength, and the like.

[0040] In general, a light-curable resin containing a

photopolymerizable oligomer of a urethane acrylate type or an epoxy type mainly is used. The urethane acrylate type has a high reaction speed and a large intermolecular cohesion. Therefore, the urethane acrylate type is more advantageous in mechanical strength/thermal strength, and is more preferable in view of strength, compared with the epoxy type. On the other hand, the epoxy type has a low polymerization reaction speed and small contraction strain. Therefore, the epoxy type is more advantageous in size precision, and is more preferable in view of precision, compared with the urethane acrylate type.

[0041] Examples of the epoxy type light-curable resin include "HS-681" (trade name) produced by Asahi Denka Kogyo K.K., "SOMOS 8100" (trade name) produced by DSM-SOMOS (the same product also is available as "SCR-8100 series" from JSR), and "SL-7540" (trade name) produced by Vantico (former Ciba Specialty Chemicals). Furthermore, an example of the urethane acrylate light-curable resin includes "TSR-1938M" (trade name) produced by Teijin Seiki Co., Ltd.

[0042] A method for stacking cured layers of a light-curable resin directly on a base plate 13, using a curing unit of the liquid light-curable resin 2 by optical forming will be described with reference to Figure 2.

[0043] First, the base plate 13 fixed on the vertical movement platform 7 is soaked in the liquid curable resin 2 that fills the tank 6. The liquid light-curable resin 2 on an upper portion of the base plate 13 is irradiated with the laser 3 emitted from the laser radiator 8, whereby the liquid light-curable resin 2 on the base plate 13 is cured.

[0044] While the laser radiator 8 is moved in parallel with the base plate 13 (in a horizontal direction) based on positional data of an X-Y coordinate or a polar coordinate, the laser 3 is radiated onto the liquid light-curable resin 2 uniformly at a predetermined position, whereby the liquid light-curable resin 2 is cured on the base plate 13 to form a thin acoustic matching layer 4.

[0045] Although not shown, the vertical movement platform 7 is lowered by a predetermined distance, and the laser 3 is radiated onto the liquid light-curable resin 2 again, whereby a new cured layer of the liquid light-curable resin 2 can be formed on the thin acoustic matching layer 4 of the light-curable resin 2 that has already been cured. Thus, by controlling the distance by which the vertical movement platform 7 is lowered and repeating the above operation so that the total movement distance of the vertical movement platform 7 becomes a finally required size of the acoustic matching layer 4, the acoustic matching layer 4 with a desired thickness can be formed on the base plate 13.

[0046] As described above, in Reference Example 1, the acoustic matching layer 4 can be formed on the base plate 13 without using materials respectively polished to a desired thickness and without using an adhesive.

[0047] No adhesive layers 24 are formed between the base plate 13 (i.e., a piezoelectric plate) and the acoustic matching layer 4 in the ultrasonic search unit of Embodiment 1 of the present invention. Therefore, there is no

variation (about 2 μm to 15 μm) in the thickness of the adhesive layers, which may be caused in a stacking process by conventional general bonding. Furthermore, there is no influence of air bubbles mixed in the adhesive layers 24. As a result, an acoustic matching layer can be formed easily, which has a desired thickness, high thickness precision, and less variation in acoustic characteristics of each acoustic element after being divided by dicing, and a highly reliable ultrasonic search unit can be provided.

Reference Example 2

[0048] Next, a method for forming an acoustic matching layer 4 with a changing acoustic impedance will be described with reference to Figure 3.

[0049] As shown in Figure 3, when cured layers of the liquid light-curable resin 2 are stacked, a filler 9 in a fine powder, fiber, or plate shape is mixed in the liquid light-curable resin 2 in the tank 6, whereby an acoustic matching layer 4 with desired acoustic impedance characteristics can be formed.

[0050] The filler 9 is mixed in the liquid light-curable resin 2, and dispersed therein uniformly with a stirrer. Examples of the filler 9 include tungsten, ferrite, and alumina, and an appropriate average particle size thereof is about 1 μm to 10 μm .

[0051] The acoustic impedance of the acoustic matching layer 4 generally has an intermediate value between the acoustic impedance (about 30 Mrayl) of the piezoelectric plate 1 and that (about 1.5 Mrayl) of the human body. For example, when maintaining the same material and the same particle size for the filler 9, by adjusting the amount of the filler 9 to be mixed in the liquid light-curable resin 2, it is possible to set the acoustic impedance of the acoustic matching layer 4 in the vicinity of an intended value (i.e., from about 30 Mrayl to about 1.5 Mrayl).

[0052] Because of this, an acoustic matching layer with a desired thickness, high thickness precision, and less variation in characteristics easily can be formed, and a highly reliable ultrasonic search unit can be provided.

[0053] Herein, the collection of a plurality of layers with a gradually-changing acoustic impedance will be referred to as a "gradually-changing matching layer".

Reference Example 3

[0054] Next, a method for producing an acoustic matching layer 4 of an ultrasonic search unit of Reference Example 3 will be described with reference to Figures 4A to 4C.

[0055] As shown in Figures 4A to 4C, in addition to Reference Example 2, when cured layers of the liquid light-curable resin 2 are stacked, the amount (mixed amount) of the filler 9 is changed gradually for each layer to be stacked, using a plurality of tanks 6.

[0056] A material having a density larger than that of the liquid light-curable resin 2 is used for the filler 9, and the amount of the filler 9 to be mixed in the liquid light-

curable resin 2 is increased gradually, whereby an average density of the entire liquid light-curable resin 2 containing the filler 9 is increased. An acoustic impedance is represented by a product of the density of a material and a sound transmission speed (sonic speed). As is understood from this, with an increase in an average density of the entire liquid light-curable resin 2, the acoustic impedance is increased.

[0057] Based on the above, by stacking cured layers of the liquid light-curable resin 2 while changing the mixed amount of the filler 9 gradually, acoustic matching layers 4 with a gradually changing acoustic impedance in a thickness direction can be formed. Thus, by adjusting the amount of the filler 9 to be mixed, it is possible to set the change in acoustic impedance to be any change such as a step-by-step change, a linear change, and a series change, in accordance with a position in a thickness direction.

[0058] A specific method for changing the amount of the filler 9 is as follows. The filler 9 is dispersed uniformly in the liquid light-curable resin 2, whereby several kinds of the tanks 6 are prepared in which the filler 9 is mixed and dispersed so as to obtain the desired acoustic impedance, respectively; every time one acoustic matching layer 4 is stacked in each tank 6, the resultant stack is moved (transferred) from the tank 6 containing a larger mixed amount of the filler 9 to the tank 6 containing a smaller mixed amount of the filler 9, and soaked in another tank 6 having a different amount of the filler 9; and another acoustic matching layer 4 is stacked on the previously stacked acoustic matching layer 4, whereby acoustic matching layers 4 with a gradually changing acoustic impedance in a thickness direction can be formed.

[0059] As the filler 9 to be mixed, tungsten, ferrite, alumina, and the like can be used, and an average particle size thereof preferably is about 1 μm to 10 μm . Hereinafter, the entire acoustic matching layer 4 composed of a plurality of layers in which the acoustic impedance is changed gradually in a thickness direction will be referred to as a "gradually-changing matching layer 5".

[0060] The acoustic impedance of the gradually-changing matching layer 5 can be changed gradually from the acoustic impedance of the piezoelectric plate 1 to that of a human body (i.e., a subject to be measured). Therefore, the acoustic impedance is adjusted by changing the amount of the filler 9 gradually so that the acoustic impedance is changed from about 30 Mrayl to about 1.5 Mrayl. More specifically, it is preferable that the gradually-changing matching layer 5 is formed so that the density of a lower layer becomes higher, and the density of an upper layer becomes lower.

[0061] At this time, the amount of the filler 9 to be mixed can be changed arbitrarily by a step-by-step change, a linear change, a series change, or the like, in accordance with a distance in a thickness direction. An ultrasonic signal to be transmitted/received by the piezoelectric plate 1 can be transmitted with good efficiency in accord-

ance with an individual difference or a site of a subject to be measured.

Reference Example 4 and Embodiment

[0062] Next, a method for producing an acoustic matching layer 4 of an ultrasonic search unit of Reference Example 4 and an embodiment according to the present invention will be described with reference to Figures 5A to 5C.

[0063] As shown in Figures 5A to 5C, in addition to Reference Example 1, when cured layers of the liquid light-curable resin 2 are stacked, the density of the filler 9 is changed, whereby an average density of the entire liquid light-curable resin 2 is changed. As a result, acoustic matching layers 4 with a gradually changing acoustic impedance in the thickness direction can be formed.

[0064] As the filler 9, tungsten (19.3 g/cm³), ferrite (7.015 g/cm³), alumina (3.95 g/cm³) and the like are used in a decreasing order of the density. However, other materials may be used.

[0065] A specific method for changing an average density of the entire liquid light-curable resin 2 using the above-mentioned fillers is as follows. As described in Reference Example 2, several kinds of the tanks 6 are prepared; the fillers 9 with different densities are mixed and stirred in the liquid light-curable resins 2 in the respective tanks 6; and acoustic matching layers 4 are stacked and cured successively in the respective tanks 6, whereby a gradually-changing matching layer 5 can be formed.

[0066] In the case of using tungsten, ferrite, and alumina as the filler 9, tungsten is mixed and stirred in the liquid light-curable resin 2 in a first tank 6, ferrite is mixed and stirred in the liquid light-curable resin 2 in a second tank, and alumina is mixed and stirred in the liquid light-curable resin 2 in a third tank. Acoustic matching layers 4 are stacked successively from the first tank 6 having a larger density material for the filler 9. As a result, the acoustic impedance of the acoustic matching layers 4 can be changed gradually from a large value to a small value. Thus, the acoustic impedance of the gradually-changing matching layer 5 is changed gradually from the acoustic impedance of the piezoelectric plate 1 to that of a human body. For this purpose, the fillers 9 with different densities are mixed in the liquid light-curable resins 2 so that an acoustic impedance is changed from about 30 Mrayl to about 1.5 Mrayl in a stacking thickness direction, thereby adjusting an acoustic impedance.

[0067] According to an embodiment of the present invention, when the fillers having the same particle size and different densities are mixed simultaneously in the liquid light-curable resin 2, the settling speed of the filler 9 with a large density is higher than that of the filler 9 with a small density. Therefore, in the case where such a liquid light-curable resin 2 is left for a predetermined period of time, the filler 9 with a large density is present in a deep portion of the liquid light-curable resin 2, and the filler

with a small density is present in a shallow portion thereof. As a result, a state where the density of the filler 9 is changed in a depth direction can be obtained. By curing the liquid light-curable resin 2 in this state, the gradually-changing matching layer 5 can be formed using one tank 6.

Reference Example 5

[0068] A method for producing the acoustic matching layer 4 of Reference Example 5 according to the present invention will be described with reference to Figures 6A to 6C.

[0069] As shown in Figures 6A to 6C, in addition to Reference Example 1, when cured layers of the liquid light-curable resin 2 are stacked, the particle size of the filler 9 is changed, whereby the acoustic matching layers 4 are formed in which an acoustic impedance is changed in a thickness direction in the same way as in the above. Even if the material of the filler 9 is the same, by changing a particle size thereof, the entire gravity (or weight) of the liquid light-curable resin 2 with the filler 9 mixed therein is changed, whereby the acoustic impedance can be changed.

[0070] Thus, an acoustic matching layer can be formed easily with an appropriate acoustic impedance (changing gradually from an acoustic impedance of the piezoelectric plate 1 to that of a human body) required for efficiently transmitting/receiving an ultrasonic wave, and an ultrasonic signal of the piezoelectric plate 1 can be transmitted/received efficiently.

[0071] A specific method for changing a particle size of the filler 9 is as follows. Several kinds of the tanks 6 are prepared, which contain the liquid light-curable resins 2 with the fillers 9 having different particle sizes mixed and stirred therein; one layer is stacked for each tank 6, whereby a gradually-changing matching layer 5 is formed by a stacking process. As the filler 9, any of the above-mentioned materials or other materials may be used. An average particle size of the filler 9 generally is about 1 to 10 μm. If required, a particle size larger than this range may be used.

[0072] In this example, acoustic matching layers 4 with a gradually changing acoustic impedance also can be stacked using one tank 6. More specifically, the filler 9 in a weight ratio of 5% is mixed and stirred in the liquid light-curable resin 2, and a first layer is cured. Then, before a second layer is cured, the filler 9 in a weight ratio of 5% further is added and stirred, and the second layer is cured. This procedure is repeated, whereby acoustic matching layers 4 with a gradually changing acoustic impedance can be stacked using one tank 6.

[0073] It also is possible to combine the respective Reference Examples 2 to 5 and Embodiment. In this case, the acoustic impedance can be changed more minutely.

[0074] Furthermore, instead of stacking the acoustic matching layers 4 of the light-curable resin 2 directly on the piezoelectric plate 1, it also may be possible that the acoustic matching layer 4 is formed singly, and bonded

to the piezoelectric plate 1 to form an ultrasonic search unit.

[0075] In the above-mentioned embodiments and examples, the acoustic matching layers 4 on the piezoelectric plate 1 have an acoustic impedance gradually changing from the acoustic impedance of the piezoelectric plate 1 to that of a living body. Therefore, the acoustic matching layers 4 with a gradually changing acoustic impedance in a thickness direction can be formed, which cannot be realized by a conventional method for bonding the respective acoustic matching layers 4. As a result, an ideal acoustic matching layer can be realized.

Example 1

[0076] As light-curable resin, "TSR-820" resin (trade name) produced by Teijin Seiki Co., Ltd was used. In a first tank, tungsten powder with an average particle size of 13 μm in an amount of 1385 mass% was mixed with "TSR-820" resin. In a second tank, tungsten powder with a particle size of 3 to 5 μm in an amount of 400 mass% was mixed with "TSR-820" resin. In a third tank, only "TSR-820" resin was used.

[0077] As laser light, a semiconductor solid laser (wavelength: 355 nm) was used. A laser irradiation power was set to be 500 mW, a laser light scanning speed was set to be 2 m/sec., and an irradiation area was set to be 250 mm². The thickness of a layer obtained by one scanning was set to be 100 μm .

[0078] Under the above condition, a first layer was formed using the resin solution in the first tank, a second layer was formed using the resin solution in the second tank, and a third layer was formed using the resin solution in the third tank. As a result, gradually-changing stacked matching layers with a total thickness of 300 μm (each layer having a thickness of 100 μm) were formed.

[0079] The characteristics of the resultant gradually-changing stacked matching layers were as follows. The acoustic impedance of the first layer was $Z = 17 \text{ Mrayl}$, that of the second layer was $Z = 7.7 \text{ Mrayl}$, and that of the third layer was $Z = 2.8 \text{ Mrayl}$. It was confirmed that matching layers were formed in which the acoustic impedance was changed gradually from the acoustic impedance (about 30 Mrayl) of a piezoelectric plate to that (about 1.5 Mrayl) of a human body.

[0080] In the case where one matching layer was bonded by a conventional method, the characteristics of a piezoelectric element, e.g., a specific band at a -6 dB position (a ratio (fw/f) of a frequency bandwidth "fw" at a -6 dB position from a gain of a central frequency "f" of an ultrasonic signal transmitted from the piezoelectric plate, with respect to the central frequency "f") was 50%, whereas the specific band of a piezoelectric element in which three matching layers were formed was substantially 100%. Thus, a piezoelectric element with a large band could be obtained (in the case of two layers, a specific band was 60%).

[0081] Furthermore, in a subsequent stage, a piezoe-

lectric element including such acoustic matching layers was provided with grooves in a thickness direction to be divided into a plurality of small pieces in a slice shape, and an electrode was connected to each small piece. At this time, the variation in characteristics of each small piece (divided element) may have a large effect on the characteristics of the entire ultrasonic search unit. However, unlike the conventional example, it is not required to bond the acoustic matching layers with an adhesive. Therefore, the acoustic matching layers having high precision were formed, in which there was no variation in thickness precision of adhesive layers and no variation caused by air bubbles in the entire element as well as in each piece (divided element).

[0082] As described above, a variation in band characteristics, frequency characteristics such as a shift of a central frequency, and a variation in sensitivity were suppressed to a half or lower of the conventional example.

[0083] Thus, in the ultrasonic search unit of the present invention, acoustic matching layers can be formed easily with a desired thickness, high thickness precision, and less variation in characteristics, and an ultrasonic search unit with high acoustic performance can be provided.

Claims

1. A method for producing an ultrasonic search unit including a piezoelectric element for transmitting/receiving an ultrasonic wave and an acoustic matching layer for transmitting the ultrasonic wave to a subject to be measured, the method comprising soaking the piezoelectric element in a liquid resin for optical forming supplied to a tank, and an amount of a filler in a lower layer of the liquid resin is set to be high, and an amount of a filler in a surface layer of the liquid resin which is located higher than the lower layer with respect to a gravity direction is set to be low by using a settling speed of the filler mixed in the resin, and forming the acoustic matching layer by irradiating the liquid resin with laser light to form a cured layer with gradually changing acoustic impedance in a thickness direction.
2. A method for producing an ultrasonic search unit according to claim 1, wherein the density of the resin layer is controlled by changing at least one selected from the group consisting of an added amount of a filler, an average particle size thereof, and a density thereof.
3. A method for producing an ultrasonic search unit according to claim 1 or 2, further comprising mixing simultaneously fillers having the same particle size and different densities in the liquid resin.
4. A method for producing an ultrasonic search unit ac-

ording to any one of claims 1 to 3, wherein the filler in an amount of 0 mass% to 2000 mass% is mixed in the resin.

5. A method for producing an ultrasonic search unit according to any one of claims 1 to 4, wherein the filler is at least one selected from the group consisting of tungsten, ferrite, and alumina.

Patentansprüche

1. Verfahren zum Herstellen einer Ultraschallwandler-Einheit, aufweisend ein piezoelektrisches Element zum Senden/Empfangen einer Ultraschallwelle und eine akustische Anpassungsschicht zum Übertragen der Ultraschallwelle auf ein zu untersuchendes Objekt, wobei das Verfahren aufweist:

Eintauchen des piezoelektrischen Elements in ein flüssiges Harz für optisches Formen, das einem Tank zugeführt ist, und Einstellen einer Menge eines Füllmittels in einer unteren Schicht des flüssigen Harzes auf einen hohen Wert und Einstellen einer Menge eines Füllmittels in einer Oberflächenschicht des flüssigen Harzes, die bezüglich der Richtung der Schwerkraft höher angeordnet ist als die untere Schicht, auf einen niedrigen Wert durch Verwendung einer Setzungsgeschwindigkeit des in dem Harz gemischten Füllmittels und Bilden der akustischen Anpassungsschicht durch Bestrahlen des flüssigen Harzes mit Laserlicht, um eine ausgehärtete Schicht zu bilden, deren akustische Impedanz sich in einer Dickerichtung graduell ändert.

2. Verfahren zum Herstellen einer Ultraschallwandler-Einheit nach Anspruch 1, wobei die Dichte der Harzschicht gesteuert wird durch Ändern mindestens eines Parameters aus der folgenden Gruppe: hinzugefügte Menge eines Füllmittels, dessen durchschnittliche Partikelgröße und dessen Dichte.
3. Verfahren zum Herstellen einer Ultraschallwandler-Einheit nach Anspruch 1 oder 2, ferner aufweisend: gleichzeitiges Mischen von Füllmitteln, die die gleiche Partikelgröße und unterschiedliche Dichten haben, in dem flüssigen Harz.
4. Verfahren zum Herstellen einer Ultraschallwandler-Einheit nach einem der Ansprüche 1 bis 3, wobei das Füllmittel in einer Menge von 0 Massen% bis 2000 Massen% in dem Harz gemischt wird.
5. Verfahren zum Herstellen einer Ultraschallwandler-Einheit nach einem der Ansprüche 1 bis 4, wobei

das Füllmittel mindestens eines aus der folgenden Gruppe ist: Wolfram, Ferrit und Aluminiumoxyd.

5 Revendications

1. Procédé pour produire une unité de recherche ultrasonore incluant un élément piézoélectrique pour émettre/recevoir une onde ultrasonore et une couche d'adaptation acoustique pour émettre l'onde ultrasonore à un objet à mesurer, le procédé comprenant le trempage de l'élément piézoélectrique dans une résine liquide pour la formation optique alimentée à un réservoir, et une quantité d'un élément de remplissage dans une couche inférieure de la résine liquide est établie de manière à être élevée, et une quantité d'un élément de remplissage dans une couche de surface de la résine liquide qui est située plus haut que la couche inférieure par rapport à une direction de gravité est établie de manière à être faible en utilisant une vitesse de sédimentation de l'élément de remplissage mélangé dans la résine, et la formation de la couche d'adaptation acoustique en irradiant la résine liquide avec une lumière laser afin de former une couche durcie en changeant graduellement l'impédance acoustique dans une direction d'épaisseur.
2. Procédé pour produire une unité de recherche ultrasonore selon la revendication 1, dans lequel la densité de la couche de résine est régulée en changeant au moins une valeur sélectionnée du groupe constitué d'une quantité ajoutée d'un élément de remplissage, d'une taille de particule moyenne de celui-ci, et d'une densité de celui-ci.
3. Procédé pour produire une unité de recherche ultrasonore selon la revendication 1 ou 2, comprenant en plus le fait de mélanger simultanément des éléments de remplissage ayant la même taille de particule et des densités différentes dans la résine liquide.
4. Procédé pour produire une unité de recherche ultrasonore selon l'une quelconque des revendications 1 à 3, dans lequel l'élément de remplissage en une proportion de 0 % en masse à 2000 % en masse est mélangé dans la résine.
5. Procédé pour produire une unité de recherche ultrasonore selon l'une quelconque des revendications 1 à 4, dans lequel l'élément de remplissage représente au moins un composant sélectionnée du groupe constitué de tungstène, de ferrite, et d'alumine.

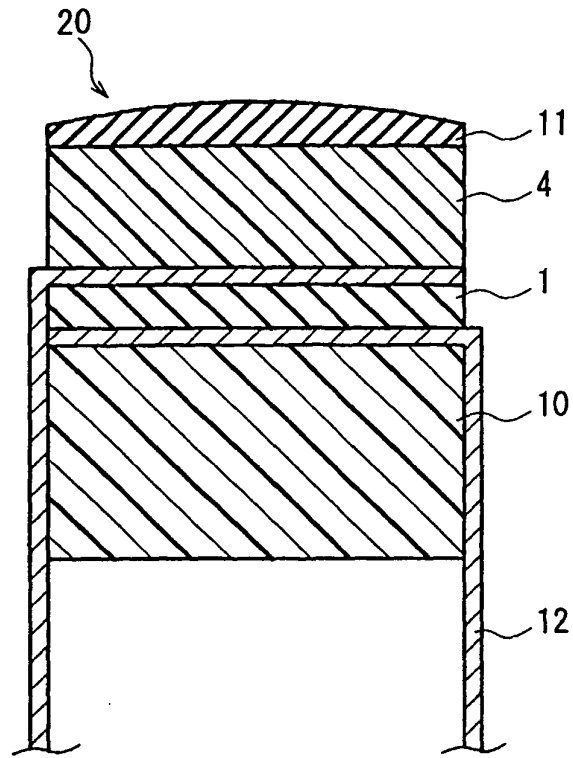


FIG. 1A

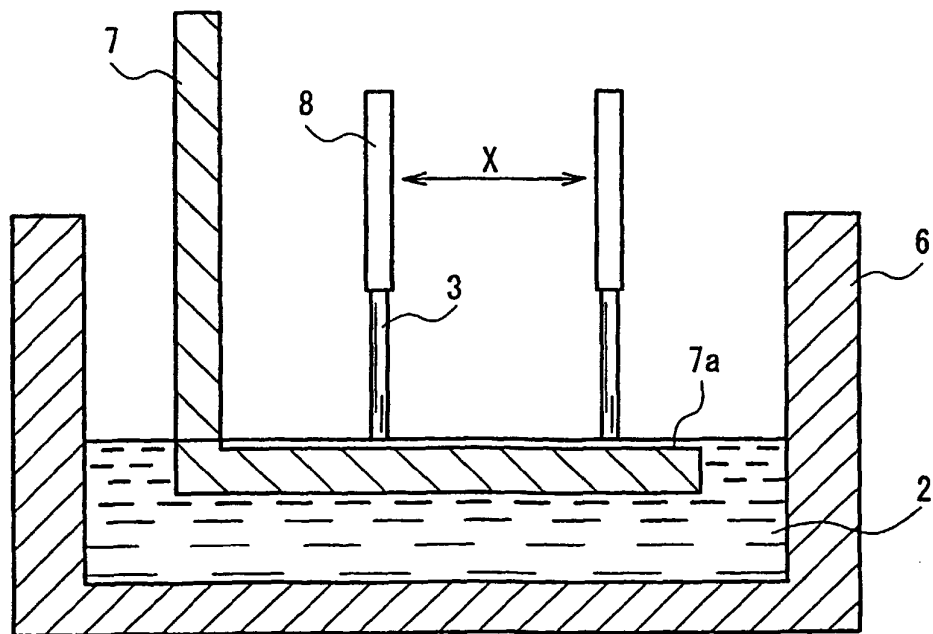


FIG. 1B

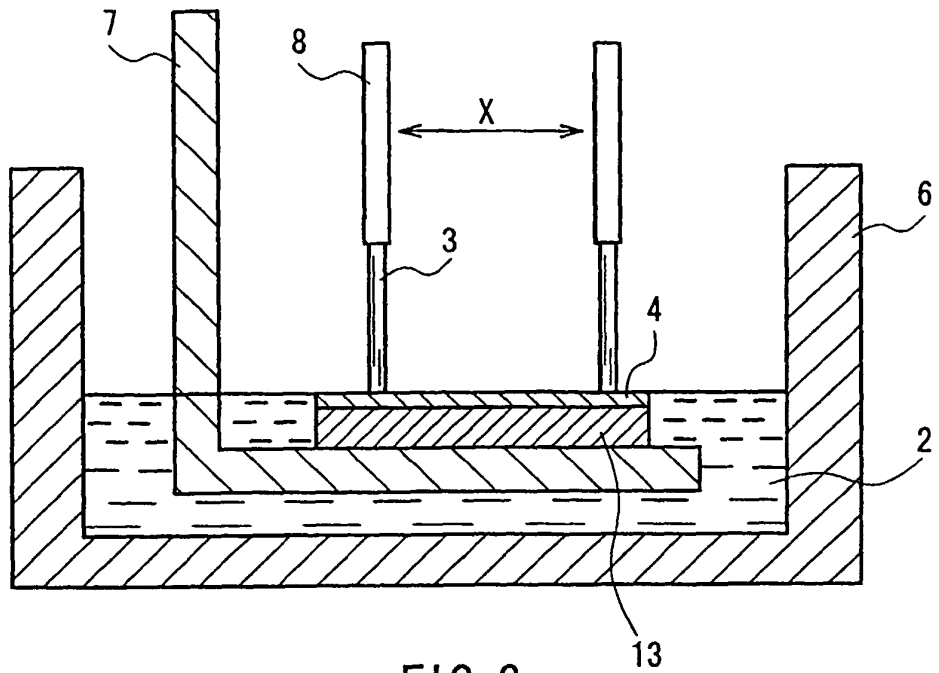


FIG. 2

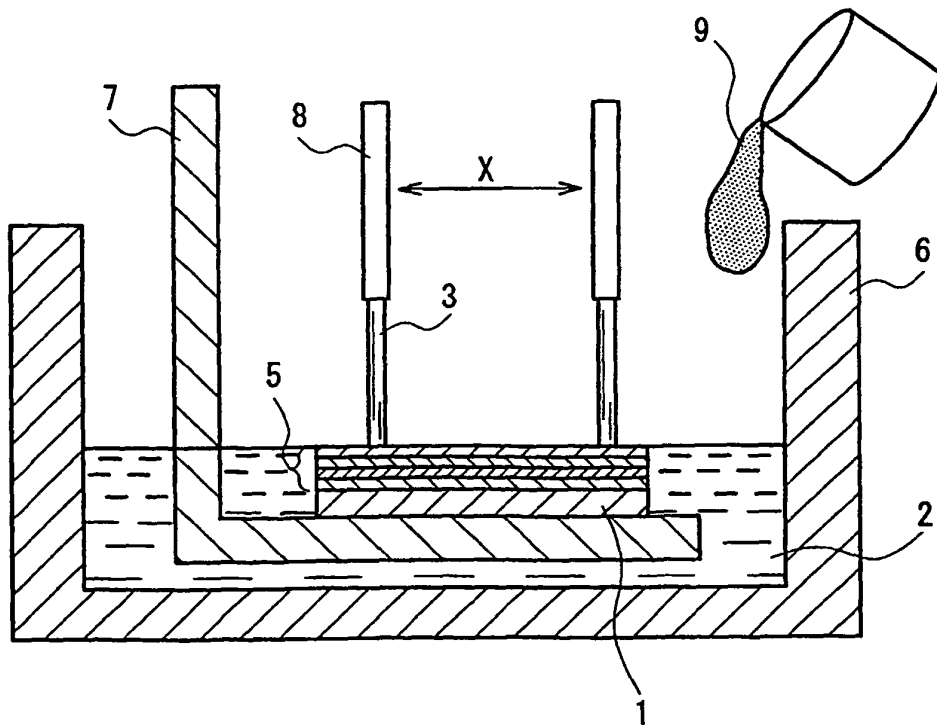


FIG. 3

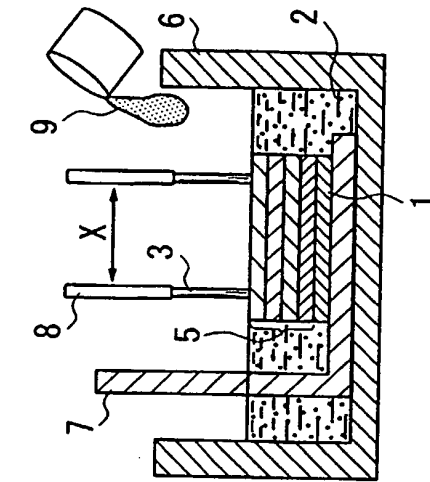


FIG. 6A

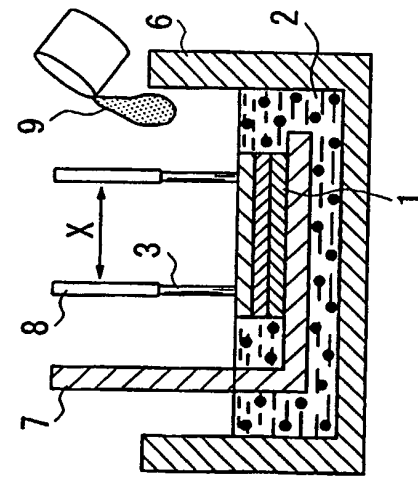


FIG. 6B



FIG. 6C

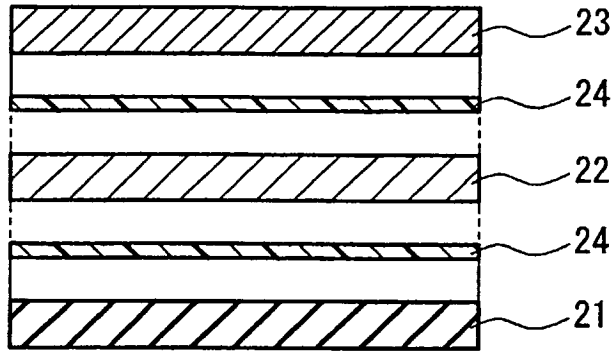


FIG. 7A
PRIOR ART

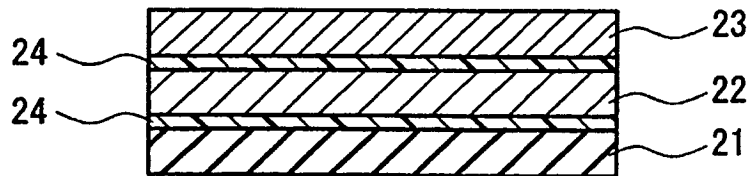


FIG. 7B
PRIOR ART

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 7001995 A [0005]
- JP 12239 B [0005]
- JP 5001993 A [0006]
- JP 15530 A [0006]
- US 5974884 A [0009]
- JP 3073137 A [0010]

专利名称(译)	制造具有声匹配层的超声搜索单元的方法		
公开(公告)号	EP1296136B1	公开(公告)日	2010-01-20
申请号	EP2002010157	申请日	2002-05-13
申请(专利权)人(译)	松下电器产业有限公司.		
当前申请(专利权)人(译)	松下电器产业株式会社		
[标]发明人	FUJII KIYOSHI KOISHIHARA YASUSHI		
发明人	FUJII, KIYOSHI KOISHIHARA, YASUSHI		
IPC分类号	G01N29/24 B06B1/06 G10K11/02 B29C35/08 A61B8/14 B29C35/02 B29C37/00 B29C67/00 G10K11/30		
CPC分类号	A61B8/14 B06B1/067 B29C35/0266 B29C35/0805 B29C37/006 B29C64/135 B29C2035/0838 B29K2105/16 B29K2995/0001 B29K2995/0064 G01N29/2437 G01N2291/02466 G01N2291/02475 G10K11/30		
代理机构(译)	法思博事务所		
优先权	2001285456 2001-09-19 JP		
其他公开文献	EP1296136A2 EP1296136A3		
外部链接	Espacenet		

摘要(译)

超声波搜索单元 (20) 包括用于发送/接收超声波的压电元件, 以及用于将由压电元件发送/接收的超声波发送到待测对象的声学匹配层 (4), 其中声学匹配层 (4) 由通过用激光照射用于光学成形的树脂而获得的固化层形成。声匹配层 (4) 也可以由多个堆叠层形成, 并且在各个层中混合不同的填充物, 由此改变各个层的声阻抗。将用于光学成形的液态树脂供应到罐, 并通过用激光照射固化成预定形状。因此, 提供了一种超声波搜索单元 (20) 及其制造方法, 其中具有所需厚度的声匹配层 (4) 以良好的精度形成而不粘合, 由此粘合剂层的厚度变化, 由气泡引起的特性变化和降解不太可能发生。




FIG. 1A

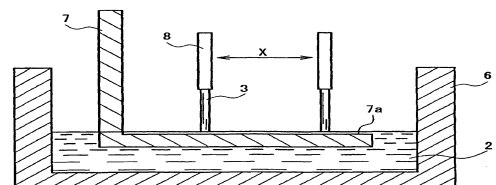


FIG. 1B