



US 20190231311A1

(19) **United States**

(12) **Patent Application Publication**
KWON

(10) **Pub. No.: US 2019/0231311 A1**

(43) **Pub. Date: Aug. 1, 2019**

(54) **ULTRASOUND PROBE**

(71) Applicant: **SAMSUNG MEDISON CO., LTD.**,
Hongcheon-gun (KR)

(72) Inventor: **Soon Ho KWON**, Gumi-si (KR)

(21) Appl. No.: **15/948,683**

(22) Filed: **Apr. 9, 2018**

(30) **Foreign Application Priority Data**

Jan. 31, 2018 (KR) 10-2018-0011929

Publication Classification

(51) **Int. Cl.**
A61B 8/00 (2006.01)
A61B 8/08 (2006.01)
B06B 1/02 (2006.01)
B06B 1/06 (2006.01)
G01N 29/24 (2006.01)

(52) **U.S. Cl.**
 CPC *A61B 8/4455* (2013.01); *A61B 8/5207*
 (2013.01); *B06B 1/0207* (2013.01); *B06B*
1/0622 (2013.01); *B06B 2201/76* (2013.01);
G01N 29/245 (2013.01); *G01N 29/2406*
 (2013.01); *G01N 29/2412* (2013.01); *B06B*
1/067 (2013.01)

(57) **ABSTRACT**

Disclosed herein is an ultrasound probe. The ultrasound probe includes a first assembly having a first case, a second assembly coupled with the first assembly, having a second case, and configured to be rotatable between a first position of being unfolded with respect to the first assembly and a second position of being folded on the first assembly, a first acoustic module disposed in the inside of the first case, a second acoustic module disposed in the inside of the second case, and a first space reducing portion disposed in at least one of a portion of the first case toward the second assembly and a portion of the second case toward the first assembly, and configured to reduce a space between the first acoustic module and the second acoustic module when the second assembly is at the first position.

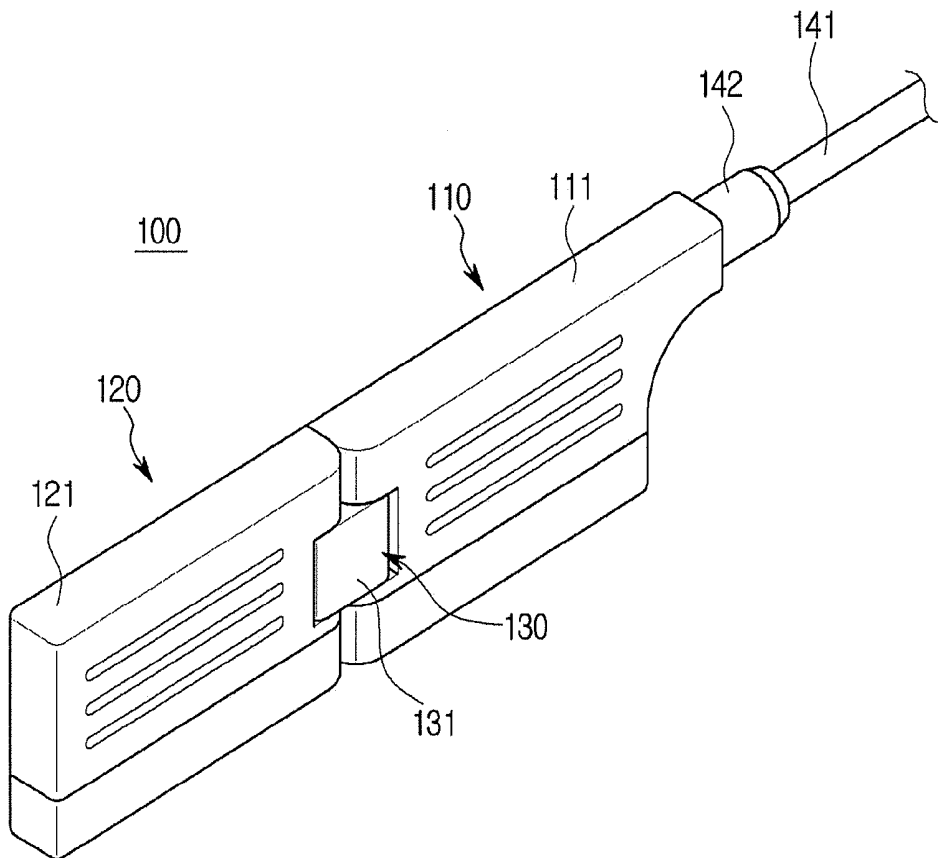


FIG. 1

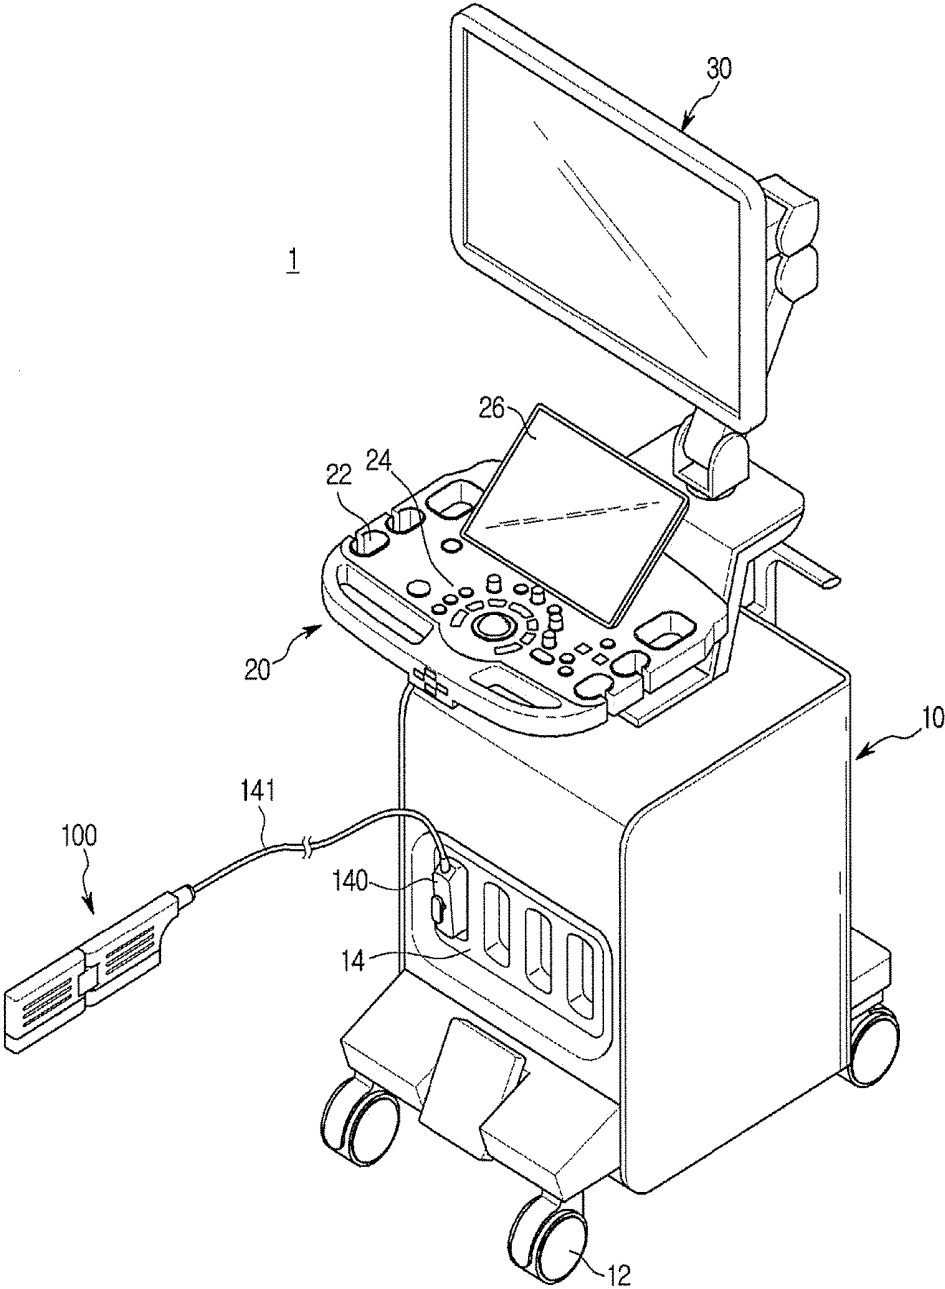


FIG. 2

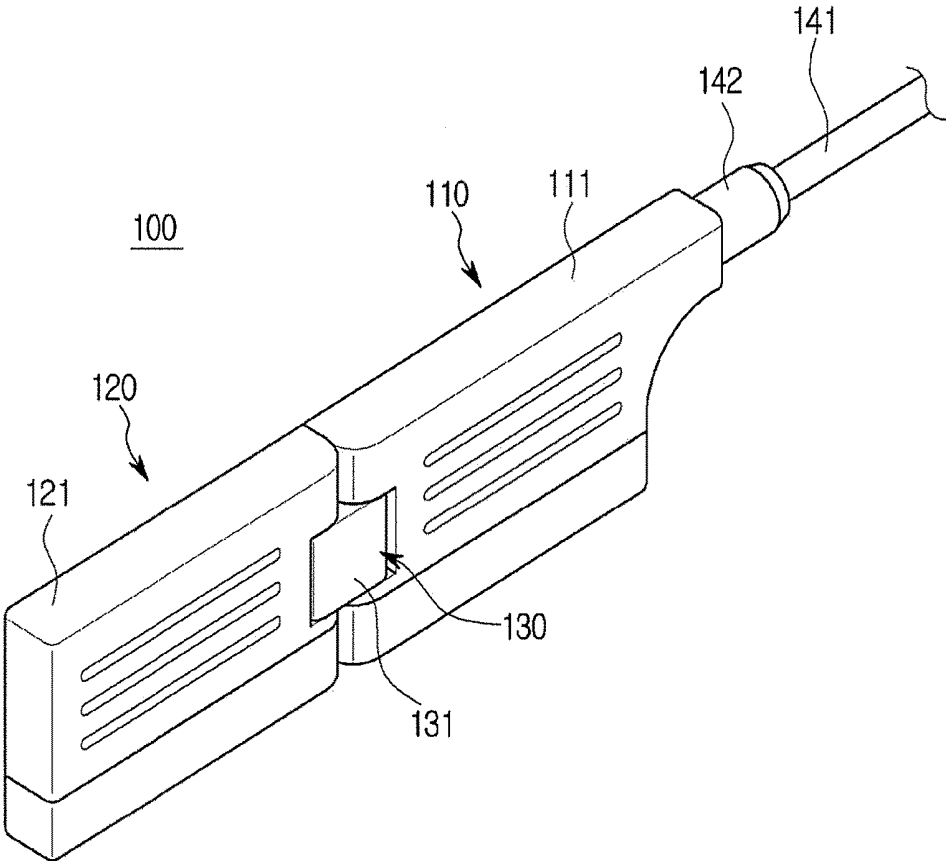


FIG. 3

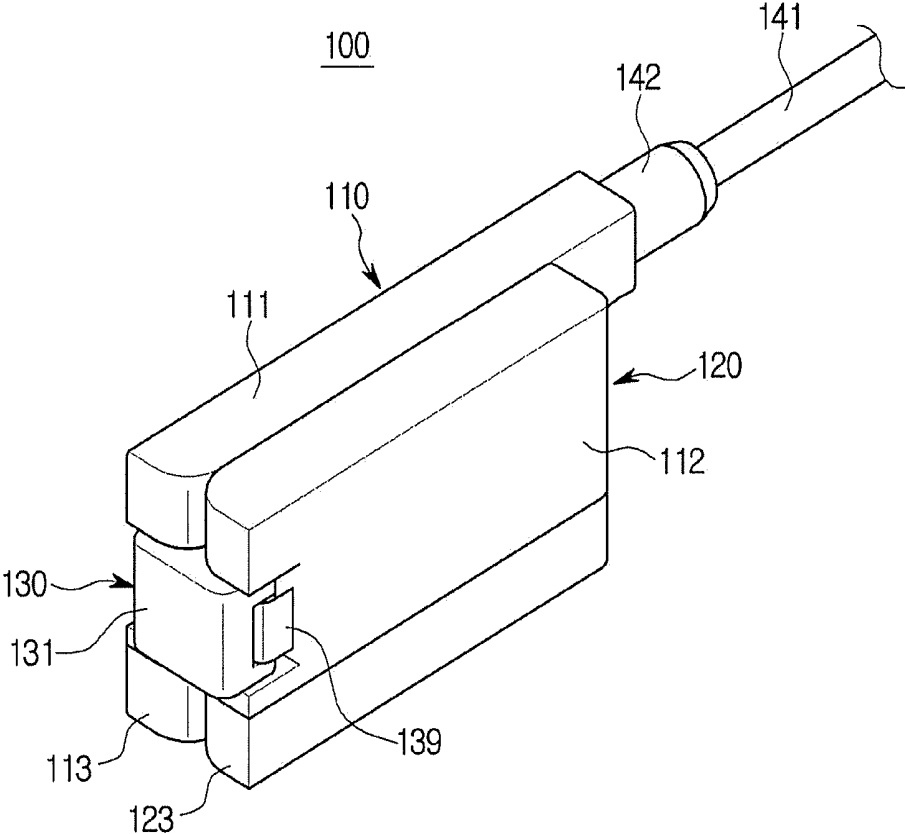


FIG. 4

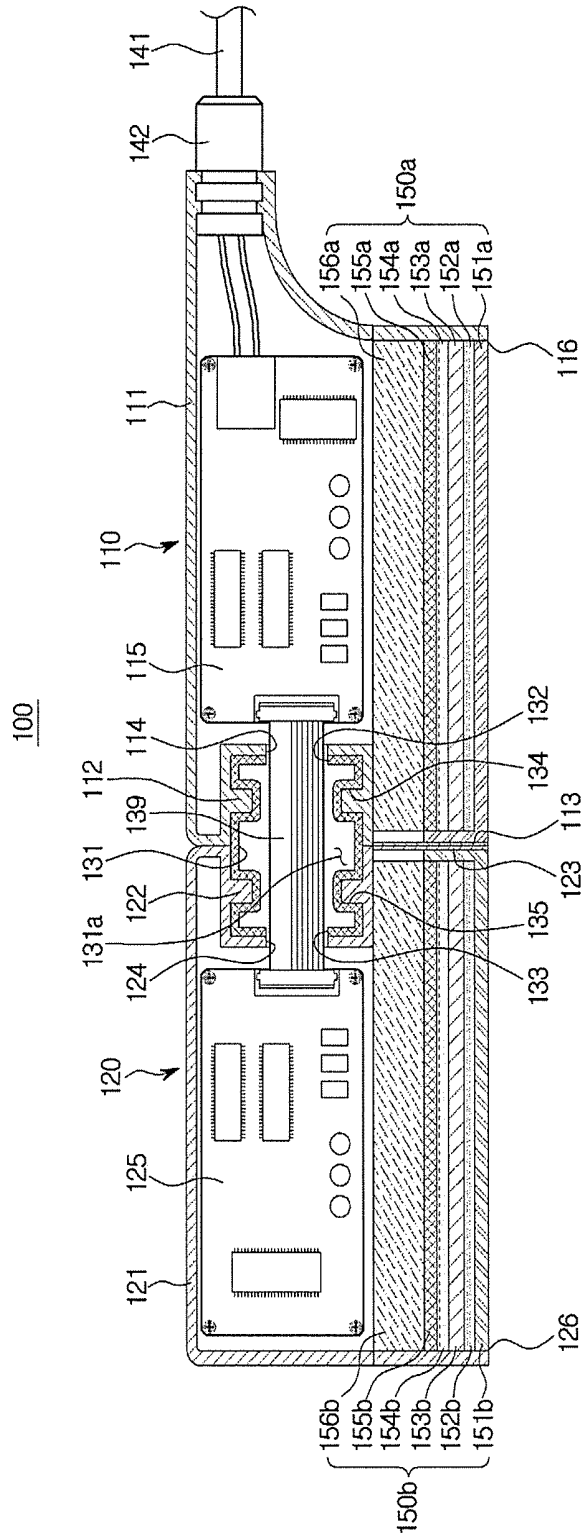


FIG. 5

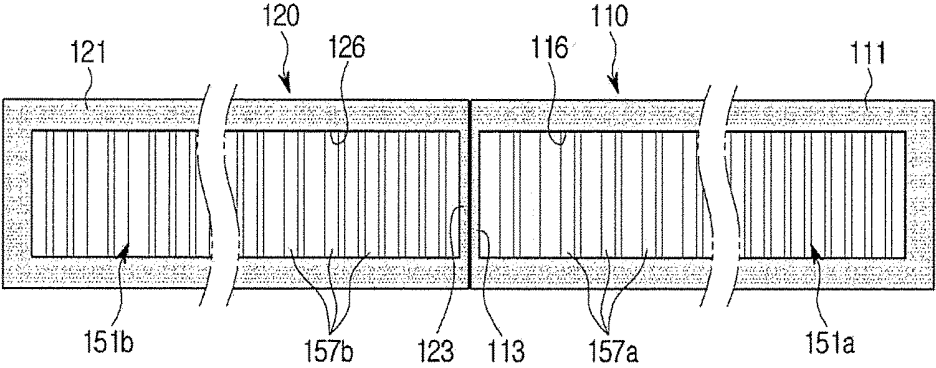


FIG. 6

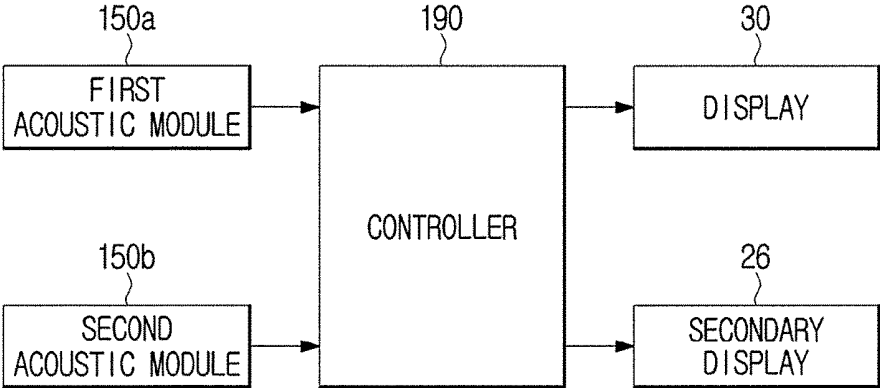


FIG. 7

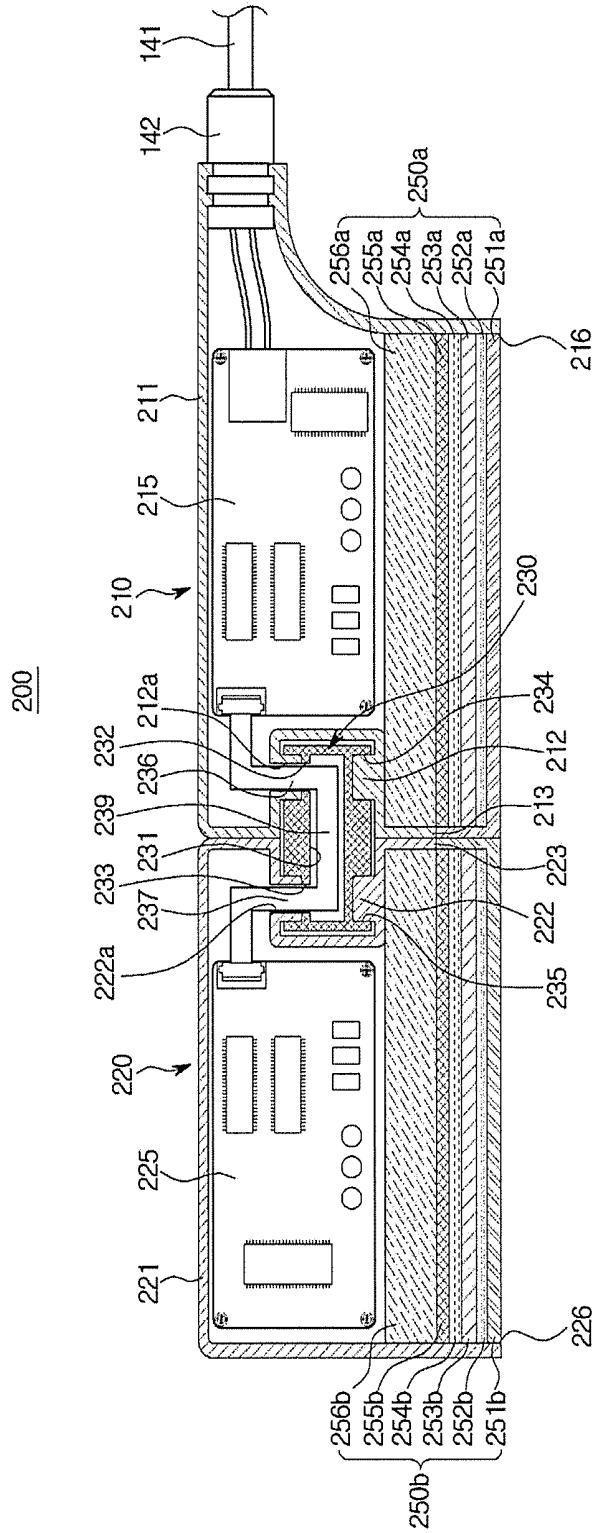


FIG. 8

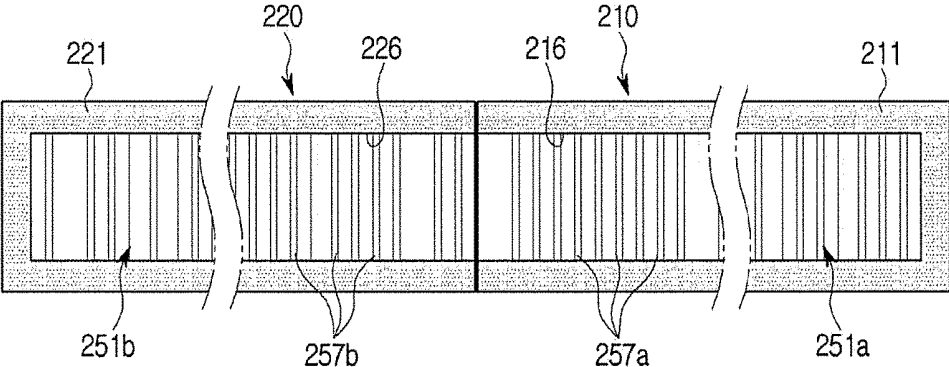


FIG. 9

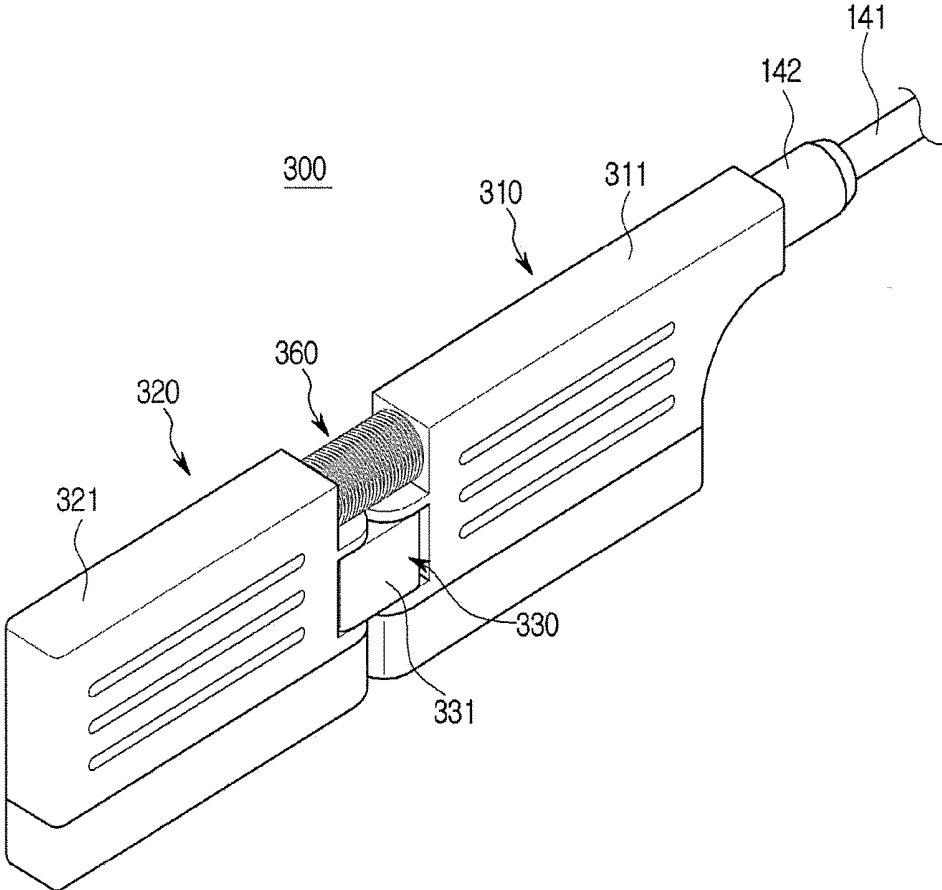


FIG. 10

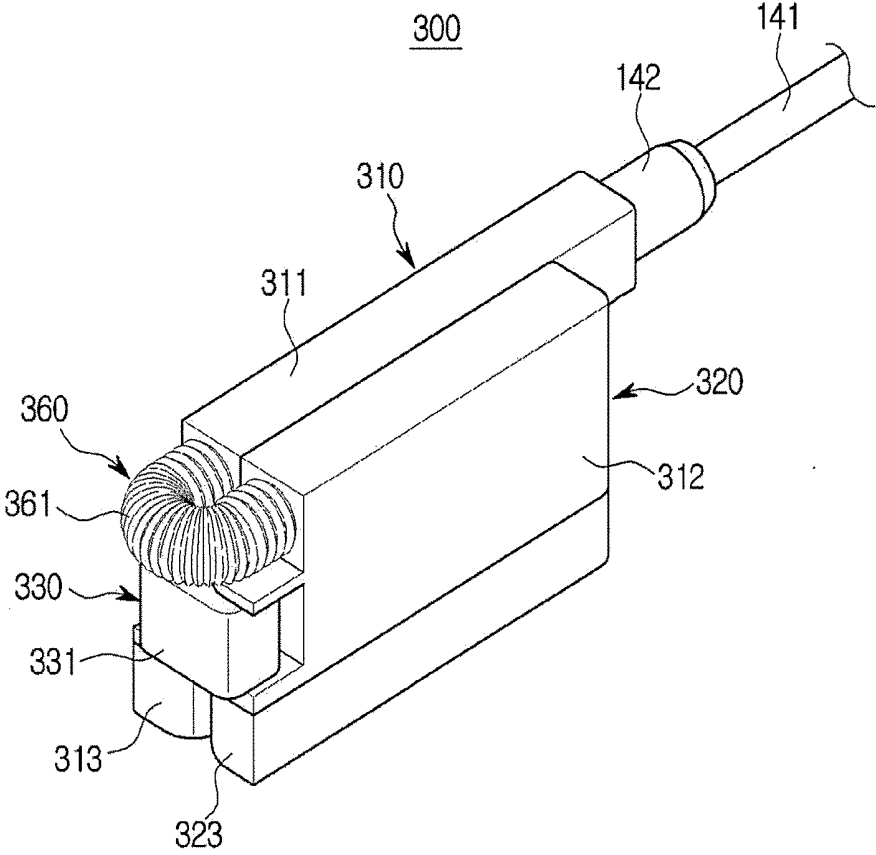


FIG. 11


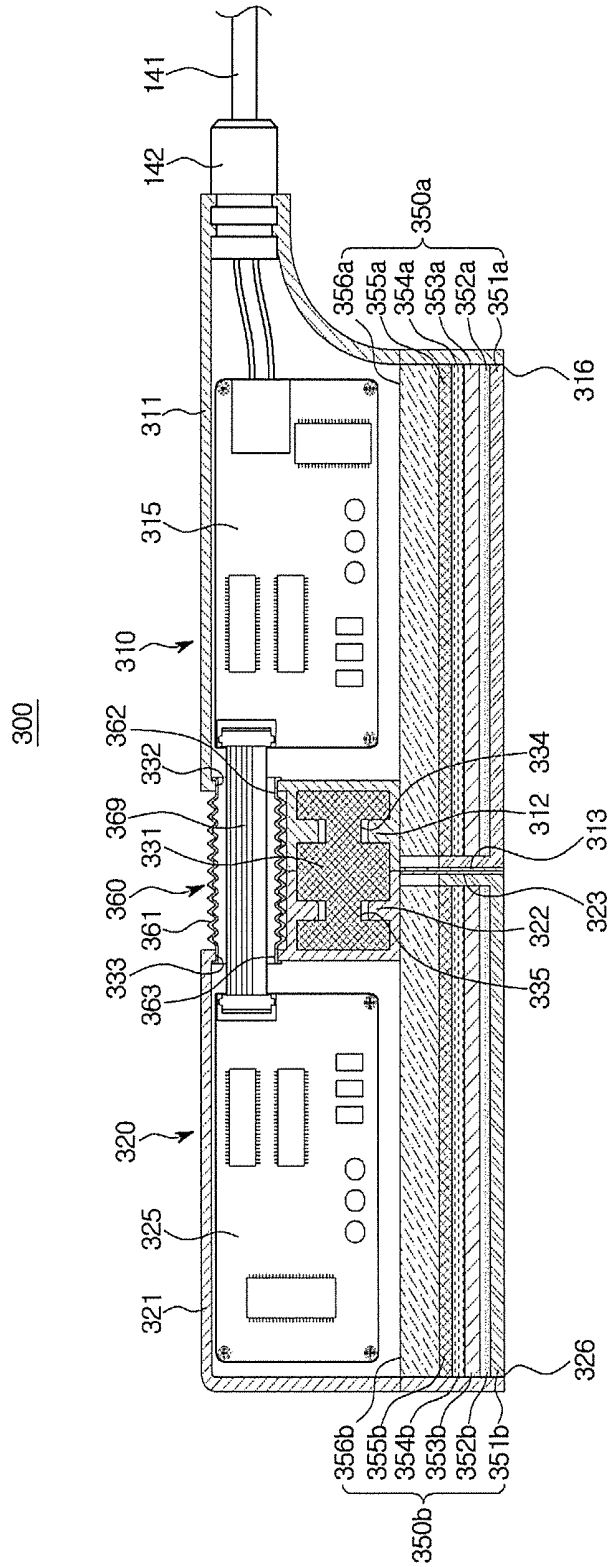


FIG. 13

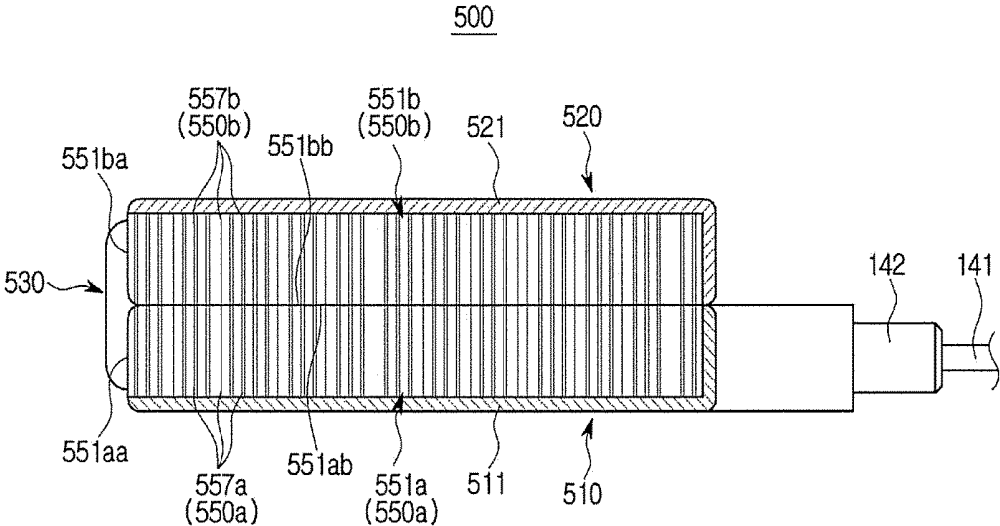

ULTRASOUND PROBE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is based on and claims priority under 35 U.S.C. § 119 to Korean Patent Application No. 10-2018-0011929, filed on Jan. 31, 2018, in the Korean Intellectual Property Office, the disclosure of which is incorporated by reference herein in its entirety.

BACKGROUND

1. Field

[0002] The present disclosure relates to an ultrasound probe, and more particularly, to an ultrasound probe with ease of use.

2. Description of the Related Art

[0003] An ultrasonic imaging apparatus irradiates ultrasound signals toward a target area of an object at the surface of the object, and receives ultrasound signals (echo ultrasound signals) reflected from the object so as to noninvasively acquire section images about soft tissue of the object or images about blood vessels of the object based on information of the echo ultrasound signals, thereby providing information about the object.

[0004] The ultrasonic imaging apparatus has advantages that it is a compact, low-priced apparatus and it can display images in real time, compared to other medical imaging apparatuses, such as an X-ray diagnostic apparatus, an X-ray Computerized Tomography (CT) scanner, a Magnetic Resonance Image (MRI) apparatus, and a nuclear medical diagnostic apparatus. Also, the ultrasonic imaging apparatus has high safety since there is no risk for patients to be exposed to radiation such as X-rays. For the advantages, the ultrasonic imaging apparatus is widely used to diagnose the heart, abdomen, urinary organs, uterus, etc.

[0005] The ultrasound imaging apparatus includes an ultrasound probe for sending and receiving ultrasonic waves. The ultrasound probe sends ultrasonic waves to an object through a transducer, and receives echo ultrasonic waves reflected from the object.

[0006] Meanwhile, an ultrasound probe for diagnosing animals has a larger size and a heavier weight than a general ultrasound probe, and accordingly, the ultrasound probe for diagnosing animals is disadvantageous in view of ease of use, such as portability and storage.

SUMMARY

[0007] Therefore, it is an aspect of the present disclosure to provide an ultrasound probe with ease of use, such as portability and storage.

[0008] It is another aspect of the present disclosure to provide an ultrasound probe capable of improving image quality.

[0009] Additional aspects of the disclosure will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the disclosure.

[0010] In accordance with an aspect of the present disclosure, an ultrasound probe includes a first assembly having a first case, a second assembly coupled with the first assembly, having a second case, and configured to be rotatable between

a first position of being unfolded with respect to the first assembly and a second position of being folded on the first assembly, a first acoustic module disposed in the inside of the first case, a second acoustic module disposed in the inside of the second case, and a first space reducing portion disposed in at least one of a portion of the first case toward the second assembly and a portion of the second case toward the first assembly, and configured to reduce a space between the first acoustic module and the second acoustic module when the second assembly is at the first position.

[0011] When the first space reducing portion is disposed in the first case, the first space reducing portion may have a thinner thickness than the other portion of the first case, and when the first space reducing portion is disposed in the second case, the first space reducing portion may have a thinner thickness than the other portion of the second case.

[0012] When the first space reducing portion is disposed in the first case, the first space reducing portion may expose at least one portion of the first acoustic module to the outside of the first case, and when the first space reducing portion is disposed in the second case, the first space reducing portion may expose at least one portion of the second acoustic module to the outside of the second case.

[0013] When the second assembly is at the first position, a portion of the first acoustic module exposed to the outside of the first case through the first space reducing portion may contact a portion of the second acoustic module exposed to the outside of the second case through the first space reducing portion.

[0014] The ultrasound probe may further include a second space reducing portion disposed in at least one of a portion of the first case toward the second assembly and a portion of the second case toward the first assembly, and configured to reduce a space between the first acoustic module and the second acoustic module when the second assembly is at the second position.

[0015] When the second space reducing portion is disposed in the first case, the second space reducing portion may have a thinner thickness than the other portion of the first case, and when the second space reducing portion is disposed in the second case, the second space reducing portion may have a thinner thickness than the other portion of the second case.

[0016] The second space reducing portion may expose at least one of the first acoustic module and the second acoustic module to the outside.

[0017] The ultrasound probe may further include a hinge unit rotatably connecting the first assembly to the second assembly, and a connection member electrically connecting the first assembly to the second assembly, and passing the hinge unit.

[0018] The connection member may pass a rotation shaft of the hinge unit.

[0019] The connection member may include at least one of a Flexible Printed Circuit Board (FPCB) and a cable.

[0020] The ultrasound probe may further include a hinge unit rotatably connecting the first assembly to the second assembly, a connection member accommodating portion connecting the first assembly to the second assembly, and made of a flexible material, and a connection member electrically connecting the first assembly to the second assembly, and disposed in the inside of the connection member accommodating portion.

[0021] The ultrasound probe may further include a controller configured to produce an image based on information received from at least one of the first acoustic module and the second acoustic module, wherein the first acoustic module may include a plurality of first elements, the second acoustic module may include a plurality of second elements, when the second assembly is at the first position, the controller may produce an image of a space between the first assembly and the second assembly, based on a mean value of at least one first element adjacent to the second assembly among the plurality of first elements and at least one second element adjacent to the first assembly among the plurality of second elements.

[0022] In accordance with an aspect of the present disclosure, an ultrasound probe include a first assembly having a first case, a second assembly coupled with the first assembly, having a second case, and configured to be rotatable between a first position of being unfolded with respect to the first assembly and a second position of being folded on the first assembly, a first acoustic module disposed in the inside of the first case, a second acoustic module disposed in the inside of the second case, and a first space reducing portion disposed in at least one of the first case and the second case, and configured to reduce a space between the first acoustic module and the second acoustic module when the second assembly is at the first position, wherein when the first space reducing portion is disposed in the first case, the first space reducing portion has a thinner thickness than the other portion of the first case, and when the first space reducing portion is disposed in the second case, the first space reducing portion has a thinner thickness than the other portion of the second case.

[0023] The ultrasound probe may further include a second space reducing portion disposed in at least one of the first case and the second case, and configured to reduce a space between the first acoustic module and the second acoustic module when the second assembly is at the second position.

[0024] When the second space reducing portion is disposed in the first case, the second space reducing portion may have a thinner thickness than the other portion of the first case, and when the second space reducing portion is disposed in the second case, the second space reducing portion may have a thinner thickness than the other portion of the second case.

[0025] The second space reducing portion may expose at least one of the first acoustic module and the second acoustic module to the outside.

[0026] The ultrasound probe may further include a controller configured to produce an image based on information received from at least one of the first acoustic module and the second acoustic module, wherein the first acoustic module may include a plurality of first elements, the second acoustic module may include a plurality of second elements, and when the second assembly is at the first position, the controller may produce an image of a space between the first assembly and the second assembly, based on a mean value of at least one first element adjacent to the second assembly among the plurality of first elements and at least one second element adjacent to the first assembly among the plurality of second elements.

[0027] In accordance with an aspect of the present disclosure, an ultrasound probe includes a first assembly having a first case, a second assembly coupled with the first assembly, having a second case, and configured to be rotatable between

a first position of being unfolded with respect to the first assembly and a second position of being folded on the first assembly, a first acoustic module disposed in the inside of the first case, a second acoustic module disposed in the inside of the second case, and a first space reducing portion disposed in at least one of the first case and the second case, and configured to reduce a space between the first acoustic module and the second acoustic module when the second assembly is at the first position, wherein when the first space reducing portion is disposed in the first case, the first space reducing portion exposes at least one portion of the first acoustic module to the outside of the first case, and when the first space reducing portion is disposed in the second case, the first space reducing portion exposes at least one portion of the second acoustic module to the outside of the second case.

[0028] When the second assembly is at the first position, a portion of the first acoustic module exposed to the outside of the first case through the first space reducing portion may contact a portion of the second acoustic module exposed to the outside of the second case through the first space reducing portion.

[0029] The ultrasound probe may further include a second space reducing portion disposed in at least one of a portion of the first case toward the second assembly and a portion of the second case toward the first assembly, and configured to reduce a space between the first acoustic module and the second acoustic module when the second assembly is at the second position.

BRIEF DESCRIPTION OF THE DRAWINGS

[0030] These and/or other aspects of the disclosure will become apparent and more readily appreciated from the following description of the embodiments, taken in conjunction with the accompanying drawings of which:

[0031] FIG. 1 shows medical equipment in which an ultrasound probe according to an embodiment of the present disclosure can be used.

[0032] FIG. 2 shows the ultrasound probe shown in FIG. 1 when the ultrasound probe is unfolded.

[0033] FIG. 3 shows the ultrasound probe shown in FIG. 1 when the ultrasound probe is folded.

[0034] FIG. 4 shows the inside of the ultrasound probe shown in FIG. 1.

[0035] FIG. 5 shows a bottom of the ultrasound probe shown in FIG. 2.

[0036] FIG. 6 is a control block diagram of the ultrasound probe shown in FIG. 1.

[0037] FIG. 7 shows the inside of an ultrasound probe according to another embodiment of the present disclosure.

[0038] FIG. 8 shows a bottom of the ultrasound probe shown in FIG. 7.

[0039] FIG. 9 shows an ultrasound probe according to another embodiment of the present disclosure when the ultrasound probe is unfolded.

[0040] FIG. 10 shows the ultrasound probe shown in FIG. 9 when the ultrasound probe is folded.

[0041] FIG. 11 shows the inside of the ultrasound probe shown in FIG. 9.

[0042] FIG. 12 shows a bottom of an ultrasound probe according to another embodiment of the present disclosure.

[0043] FIG. 13 shows a bottom of an ultrasound probe according to another embodiment of the present disclosure.

DETAILED DESCRIPTION

[0044] Configurations illustrated in the embodiments and the drawings described in the present specification are only the preferred embodiments of the present disclosure, and thus it is to be understood that various modified examples, which may replace the embodiments and the drawings described in the present specification, are possible when filing the present application.

[0045] Also, like reference numerals or symbols denoted in the drawings of the present specification represent members or components that perform the substantially same functions.

[0046] The terms used in the present specification are used to describe the embodiments of the present disclosure. Accordingly, it should be apparent to those skilled in the art that the following description of the exemplary embodiments of the present disclosure is provided for illustration purpose only and not for the purpose of limiting the disclosure. It is to be understood that the singular forms “a,” “an,” and “the” include plural referents unless the context clearly dictates otherwise. It will be understood that when the terms “includes,” “comprises,” “including,” and/or “comprising,” when used in this specification, specify the presence of stated features, figures, steps, components, or combination thereof, but do not preclude the presence or addition of one or more other features, figures, steps, components, members, or combinations thereof.

[0047] Also, it will be understood that, although the terms first, second, etc. may be used herein to describe various components, these components should not be limited by these terms. These terms are only used to distinguish one component from another. For example, a first component could be termed a second component, and, similarly, a second component could be termed a first component, without departing from the scope of the present disclosure. As used herein, the term “and/or” includes any and all combinations of one or more of associated listed items.

[0048] Meanwhile, in the following description, the terms “rear,” “upper,” “lower,” etc. are defined based on the drawings, and the shapes and positions of the components are not limited by the terms.

[0049] Hereinafter, the embodiments of the present disclosure will be described in detail with reference to the accompanying drawings.

[0050] FIG. 1 shows medical equipment in which an ultrasound probe according to an embodiment of the present disclosure can be used.

[0051] Referring to FIG. 1, medical equipment 1 according to an embodiment of the present disclosure may include a main body 10, and an ultrasound probe 100 for sending an ultrasound signal to an object to be diagnosed and receiving a signal reflected from the object. The ultrasound probe 100 may be connected to the main body 10 by a cable 141.

[0052] The ultrasound probe 100 may be put in a holder 22 to be fixed at the main body 10. When a user does not use the medical equipment 1, the user may put the ultrasound probe 100 in the holder 22 to keep the ultrasound probe 100. In FIG. 1, the holder 22 for putting the ultrasound probe 100 therein is provided in a control panel 20. However, the holder 22 may be provided in the main body 10 according to user convenience. Also, two holders 22 may be provided in both the main body 10 and the control panel 20, respectively.

[0053] In the main body 10, a moving apparatus 12 for moving the medical equipment 1 may be provided. The moving apparatus 12 may be a plurality of casters attached on a bottom of the main body 10. The casters may be aligned to move the main body 10 in a predetermined direction, arranged to move the main body 10 in an arbitrary direction, or locked to stop the main body 10 at a predetermined position.

[0054] The ultrasound probe 100 may include a plurality of acoustic modules 150a and 150b (also, referred to as a first acoustic module 150a and a second acoustic module 150b) installed in a case 110. Each of the acoustic modules 150a and 150b may include a transducer module for irradiating ultrasonic waves toward an object, receiving echo ultrasonic waves reflected from the object, and converting electrical signals into ultrasonic waves and ultrasonic waves into electrical signals. The ultrasound probe 100 may include a male connector 140 physically coupled with a female connector 14 of the main body 10 to send/receive signals to/from the main body 10, and the cable 141 connecting the male connector 140 to the acoustic modules 150a and 150b.

[0055] The object may be a human's or animal's body part, or tissue in a body part, such as vessels, bones, and muscles. However, the object is not limited to the above-mentioned body part or tissue, and may be anything whose inner structure can be imaged by the medical equipment 1, that is, an ultrasonic imaging apparatus.

[0056] The echo ultrasonic waves may be ultrasonic waves reflected from the object to which ultrasonic waves have been irradiated, and may have various frequency bands or energy levels to produce various ultrasound images according to diagnosis modes.

[0057] The acoustic modules 150a and 150b may generate ultrasonic waves according to alternating-current (AC) power applied thereto. More specifically, the acoustic modules 150a and 150b may receive AC power from an external power supply or from an internal power storage unit, for example, a battery. Vibrators of the acoustic modules 150a and 150b may vibrate according to the AC power to generate ultrasonic waves.

[0058] One end of the cable 141 may be connected to the transducer module 110, and the other end of the cable 141 may be connected to the male connector 140, so as to connect the acoustic modules 150a and 150b to the male connector 140. The male connector 140 may be physically coupled with the female connector 14 of the main body 10. The male connector 140 may transfer electrical signals generated by the acoustic modules 150a and 150b to the female connector 14, or may receive control signals generated by the main body 10 from the female connector 14.

[0059] In FIG. 1, the male connector 140 and the cable 141 are exposed to the outside. However, the male connector 140 and the cable 141 may be installed in a housing forming the main body 10.

[0060] Meanwhile, on the main body 10 of the medical equipment 1, a display 30 and a control panel 20 may be mounted. On the control panel 20, an input device 24 may be provided to enable a user to control the medical equipment 1. The input device 24 may receive various control commands, as well as setting information about the ultrasound probe 100, from the user.

[0061] According to an embodiment, the setting information about the ultrasound probe 100 may include gain

information, zoom information, focus information, Time Gain Compensation (TGC) information, depth information, frequency information, power information, frame average information, dynamic range information, etc. However, the setting information about the ultrasound probe **100** is not limited to the above-mentioned information, and may include various information that can be set in order to photograph ultrasound images.

[0062] The information may be transferred to the ultrasound probe **100** through the cable **141**, and the ultrasound probe **100** may be set according to the received information. Also, the main body **10** may receive various control commands, such as a command for transmitting an ultrasound signal, through the input device **24**, from the user, and transfer the various control commands to the ultrasound probe **100**.

[0063] Meanwhile, the input device **24** may be implemented as a keyboard, a foot switch, or a foot pedal. For example, the keyboard may be hardwarely implemented. The keyboard may include at least one of a switch, a key, a joystick, and a trackball. According to another example, the keyboard may be softwarely implemented, like a graphic user interface. In this case, the keyboard may be displayed through the display **30**. The foot switch or the foot pedal may be disposed below the main body **10**, and the user may control operations of the medical equipment **1** using the foot switch or the foot pedal.

[0064] The display **30** may be a Cathode Ray Tube (CRT) display, a Liquid Crystal Display (LCD), a Light Emitting Diodes (LED) display, a Plasma Display Panel (PDP) display, or an Organic Light Emitting Diode (OLED) display, although not limited to these.

[0065] The display **30** may display an ultrasound image about a target part of an object. The ultrasound image displayed on the display **30** may be a 2D ultrasound image or a 3D ultrasound image. The display **300** may display various ultrasound images according to operation modes of the medical equipment **1**. Also, the display **30** may display information related to an operation state of the ultrasound probe **100**, as well as a menu or guidance needed for ultrasonic diagnosis.

[0066] According to an embodiment, the ultrasound image may include an Amplitude-mode (A-mode) image, a Brightness-mode (B-mode) image, a Motion-mode (M-mode) image, a Color-mode (C-mode) image, and a Doppler-mode (D-mode) image.

[0067] The A-mode image means an ultrasound image representing the amplitude of an ultrasound signal corresponding to an echo ultrasound signal, the B-mode image means an ultrasound image representing the amplitude of an ultrasound signal corresponding to an echo ultrasound signal as brightness, and the M-mode image means an ultrasound image representing the motion of an object ob according to time at a specific location. The D-mode image means an ultrasound image representing a moving object ob in the form of a waveform using the Doppler effect, and the C-mode image means an ultrasound image representing a moving object ob in the form of a color spectrum.

[0068] Meanwhile, a secondary display **26** may be mounted on the control panel **20**. The secondary display **26** may provide a menu for optimizing ultrasound images, or related information such as secondary images, or may provide the user with a graphic interface.

[0069] Also, if the secondary display **26** is implemented as a touch screen, the display **30** may function as the input device **24**. That is, the main body **10** may receive various commands from the user, through at least one of the display **30** and the input device **24**. Also, the main body **10** may include a voice recognition sensor for receiving voice commands from the user, although not shown in the drawings.

[0070] FIG. 2 shows the ultrasound probe shown in FIG. 1 when the ultrasound probe is unfolded. FIG. 3 shows the ultrasound probe shown in FIG. 1 when the ultrasound probe is folded. FIG. 4 shows the inside of the ultrasound probe shown in FIG. 1. FIG. 5 shows a bottom of the ultrasound probe shown in FIG. 2.

[0071] Referring to FIGS. 2, 3, and 4, the ultrasound probe **100** may include a first assembly **110**, a second assembly **120**, and a hinge unit **130** rotatably coupling the second assembly **120** with the first assembly **110**.

[0072] The first assembly **110** may include a first case **111** forming an outer appearance of the first assembly **110**. In the inside of the first case **111**, a first electronic component **115** and/or the first acoustic module **150a** may be installed. The first case **111** may include a first lens opening **116** for exposing a first lens **151a** of the first acoustic module **150a** to the outside. The first lens opening **116** may be formed in a side of the ultrasound probe **100** facing an object when the object is inspected with the ultrasound probe **100**.

[0073] The first assembly **110** may include a cable connecting portion **142** connected to the cable **141**. The cable connecting portion **142** may be formed at one end of the first case **111**. The cable **141** guided into the inside of the first assembly **110** via the cable connecting portion **142** may be electrically connected to the first electronic component **115** installed in the inside of the first assembly **110**.

[0074] The first electronic component **115** may be installed in the inside of the first case **111** to drive the first assembly **110**. The first electronic component **115** may drive the first acoustic module **150a**. The first electronic component **115** may be electrically connected to a second electronic component **125** of the second assembly **120** by a connecting member **139**.

[0075] The first case **111** may include a first fixing protrusion **112** with which the hinge unit **130** is rotatably coupled. A plurality of first fixing protrusions **112** may be provided to face each other. The first fixing protrusion **112** may be rotatably inserted into a first fixing groove **134** of the hinge unit **130**.

[0076] The first case **111** may include a first connecting opening **114** through which the connecting member **139** electrically connecting the first assembly **110** to the second assembly **120** passes. The first connecting opening **114** may be formed to correspond to a size of the connecting member **139**. The first connecting opening **114** may be formed in a portion of the first case **111** with which the hinge unit **130** is coupled.

[0077] The second assembly **120** may include a second case **121** forming an outer appearance of the second assembly **120**. In the inside of the second case **121**, the second electric component **125** and/or the second acoustic module **150b** may be installed. The second case **121** may include a second lens opening **126** for exposing a second lens **151b** of the second acoustic module **150b** to the outside. The second lens opening **126** may be formed in the side of the ultrasound probe **100** facing an object when the object is inspected with the ultrasound probe **100**.

[0078] The second electronic component 125 may be installed in the inside of the second case 121 to drive the second assembly 120. The second electronic component 125 may drive the second acoustic module 150b. The first electronic component 125 may be electrically connected to the first electronic component 115 of the first assembly 110 by the connecting member 139.

[0079] The second case 121 may include a second fixing protrusion 122 with which the hinge unit 130 is rotatably coupled. A plurality of second fixing protrusions 122 may be provided to face each other. The second fixing protrusion 122 may be rotatably inserted into the second fixing groove 135 of the hinge unit 130.

[0080] The second case 121 may include a second connecting opening 124 through which the connecting member 139 electrically connecting the second assembly 120 to the first assembly 110 passes. The second connecting opening 124 may be formed to correspond to a size of the connecting member 139. The second connecting opening 124 may be formed in a portion of the second case 121 with which the hinge unit 130 is coupled.

[0081] The hinge unit 130 may electrically connect the second assembly 120 to the first assembly 110. The hinge unit 130 may include a hinge body 131, a first opening 132, a second opening 133, the first fixing groove 134, and the second fixing groove 135.

[0082] The hinge body 131 may be rotatably connected to the first assembly 110 at one end, and rotatably connected to the second assembly 120 at the other end. The hinge body 131 may include a space 131a in which the connecting member 139 is installed.

[0083] The first opening 132 may pass the connecting member 139 through. The first opening 132 may be formed at one end of the hinge body 131 toward the first assembly 110.

[0084] The second opening 133 may pass the connecting member 139 through. The second opening 133 may be formed at the other end of the hinge body 131 toward the second assembly 120.

[0085] The first fixing protrusion 112 of the first assembly 110 may be rotatably inserted into the first fixing groove 134. A size and shape of the first fixing groove 134 may correspond to those of the first fixing protrusion 112. The number of the first fixing groove 134 may also correspond to that of the first fixing protrusion 112.

[0086] The second fixing protrusion 122 of the second assembly 120 may be rotatably inserted into the second fixing groove 135. A size and shape of the second fixing groove 135 may correspond to those of the second fixing protrusion 122. The number of the second fixing groove 135 may also correspond to that of the second fixing protrusion 122.

[0087] The connecting member 139 may electrically connect the second assembly 120 to the first assembly 110. The connecting member 139 may pass the hinge unit 130. The connecting member 139 may be connected to the first electric component 115 at one end, pass through the first connecting opening 114, the first opening 132, the second opening 133, and the second connecting opening 124, and then be connected to the second electric component 125 at the other end. The connecting member 139 may be made of a flexible material. The connecting member 139 may be a Flexible Printed Circuit Board (FPCB). The connecting member 139 may be a cable.

[0088] The first acoustic module 150a may be installed in the inside of the first case 111 of the first assembly 110. The first acoustic module 150a may include the first lens 151a, a first foreign material blocking layer 152a, a first matching layer 153a, a first piezoelectric layer 154a, a first sound-absorption layer 155a, and a first sound-reflection layer 156a.

[0089] The first lens 151a may be disposed at an outermost portion of the first acoustic module 150a. The first lens 151a may focus ultrasonic waves generated by the first piezoelectric layer 154a. The first lens 151a may be made of a material, such as silicon and rubber, having acoustic impedance that is similar to acoustic impedance of an object. The first lens 151a may be a convex type whose center portion has a convex curved surface, or a linear type having a flat surface.

[0090] The first foreign material blocking layer 152a may block foreign materials from entering the inside of the first case 111. The first foreign material blocking layer 152a may be made of a material that passes ultrasonic waves through.

[0091] The first matching layer 153a may reduce a difference in acoustic impedance between the first piezoelectric layer 154a and an object to match acoustic impedance of the first piezoelectric layer 154a with acoustic impedance of the object so that ultrasonic waves generated by the first piezoelectric layer 154a can be efficiently transferred to the object.

[0092] For this, the first matching layer 153a may have acoustic impedance corresponding to a median value of acoustic impedance of the first piezoelectric layer 154a and acoustic impedance of the object. More specifically, the first matching layer 153a may have a median value of acoustic impedance of the first piezoelectric layer 154a and acoustic impedance of the object.

[0093] Also, the first matching layer 153a may be a plurality of layers so that acoustic impedance can change gradually toward the object from the first piezoelectric layer 154a. The plurality of matching layers may be made of different materials. The first matching layer 153a may be made of glass or a resin.

[0094] An effect in which a voltage is generated when mechanical pressure is applied to a predetermined material, and an effect in which mechanical deformation occurs when a voltage is applied are called a piezoelectric effect and a converse piezoelectric effect, respectively. The first piezoelectric layer 154a may contain a piezoelectric material having the piezoelectric effect and the converse piezoelectric effect. That is, the piezoelectric material is a material of converting electricity energy into mechanical vibration energy and mechanical vibration energy into electricity energy.

[0095] That is, the first piezoelectric layer 154a may be a piezoelectric layer, and the piezoelectric layer may vibrate to convert an electrical signal into a sound signal and a sound signal into an electrical signal. Also, an electrode for receiving electrical signals may be formed above or below the first piezoelectric layer 154a, although not shown in the drawings.

[0096] More specifically, the piezoelectric material forming the first piezoelectric layer 154a may be ceramic of lead zirconate titanate (PZT), PZMT single crystal made of a solid solution of lead magnesium niobate and lead titanate, or PZNT single crystal made of a solid solution of lead zirconate and lead titanate.

[0097] That is, the first piezoelectric layer **154a** according to an embodiment of the present disclosure may be made of a piezoelectric material that converts, when an electrical signal is applied, the electrical signal into mechanical vibrations to generate ultrasonic waves.

[0098] The first piezoelectric layer **154a** may be a piezoelectric ultrasonic transducer using the piezoelectric effect of a piezoelectric material. However, the first piezoelectric layer **154a** may be a magnetostrictive ultrasonic transducer using the magnetostrictive effect of a magnetic material, or a capacitive micromachined ultrasonic transducer (cMUT) that transmits and receives ultrasonic waves using vibration of several hundreds or thousands of micromachined thin films.

[0099] The first sound-absorption layer **155a** may function to prevent an ultrasound signal from being transferred in a rear direction of the ultrasound probe **100** and to absorb or reflect an ultrasound signal transferred in the rear direction of the ultrasound probe **100**, thereby preventing image distortion. Also, the first sound-absorption layer **155a** may focus an ultrasound signal to be sent at a predetermined location in an elevation direction of the ultrasound probe **100**.

[0100] More specifically, the first sound-absorption layer **155a** may suppress free vibrations of the first piezoelectric layer **154a** to reduce a pulse width of ultrasonic waves, and may prevent ultrasonic waves from being propagated unnecessarily in the rear direction of the first piezoelectric layer **154a**, thereby preventing distortion of ultrasound images. The first sound-absorption layer **155a** may be made of a material including rubber containing an epoxy resin, tungsten power, etc.

[0101] The first sound-reflection layer **156a** may totally reflect ultrasonic waves passed through the first sound-absorption layer **155a**. Thereby, the ultrasound probe **100** may have a wide bandwidth and high sensitivity.

[0102] The first sound-reflection layer **156a** may be made of a material having very high acoustic impedance in order to totally reflect ultrasonic waves. For example, the first sound-reflection layer **156a** may contain at least one material among tungsten carbide and a graphite compound.

[0103] The first sound-reflection layer **156a** may have higher acoustic impedance than the first piezoelectric layer **154a**. The first sound-reflection layer **156a** may be made of a material having electrical conductivity. Also, a thickness of the first sound-reflection layer **156a** may be $\frac{1}{2}\lambda$, $\frac{1}{4}\lambda$, $\frac{1}{8}\lambda$, or $\frac{1}{16}\lambda$ of the wavelength of the piezoelectric material constituting the first piezoelectric layer **154a**. That is, if the wavelength of the piezoelectric material constituting the first piezoelectric layer **154a** is λ , the thickness of the first sound-reflection layer **156a** may be $\frac{1}{2}\lambda$, $\frac{1}{4}\lambda$, $\frac{1}{8}\lambda$, or $\frac{1}{16}\lambda$.

[0104] The second acoustic module **150b** may be installed in the inside of the second case **121** of the second assembly **120**. The second acoustic module **150b** may include the second lens **151b**, a second foreign material blocking layer **152b**, a second matching layer **153b**, a second piezoelectric layer **154b**, a second sound-absorption layer **155b**, and a second sound-reflection layer **156b**. The second lens **151b**, the second foreign material blocking layer **152b**, the second matching layer **153b**, the second piezoelectric layer **154b**, the second sound-absorption layer **155b**, and the second sound-reflection layer **156b** may be the same configuration as the first lens **151a**, the first foreign material blocking layer **152a**, the first matching layer **153a**, the first piezoelectric

layer **154a**, the first sound-absorption layer **155a**, and the first sound-reflection layer **156a**, and accordingly, detailed descriptions thereof will be omitted.

[0105] According to the configuration, the second assembly **120** may be rotatable between a first position of being unfolded with respect to the first assembly **110** and a second position of being folded on the first assembly **110**. Accordingly, a user can fold the ultrasound probe **100** to carry it, and also can unfold the ultrasound probe **100** to use it, resulting in ease of use.

[0106] Meanwhile, when the second assembly **120** is unfolded with respect to the first assembly **110**, the first acoustic module **150a** may be spaced from the second acoustic module **150b**. More specifically, the first acoustic module **150a** may be spaced by a distance corresponding to a sum of a thickness of the first case **111** and a thickness of the second case **121** from the second acoustic module **150b**. However, if the first acoustic module **150a** is spaced from the second acoustic module **150b**, image quality may deteriorate. Particularly, the ultrasound probe **100** for diagnosing large animals includes a plurality of acoustic modules since it is difficult to manufacture an acoustic module that is larger than a specific size, and in this case, spaces between the plurality of acoustic modules may cause a deterioration in image quality.

[0107] Referring to FIGS. 2 to 5, the ultrasonic probe **100** may include a plurality of first space reducing portions **113** and **123** in order to prevent a deterioration in image quality due to the space between the first acoustic module **150a** and the second acoustic module **150b**.

[0108] The first space reducing portions **113** and **123** may include a 1a-th space reducing portion **113** formed in the first case **111** of the first assembly **110**, and a 1b-th space reducing portion **123** formed in the second case **121** of the second assembly **120**. The first space reducing portions **113** and **123** may have a thinner thickness than the other portion of the first case **111** and/or the second case **121**.

[0109] The 1a-th space reducing portion **113** may be positioned on a surface of the first case **111** facing the second assembly **120** when the second assembly **120** is at the first position at which it is unfolded with respect to the first assembly **110**. The 1a-th space reducing portion **113** may be disposed to correspond to one edge of the first acoustic module **150a**. The 1a-th space reducing portion **113** may have a thinner thickness than the other portion of the first case **111**.

[0110] The 1b-th space reducing portion **123** may be positioned on a surface of the second case **121** facing the first assembly **110** when the second assembly **120** is at the first position at which it is unfolded with respect to the first assembly **110**. The 1b-th space reducing portion **123** may be disposed to correspond to one edge of the first acoustic module **150b**. The 1b-th space reducing portion **123** may have a thinner thickness than the other portion of the second case **121**.

[0111] In FIGS. 4 and 5, both the first case **111** and the second case **121** include the first space reducing portions **113** and **123**, respectively. However, the first space reducing portions **113** and **123** may be provided on the first case **111** or the second case **121**.

[0112] According to the configuration, the ultrasound probe **100** according to an embodiment of the present disclosure can reduce the space between the first acoustic

module **150a** and the second acoustic module **150b**, thereby preventing a deterioration in image quality.

[0113] FIG. 6 is a control block diagram of the ultrasound probe shown in FIG. 1.

[0114] Referring to FIGS. 5 and 6, the first acoustic module **150a** may include a plurality of first elements **157a**, and the second acoustic module **150b** may include a plurality of second elements **157b**. The first elements **157a** and the second elements **157b** may convert ultrasonic signals into electrical signals and electrical signals into ultrasonic signals.

[0115] The ultrasound probe **100** according to an embodiment of the present disclosure may include a controller **190**. The controller **190** may receive signals from the first acoustic module **150a** and the second acoustic module **150b** to produce an image. The controller **190** may produce an image, and transfer the image to the display **30** and/or the secondary display **26** to represent the image visually.

[0116] Meanwhile, when the second assembly **120** is at the first position at which it is unfolded with respect to the first assembly **110**, the controller **190** may produce an image of the space between the first assembly **110** and the second assembly **120**, based on a mean value of at least one first element **157a** adjacent to the second assembly **120** among the plurality of first elements **157a** and at least one second element **157b** adjacent to the first assembly **110** among the plurality of second elements **157b**. For example, when calculating the mean value, the controller **190** may receive signal information from three first elements **157a** adjacent to the second assembly **120** and three second elements **157b** adjacent to the first assembly **110**.

[0117] According to the configuration, the ultrasound probe **100** according to an embodiment of the present disclosure may prevent a deterioration in image quality due to the space between the first acoustic module **150a** and the second acoustic module **150b**.

[0118] FIG. 7 shows the inside of an ultrasound probe according to another embodiment of the present disclosure. FIG. 8 shows a bottom of the ultrasound probe shown in FIG. 7.

[0119] Referring to FIGS. 7 and 8, an ultrasound probe **200** according to another embodiment of the present disclosure will be described. In the following description, the same components as those described in the above-described embodiment will be assigned the same reference numerals, and detailed descriptions thereof will be omitted.

[0120] The ultrasound probe **200** may include a first assembly **210**, a second assembly **220**, and a hinge unit **230**.

[0121] The first assembly **210** may include a first case **211**, and in the inside of the first case **211**, a first electronic component **215** and/or a first acoustic module **250a** may be installed. The first case **211** may include a first lens opening **216** for exposing a first lens **251a** to the outside.

[0122] The first acoustic module **250a** may include a first lens **251a**, a first foreign material blocking layer **252a**, a first matching layer **253a**, a first piezoelectric layer **254a**, a first sound-absorption layer **255a**, and a first sound-reflection layer **256a**.

[0123] The second assembly **220** may include a second case **221**. In the inside of the second case **221**, a second electric component **225** and/or a second acoustic module **250b** may be installed. The second case **221** may include a second lens opening **226** for exposing a second lens **251b** to the outside.

[0124] The second acoustic module **250b** may include the second lens **251b**, a second foreign material blocking layer **252b**, a second matching layer **253b**, a second piezoelectric layer **254b**, a second sound-absorption layer **255b**, and a second sound-reflection layer **256b**.

[0125] The hinge unit **230** may rotatably connect the second case **210** to the second case **220**. The hinge unit **330** may include a hinge body **231**.

[0126] The hinge body **231** may include a first fixing groove **234** into which a first fixing protrusion **212** is rotatably inserted. The hinge body **231** may include a second fixing groove **235** into which a second fixing protrusion **222** is rotatably inserted.

[0127] A connection member **239** according to an embodiment of the present disclosure may pass a rotation shaft of the hinge unit **230**. That is, a first portion **236** of the connection member **239** may pass a first rotation shaft opening **212a** of the first case **211** and a first rotation shaft opening **232** of the hinge body **231**. Also, a second portion **237** of the connection member **239** may pass a second rotation shaft opening **222a** of the second case **221** and a second rotation shaft opening **233** of the hinge body **231**. Accordingly, the connection member **239** may electrically connect the first electronic component **215** of the first assembly **210** to the second electronic component **225** of the second assembly **220**.

[0128] According to the configuration, the ultrasound probe **200** according to another embodiment of the present disclosure may prevent the connection member **239** from being exposed to the outside, when the second assembly **220** is at the second position at which it is folded on the first assembly **210**.

[0129] The ultrasound probe **200** according to the other embodiment of the present disclosure may include a plurality of first space reducing portions **213** and **223** in order to prevent a deterioration in image quality due to the space between the first acoustic module **250a** and the second acoustic module **250b**. The plurality of first space reducing portions **213** and **223** may include a 1a-th space reducing portion **213** and a 1b-th space reducing portion **223**.

[0130] The 1a-th space reducing portion **213** may expose at least one portion of the first acoustic module **250a** to the outside of the first case **211**, when it is disposed on the first case **211**. That is, the 1a-th space reducing portion **213** may be formed in the shape of an opening in a side of the first case **211** facing the second assembly **220**. The 1a-th space reducing portion **213** may extend less in a direction toward an object than the other side of the first case **211** that is opposite to the side of the first case **211** in which the 1a-th space reducing portion **213** is formed. Accordingly, the first lens **251a** may be exposed to the outside.

[0131] The 1b-th space reducing portion **223** may expose at least one portion of the second acoustic module **250b** to the outside of the second case **221**, when it is disposed on the second case **221**. That is, the 1b-th space reducing portion **223** may be formed in the shape of an opening at a side of the second case **221** facing the first assembly **210**. The 1b-th space reducing portion **223** may be formed in the shape of an opening in a side of the second case **221** facing the second assembly **210**. The 1b-th space reducing portion **213** may extend less in a direction toward an object than the other side of the second case **221** that is opposite to the side of the

second case 221 in which the 1b-th space reducing portion 223 is formed. Accordingly, the second lens 251b may be exposed to the outside.

[0132] More specifically, when the second assembly 220 is at the first position at which it is unfolded with respect to the first assembly 210, a portion of the first acoustic module 250a exposed to the outside of the first case 211 through the first space reducing portion 213 may contact a portion of the second acoustic module 250b exposed to the outside of the second case 221 through the 1b-th space reducing portion 223.

[0133] According to the configuration, the space between the first acoustic module 250a and the second acoustic module 250b may be reduced, thereby preventing a deterioration in image quality.

[0134] FIG. 9 shows an ultrasound probe according to another embodiment of the present disclosure when the ultrasound probe is unfolded. FIG. 10 shows the ultrasound probe shown in FIG. 9 when the ultrasound probe is folded. FIG. 11 shows the inside of the ultrasound probe shown in FIG. 9.

[0135] Referring to FIGS. 9 to 11, an ultrasound probe 300 according to another embodiment of the present disclosure will be described. In the following description, the same components as those described in the above-described embodiment will be assigned the same reference numerals, and detailed descriptions thereof will be omitted.

[0136] An ultrasound probe 300 may include a first assembly 310, a second assembly 320, and a hinge unit 330.

[0137] The first assembly 310 may include a first case 311, and in the inside of the first case 311, a first electronic component 315 and/or a first acoustic module 350a may be installed. The first case 311 may include a first lens opening 316 for exposing a first lens 351a to the outside. The first case 311 may include a 1a-th space reducing portion 313 having a thinner thickness than the other portion.

[0138] The first acoustic module 350a may include a first lens 351a, a first foreign material blocking layer 352a, a first matching layer 353a, a first piezoelectric layer 354a, a first sound-absorption layer 355a, and a first sound-reflection layer 356a.

[0139] The second assembly 320 may include a second case 321. In the inside of the second case 321, a second electric component 325 and/or a second acoustic module 350b may be installed. The second case 321 may include a second lens opening 326 for exposing a second lens 351b to the outside. The second case 321 may include a 1b-th space reducing portion 323 having a thinner thickness than the other portion.

[0140] The second acoustic module 350b may include a second lens 351b, a second foreign material blocking layer 352b, a second matching layer 353b, a second piezoelectric layer 354b, a second sound absorption layer 355b, and a second sound reflection layer 356b.

[0141] The hinge unit 330 may rotatably connect the second case 310 to the second case 320. The hinge unit 330 may include a hinge body 331.

[0142] The hinge body 331 may include a first fixing groove 334 into which a first fixing protrusion 312 is rotatably inserted. The hinge body 331 may include a second fixing groove 335 into which a second fixing protrusion 322 is rotatably inserted.

[0143] The ultrasound probe 300 according to the other embodiment of the present disclosure may include a con-

nection member accommodating portion 360 connecting the first assembly 310 to the second assembly 320, and made of a flexible material. A connection member 369 may be accommodated in the connection member accommodating portion 360. The connection member accommodating portion 360 may stretch although the second assembly 320 rotates with respect to the first assembly 310, and maintain the connection between the first assembly 310 and the second assembly 320. The connection member accommodating portion 360 may include an accommodating portion body 361 that is stretchable.

[0144] The accommodating portion body 361 may be coupled with the first opening 332 of the first case 311 at one end, and coupled with the second opening 333 of the second case 321 at the other end. The connection member 369 may pass through a first connection opening 362 and a second connection opening 363 formed in the accommodating portion body 361 to electrically connect the first electronic component 315 to the second electronic component 325.

[0145] According to the configuration, the ultrasound probe 300 according to the other embodiment of the present disclosure may prevent the connection member 369 from being exposed to the outside.

[0146] FIG. 12 shows a bottom of an ultrasound probe according to another embodiment of the present disclosure.

[0147] Referring to FIG. 12, an ultrasound probe 400 according to another embodiment of the present disclosure will be described. In the following description, the same components as those described in the above-described embodiment will be assigned the same reference numerals, and detailed descriptions thereof will be omitted.

[0148] The ultrasound probe 400 may include a first assembly 410, a second assembly 420, and a hinge unit 430.

[0149] The first assembly 410 may include a first case 411. In the inside of the first case 411, a first acoustic module 450a including a plurality of first elements 457a may be installed. The first acoustic module 450a may include a first lens 451a. The first case 411 may include a 1a-th space reducing portion 413.

[0150] The second assembly 420 may include a second case 421. In the inside of the second case 421, a second acoustic module 450b including a plurality of second elements 457b may be installed. The second acoustic module 450b may include a second lens 451b. The second case 421 may include a 1b-th space reducing portion 423.

[0151] The ultrasound probe 400 may inspect an object in the state in which the second assembly 420 is folded on the first assembly 410.

[0152] In order to inspect the object in the state in which the second assembly 420 is folded on the first assembly 410, the ultrasound probe 400 may include a plurality of second space reducing portions 417 and 427 at areas where which the second assembly 420 faces the first assembly 410 when the second assembly 420 is folded on the first assembly 410. The second space reducing portions 417 and 427 may include a 2a-th space reducing portion 417 and a 2b-th space reducing portion 427.

[0153] The second space reducing portions 417 and 427 may have a thinner thickness than the other portions of the first case 411 and/or the second case 421, like the first space reducing portions 113 and 123 shown in FIGS. 2 to 6. That is, the 2a-th space reducing portion 417 may have a thinner thickness than the other portion of the first case 411. The 2a-th space reducing portion 417 may have the same thick-

ness as the 1a-th space reducing portion **413**. The 2b-th space reducing portion **427** may have a thinner thickness than the other portion of the second case **421**. The 2b-th space reducing portion **427** may have the same thickness as the 1b-th space reducing portion **423**.

[0154] According to the configuration, the ultrasound probe **400** according to the other embodiment of the present disclosure may minimize the space between the first acoustic module **450a** and the second acoustic module **450b**, even when it is used in the state in which the second assembly **420** is folded on the first assembly **410**, thereby preventing a deterioration in image quality.

[0155] FIG. **13** shows a bottom of an ultrasound probe according to another embodiment of the present disclosure.

[0156] Referring to FIG. **13**, an ultrasound probe **500** according to another embodiment of the present disclosure will be described. In the following description, the same components as those described in the above-described embodiment will be assigned the same reference numerals, and detailed descriptions thereof will be omitted.

[0157] An ultrasound probe **500** may include a first assembly **510**, a second assembly **520**, and a hinge unit **530**.

[0158] The first assembly **510** may include a first case **511**. In the inside of the first case **511**, a first acoustic module **550a** including a plurality of first elements **557a** may be installed. The first acoustic module **550a** may include a first lens **551a**.

[0159] The first case **511** may include a 1a-th space reducing portion **511aa**. The 1a-th space reducing portion **511aa** may be formed in the shape of an opening in the first case **511**, as the embodiment shown in FIGS. **7** and **8**, to expose the first lens **551a** to the outside.

[0160] The second assembly **520** may include a second case **521**. In the inside of the second case **521**, a second acoustic module **550b** including a plurality of second elements **557b** may be installed. The second acoustic module **550b** may include a second lens **551b**.

[0161] The second case **521** may include a 1b-th space reducing portion **511ba**. The 1b-th space reducing portion **511ba** may be formed in the shape of an opening in the second case **521**, like the embodiment shown in FIGS. **7** and **8**, to expose the second lens **551b** to the outside.

[0162] The ultrasound probe **500** may inspect an object in the state in which the second assembly **520** is folded on the first assembly **510**.

[0163] In order to inspect an object in the state in which the second assembly **520** is folded on the first assembly **510**, the ultrasound probe **500** may include a plurality of second space reducing portions **551ab** and **551bb** facing each other when the second assembly **510** is folded on the first assembly **510**. The second space reducing portions **551ab** and **551bb** may include a 2a-th space reducing portion **551ab** and a 2b-th space reducing portion **551bb**.

[0164] The 2a-th space reducing portion **551ab** may be formed in the shape of an opening in the first case **511**, like the embodiment shown in FIGS. **7** and **8**, to expose a portion of the first lens **551a** toward the second assembly **520**.

[0165] The 2b-th space reducing portion **551bb** may be formed in the shape of an opening in the second case **521**, like the embodiment shown in FIGS. **7** and **8**, to expose a portion of the second lens **551b** toward the first assembly **510**.

[0166] The portion of the first lens **551a** exposed to the outside through the 2a-th space reducing portion **551ab** may

contact the portion of the second lens **551b** exposed to the outside through the 2b-th space reducing portion **551bb**.

[0167] According to the configuration, the ultrasound probe **500** according to the other embodiment of the present disclosure may minimize the space between the first acoustic module **550** and the second acoustic module **550b** even when the second assembly **520** is folded on the first assembly **510**, thereby preventing a deterioration in image quality.

[0168] According to a technical concept of the present disclosure, since the second assembly is rotatably connected to the first assembly, the ultrasound probe may be advantageous in view of ease of use, such as portability and storage.

[0169] According to another technical concept of the present disclosure, the ultrasound probe can minimize the distance between the first acoustic module of the first assembly and the second acoustic module of the second assembly, thereby improving image quality.

[0170] Although a few embodiments of the present disclosure have been shown and described, it would be appreciated by those skilled in the art that changes may be made in these embodiments without departing from the principles and spirit of the disclosure, the scope of which is defined in the claims and their equivalents.

What is claimed is:

1. An ultrasound probe comprising:

- a first assembly having a first case;
- a second assembly coupled with the first assembly, having a second case, and configured to be rotatable between a first position of being unfolded with respect to the first assembly and a second position of being folded on the first assembly;
- a first acoustic module disposed in the inside of the first case;
- a second acoustic module disposed in the inside of the second case; and
- a first space reducing portion disposed in at least one of a portion of the first case toward the second assembly and a portion of the second case toward the first assembly, and configured to reduce a space between the first acoustic module and the second acoustic module when the second assembly is at the first position.

2. The ultrasound probe according to claim 1, wherein when the first space reducing portion is disposed in the first case, the first space reducing portion has a thinner thickness than the other portion of the first case, and

when the first space reducing portion is disposed in the second case, the first space reducing portion has a thinner thickness than the other portion of the second case.

3. The ultrasound probe according to claim 1, wherein when the first space reducing portion is disposed in the first case, the first space reducing portion exposes at least one portion of the first acoustic module to the outside of the first case, and

when the first space reducing portion is disposed in the second case, the first space reducing portion exposes at least one portion of the second acoustic module to the outside of the second case.

4. The ultrasound probe according to claim 3, wherein when the second assembly is at the first position, a portion of the first acoustic module exposed to the outside of the first case through the first space reducing portion contacts a portion of the second acoustic module exposed to the outside of the second case through the first space reducing portion.

5. The ultrasound probe according to claim 1, further comprising a second space reducing portion disposed in at least one of a portion of the first case toward the second assembly and a portion of the second case toward the first assembly, and configured to reduce a space between the first acoustic module and the second acoustic module when the second assembly is at the second position.

6. The ultrasound probe according to claim 5, wherein when the second space reducing portion is disposed in the first case, the second space reducing portion has a thinner thickness than the other portion of the first case, and

when the second space reducing portion is disposed in the second case, the second space reducing portion have a thinner thickness than the other portion of the second case.

7. The ultrasound probe according to claim 5, wherein the second space reducing portion exposes at least one of the first acoustic module and the second acoustic module to the outside.

8. The ultrasound probe according to claim 1, further comprising:

a hinge unit rotatably connecting the first assembly to the second assembly; and

a connection member electrically connecting the first assembly to the second assembly, and passing the hinge unit.

9. The ultrasound probe according to claim 8, wherein the connection member passes a rotation shaft of the hinge unit.

10. The ultrasound probe according to claim 8, wherein the connection member comprises at least one of a Flexible Printed Circuit Board (FPCB) and a cable.

11. The ultrasound probe according to claim 1, further comprising:

a hinge unit rotatably connecting the first assembly to the second assembly;

a connection member accommodating portion connecting the first assembly to the second assembly, and made of a flexible material; and

a connection member electrically connecting the first assembly to the second assembly, and disposed in the inside of the connection member accommodating portion.

12. The ultrasound probe according to claim 1, further comprising a controller configured to produce an image based on information received from at least one of the first acoustic module and the second acoustic module,

wherein the first acoustic module comprises a plurality of first elements,

the second acoustic module comprises a plurality of second elements,

when the second assembly is at the first position, the controller produces an image of a space between the first assembly and the second assembly, based on a mean value of at least one first element adjacent to the second assembly among the plurality of first elements and at least one second element adjacent to the first assembly among the plurality of second elements.

13. An ultrasound probe comprising:

a first assembly having a first case;

a second assembly coupled with the first assembly, having a second case, and configured to be rotatable between a first position of being unfolded with respect to the first assembly and a second position of being folded on the first assembly;

a first acoustic module disposed in the inside of the first case;

a second acoustic module disposed in the inside of the second case; and

a first space reducing portion disposed in at least one of the first case and the second case, and configured to reduce a space between the first acoustic module and the second acoustic module when the second assembly is at the first position,

wherein when the first space reducing portion is disposed in the first case, the first space reducing portion has a thinner thickness than the other portion of the first case, and when the first space reducing portion is disposed in the second case, the first space reducing portion has a thinner thickness than the other portion of the second case.

14. The ultrasound probe according to claim 13, further comprising a second space reducing portion disposed in at least one of the first case and the second case, and configured to reduce a space between the first acoustic module and the second acoustic module when the second assembly is at the second position.

15. The ultrasound probe according to claim 14, wherein when the second space reducing portion is disposed in the first case, the second space reducing portion has a thinner thickness than the other portion of the first case, and

when the second space reducing portion is disposed in the second case, the second space reducing portion has a thinner thickness than the other portion of the second case.

16. The ultrasound probe according to claim 14, wherein the second space reducing portion exposes at least one of the first acoustic module and the second acoustic module to the outside.

17. The ultrasound probe according to claim 13, further comprising a controller configured to produce an image based on information received from at least one of the first acoustic module and the second acoustic module,

wherein the first acoustic module comprises a plurality of first elements,

the second acoustic module comprises a plurality of second elements, and

when the second assembly is at the first position, the controller produces an image of a space between the first assembly and the second assembly, based on a mean value of at least one first element adjacent to the second assembly among the plurality of first elements and at least one second element adjacent to the first assembly among the plurality of second elements.

18. An ultrasound probe comprising:

a first assembly having a first case;

a second assembly coupled with the first assembly, having a second case, and configured to be rotatable between a first position of being unfolded with respect to the first assembly and a second position of being folded on the first assembly;

a first acoustic module disposed in the inside of the first case;

a second acoustic module disposed in the inside of the second case; and

a first space reducing portion disposed in at least one of the first case and the second case, and configured to

reduce a space between the first acoustic module and the second acoustic module when the second assembly is at the first position, wherein when the first space reducing portion is disposed in the first case, the first space reducing portion exposes at least one portion of the first acoustic module to the outside of the first case, and when the first space reducing portion is disposed in the second case, the first space reducing portion exposes at least one portion of the second acoustic module to the outside of the second case.

19. The ultrasound probe according to claim **18**, wherein when the second assembly is at the first position, a portion of the first acoustic module exposed to the outside of the first case through the first space reducing portion contacts a portion of the second acoustic module exposed to the outside of the second case through the first space reducing portion.

20. The ultrasound probe according to claim **18**, further comprising a second space reducing portion disposed in at least one of a portion of the first case toward the second assembly and a portion of the second case toward the first assembly, and configured to reduce a space between the first acoustic module and the second acoustic module when the second assembly is at the second position.

* * * * *

专利名称(译)	超声探头		
公开(公告)号	US20190231311A1	公开(公告)日	2019-08-01
申请号	US15/948683	申请日	2018-04-09
[标]申请(专利权)人(译)	三星麦迪森株式会社		
申请(专利权)人(译)	三星MEDISON CO., LTD.		
当前申请(专利权)人(译)	三星MEDISON CO., LTD.		
[标]发明人	KWON SOON HO		
发明人	KWON, SOON HO		
IPC分类号	A61B8/00 A61B8/08 B06B1/02 B06B1/06 G01N29/24		
CPC分类号	A61B8/4455 A61B8/5207 B06B1/0207 B06B1/0622 B06B1/067 G01N29/245 G01N29/2406 G01N29/2412 B06B2201/76		
优先权	1020180011929 2018-01-31 KR		
外部链接	Espacenet USPTO		

摘要(译)

本文公开了一种超声探头。超声探头包括第一组件和第二组件，第一组件具有第一壳体，第二组件与第一组件连接，第二组件具有第二壳体，并且构造成可在相对于第一组件展开的第一位置和第二组件之间旋转。折叠在第一组件上，第一声学模块设置在第一壳体的内部，第二声学模块设置在第二壳体的内部，第一空间减小部分设置在第一壳体的至少一部分中朝向第二组件并且第二壳体的一部分朝向第一组件，并且被配置为当第二组件处于第一位置时减小第一声学模块和第二声学模块之间的空间。

