



US 20160345935A1

(19) **United States**(12) **Patent Application Publication**
WOO et al.(10) **Pub. No.: US 2016/0345935 A1**(43) **Pub. Date: Dec. 1, 2016**(54) **ULTRASONIC IMAGING DEVICE AND
MOVING UNIT APPLIED TO THE SAME**(52) **U.S. Cl.**
CPC *A61B 8/462* (2013.01); *A61B 8/4444*
(2013.01); *A61B 8/467* (2013.01); *A61B*
8/4405 (2013.01)(71) Applicant: **SAMSUNG MEDISON CO., LTD.**,
Hongcheon-gun (KR)(72) Inventors: **Kyeong Gu WOO**, Suwon-si (KR);
Yeon-Ho KIM, Seongnam-si (KR); **Jae**
Moon JO, Seongnam-si (KR); **Gil-Ju**
JIN, Seoul (KR)(21) Appl. No.: **15/050,174**(22) Filed: **Feb. 22, 2016**(30) **Foreign Application Priority Data**

May 29, 2015 (KR) 10-2015-0075982

Publication Classification(51) **Int. Cl.**
A61B 8/00 (2006.01)(57) **ABSTRACT**

Disclosed herein is an ultrasonic imaging apparatus including: a main body; a probe; a display unit connected to the main body in such a manner to be movable with respect to the main body; and a moving unit configured to connect the display unit to the main body, and to enable the display unit to move with respect to the main body, wherein the moving unit includes: a first coupling member rotatably attached on a part of the main body; a rotating arm coupled with the first coupling member and configured to rotate with respect to the first coupling member; and a moving member having one end coupled with the display unit, and installed in the rotating arm to enable the display unit to move in a longitudinal direction of the rotating arm.

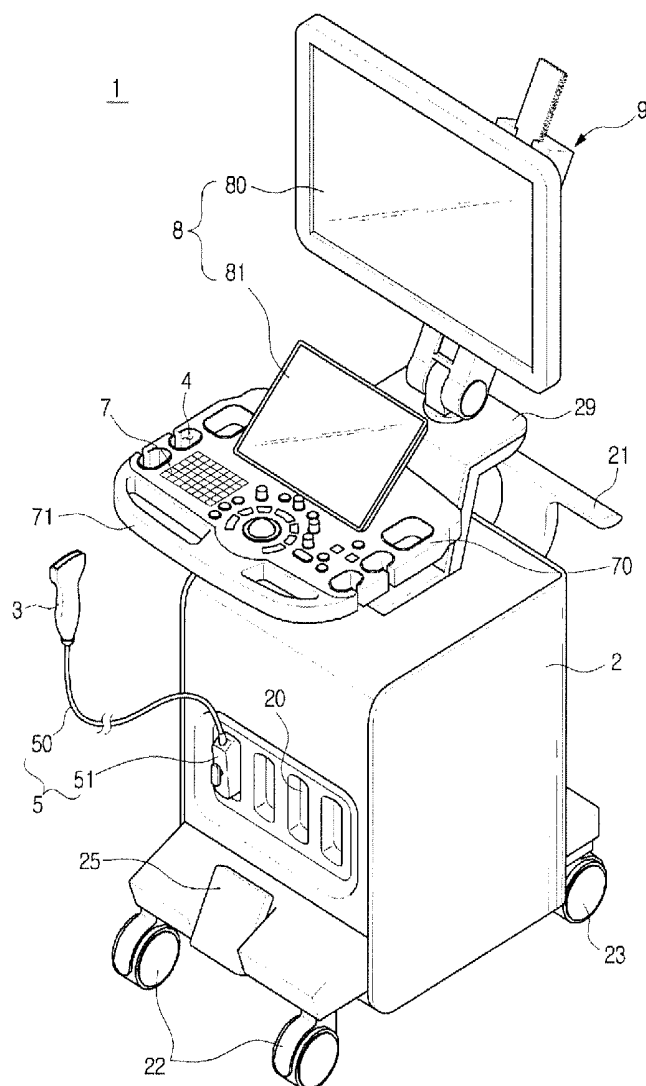


FIG. 1

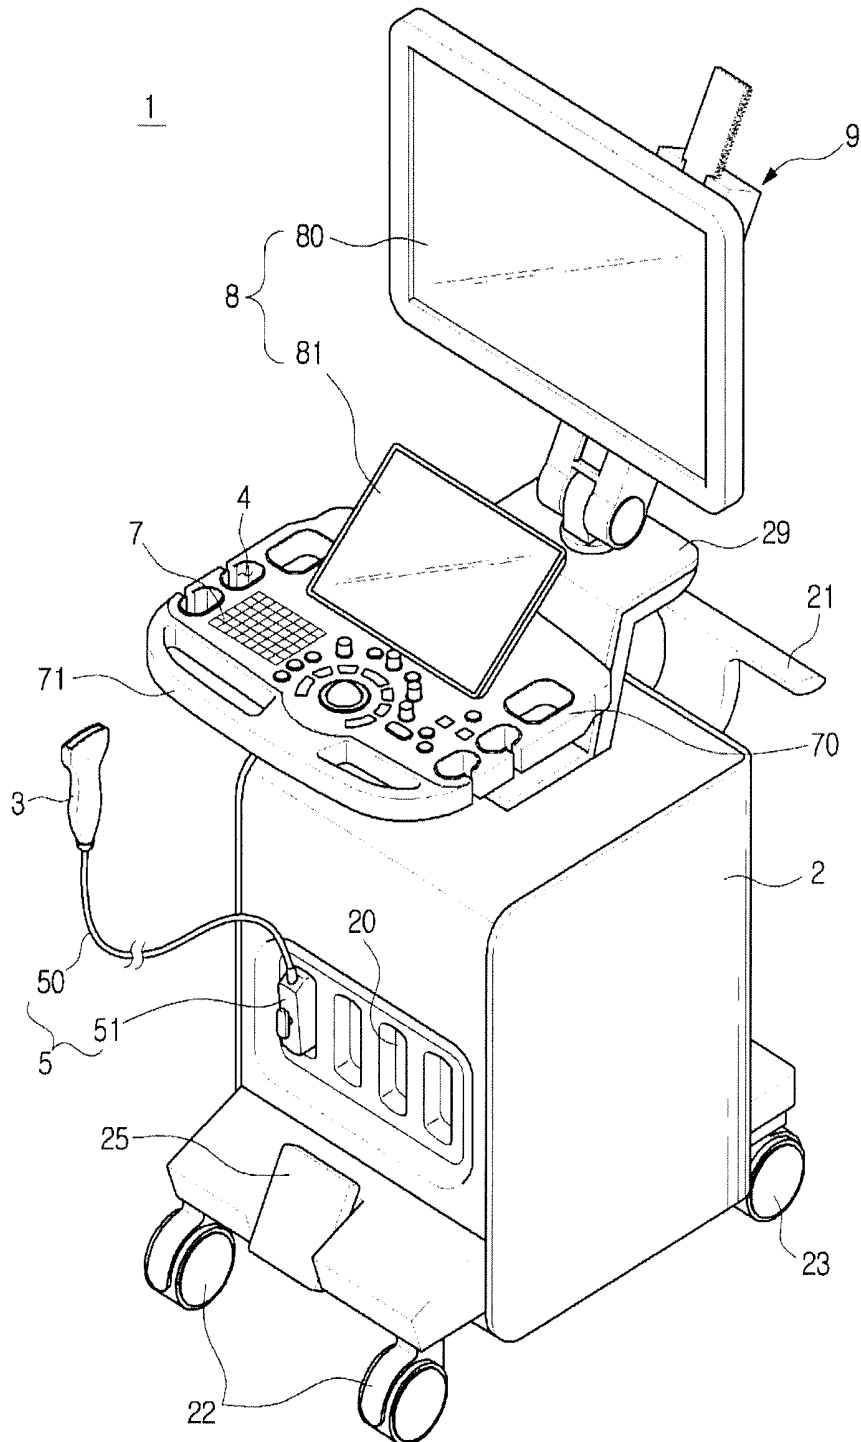


FIG. 2

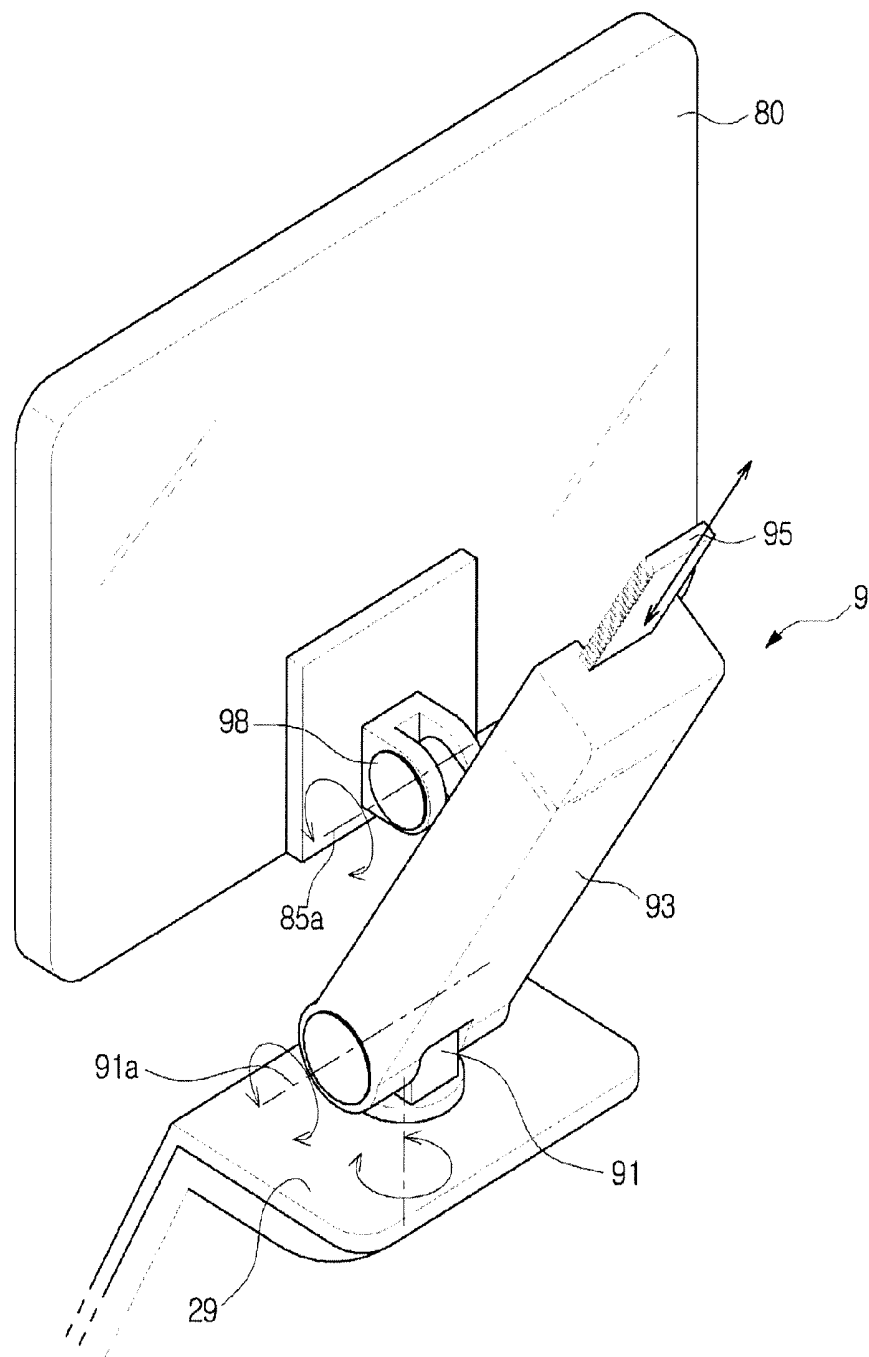


FIG. 3

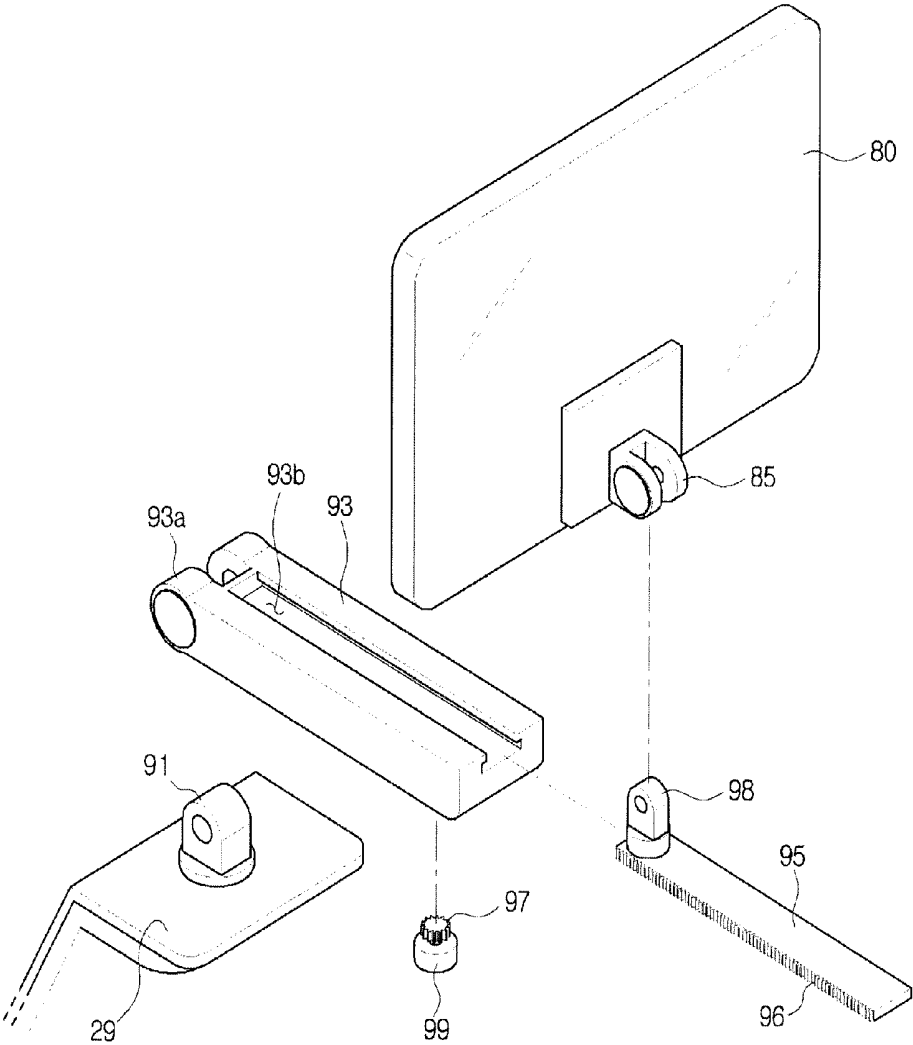


FIG. 4

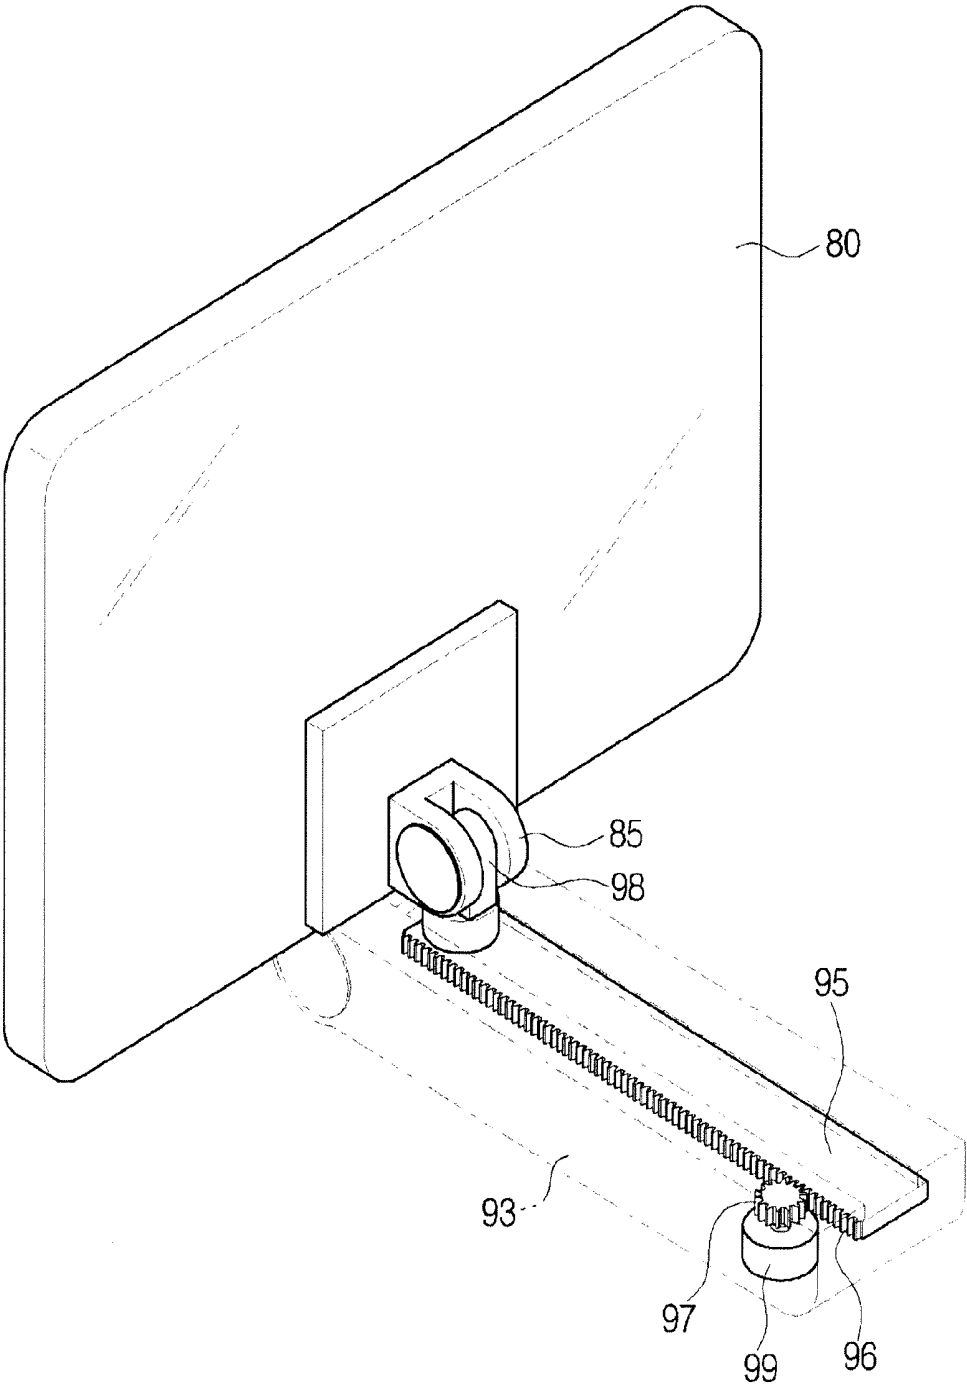


FIG. 5

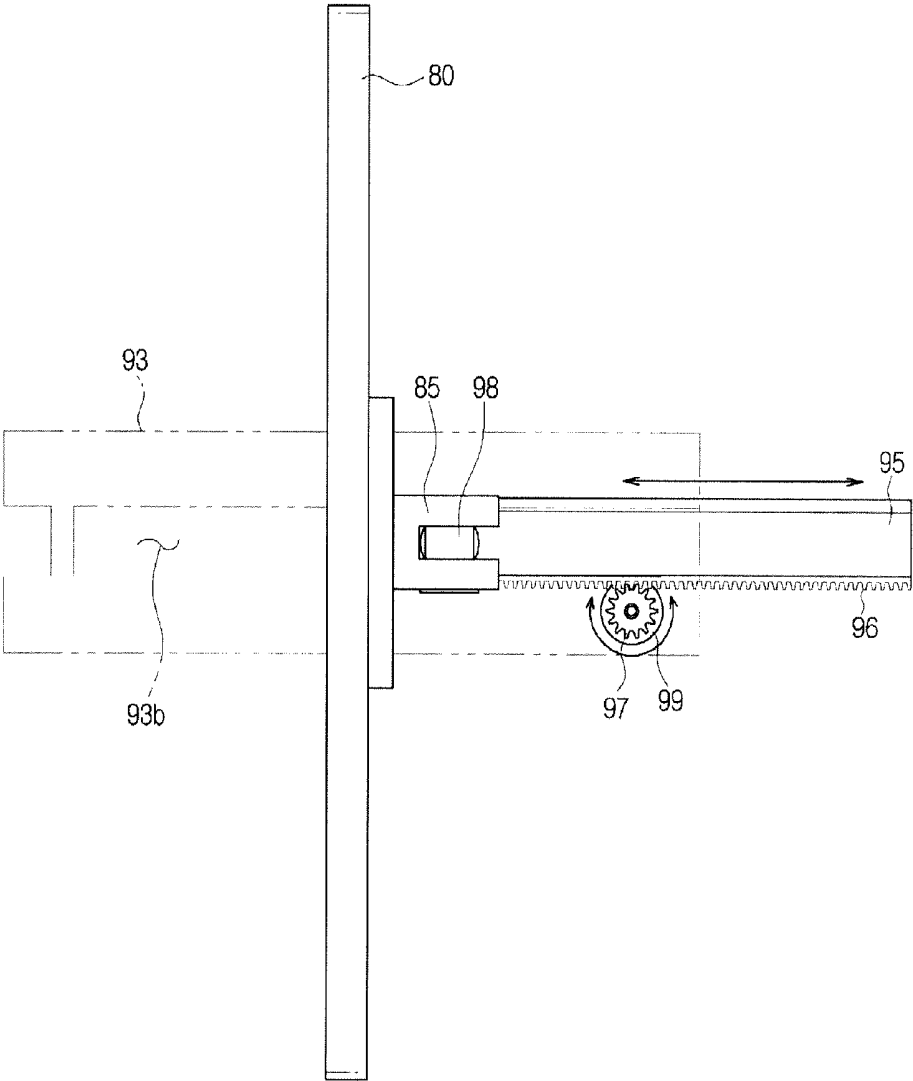


FIG. 6

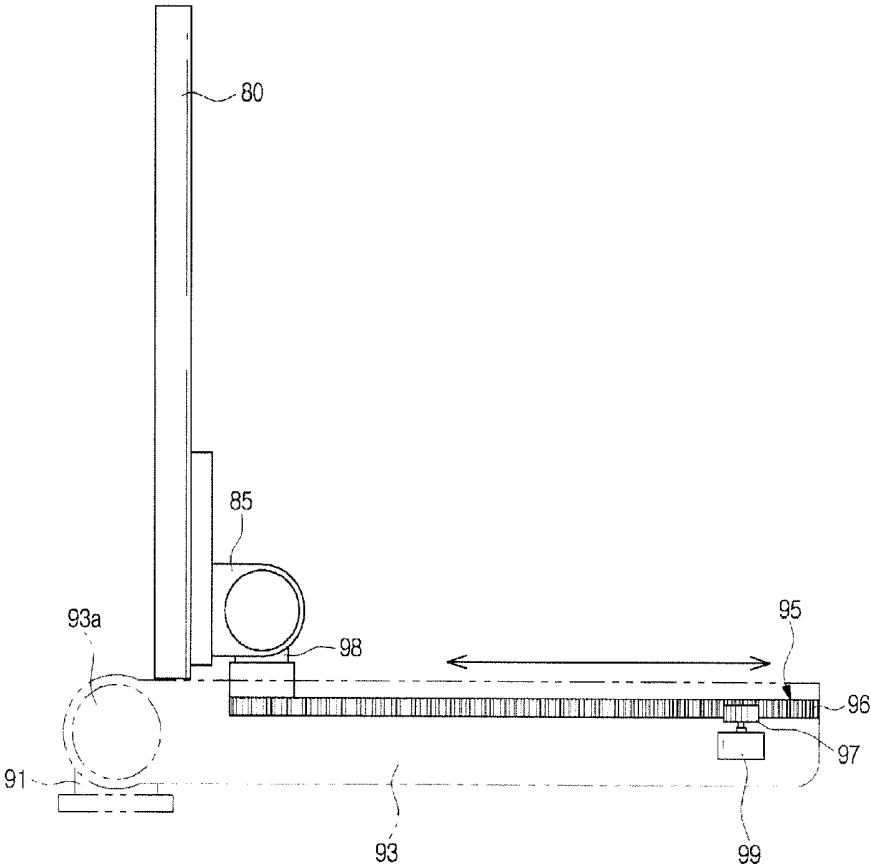


FIG. 7

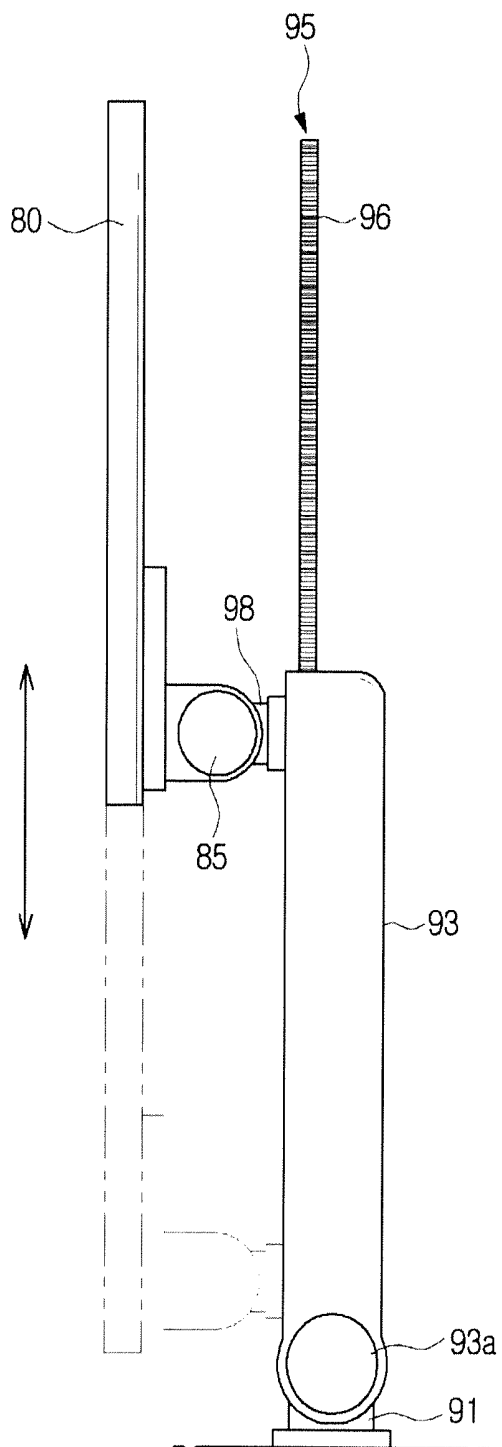


FIG. 8

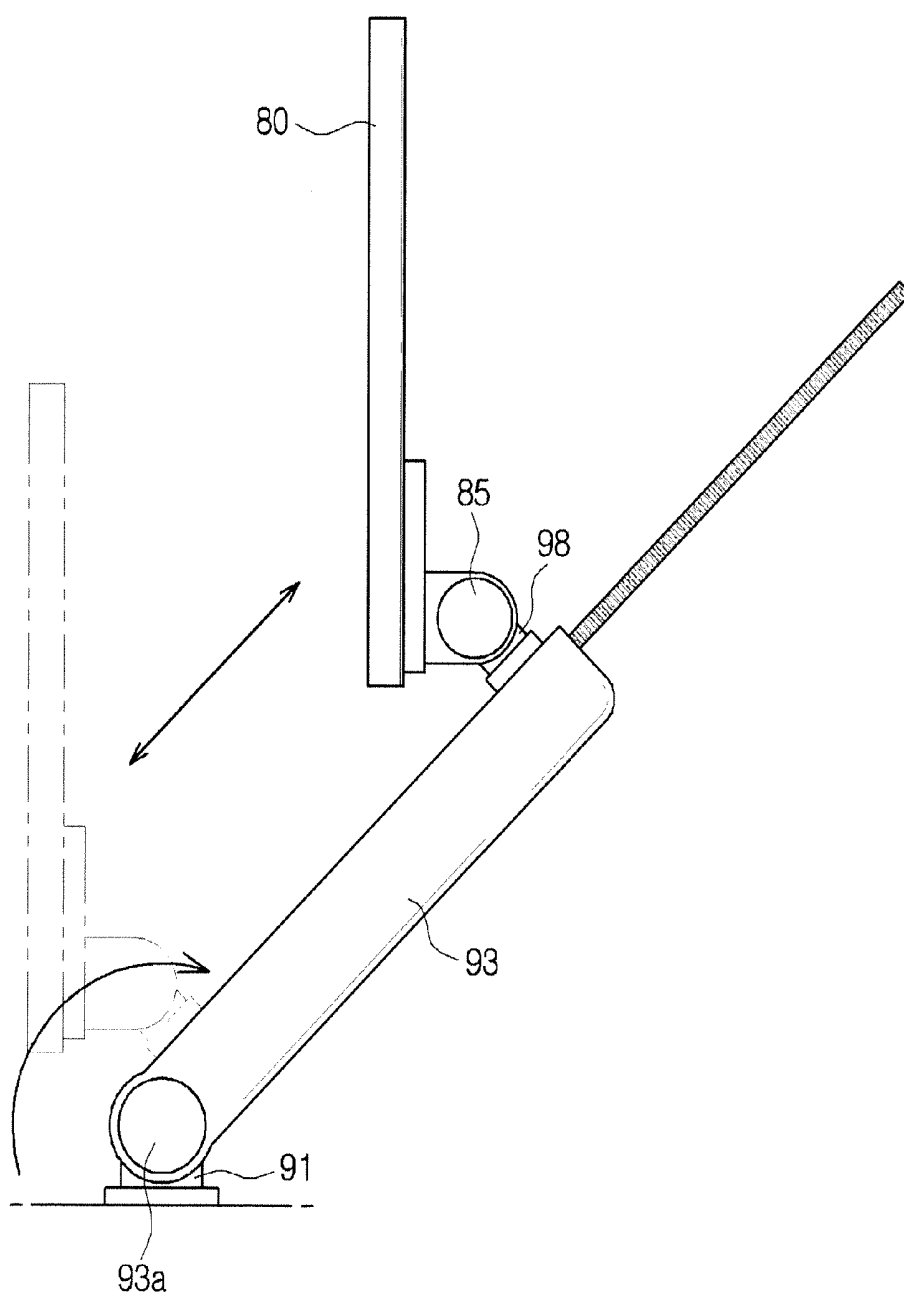


FIG. 9

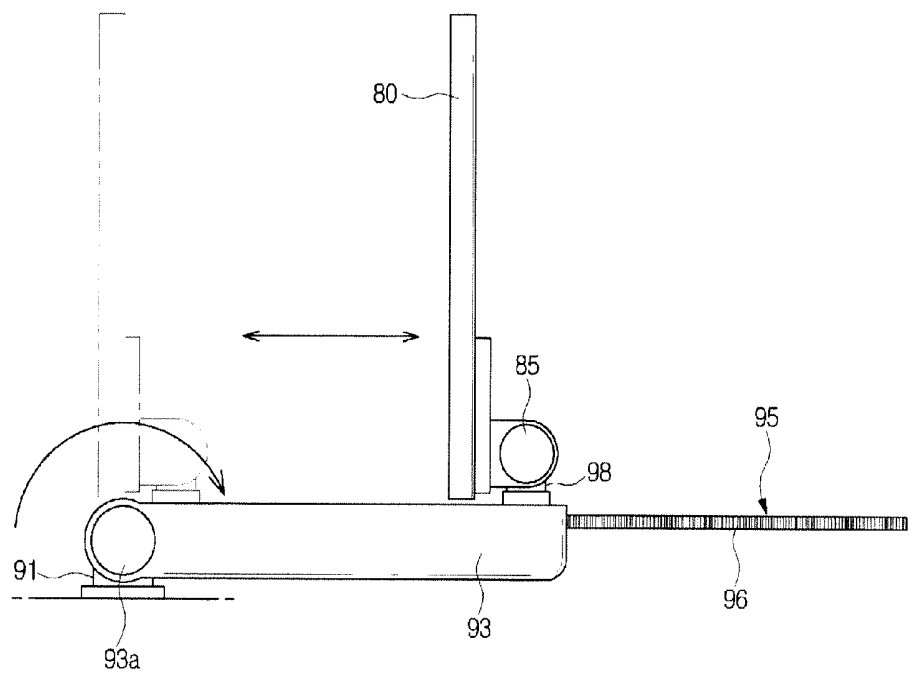


FIG. 10

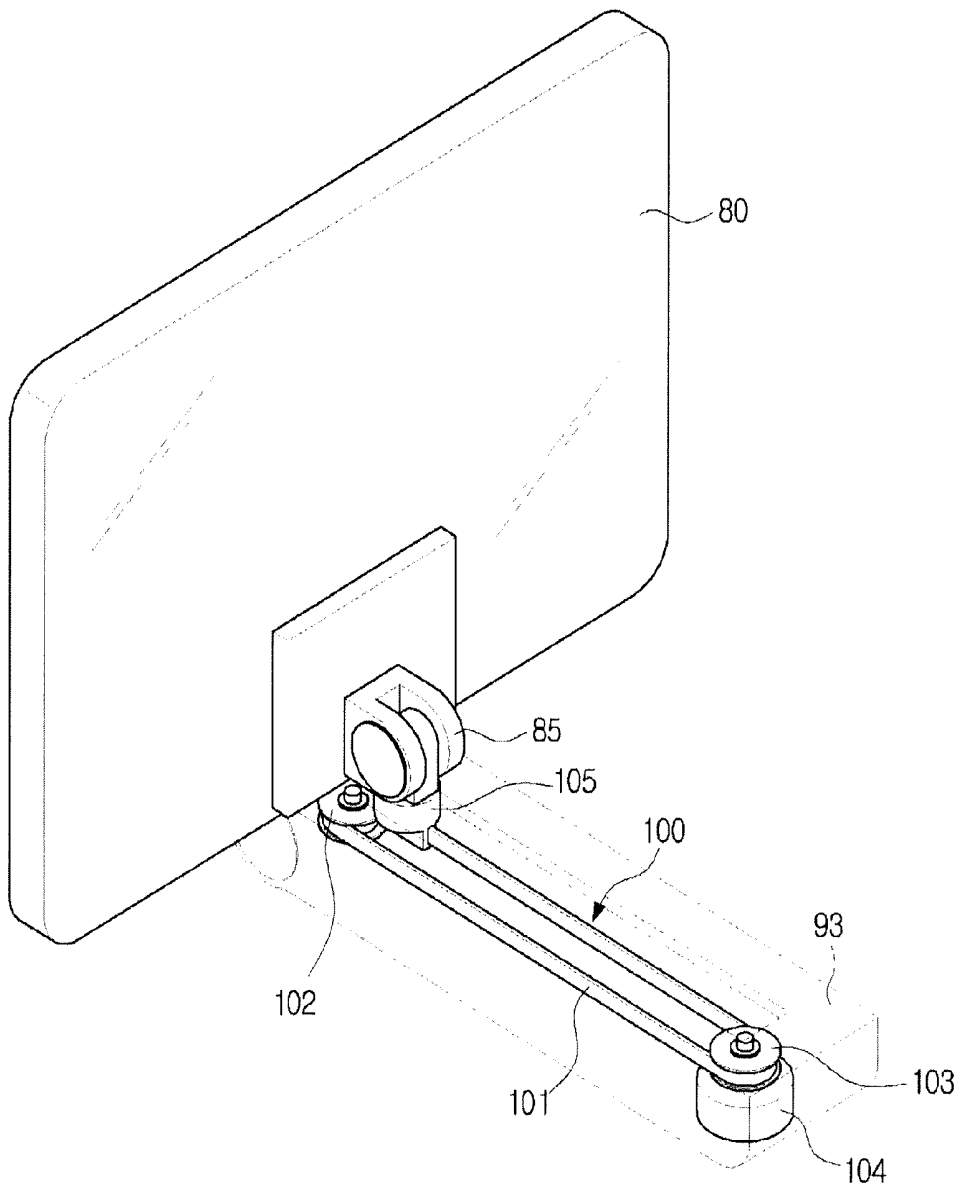


FIG. 11

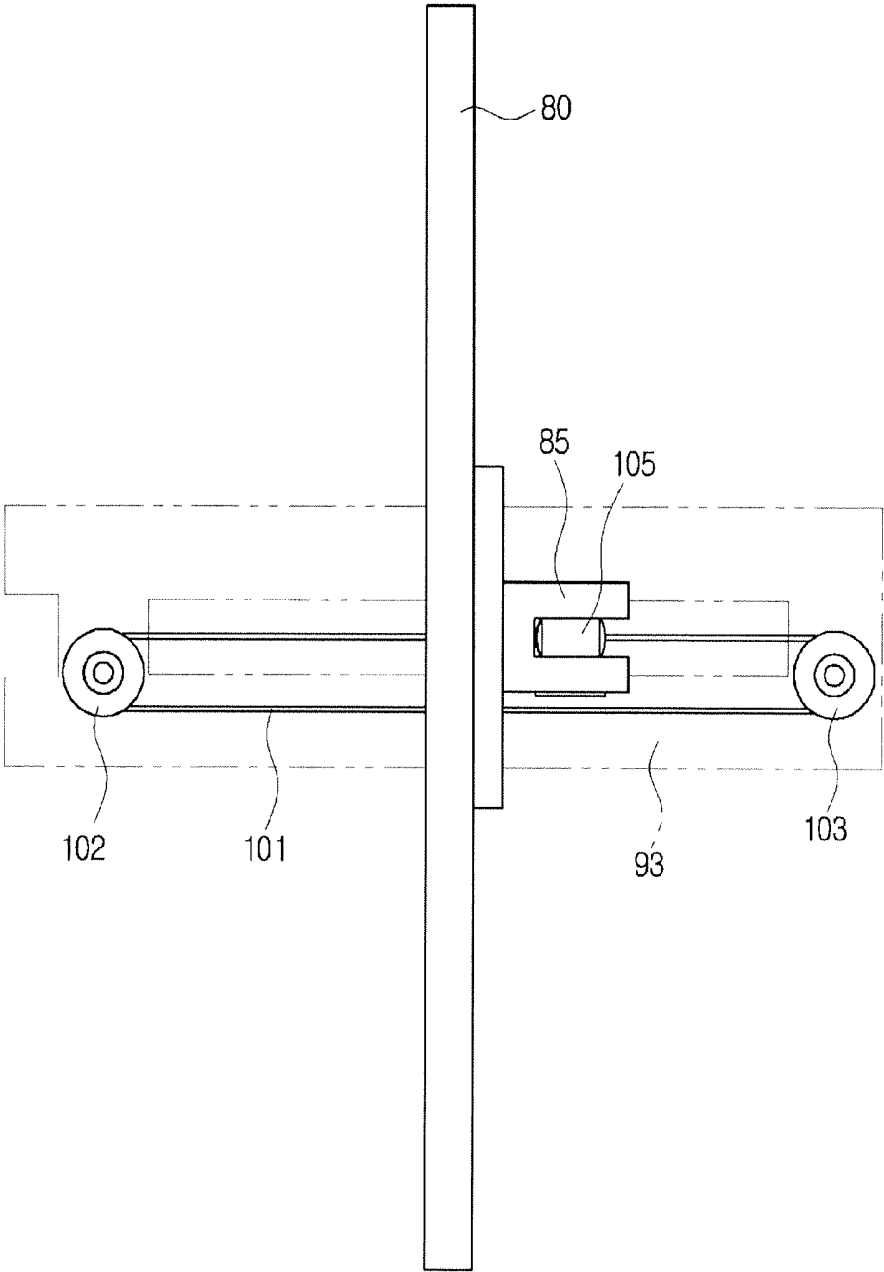


FIG. 12

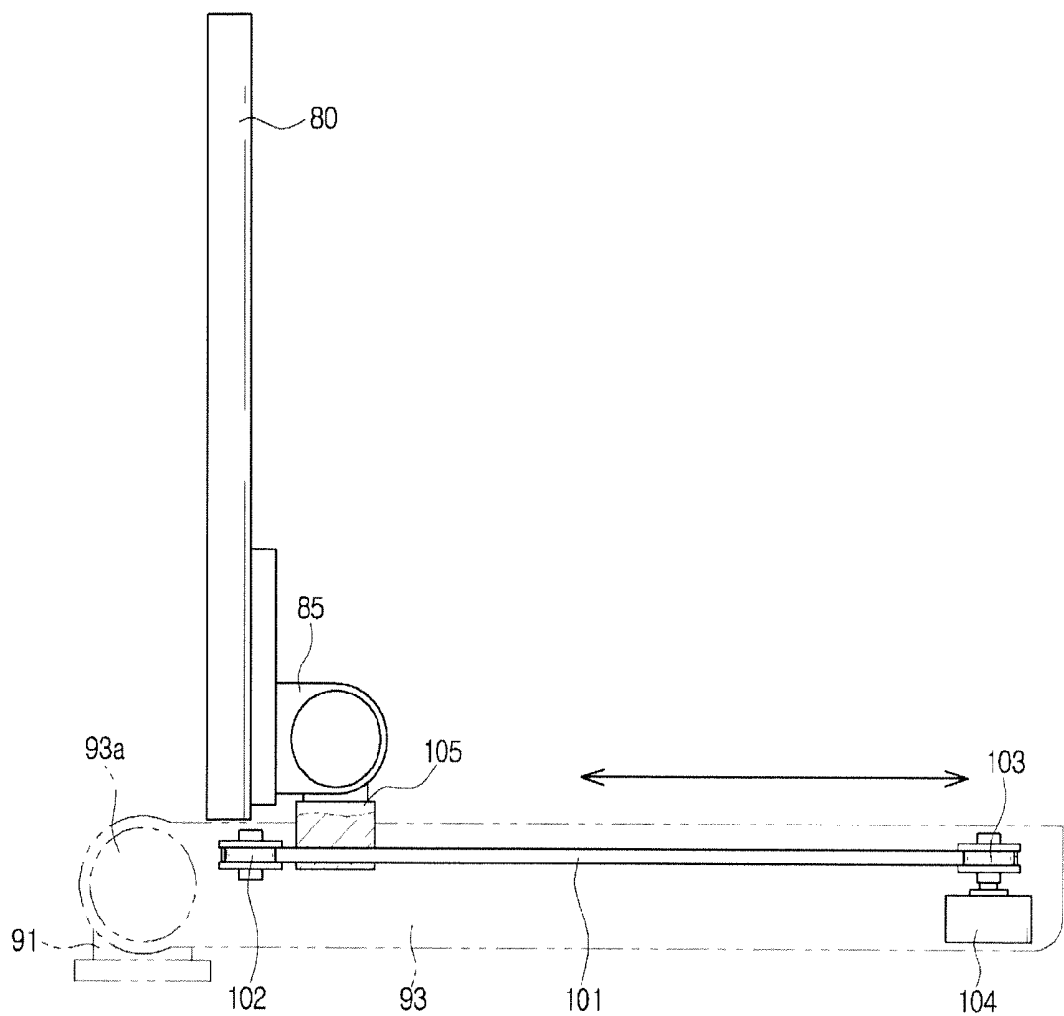


FIG. 13

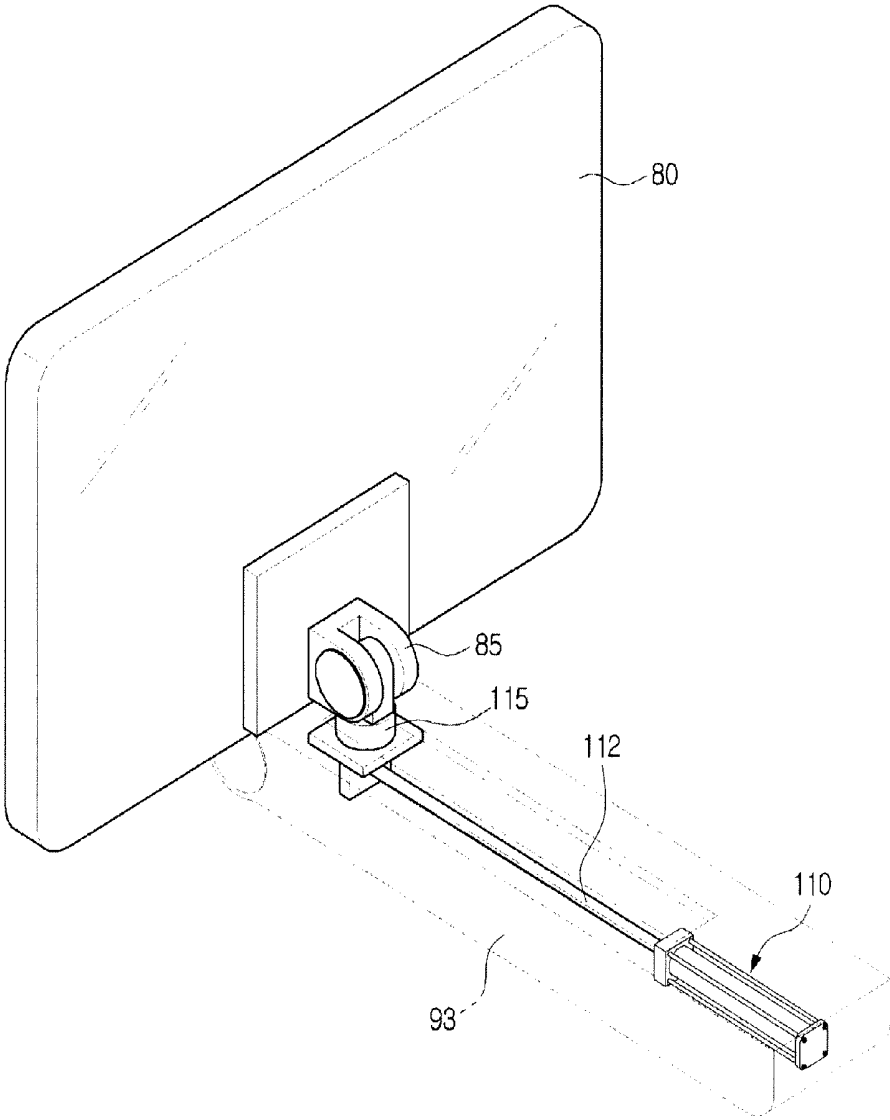


FIG. 14


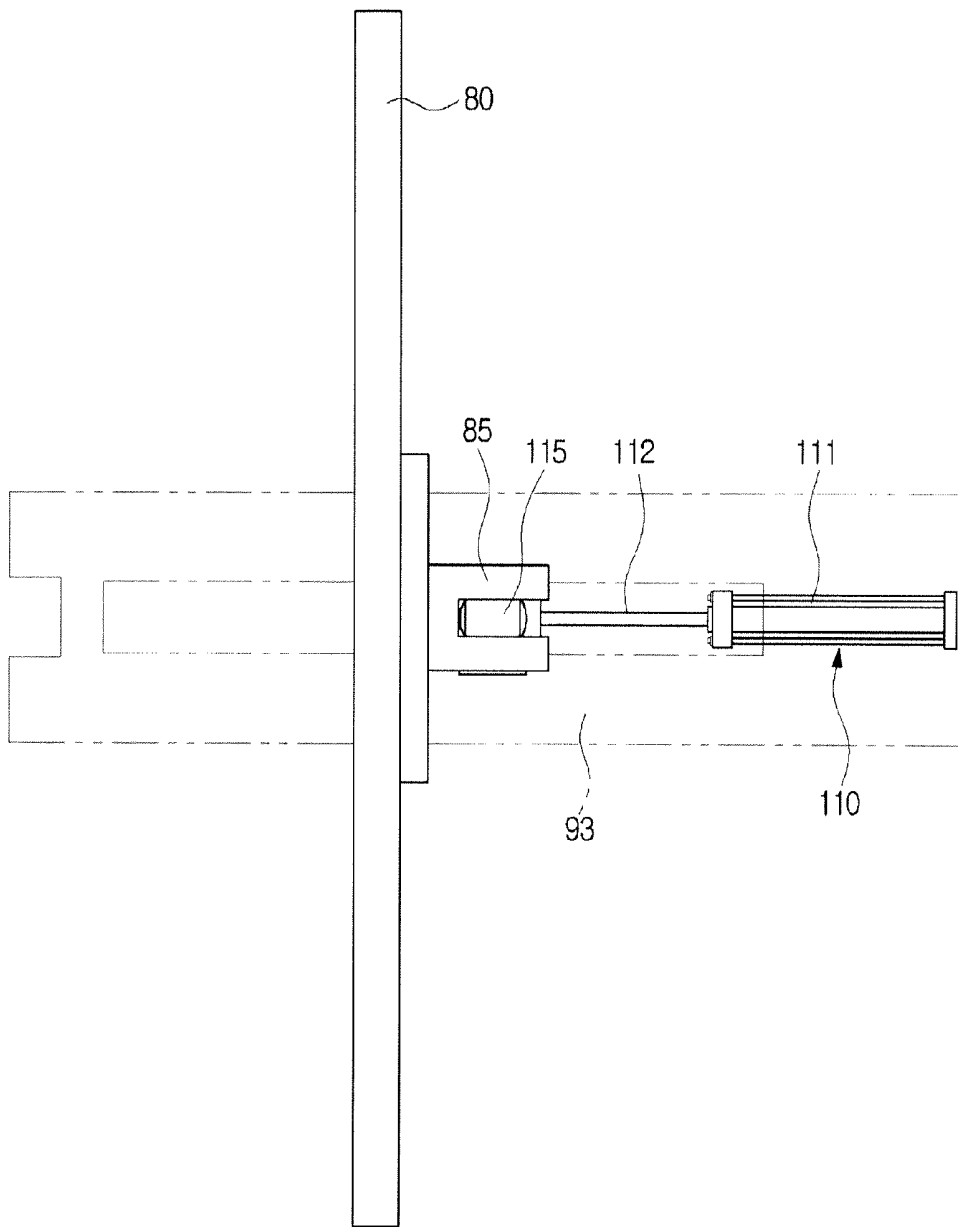


FIG. 15

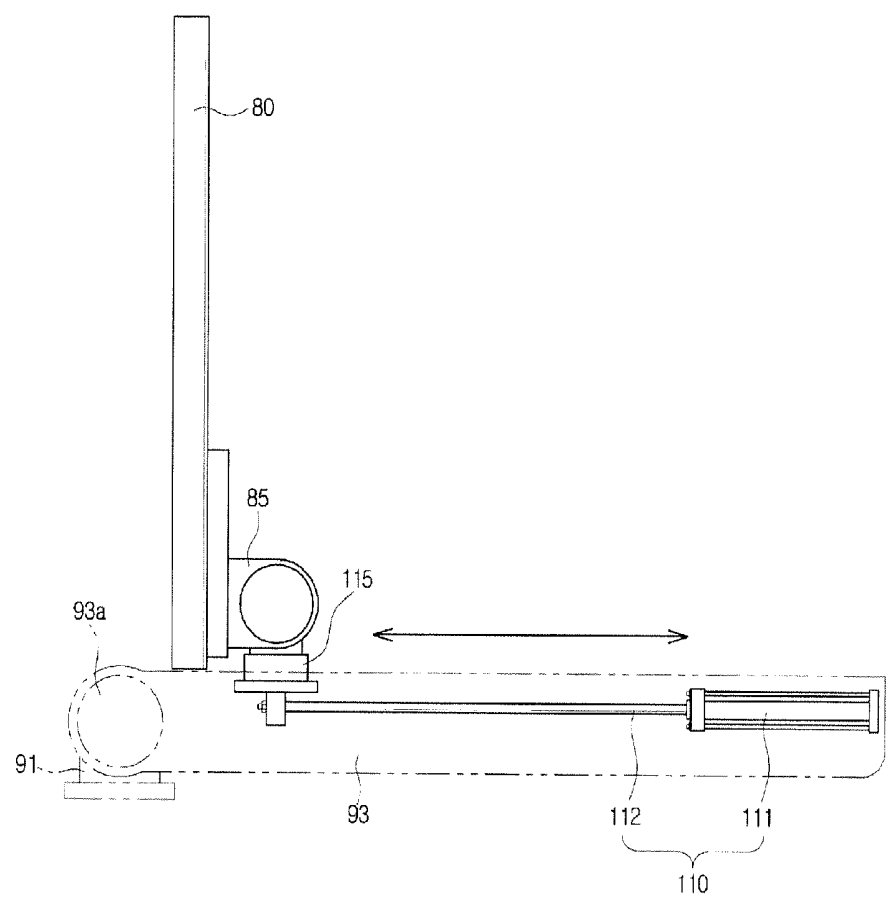

ULTRASONIC IMAGING DEVICE AND MOVING UNIT APPLIED TO THE SAME

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of Korean Patent Application No. 10-2015-0075982, filed on May 29, 2015 in the Korean Intellectual Property Office, the disclosure of which is incorporated herein by reference.

BACKGROUND

[0002] 1. Field

[0003] Embodiments of the present disclosure relate to an ultrasonic imaging apparatus with an improved structure for easily moving a display unit.

[0004] 2. Description of the Related Art

[0005] An ultrasonic imaging apparatus emits ultrasonic signals toward a target part of a subject from the skin surface of the subject, and receives ultrasonic signals (that is, ultrasonic echo signals) reflected from the target part of the subject so as to non-invasively acquire slice images about soft tissue or images about blood vessels based on information about the ultrasonic echo signals.

[0006] The ultrasonic imaging apparatus has advantages that it is a compact, low-priced apparatus and it can display images in real time, compared to other imaging apparatuses, such as an X-ray diagnostic apparatus, an X-ray Computerized Tomography (CT) scanner, a Magnetic Resonance Image (MRI) apparatus, and a nuclear medical diagnostic apparatus. Also, the ultrasonic imaging apparatus has high safety since there is no risk for patients to be exposed to radiation. For the advantages, the ultrasonic diagnostic apparatus is widely used to diagnose the heart, abdomen, urinary organs, uterus, etc.

SUMMARY

[0007] Therefore, it is an aspect of the present disclosure to provide an ultrasonic imaging apparatus with an improved structure for easily moving a display unit spaced from a main body.

[0008] Additional aspects of the disclosure will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the disclosure.

[0009] In accordance with one aspect of the present disclosure, there is provided an ultrasonic imaging apparatus including: a main body; a probe configured to irradiate ultrasonic waves and to receive ultrasonic waves, and connected to the main body to transmit an ultrasonic signal corresponding to the received ultrasonic waves to the main body; a display unit connected to the main body in such a manner to be movable with respect to the main body; and a moving unit configured to connect the display unit to the main body, and to enable the display unit to move with respect to the main body, wherein the moving unit includes: a first coupling member rotatably attached on a part of the main body; a rotating arm coupled with the first coupling member and configured to rotate with respect to the first coupling member; and a moving member having one end coupled with the display unit, and installed in the rotating arm to enable the display unit to move in a longitudinal direction of the rotating arm.

[0010] The moving unit may further include a rack gear and a pinion gear, and one of the rack gear and the pinion gear may move back and forth in the longitudinal direction of the rotating arm.

[0011] The first coupling unit may be configured to be rotatable on a first plane, and the rotating arm may be configured to rotate together with the first coupling member,

[0012] The rotating arm may be configured to be rotatable on a second plane that is vertical to the first plane.

[0013] The display unit may be rotatably coupled with a second coupling member disposed at one end of the moving member.

[0014] The moving unit may further include a belt member configured to move in both directions along the longitudinal direction of the rotating arm, and a second coupling member coupled with a part of the belt member and configured to move together with the belt member, and the second coupling member may be coupled with the display unit.

[0015] The display unit may be rotatably coupled with the second coupling member.

[0016] The moving unit may further include a hydraulic cylinder configured to move back and forth along the longitudinal direction of the rotating arm, and a second coupling member coupled with one end of the hydraulic cylinder and configured to move together with the hydraulic cylinder, and the second coupling member may be coupled with the display unit.

[0017] The display unit may be rotatably coupled with the second coupling member.

[0018] In accordance with another aspect of the present disclosure, there is provided a moving unit which supports a display unit spaced from a main body and moves the display unit, the moving unit including: a first coupling member attached on a part of the main body, and configured to rotate with respect to the main body; a rotating arm having one end coupled with the first coupling member, and configured to rotate with respect to the first coupling member; and a moving member having one end coupled with the display unit, and installed in the rotating arm to enable the display unit to slide along the rotating arm.

[0019] The moving unit may further include a rack gear and a pinion gear, and one of the rack gear and the pinion gear may move back and forth along a longitudinal direction of the rotating arm.

[0020] The moving unit may further include a second coupling member coupled with the display unit, at one of the rack gear and the pinion gear, which moves along the longitudinal direction of the rotating arm.

[0021] The moving unit may include a hydraulic cylinder configured to move back and forth along a longitudinal direction of the rotating arm, and a second coupling member coupled with one end of the hydraulic cylinder and configured to move together with the hydraulic cylinder, and the second coupling member may be coupled with the display unit.

[0022] The moving unit may include a belt member configured to move in both directions along a longitudinal direction of the rotating arm, and a second coupling member coupled with a part of the belt member and configured to move together with the belt member, and the second coupling member may be coupled with the display unit.

[0023] The display unit may be configured to rotate with respect to the second coupling member.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] These and/or other aspects of the disclosure will become apparent and more readily appreciated from the following description of the embodiments, taken in conjunction with the accompanying drawings of which:

[0025] FIG. 1 is a perspective view showing an ultrasonic imaging apparatus according to an embodiment of the present disclosure;

[0026] FIG. 2 shows a moving member installed in a rotating arm, according to an embodiment of the present disclosure, and the back part of a display unit coupled with a moving unit including the moving member;

[0027] FIG. 3 is an exploded perspective view showing a configuration of the moving unit of FIG. 2;

[0028] FIG. 4 is a back view of the moving unit including the moving member of FIG. 2 coupled with the rotating arm;

[0029] FIG. 5 is a top view of the moving unit of FIG. 4;

[0030] FIG. 6 is a side view of the moving unit of FIG. 4;

[0031] FIGS. 7 to 9 show movements of the display unit of FIG. 2 according to driving of a rotating arm;

[0032] FIG. 10 shows a moving unit according to another embodiment of the present disclosure, coupled with a display unit and including a belt member installed in a rotating arm;

[0033] FIG. 11 is a top view of the moving unit of FIG. 10;

[0034] FIG. 12 is a side view of the moving unit of FIG. 10;

[0035] FIG. 13 shows a moving unit according to still another embodiment of the present disclosure, coupled with a display unit and including a cylinder and a plunger installed in a rotating arm;

[0036] FIG. 14 is a top view of the moving unit of FIG. 13; and

[0037] FIG. 15 is a side view of the moving unit of FIG. 13.

DETAILED DESCRIPTION

[0038] Reference will now be made in detail to the embodiments of the present disclosure, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to like elements throughout.

[0039] Hereinafter, an ultrasonic imaging apparatus according to an embodiment of the present disclosure will be described in detail with reference to the accompanying drawings.

[0040] FIG. 1 is a perspective view showing an ultrasonic imaging apparatus according to an embodiment of the present disclosure.

[0041] Referring to FIG. 1, an ultrasonic imaging apparatus according to an embodiment of the present disclosure may include a main body 2, an ultrasound probe 3, an input unit 7, and a display unit 8. The display unit 8 may include a main display 80 and a sub display 81.

[0042] The display unit 8 may display ultrasound images acquired during ultrasonic diagnosis. Also, the display unit 8 may display an application related to operations of the ultrasonic imaging apparatus 1. For example, the main display 80 may display ultrasound images acquired during ultrasonic diagnosis, and the sub display 81 may display data related to operations of the ultrasonic imaging apparatus.

[0043] The main display 80 or the sub display 81 may be implemented as Cathode Ray Tube (CRT), Liquid Crystal

Display (LCD), or the like. The main display 80 or the sub display 81 may be coupled with or separated from the main body 2.

[0044] The ultrasonic imaging apparatus 1 may further include a moving unit 9. The moving unit 9 may connect the display unit 8 to the main body 2. The moving unit 9 may be configured to move the display unit 8 with respect to the main body 2. The moving unit 9 enables the display unit 8 to be located spaced from the main body 2. The moving unit 9 will be described in detail, later.

[0045] The main body 2 may include the input unit 7. The input unit 7 may be implemented as a keyboard, one or more buttons, a dial, a foot switch, or a foot pedal. If the input unit 7 is a keyboard, the input unit 7 may be mounted on the upper part of the main body 2. If the input unit 7 is a foot switch or a foot pedal, the input unit 7 may be provided in the lower part of the main body 2. A sonographer may use the input unit 7 to control operations of the ultrasonic imaging apparatus 1.

[0046] The input unit 7 may be implemented as an input panel 70 on which a keyboard, one or more buttons, a dial, and the like are arranged. The input panel 70 may be mounted on the main body 2. At one side of the input panel 70, a handle part 71 may be provided. A user may hold the handle part 71 and apply a force to move the ultrasonic imaging apparatus 1.

[0047] The ultrasound probe 3 may connect to the main body 2 through a connecting member 5. The connecting member 5 may include a cable 50 and a connector 51. The ultrasound probe 3 may be connected to one end of the cable 50, and the other end of the cable 50 may be connected to a male connector 51. The male connector 51 may be detachably inserted into a female connector 20 formed in the main body 2 so as to connect the ultrasound probe 3 to the main body 2.

[0048] One or more probe holders 4 for accommodating the ultrasound probe 3 may be provided at one lateral side of the ultrasonic imaging apparatus 1. The sonographer may put the ultrasound probe 3 into one of the probe holders 4 to safely keep the ultrasound probe 3 when he/she does not use the ultrasonic imaging apparatus 1. For example, each probe holder 4 may be formed in the input panel 70 in the form of a hole through which a handle part of the ultrasound probe 3 can pass. The ultrasound probe 3 may be inserted into the hole formed in the input panel 70 to thereby be safely kept. As another example, the probe holder 4 may be provided in the shape of a holder attached to the main body 2. The ultrasound probe 3 may be inserted into and rested in the holder 4.

[0049] At the front and back parts of the main body 2, handle parts 21 and 71 may be provided so that a user can hold the handle parts 21 and 71 to move the ultrasonic imaging apparatus 1. The handle parts 21 and 71 may include a first handle part 71 provided at the front part of the main body 2, and a second handle part 21 provided at the back part of the main body 2. The first handle part 71 may be provided at one side of the input panel 7, and the second handle part 21 may be provided with a protruding structure at the back part of the main body 2.

[0050] The main body 2 may include a plurality of castors 22 and 23 to move the ultrasonic imaging apparatus 1. The castors 22 and 23 may be aligned to move the main body 2 in a specific direction (an alignment movement mode), may

move the main body freely (a free movement mode), or may be locked to fix the main body 2 at a specific location (a locking mode).

[0051] The castors 22 and 23 may include first castors 22 and second castors 23. If a direction in which the input unit 7 and the display unit 8 are located is the front, and a direction that is opposite to the front is the back, the first castors 22 may be located in the front of the main body 2, and the second castors 23 may be located in the back of the main body 2. The first castors 22 may be located at both left and right sides in the front of the main body 2, and the second castors 23 may be located at both left and right sides in the back of the main body 2 in correspondence to the first castors 22.

[0052] The main body 2 may include a manipulating unit 25 to control the castors 22 and 23. The manipulating unit 25 may be provided in the form of a foot pedal, as shown in FIG. 1, or in the form of a button or dial. The user may press down the foot pedal 25 and hold the first handle part 71 to move or stop the ultrasonic imaging apparatus 1.

[0053] Hereinafter, the moving unit 9 according to an embodiment of the present disclosure will be described in detail.

[0054] FIG. 2 shows a moving member installed in a rotating arm, according to an embodiment of the present disclosure, and the back part of a display unit coupled with a moving unit including the moving member, FIG. 3 is an exploded perspective view showing a configuration of the moving unit of FIG. 2, FIG. 4 is a back view of the moving unit including the moving member of FIG. 2 coupled with the rotating arm, FIG. 5 is a top view of the moving unit of FIG. 4, and FIG. 6 is a side view of the moving unit of FIG. 4.

[0055] Referring to FIGS. 1 to 6, the moving unit 9 may connect the display unit 8 to the main body 2. The moving unit 9 may be configured to move the display unit 8 with respect to the main body 2. The moving unit 9 may include a first coupling member 91, a rotating arm 93, and a moving member 95. Hereinafter, for convenience of description, the display unit 8 is assumed to be the main display 80, however, the moving unit 9 may be applied to both the main display 80 and the sub display 81.

[0056] One end of the rotating arm 93 may be coupled with the main body 2. The rotating arm 93 may be rotatably coupled with a part of the main body 2. The other end of the rotating arm 93 may be coupled with the display unit 8 so that the rotating arm 93 can rotate together with the display unit 8.

[0057] The rotating arm 93 may be coupled with the first coupling member 91 attached on a part of the main body 2. The rotating arm 93 may be rotatably coupled with the first coupling member 91 such that the rotating arm 93 can rotate with respect to a rotating axis 91a. At one end of the rotating arm 93, a rotating arm coupling part 93a that is coupled with the first coupling member 91 may be formed. The rotating arm coupling part 93a may be coupled with the first coupling member 91 so that the rotating arm 93 can rotate with respect to the rotating arm rotating axis 91a.

[0058] The first coupling member 91 may be disposed on the upper part of the main body 2. The main body 2 may further include a supporting member 29 coupled with the upper part of the main body 2, and bent upward. The first

coupling member 91 may be attached on the supporting member 29, and spaced upward from the upper surface of the main body 2.

[0059] As shown in FIG. 2, the first coupling member 91 can rotate. The first coupling member 91 may be rotatable on a first plane, wherein the first plane may be defined as a plane that is parallel to the upper surface of the main body 2. That is, the first coupling member 91 may be rotatable on a first plane that is parallel to the supporting member 29. When the first coupling member 91 rotates, the rotating arm 93 may rotate together with the first coupling member 91.

[0060] When the first coupling member 91 rotates, the rotating arm 93 may rotate and move on the first plane together with the first coupling member 91. Also, the rotating arm 93 may rotate with respect to the rotating axis 91a, more specifically, the rotating arm 93 may rotate with respect to the rotating axis 91a on a second plane that is vertical to the first plane. The rotating arm 93 may rotate and move on the first plane, may rotate and move on the second plane, or may rotate and move on both the first plane and the second plane.

[0061] The moving member 95 may be installed in the rotating arm 93. The moving member 95 may move along the rotating arm 93. More specifically, the moving member 95 may slide in both directions along the rotating arm 93.

[0062] One end of the moving member 95 may be coupled with the display unit 8. The moving member 95 may move along the rotating arm 93, together with the display unit 8. The moving member 95 may be inserted into a moving groove 93b formed in the rotating arm 93 to thus be coupled with the rotating arm 93. The moving member 95 may move along the moving groove 93b in the longitudinal direction of the rotating arm 93.

[0063] According to an embodiment of the present disclosure, the moving unit 9 may further include a rack gear 96 formed at one lateral side of the moving member 95, a pinion gear 97 interlocked with the rack gear 96, and a second coupling member 98 coupled with the display unit 8.

[0064] As shown in FIGS. 4 to 6, the rack gear 96 and the pinion gear 97 may enable the moving member 95 to move along the rotating arm 93. The rack gear 96 may be formed at one lateral side of the moving member 95, and the pinion gear 97 may be installed in the rotating arm 93 and interlocked with the rack gear 96. The pinion gear 97 may be configured to restrict movement of the moving member 95 with the rack gear 96 within a predetermined range. The pinion gear 97 may be configured to fix the display unit 8 and the moving member 95 at a position to which the display unit 8 moves.

[0065] The moving unit 9 may further include a driving member 99 coupled with the pinion gear 97. The driving member 99 may generate a rotating force for rotating the pinion gear 97. If a user manipulates the input unit 7 in order to adjust a position of the display unit 8, the driving member 99 may rotate the pinion gear 97 according to the user's manipulation to move the display member 8.

[0066] The second coupling member 98 may be disposed on one end of the moving member 95. The second coupling member 98 may be coupled with the display unit 8 so that the display unit 8 can move together with the moving member 95. The second coupling member 98 may be coupled with a display coupling member 85 attached on the back surface of the display unit 8. As shown in FIG. 2, the second coupling member 98 may enable the display unit 8

to rotate with respect to a display rotating axis **85a** of the second coupling member **98**. Accordingly, the display unit **8** may rotate with respect to the display rotating axis **85a**.

[0067] FIGS. 7 to 9 show movements of the display unit **8** of FIG. 2 according to driving of a rotating arm.

[0068] As shown in FIGS. 7 to 9, the rotating arm **93** may rotate with respect to the first coupling member **91**. FIG. 7 shows a state when the rotating arm **93** is positioned vertically with respect to the main body **2** (see FIG. 1), FIG. 8 shows a state when the rotating arm **93** rotates at a predetermined angle backward with respect to the main body **2**, and FIG. 9 shows a state when the rotating arm **93** rotates backward with respect to the main body **2** to be at a position that is parallel to the main body **2**. That is, the rotating arm **93** may rotate backward with respect to the main body **2**, from a position at which the rotating arm **93** is vertical to the main body **2**, as shown in FIG. 7, to a position at which the rotating arm **93** is parallel to the main body **2**, as shown in FIG. 9. On the contrary, the rotating arm **93** may rotate from the position at which the rotating arm **93** is parallel to the main body **2**, as shown in FIG. 9, to the position at which the rotating arm **93** is vertical to the main body **2**, as shown in FIG. 7. The rotating arm **93** may rotate in both directions with respect to the first coupling member **91**. Accordingly, the display unit **8** may rotate in both directions with respect to the first coupling member **91**, together with the rotating arm **93**.

[0069] The display unit **8** may move along the rotating arm **93**. The display unit **8** may move back and forth in the longitudinal direction of the rotating arm **93**, together with the moving member **95**. The display unit **8** can move in the longitudinal direction of the rotating arm **93** even when the rotating arm **93** is at different positions, as shown in FIGS. 7 to 9. Accordingly, the display unit **8** may rotate in both directions with respect to the first coupling member **91**, together with the rotating arm **93**, and independently slide along the rotating arm **93** in the longitudinal direction of the rotating arm **93**.

[0070] Also, as shown in FIG. 2, since the first coupling member **91** is rotatable with respect to the main body **2**, the display unit **8** may rotate together with the first coupling member **91**. As described above, according to an embodiment of the present disclosure, the display unit **8** may be easily moved to various positions by the moving unit **9**.

[0071] Hereinafter, an ultrasonic imaging apparatus **1** including a moving unit according to another embodiment of the present disclosure will be described. In the ultrasonic imaging apparatus **1** according to the current embodiment, the configuration of a moving unit is different from that of the moving unit **100** included in the ultrasonic imaging apparatus **1** of FIG. 2, and the remaining components are the same as the corresponding ones of the ultrasonic imaging apparatus **1** of FIG. 2. Accordingly, descriptions about the same components will be omitted.

[0072] FIG. 10 shows a moving unit according to another embodiment of the present disclosure, coupled with a display unit and including a belt member installed in a rotating arm, FIG. 11 is a top view of the moving unit of FIG. 10, and FIG. 12 is a side view of the moving unit of FIG. 10.

[0073] Referring to FIGS. 10 to 12, a moving unit **100** may include a first coupling member **91**, a rotating arm **93**, a belt member **101**, pulley members **102** and **103**, and a second coupling member **105**.

[0074] The belt member **101** and the pulley members **102** and **103** may be installed in the rotating arm **93**. The pulley members **102** and **103** may include a first pulley **102** and a second pulley **103**. For example, the first pulley **102** may be disposed at a location close to the first coupling member **91** in the rotating arm **93**, and the second pulley **103** may be disposed at a location that is opposite to the first coupling member **91** in the rotating arm **93**. The belt member **101** may be disposed to surround the first pulley **102** and the second pulley **103**, and move according to rotation of the first pulley **102** and the second pulley **103**. The belt member **101** may move in both directions along the longitudinal direction of the rotating arm **93**, according to rotation directions of the first pulley **102** and the second pulley **103**.

[0075] The second coupling member **105** may be coupled with a part of the belt member **101**. The second coupling member **105** may be coupled with the display unit **8** to move along the belt member **101** together with the display unit **8**. Accordingly, the display unit **8** may move in the longitudinal direction of the rotating arm **93** according to the movement direction of the belt member **101**. Also, the second coupling member **105** may enable the display unit **8** to rotate with respect to the second coupling member **105**.

[0076] The moving unit **100** may further include a belt driver **104**. The belt driver **104** may generate a rotating force to move the belt member **101**. Accordingly, if a user manipulates the input unit **7** in order to adjust a position of the display unit **8**, the belt driver **104** may move the belt member **101** to move the display unit **8**.

[0077] Hereinafter, an ultrasonic imaging apparatus **1** including a moving unit according to still another embodiment of the present disclosure will be described. In the ultrasonic imaging apparatus **1** according to the current embodiment, the configuration of a moving unit is different from that of the moving unit **100** included in the ultrasonic imaging apparatus **1** of FIG. 2, and the remaining components are the same as the corresponding ones of the ultrasonic imaging apparatus **1** of FIG. 2. Accordingly, descriptions about the same components will be omitted.

[0078] FIG. 13 shows a moving unit according to still another embodiment of the present disclosure, coupled with the display unit **8** and including a cylinder and a plunger installed in the rotating arm **93**, FIG. 14 is a top view of the moving unit of FIG. 13, and FIG. 15 is a side view of the moving unit of FIG. 13.

[0079] Referring to FIGS. 13 to 15, a moving unit **110** may include a first coupling member **91**, a rotating arm **93**, a cylinder **111**, a plunger **112**, and a second coupling member **115**.

[0080] The cylinder **111** and the plunger **112** may be installed in the rotating arm **93**. The cylinder **111** may be installed at one end of the rotating arm **93**, and the plunger **112** may be connected to the cylinder **111** to move back and forth in the longitudinal direction of the rotating arm **93** by oil pressure of the cylinder **111**.

[0081] The second coupling member **115** may be coupled with one end of the plunger **112**. The second coupling member **115** may be coupled with the display unit **8**, and move along the plunger **112** together with the display unit **8**. Accordingly, the display unit **8** may move in the longitudinal direction of the rotating arm **93** according to the movement direction of the plunger **112**. Also, the second coupling unit **115** may enable the display unit **8** to rotate with respect to the second coupling member **115**.

[0082] According to the embodiments of the present disclosure, the display unit of the ultrasonic imaging apparatus can be easily moved.

[0083] More specifically, the display unit of the ultrasonic imaging apparatus may be easily moved in front, back, left, and right directions by the moving unit.

[0084] Although a few embodiments of the present disclosure have been shown and described, it would be appreciated by those skilled in the art that changes may be made in these embodiments without departing from the principles and spirit of the disclosure, the scope of which is defined in the claims and their equivalents.

1. An ultrasonic imaging apparatus comprising:

a main body;

a probe configured to irradiate ultrasonic waves and to receive ultrasonic waves, and connected to the main body to transmit an ultrasonic signal corresponding to the received ultrasonic waves to the main body;

a display unit connected to the main body in such a manner to be movable with respect to the main body; and

a moving unit configured to connect the display unit to the main body, and to enable the display unit to move with respect to the main body,

wherein the moving unit comprises:

a first coupling member rotatably attached on a part of the main body;

a rotating arm coupled with the first coupling member and configured to rotate with respect to the first coupling member; and

a moving member having one end coupled with the display unit, and installed in the rotating arm to enable the display unit to move in a longitudinal direction of the rotating arm.

2. The ultrasonic imaging apparatus according to claim 1, wherein the moving unit further comprises a rack gear and a pinion gear, and one of the rack gear and the pinion gear moves back and forth in the longitudinal direction of the rotating arm.

3. The ultrasonic imaging apparatus according to claim 1, wherein the first coupling unit is configured to be rotatable on a first plane, and

wherein the rotating arm is configured to rotate together with the first coupling member.

4. The ultrasonic imaging apparatus according to claim 3, wherein the rotating arm is configured to be rotatable on a second plane that is vertical to the first plane.

5. The ultrasonic imaging apparatus according to claim 1, wherein the display unit is rotatably coupled with a second coupling member disposed at one end of the moving member.

6. The ultrasonic imaging apparatus according to claim 1, wherein the moving unit further comprises a belt member configured to move in both directions along the longitudinal direction of the rotating arm, and a second coupling member coupled with a part of the belt member and configured to move together with the belt member, and

wherein the second coupling member is coupled with the display unit.

7. The ultrasonic imaging apparatus according to claim 6, wherein the display unit is rotatably coupled with the second coupling member.

8. The ultrasonic imaging apparatus according to claim 1, wherein the moving unit further comprises a hydraulic cylinder configured to move back and forth along the longitudinal direction of the rotating arm, and a second coupling member coupled with one end of the hydraulic cylinder and configured to move together with the hydraulic cylinder, and

wherein the second coupling member is coupled with the display unit.

9. The ultrasonic imaging apparatus according to claim 8, wherein the display unit is rotatably coupled with the second coupling member.

10. A moving unit which supports a display unit spaced from a main body and moves the display unit, the moving unit comprising:

a first coupling member attached on a part of the main body, and configured to rotate with respect to the main body;

a rotating arm having one end coupled with the first coupling member, and configured to rotate with respect to the first coupling member; and

a moving member having one end coupled with the display unit, and installed in the rotating arm to enable the display unit to slide along the rotating arm.

11. The moving unit according to claim 10, further comprising a rack gear and a pinion gear, wherein one of the rack gear and the pinion gear moves back and forth along a longitudinal direction of the rotating arm.

12. The moving unit according to claim 11, further comprising a second coupling member coupled with the display unit, at one of the rack gear and the pinion gear, which moves along the longitudinal direction of the rotating arm.

13. The moving unit according to claim 10, comprising a hydraulic cylinder configured to move back and forth along a longitudinal direction of the rotating arm, and a second coupling member coupled with one end of the hydraulic cylinder and configured to move together with the hydraulic cylinder,

wherein the second coupling member is coupled with the display unit.

14. The moving unit according to claim 10, comprising a belt member configured to move in both directions along a longitudinal direction of the rotating arm, and a second coupling member coupled with a part of the belt member and configured to move together with the belt member,

wherein the second coupling member is coupled with the display unit.

15. The moving unit according to claim 12, wherein the display unit is configured to rotate with respect to the second coupling member.

16. The moving unit according to claim 13, wherein the display unit is configured to rotate with respect to the second coupling member.

17. The moving unit according to claim 14, wherein the display unit is configured to rotate with respect to the second coupling member.

* * * * *

专利名称(译)	超声波成像装置和应用其的移动单元		
公开(公告)号	US20160345935A1	公开(公告)日	2016-12-01
申请号	US15/050174	申请日	2016-02-22
[标]申请(专利权)人(译)	三星麦迪森株式会社		
申请(专利权)人(译)	三星MEDISON CO. , LTD.		
当前申请(专利权)人(译)	三星MEDISON CO. , LTD.		
[标]发明人	WOO KYEONG GU KIM YEON HO JO JAE MOON JIN GIL JU		
发明人	WOO, KYEONG GU KIM, YEON-HO JO, JAE MOON JIN, GIL-JU		
IPC分类号	A61B8/00		
CPC分类号	A61B8/462 A61B8/4405 A61B8/467 A61B8/4444 A61B8/464		
优先权	1020150075982 2015-05-29 KR		
外部链接	Espacenet USPTO		

摘要(译)

本发明公开了一种超声波成像装置，包括：主体；一个探针；显示单元，以可相对于主体移动的方式连接到主体；移动单元，被配置为将显示单元连接到主体，并且使显示单元能够相对于主体移动，其中移动单元包括：第一连接构件，可旋转地连接在主体的一部分上；旋转臂，与第一连接构件连接，并构成相对于第一连接构件旋转；移动构件，其一端与显示单元连接，并安装在旋转臂中，使显示单元能够沿旋转臂的纵向移动。

