



(12) **Patent Application Publication**  
**CANFIELD**

(43) **Pub. Date:** Sep. 6, 2018

### Publication Classification

(51) **Int. Cl.**  
*A61L 2/10* (2006.01)  
*A61B 8/00* (2006.01)

(52) **U.S. CI.**  
CPC ..... ***A61L 2/10*** (2013.01); ***A61B 8/4422***  
(2013.01); ***A61L 2202/24*** (2013.01); ***A61L***  
***2202/14*** (2013.01); ***A61L 2202/16*** (2013.01);  
***A61B 8/462*** (2013.01)

(22) PCT Filed: **Aug. 31, 2016**


(57) **ABSTRACT**

An ultrasound imaging system (100) including a disinfection system is disclosed. The disinfection system may include one or more ultraviolet light sources (115). The UV light sources may be included in a display (105). The disinfection system may be configured to operate when the display is parallel to a control panel (120) of the ultrasound imaging system. The disinfection system may provide indications of the disinfection status of the ultrasound imaging system.


(2) Date: **Mar. 1, 2018**

### Related U.S. Application Data

(60) Provisional application No. 62/215,799, filed on Sep. 9, 2015.

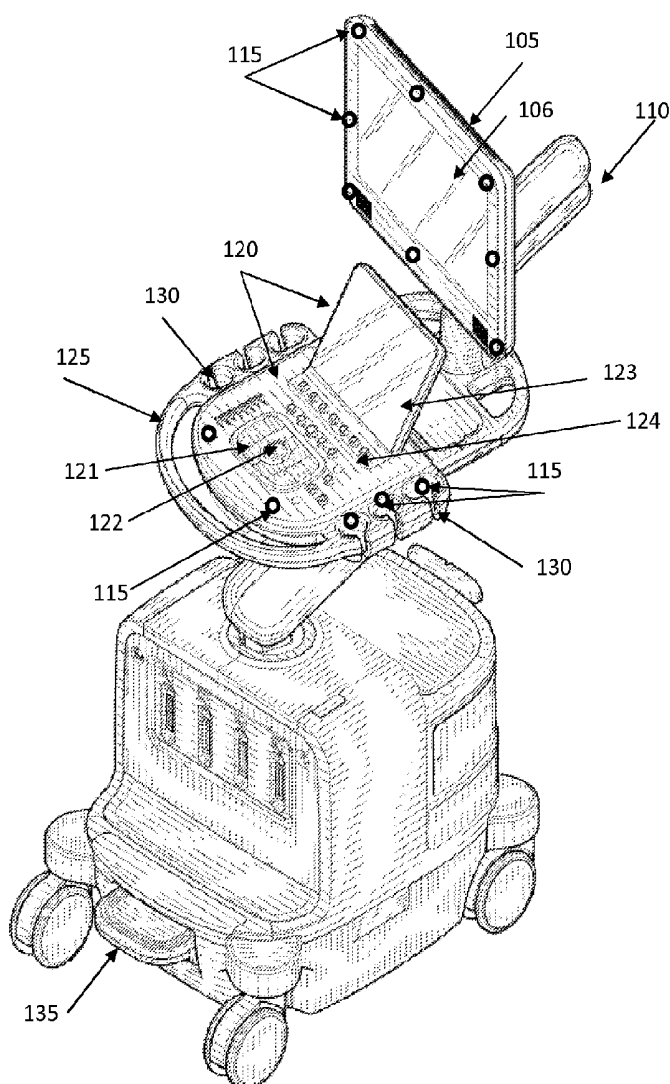

100

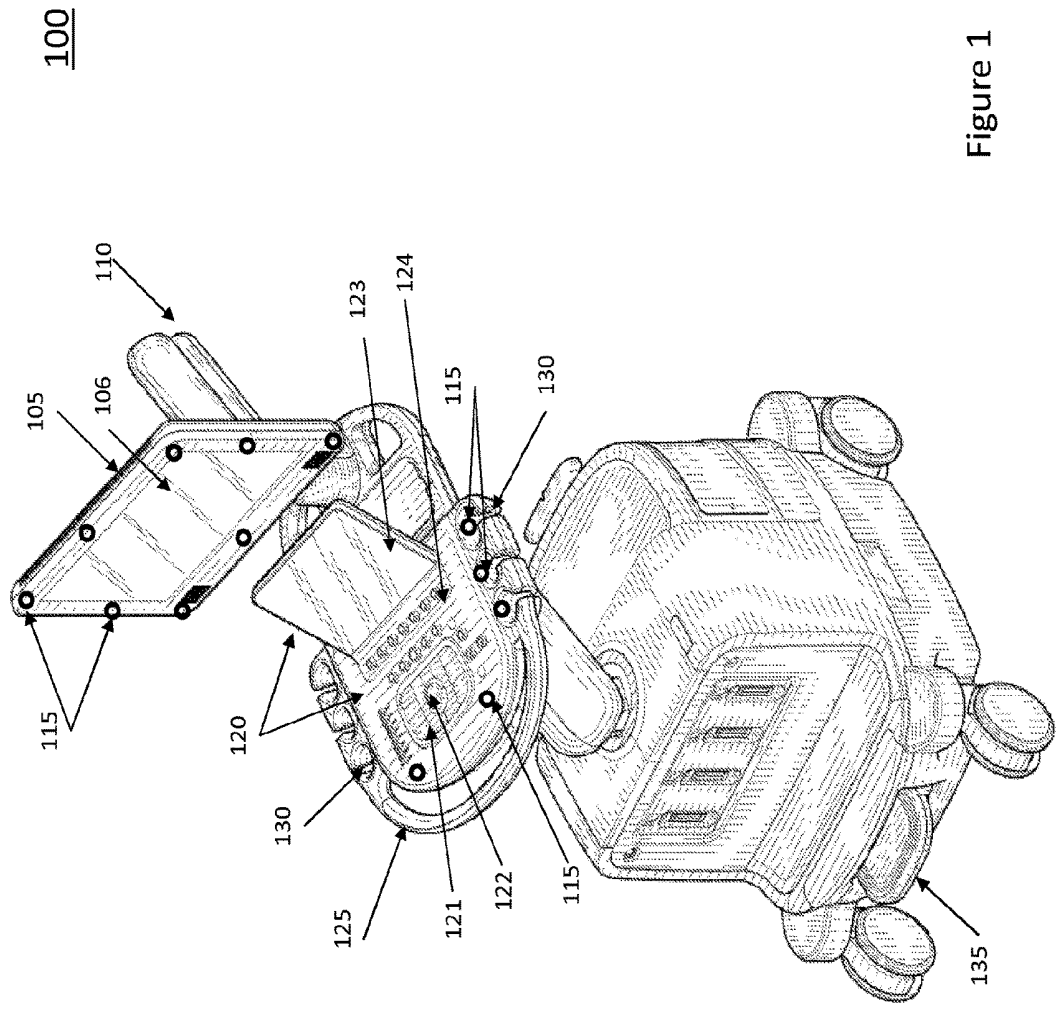

100

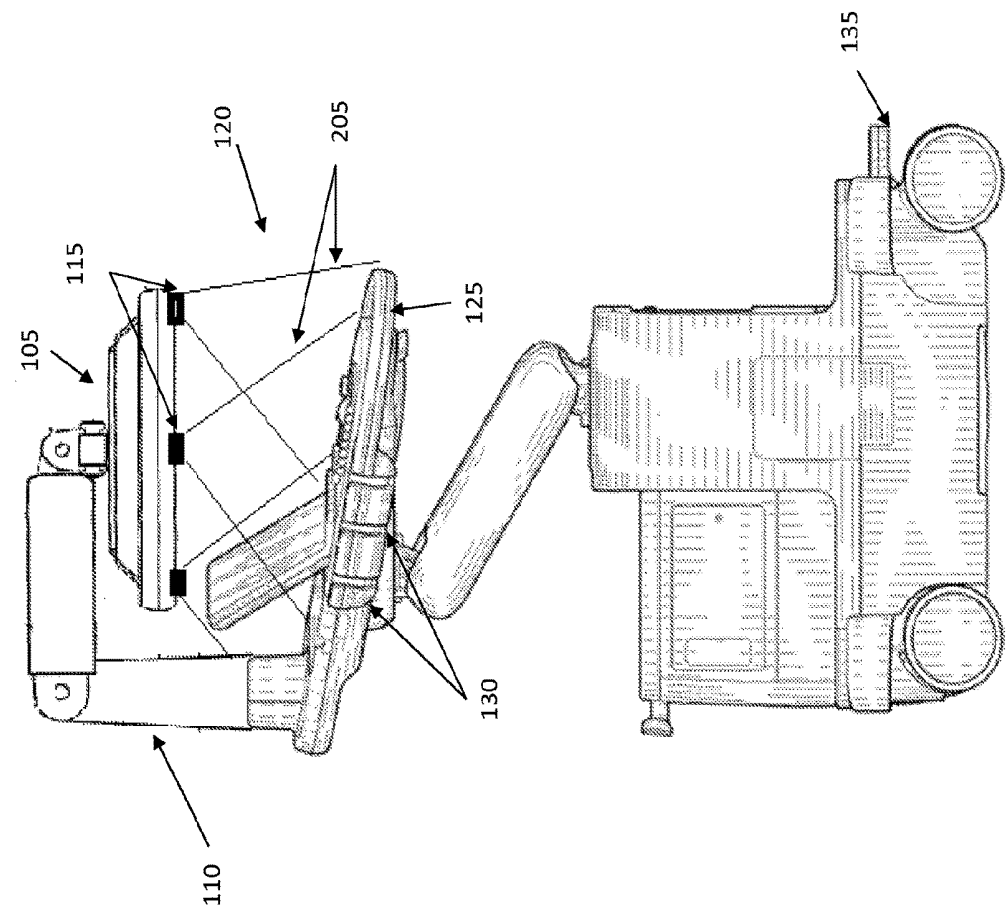


Figure 2

300



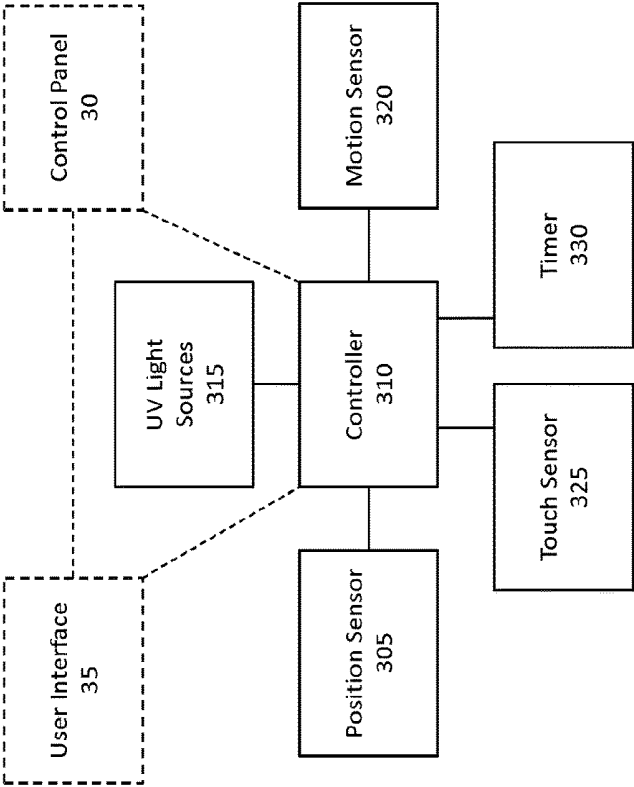


Figure 3

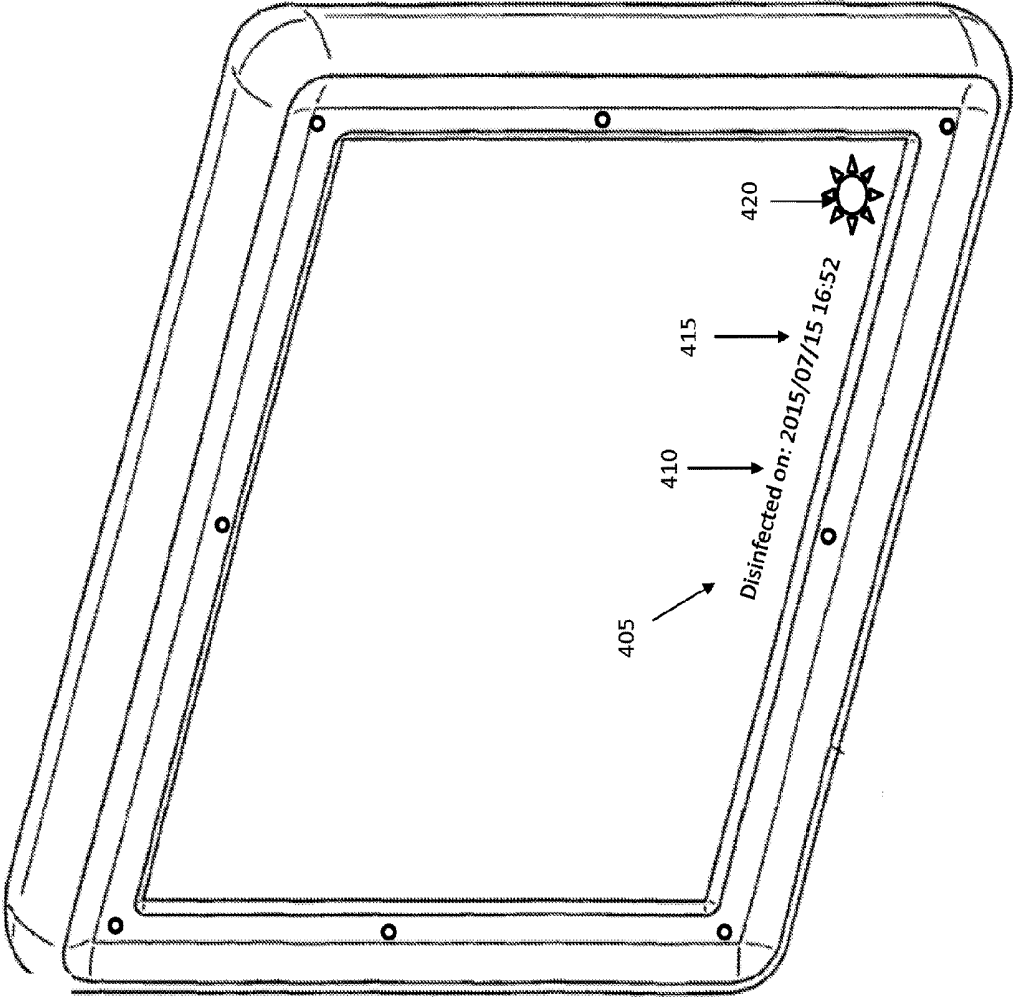

400

Figure 4

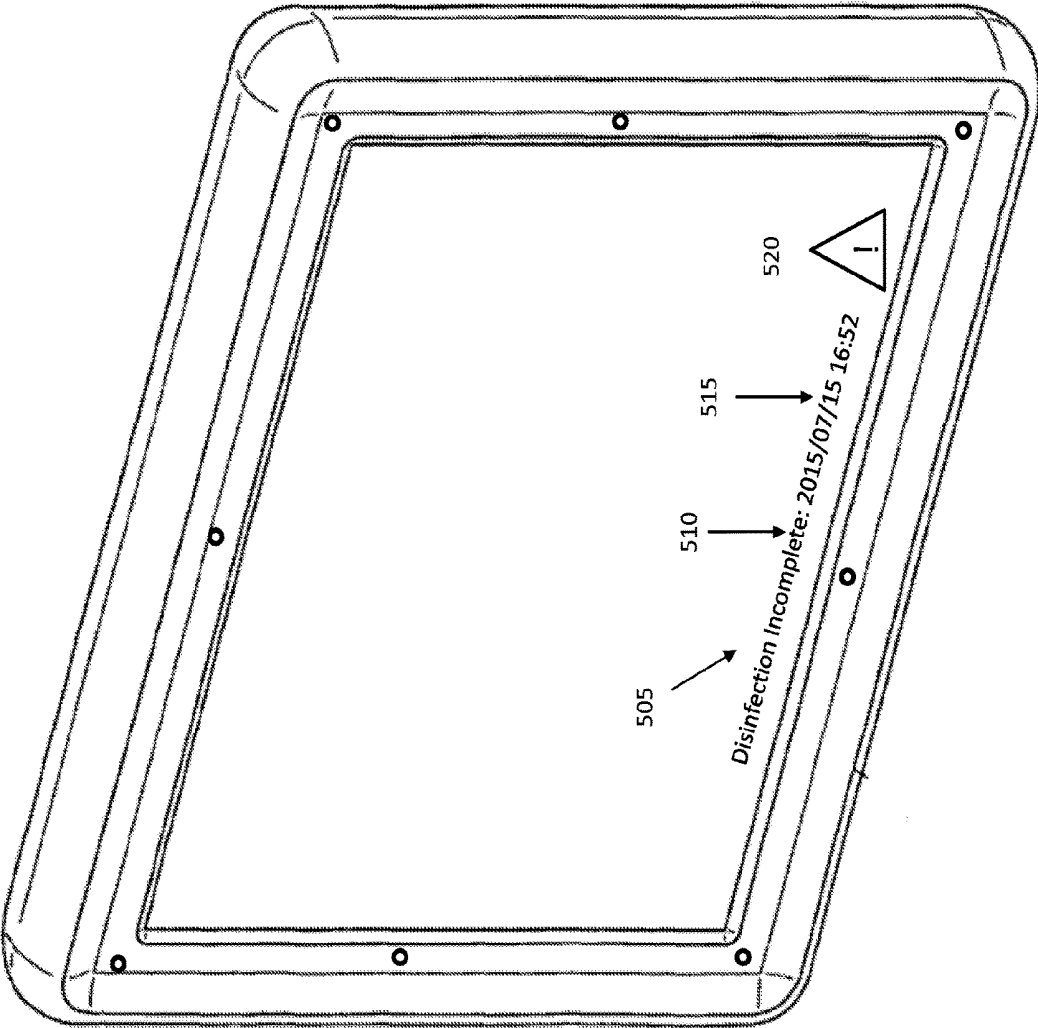

400

Figure 5

400

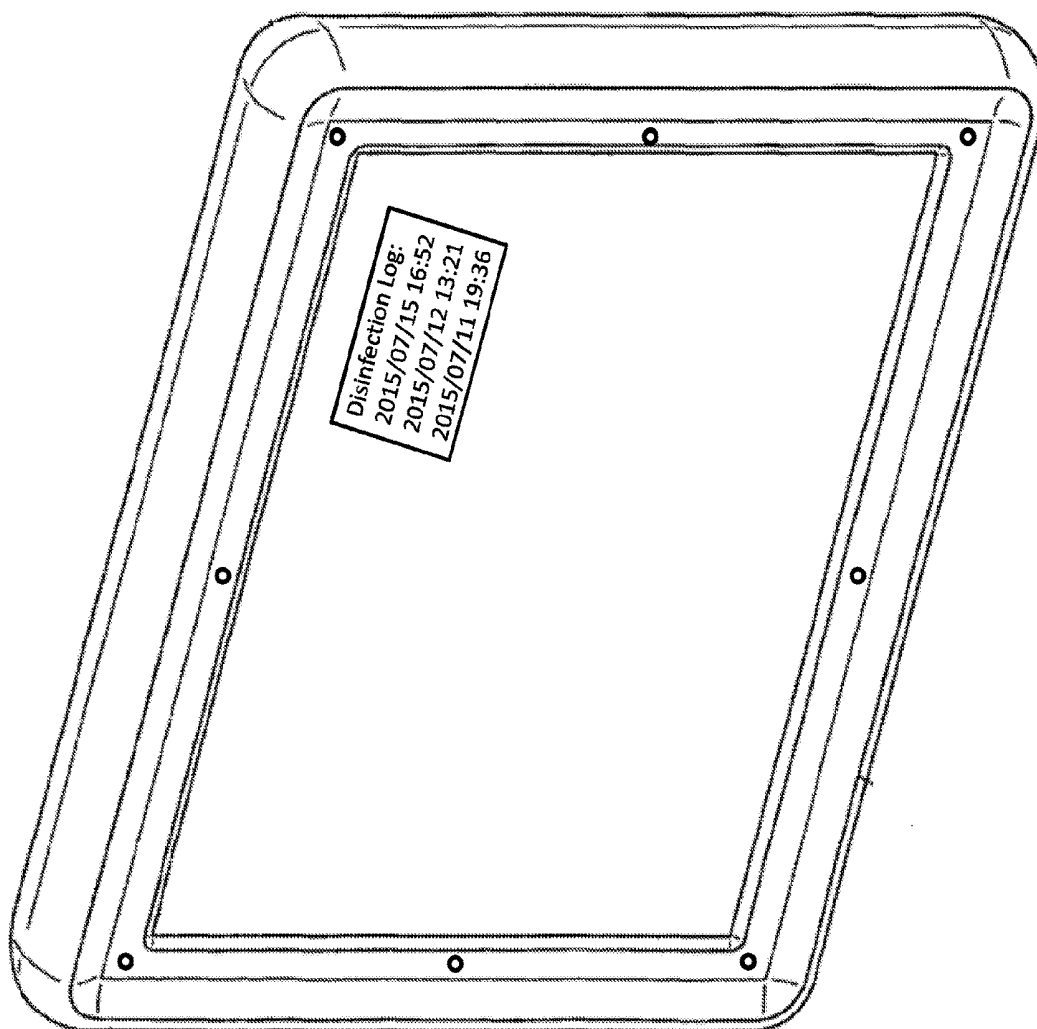


Figure 6

700

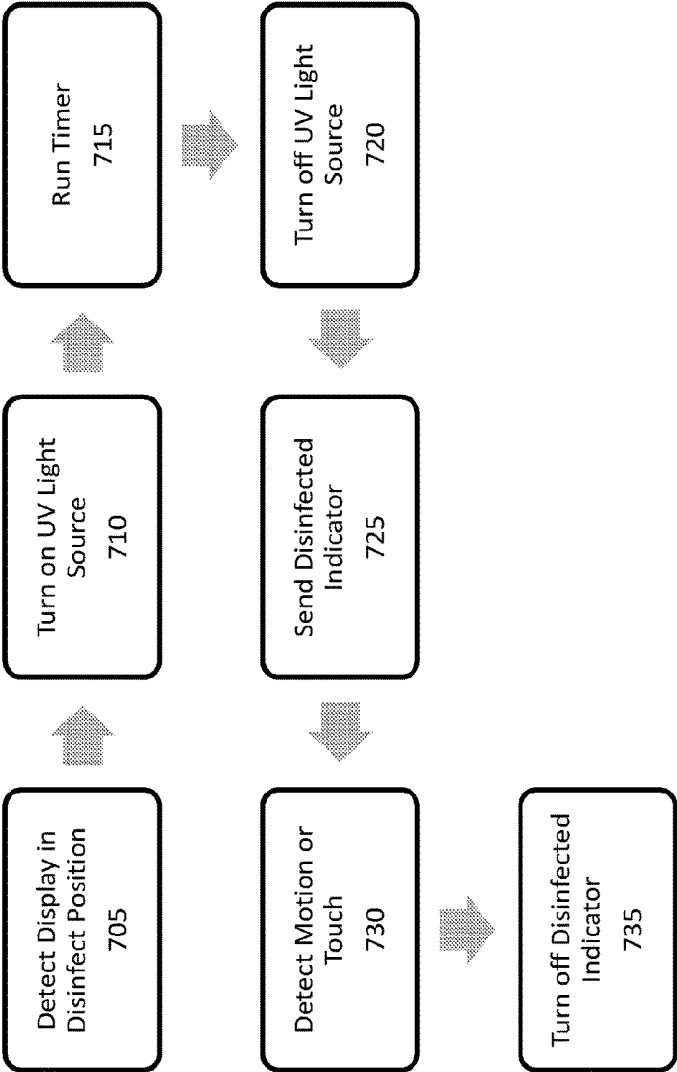


Figure 7

800

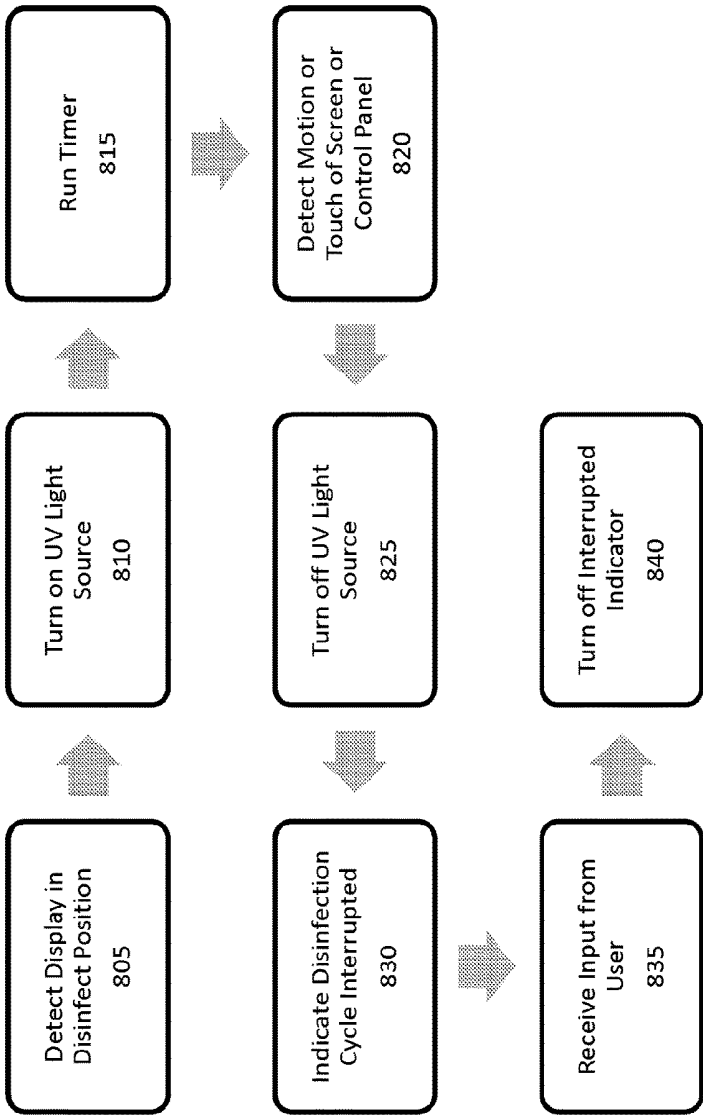


Figure 8

## ULTRASOUND SYSTEM WITH DISINFECTING FEATURE

### BACKGROUND

[0001] Medical devices are prone to contamination by infectious agents such as viruses and bacteria. Even medical devices that do not come in direct contact with a patient may become contaminated. For example, control panels on medical devices (e.g., ultrasound imaging systems, pulse oximeters, IV pumps) may become contaminated when a technician touches a patient and then touches the control panel. A technician may also contaminate the control panel by transferring infectious agents from other locations (e.g., restroom, cafeteria, other control panel). This may increase the risk of transferring an infectious agent to a patient via the medical device.

[0002] Control panels and other portions of medical devices are regularly disinfected to avoid cross-contamination. Disinfecting the medical device may be accomplished by cleansing the medical device with a disinfecting solution. The disinfecting solution may be sprayed on and wiped off or the disinfecting solution may be included in a pre-saturated towel that used to wipe down the medical device. While effective, the disinfecting solution is toxic and can degrade surfaces of the medical device.

### SUMMARY

[0003] An example ultrasound system according to an embodiment of the disclosure may include a display, a control panel, an ultraviolet (UV) light source coupled to the display, wherein the UV light source may be configured to turn on responsive to a control signal, an articulation system coupled to the display that may be configured to position the display, and a controller coupled to the UV light source and the controller may be configured to provide the control signal to turn on the UV light source responsive to the display being positioned in a disinfect position.

[0004] An example method of disinfecting an ultrasound imaging system according to an embodiment of the disclosure may include detecting, with a position sensor, a display is in a disinfect position; providing a control signal to an ultra violet (UV) light source to turn on the UV light source; running a timer for a disinfection cycle time; and providing the control signal to the UV light source to turn off the UV light source responsive to completion of the disinfection cycle time, wherein the control signal may be provided by a controller.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIG. 1 is a schematic illustration of an ultrasound system including a disinfection system according to an embodiment of the disclosure.

[0006] FIG. 2 is a schematic illustration of the ultrasound system including the disinfection system shown in FIG. 1.

[0007] FIG. 3 is a functional block diagram of a disinfection system according to an embodiment of the disclosure.

[0008] FIG. 4 is an example of a graphical display of a user interface according to an embodiment of the disclosure.

[0009] FIG. 5 is an example of a graphical display of a user interface according to an embodiment of the disclosure.

[0010] FIG. 6 is an example of a graphical display of a user interface according to an embodiment of the disclosure.

[0011] FIG. 7 is a flow chart of a method according to an embodiment of the disclosure.

[0012] FIG. 8 is a flow chart of a method according to an embodiment of the disclosure.

### DETAILED DESCRIPTION

[0013] The following description of certain exemplary embodiments is merely exemplary in nature and is in no way intended to limit the invention or its applications or uses. In the following detailed description of embodiments of the present systems and methods, reference is made to the accompanying drawings which form a part hereof, and in which are shown by way of illustration specific embodiments in which the described systems and methods may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the presently disclosed systems and methods, and it is to be understood that other embodiments may be utilized and that structural and logical changes may be made without departing from the spirit and scope of the present system.

[0014] The following detailed description is therefore not to be taken in a limiting sense, and the scope of the present system is defined only by the appended claims. The leading digit(s) of the reference numbers in the figures herein typically correspond to the figure number, with the exception that identical components which appear in multiple figures are identified by the same reference numbers. Moreover, for the purpose of clarity, detailed descriptions of certain features will not be discussed when they would be apparent to those with skill in the art so as not to obscure the description of the present system.

[0015] Ultrasound imaging systems may be portable units on carts that may be transported to different locations, for example, different exam rooms in a hospital. The ultrasound imaging system may include a control panel for operating the ultrasound imaging system and a display for viewing images acquired with the ultrasound imaging system. The display may be a flat panel display that may be moved into different positions. After completing an exam, a sonographer may move the display into a position parallel to the control panel. The display may include one or more ultraviolet (UV) light sources that may power on when the display is in the parallel position. The UV light sources may disinfect the control panel and/or other components of the ultrasound imaging system. As known, UV light may be an effective disinfectant by killing organisms such as bacteria and viruses. After disinfection, the sonographer may return the display to a position viewable to the sonographer and conduct another exam. The disinfection of the control panel may reduce or eliminate cross-contamination between exams.

[0016] FIG. 1 is a schematic diagram of an ultrasound imaging system 100 including a disinfection system according to at least one embodiment of the disclosure. An ultrasound imaging system may include a display 105 that may be positioned by a user. In some embodiments, the display 105 may be a flat panel display. The display 105 may be articulated to be viewed over a wide range of viewing positions. The articulation may be provided by a two-arm articulation system 110 with a counter-weight assisted 4-bar linkage. The display 105 may have a peripheral gripping surface which may facilitate holding the display 105 and being repositioned with one hand. An example of an ultrasound system having an articulated flat panel display that

may be used to implement one or more embodiments of the disclosure may be found in European Patent EP 1713396. The display **105** may be positioned parallel to a control panel **120** of the ultrasound imaging system. The parallel position may facilitate moving the ultrasound imaging system between locations and/or facilitate disinfecting the control panel **120** as will be described further below. The control panel **120** may include one or more control elements for controlling the ultrasound imaging system **100**. In the embodiment shown in FIG. 1, the control panel **120** includes a keyboard **121**, a track ball **122**, control knobs and switches **124**, and a flat panel touch screen **123**. Other embodiments of the control panel **120** may include more or fewer control elements. Other embodiments of the control panel **120** may include different elements than those shown in FIG. 1. For example, the control panel **120** may include a track pad, one or more rocker switches, and/or microphone.

**[0017]** The display **105** may include one or more UV light sources **115**. The UV light sources **115** may be located along a perimeter of a screen portion **106** of display **105**, for example, as shown in the embodiment of FIG. 1. In some embodiments, the UV light sources **115** may be embedded within and/or behind the screen portion **106**. Examples of UV light sources **115** may include but are not limited to LEDs, pulsed xenon lamps, and fluorescent bulbs. The display **105** may include one or more types of UV light sources **115**. The UV light sources **115** may emit UV waves in the range of approximately 100-280 nm, 200 nm-320 nm, 100-320 nm, 250-260 nm, and/or other range suitable for killing organisms such as bacteria and viruses. In some embodiments, the UV light sources **115** may produce UV light having a fluence of 2,000-10,000  $\mu\text{W s/cm}^2$ .

**[0018]** FIG. 2 is a schematic diagram of the ultrasound imaging system **100** according to at least one embodiment of the disclosure where the display **105** is in a position parallel to the control panel **120**. When the display **105** is in a position parallel to a control panel **120**, the UV light sources **115** may illuminate the control panel **120** when powered on. The UV illumination is depicted by lines **205**. The UV illumination may disinfect surfaces of the control panel **120** exposed to the UV illumination, including the control elements such as the keyboard **121**, track ball **122**, control knobs and switches **124**, and touch screen **123**. In some embodiments, the UV illumination may illuminate other portions of the ultrasound imaging system **100** for disinfection. For example, the UV illumination may disinfect a handle **125**, ultrasound probes (not shown), instrument holders **130**, ultrasound probe cables (not shown), cable holders (not shown), pedals **135**, and/or a combination thereof.

**[0019]** Referring to both FIGS. 1 and 2, in some embodiments, the ultrasound imaging system **100** may include UV light sources **115** other than the display **105**. For example, UV light sources **115** may be included in instrument holders **130** of the ultrasound imaging system. The UV light sources may illuminate and disinfect the holder **130** and/or at least a portion of an instrument (e.g., handle of an ultrasound probe) in the instrument holder **130**. In another example, the UV light sources **115** may be included under a keyboard **121** of the control panel **120** (not visible in FIGS. 1 and 2). The UV light sources **115** may illuminate the underside of a track ball **122** of the control panel **120**. This may facilitate disinfecting all surfaces of the track ball **122**. In another example, the UV light sources **115** may be included in the

control panel **120** and/or a periphery of the control panel **120**. These UV light sources may illuminate the display **105** for disinfection.

**[0020]** FIG. 3 is a functional block diagram of a disinfection system **300** of an ultrasound imaging system, such as ultrasound imaging system **100**, according to at least one embodiment of the disclosure. The disinfection system **300** may include a position sensor **305** that may detect a position of a display. In some embodiments, the position sensor **305** may be located in an articulation system of the display. The position sensor **305** may provide information on the detected position to a controller **310** of the ultrasound imaging system. The controller **310** may be implemented as hardware, software, or combinations thereof. For example, in some embodiments, the controller **310** may be an integrated circuit including circuits such as logic circuits and computational circuits. The circuits of the controller **310** may operate to execute various operations and provide control signals to other circuits of the disinfection system **300**. In some embodiments, the controller **310** may be implemented as multiple controllers. The controller **310** may control the operation of the UV light sources **315**. The controller **310** may provide one or more control signals to the UV light sources **315**. The UV light sources **315** may turn on and/or off responsive to the one or more control signals. For example, the controller **310** may prevent UV light sources **315** from being powered on and/or the controller **310** may shut off the UV light sources **315** when the display is not in a position parallel to a control panel. This may prevent the UV light sources **315** from being powered on when the display is in an upright position, which may inadvertently illuminate eyes and/or skin of a user and/or patient causing irritation or annoyance. The UV light sources **315** may be implemented as UV light sources **115** in some embodiments.

**[0021]** The UV light sources **315** may illuminate a control panel and/or other portions of the ultrasound imaging system for a period of time to disinfect the surfaces illuminated by the UV light sources **315**. The period of time may be several seconds, half a minute, a minute, several minutes, fifteen minutes, an hour, or several hours. In an example embodiment, the period of time is two minutes. The UV light sources **315** may power down after the period of time has elapsed. This period of time may be referred to as a disinfection cycle. The length of the disinfection cycle may be set by a timer **330**. The timer **330** may send time information to the controller **310**. The controller **310** may be configured to turn off the UV light source **315** when the timer **330** indicates that the disinfection cycle has elapsed. In some embodiments, the timer **330** is pre-programmed. In some embodiments, the timer **330** may be set by a user.

**[0022]** The disinfection system **300** may include a motion sensor **320** and/or touch sensor **325** that may detect when a user's hand has touched the control panel and/or moved between the control panel and the display. The motion sensor **320** and/or touch sensor **325** may provide information on the detected motion and/or touch to the controller **310**. The controller **310** may prevent the UV light sources **315** from being powered on and/or shut off the UV light sources **315** when motion and/or touch is detected. This may prevent the UV light sources from being powered on when they may illuminate the skin of a user and/or patient. It may also prevent the ultrasound imaging system from indicating it is disinfected. For example, if a user touches a button of the control panel half-way through a disinfection cycle of the

UV light sources **315**, the user may contaminate the button. However, the UV light sources **315** may not illuminate the button for a long enough period of time after the user's touch to fully disinfect the button.

[0023] The motion sensor **320** may be included on the display and/or the control panel of the ultrasound imaging system. In an example embodiment, an infrared (IR) light source may be included on the display and an IR light detector may be included on the control panel. The IR light source may provide a beam of IR light to the detector. When the IR light detector detects a break in the beam, the IR light detector may register a detected motion. Other configurations and/or types of motion sensors may be used. In an example embodiment, the touch sensor **325** may be included in the control panel of the ultrasound imaging system. The touch sensor **325** may detect actuation of control elements (e.g., buttons, switches, knobs) based, at least in part, on electrical signals generated with the control elements are actuated. The touch sensor **325** may detect changes in resistance across the control panel as a result of a user coming in contact with the control panel. Other types of touch sensors may also be used.

[0024] The controller **310** may be pre-programmed and/or may be programmed by a user. For example, the user may adjust the disinfection cycle time via the control panel **30** of the ultrasound imaging system. In some embodiments, the user may set the disinfection system **300** to run a disinfection cycle automatically whenever the display is in a position parallel to the control panel. In other embodiments, the user may set the disinfection system **300** to run a disinfection cycle when display is in a position parallel to the control panel only at certain times (e.g., once an hour, overnight).

[0025] The controller **310** may provide information to a user interface **35** (e.g., a screen portion of the display of the ultrasound imaging system). The information may include the length of a disinfection cycle, the time of the last full disinfection cycle, time of an interrupted disinfection cycle, disinfection status, and/or other information.

[0026] FIGS. 4-6 are schematic illustrations of example graphical displays of a user interface **400** according to at least one embodiment of the disclosure. The user interface **400** may be controlled by hardware, software, or a combination thereof. For example, the user interface **400** may receive information and/or control signals from a controller such as controller **310**. In some embodiments, the user interface **400** may receive information and/or control signals from one or more processors of the ultrasound imaging system. The one or more processors may execute software instructions provided on a non-transitory computer readable medium. For example, the processors may generate graphics for the graphical displays and provide the graphics to the user interface **400**. The graphical displays of the user interface **400** may be responsive to information received from a controller of a disinfection system, such as controller **310** of disinfection system **300**. The graphical displays of the user interface **400** may be shown on a display of an ultrasound imaging system.

[0027] FIG. 4 shows an example graphic **405** that indicates that an ultrasound imaging system was successfully disinfected. The graphic **405** may include an icon **420** and text **410** that indicate the system has been disinfected, and/or the time and/or date **415** of the disinfection. The graphic **405** may be helpful to a user to confirm that a disinfection cycle has completed, when the disinfection cycle was completed,

and that the system is now considered disinfected. The graphic **405** may be shown on a display of the ultrasound imaging system until a user touches the control panel and/or begins an exam.

[0028] FIG. 5 shows an example graphic **505** that indicates that disinfection of an ultrasound imaging system was interrupted. The graphic **505** may include an icon **520**, text **510** that indicates the system has not been disinfected, and/or the time and/or date **515** of the interruption. The graphic **505** may be helpful to a user to appreciate that a disinfection cycle was not completed, and that another disinfection cycle may need to be performed before the system is considered disinfected. The graphic **505** may be shown on a display of the ultrasound imaging system until a user touches the control panel and/or begins an exam.

[0029] The graphics **405** and **505** shown in FIGS. 4 and 5 are generally located at the bottom portion of the graphical display of the user interface **400**. The graphic **405** may be located in other portions of the graphical display of the user interface **400**. For example, in some embodiments, the graphic **405** may be generally located at an upper portion of the graphical display of the user interface **400**. In other embodiments, the graphic **405** may be located to either the right portion or the left portion of the graphical display of the user interface **400**.

[0030] FIG. 6 shows an example graphic **605** that indicates past disinfections, which may provide a disinfection log. The graphic **605** may include the times and dates of past disinfections. The graphic **605** may be helpful to a user to provide a historical understanding of, for example, frequency of disinfection cycles, when the last disinfection cycle was performed, as well as other information related to disinfection of the ultrasound imaging system. In some embodiments, the graphic **605** may include interrupted disinfection cycles in addition to completed disinfection cycles. The graphic **605** may be shown on a display of the ultrasound imaging system until a user touches the control panel and/or begins an exam. In some embodiments, the user may access the graphic **605** through the user interface **400** through the control panel. The graphic **605** shown in FIG. 6 is generally located at the upper-right portion of the graphical display of the user interface **400**. The graphic **605** may be located in other portions of the graphical display of the user interface **400**. For example, in some embodiments, the graphic **605** may be generally located at an upper-left portion of the graphical display of the user interface **400**. In other embodiments, the graphic **605** may be located to either the lower-right portion or the lower-left portion of the graphical display of the user interface **400**.

[0031] FIGS. 4-6 are provided as exemplary displays of a user interface. Other text, colors, shapes, and/or information may be provided by the user interface **400** without departing from the principles of the disclosure.

[0032] FIG. 7 is a flow chart of a method **700** according to at least one embodiment of the disclosure. The method **700** may be performed by a disinfection system of an ultrasound imaging system, such as disinfection system **300** of FIG. 3. At Block **705**, the disinfection system may detect a display in a disinfect position (e.g., parallel to a control panel). At Block **710**, the disinfection system may turn on a UV light source. The disinfection system may then run a timer for a disinfection cycle time at Block **715**. In some embodiments, Block **710** and Block **715** may be initiated simultaneously. After the disinfection cycle time has completed, the disin-

fection system may turn off the UV light source at Block 720. At Block 725, the disinfection system may send a disinfected indicator to a user interface. Responsive to the indicator, the user interface may display a graphic indicating that the ultrasound imaging system has been disinfected. At Block 730, the disinfection system may detect motion of the display, touch on the control panel, and/or portion of the ultrasound imaging system. The disinfection system may then send an indicator to the user interface to stop displaying the graphic indicating that the ultrasound imaging system is disinfected at Block 735.

[0033] FIG. 8 is a flow chart of a method 800 according to at least one embodiment of the disclosure. The method 800 may be performed by a disinfection system of an ultrasound imaging system, such as disinfection system 300 of FIG. 3. At Block 805, the disinfection system may detect a display in a disinfect position (e.g., parallel to a control panel). At Block 810, the disinfection system may turn on a UV light source. The disinfection system may then run a timer at Block 815. In some embodiments, Block 810 and Block 815 may be initiated simultaneously. At Block 820, the disinfection system may detect motion of the flat panel display, touch on the control panel, and/or portion of the ultrasound imaging system prior to the end of the timer started at Block 815. The disinfection system may then turn off the UV light source at Block 825 and send an indicator to a user interface that the disinfection cycle was interrupted at Block 830. Responsive to the indicator, the user interface may display a graphic indicating that the ultrasound imaging system has not been disinfected. At Block 835, the disinfection system may detect an input from a user. In some embodiments, the input may be a detected touch on the control panel and/or portion of the ultrasound imaging system. In some embodiments, the input from the user may be an input provided to the user interface to acknowledge viewing the graphic indicating that the ultrasound imaging system has not been disinfected. In some embodiments, the input from the user may be initiating an ultrasound exam. The disinfection system may then send an indicator to the user interface to stop displaying the graphic indicating that the ultrasound imaging system is not disinfected at Block 840. Alternatively, the disinfection system may send an indicator to the user interface to stop displaying the graphic after a set period of time (e.g., five minutes, one hour).

[0034] An ultrasound system including a disinfection system may optionally include additional features. For example, a curtain may be coupled to a periphery of a display. The curtain may surround the display and obscure the control panel from view when the display is parallel to the control panel. The curtain may reduce or eliminate UV light from reflecting off the control panel onto other surfaces in a room (e.g., patient eyes and skin, UV sensitive equipment, UV sensitive drugs). In some embodiments, the display may include an indicator on an edge or a back surface. The indicator may indicate a disinfection status of the ultrasound imaging system. For example, an LED may be included on an edge or back surface of the display. The LED may be red during disinfection, green after disinfection, and yellow after an interrupted disinfection cycle. This may allow a user to determine the disinfection status without touching the display. In some embodiments, the ultrasound imaging system may provide audible signals based on the disinfection status. In some embodiments, the ultrasound imaging system may provide disinfection status and/or other

information (e.g., disinfection log) to an external computer system. For example, a hospital may have a computer system that tracks the disinfection status of medical devices in the hospital. The information may be transmitted wirelessly, via Ethernet cable, and/or other method.

[0035] Although the present system has been described with reference to an ultrasound imaging system, the present system may be extended to other imaging systems and medical devices. Further, the present system may also include one or more elements which may be used with non-ultrasound imaging systems so that they may provide features and advantages of the present system.

[0036] Further, the present methods, systems, and apparatuses may be applied to existing imaging systems such as, for example, ultrasonic imaging systems. Suitable ultrasonic imaging systems may include a Philips® ultrasound system which may, for example, support a conventional broadband linear array transducer that may be suitable for small-parts imaging.

[0037] Certain additional advantages and features of this invention may be apparent to those skilled in the art upon studying the disclosure, or may be experienced by persons employing the novel system and method of the present invention, chief of which is UV disinfection of ultrasound systems and methods of operation thereof are provided. Another advantage of the present systems and method is that conventional medical image systems may be upgraded to incorporate the features and advantages of the present systems, devices, and methods.

[0038] Of course, it is to be appreciated that any one of the above embodiments or processes may be combined with one or more other embodiments and/or processes or be separated and/or performed amongst separate devices or device portions in accordance with the present systems, devices and methods.

[0039] Finally, the above-discussion is intended to be merely illustrative of the present system and should not be construed as limiting the appended claims to any particular embodiment or group of embodiments. Thus, while the present system has been described in particular detail with reference to exemplary embodiments, it should also be appreciated that numerous modifications and alternative embodiments may be devised by those having ordinary skill in the art without departing from the broader and intended spirit and scope of the present system as set forth in the claims that follow. Accordingly, the specification and drawings are to be regarded in an illustrative manner and are not intended to limit the scope of the appended claims.

What is claimed is:

1. An ultrasound system comprising:

a display;

a control panel;

an ultraviolet (UV) light source coupled to the display, wherein the UV light source is configured to turn on responsive to a control signal;

an articulation system coupled to the display and configured to position the display; and

a controller coupled to the UV light source and configured to provide the control signal to turn on the UV light source responsive to the display being positioned in a disinfect position, and wherein the controller is further configured to prevent the UV light source from illuminating or to turn off the UV light source responsive to

a detection of an object between the control panel and the display while the display is in the disinfect position.

2. The ultrasound system of claim 1 further comprising a position sensor coupled to the controller, wherein the position sensor is configured to provide to the controller position information of the display.

3. The ultrasound system of claim 1, wherein the disinfect position is parallel to the control panel and over the control panel.

4. The ultrasound system of claim 1, further comprising a motion sensor coupled to the controller, wherein the motion sensor is configured to detect a motion of the object between the control panel and the display, and wherein the controller is configured to provide a control signal to turn off the UV light source when the motion sensor detects the motion.

5. The ultrasound system of claim 1, further comprising a touch sensor coupled to the controller, wherein the touch sensor is configured to detect a touch on the control panel, and wherein the controller is configured to provide a control signal to turn off the UV light source when the touch sensor detects the touch.

6. The ultrasound system of claim 1, further comprising a timer coupled to the controller, wherein the timer is configured to set a length of a disinfection cycle, and wherein the controller is further configured to provide a control signal to turn off the UV light source upon completion of the disinfection cycle absent the detection of an object between the control panel and the display prior to the completion of the disinfection cycle.

7. The ultrasound system of claim 1, further comprising a user interface configured to provide a graphic to the display.

8. The ultrasound system of claim 8, wherein the controller is further configured to provide a disinfection status to the user interface, wherein the graphic provided to the display is based, at least in part, on the disinfection status.

9. The ultrasound system of claim 1, further comprising a second UV light source on the control panel.

10. The ultrasound system of claim 1, wherein the UV light source is an LED.

11. The ultrasound system of claim 1, further comprising an instrument holder adjacent to the control panel, wherein the instrument holder includes a second UV light source configured to illuminate an interior of the instrument holder.

12. The ultrasound system of claim 1, wherein the control panel comprises:

a keyboard;

a track ball integrated with the keyboard; and

a second UV light source under the keyboard, the second UV light source configured to illuminate the track ball.

13. A method of disinfecting an ultrasound imaging system, the method comprising:

detecting, with a position sensor, a display is in a disinfect position;

providing a control signal to an ultra violet (UV) light source to turn on the UV light source;

running a timer for a disinfection cycle time; and

providing the control signal to the UV light source to turn off the UV light source responsive to completion of the disinfection cycle time, wherein the control signal is provided by a controller.

14. The method of claim 13, further comprising sending a disinfected indicator to a user interface.

15. The method of claim 14, further comprising detecting at least one of a motion or a touch of the ultrasound imaging system and sending an indicator to turn off the disinfected indicator.

16. The method of claim 13, further comprising turning off the UV light source prior to an end of the disinfection cycle time responsive, at least in part, to detecting at least one of a motion or touch of the ultrasound imaging system.

17. The method of claim 16, further comprising sending a disinfection cycle interrupted indicator to a user interface.

18. (canceled)

19. (canceled)

20. (canceled)

21. The ultrasound system of claim 1, wherein the UV light source is one of a plurality of UV light sources arranged around a perimeter of the display.

22. The ultrasound system of claim 1, wherein the UV light source is one of a plurality of UV light sources embedded within a screen portion of the display.

23. The ultrasound system of claim 1, wherein the user interface is configured to display the graphic until the user touches the control panel and/or begins an exam.

\* \* \* \* \*

|                |                                                                            |         |            |
|----------------|----------------------------------------------------------------------------|---------|------------|
| 专利名称(译)        | 具有消毒功能的超声系统                                                                |         |            |
| 公开(公告)号        | <a href="#">US20180250428A1</a>                                            | 公开(公告)日 | 2018-09-06 |
| 申请号            | US15/756631                                                                | 申请日     | 2016-08-31 |
| [标]申请(专利权)人(译) | 皇家飞利浦电子股份有限公司                                                              |         |            |
| 申请(专利权)人(译)    | 皇家飞利浦N.V.                                                                  |         |            |
| 当前申请(专利权)人(译)  | 皇家飞利浦N.V.                                                                  |         |            |
| [标]发明人         | CANFIELD EARL M                                                            |         |            |
| 发明人            | CANFIELD, EARL M.                                                          |         |            |
| IPC分类号         | A61L2/10 A61B8/00                                                          |         |            |
| CPC分类号         | A61L2/10 A61B8/4422 A61B8/462 A61L2202/14 A61L2202/16 A61L2202/24 A61L2/24 |         |            |
| 优先权            | 62/215799 2015-09-09 US                                                    |         |            |
| 外部链接           | <a href="#">Espacenet</a> <a href="#">USPTO</a>                            |         |            |

#### 摘要(译)

公开了一种包括消毒系统的超声成像系统 ( 100 )。消毒系统可包括一个或多个紫外光源 ( 115 )。UV光源可以包括在显示器中 ( 105 )。消毒系统可以被配置为当显示器平行于超声成像系统的控制面板 ( 120 ) 时进行操作。消毒系统可以提供超声成像系统的消毒状态的指示。

