

(19) 日本国特許庁(JP)

(12) 公表特許公報(A)

(11) 特許出願公表番号

特表2004-528925

(P2004-528925A)

(43) 公表日 平成16年9月24日(2004.9.24)

(51) Int.Cl.⁷

A 6 1 B 18/00

A 6 1 B 8/12

F I

A 6 1 B 17/36 3 3 0

A 6 1 B 8/12

テーマコード (参考)

4 C 0 6 0

4 C 6 0 1

審査請求 未請求 予備審査請求 有 (全 102 頁)

(21) 出願番号 特願2002-593014 (P2002-593014)
 (86) (22) 出願日 平成14年5月28日 (2002.5.28)
 (85) 翻訳文提出日 平成15年11月28日 (2003.11.28)
 (86) 国際出願番号 PCT/US2002/016698
 (87) 国際公開番号 W02002/096506
 (87) 国際公開日 平成14年12月5日 (2002.12.5)
 (31) 優先権主張番号 60/294,135
 (32) 優先日 平成13年5月29日 (2001.5.29)
 (33) 優先権主張国 米国 (US)
 (31) 優先権主張番号 10/000,000
 (32) 優先日 平成14年5月22日 (2002.5.22)
 (33) 優先権主張国 米国 (US)


(71) 出願人 595057890
 エシコン・エンドーサージェリィ・インコーポレイテッド
 Ethicon Endo-Surgery, Inc.
 アメリカ合衆国、45242 オハイオ州、シンシナティ、クリーク・ロード 4545
 (74) 代理人 100066474
 弁理士 田澤 博昭
 (74) 代理人 100088605
 弁理士 加藤 公延
 (74) 代理人 100123434
 弁理士 田澤 英昭

最終頁に続く

(54) 【発明の名称】 超音波治療用の組織保持システム

(57) 【要約】

超音波治療システム(10)は患者(14)の体内に挿入可能なエンドエフェクタ(12)を含む。このエンドエフェクタ(12)は、組織保持装置(16)を含む。組織保持装置(16)は、超音波治療トランスデューサ(26)を有する第1の組織保持部材(18)と第2の組織保持部材(22)を含む。第1の組織保持部材及び第2の組織保持部材(18, 22)は機能的に連結されていて、協働して第1の保持部材(18)と第2の保持部材(22)との間に患者組織(24)を保持することができ、かつそのように保持した患者組織を放すことができる。一例では、第2の組織保持部材(22)は超音波反射器(28)を有する。同じまたは別の例では、超音波治療トランスデューサ(26)は、超音波イメージング/治療トランスデューサである。

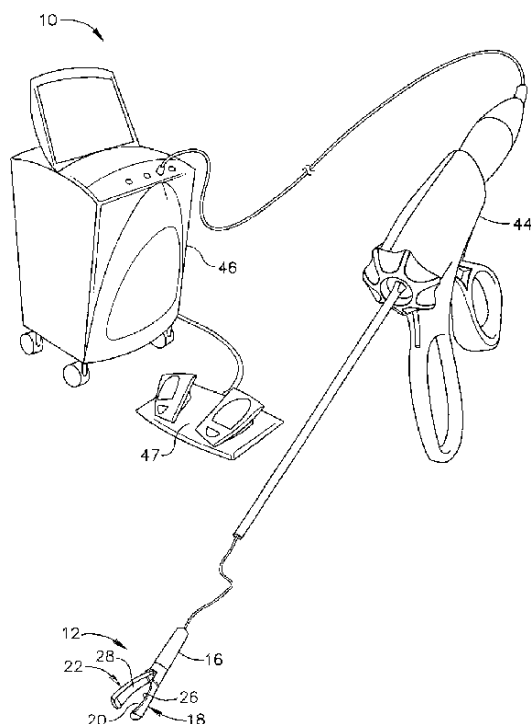

【特許請求の範囲】**【請求項 1】**

患者の体内に挿入可能なエンドエフェクタを含む超音波治療システムであって、前記エンドエフェクタが組織保持装置を含み、前記組織保持装置が、超音波治療トランスデューサを有する第 1 の組織保持部材と、第 2 の組織保持部材とを含み、前記第 1 の組織保持部材と前記第 2 の組織保持部材が機能的に連結されていて、協動して前記第 1 の組織保持部材と前記第 2 の組織保持部材との間に患者組織を保持することができ、かつそのように保持した前記患者組織を放すことができることを特徴とする超音波治療システム。

【請求項 2】

前記保持される患者組織が、前記トランスデューサと前記第 2 の組織保持部材との間に保持されることを特徴とする請求項 1 に記載の超音波治療システム。 10

【請求項 3】

患者の体内に挿入可能なエンドエフェクタを含む超音波治療システムであって、前記エンドエフェクタが組織保持装置を含み、前記組織保持装置が、超音波イメージング / 治療トランスデューサを有する第 1 の組織保持部材と、第 2 の組織保持部材とを含み、前記第 1 の組織保持部材と前記第 2 の組織保持部材が機能的に連結されていて、協動して前記第 1 の組織保持部材と前記第 2 の組織保持部材との間に患者組織を保持することができ、かつそのように保持した前記患者組織を放すことができることを特徴とする超音波治療システム。

【請求項 4】

前記保持された患者組織が、前記トランスデューサと前記第 2 の組織保持部材との間に保持されることを特徴とする請求項 3 に記載の超音波治療システム。 20

【請求項 5】

前記エンドエフェクタが、開放手術エンドエフェクタ、内視鏡エンドエフェクタ、腹腔鏡エンドエフェクタ、カテーテルエンドエフェクタ、または針エンドエフェクタであることを特徴とする請求項 3 に記載の超音波治療システム。

【請求項 6】

前記トランスデューサが超音波エネルギーを集束することを特徴とする請求項 3 に記載の超音波治療システム。

【請求項 7】

請求項 3 の超音波治療システムを用いて患者を超音波治療するための方法であって、
(a) 前記患者の耳、鼻、または喉の中に前記エンドエフェクタを内視鏡的に挿入するステップと、
(b) 前記患者の体内で前記エンドエフェクタを案内するステップと、
(c) 少なくとも部分的に前記トランスデューサを用いて超音波イメージングから、治療のために患者組織を識別するステップと、
(d) 前記組織保持装置を用いて、前記識別した患者組織を保持するステップと、
(e) 前記保持した患者組織を、前記トランスデューサを用いて超音波で治療するステップとを含むことを特徴とする方法。 30

【請求項 8】

請求項 3 に記載の超音波治療システムを用いて患者を超音波治療するための方法であって、
(a) 前記患者の体内に前記エンドエフェクタを挿入するステップと、
(b) 前記組織保持装置を用いて、前記患者の組織を含む椎間板を保持するステップと、
(c) 前記組織を収縮させるべく、前記トランスデューサを用いて超音波で前記保持した椎間板を治療するステップとを含むことを特徴とする方法。 40

【請求項 9】

請求項 3 に記載の超音波治療システムを用いて患者を超音波治療するための方法であって、
(a) 前記患者の体内に前記エンドエフェクタを挿入するステップと、 50

(b) 前記組織保持装置を用いて、前記患者の組織を含む関節を保持するステップと、
(c) 前記組織を収縮させるべく、前記トランスデューサを用いて超音波で前記保持した関節を治療するステップとを含むことを特徴とする方法。

【請求項 10】

前記第 2 の組織保持部材が実質的に超音波を反射しないことを特徴とする請求項 3 に記載の超音波治療システム。

【請求項 11】

患者の体内に挿入可能なエンドエフェクタを含む超音波治療システムであって、前記エンドエフェクタが組織保持装置を含み、前記組織保持装置が、超音波治療トランスデューサを有する第 1 の組織保持部材と、超音波反射器を有する第 2 の組織保持部材とを含み、前記第 1 の組織保持部材及び前記第 2 の組織保持部材が機能的に連結されていて、協働して前記第 1 の組織保持部材と前記第 2 の組織保持部材との間に患者組織を保持することができ、かつそのように保持した前記患者組織を放すことができることを特徴とする超音波治療システム。

10

【請求項 12】

前記保持される患者組織が、前記トランスデューサと前記反射器との間に保持されることを特徴とする請求項 11 に記載の超音波治療システム。

【請求項 13】

患者の体内に挿入可能なエンドエフェクタを含む超音波治療システムであって、前記エンドエフェクタが組織保持装置を含み、前記組織保持装置が、超音波イメージング / 治療トランスデューサを有する第 1 の組織保持部材と、超音波反射器を有する第 2 の組織保持部材とを含み、前記第 1 の組織保持部材と前記第 2 の組織保持部材が機能的に連結されていて、協働して前記第 1 の組織保持部材と前記第 2 の組織保持部材との間に患者組織を保持することができ、かつそのように保持した前記患者組織を放すことができることを特徴とする超音波治療システム。

20

【請求項 14】

前記保持される患者組織が、前記トランスデューサと前記反射器との間に保持されることを特徴とする請求項 13 に記載の超音波治療システム。

【請求項 15】

前記エンドエフェクタが、開放手術エンドエフェクタ、内視鏡エンドエフェクタ、腹腔鏡エンドエフェクタ、カテーテルエンドエフェクタ、または針エンドエフェクタであることを特徴とする請求項 13 に記載の超音波治療システム。

30

【請求項 16】

前記反射器が、前記トランスデューサからの超音波エネルギーを受けるように配置されており、前記組織保持装置によって保持された患者組織内に向かってその超音波エネルギーを反射するように向いていることを特徴とする請求項 13 に記載の超音波治療システム。

【請求項 17】

前記トランスデューサ及び前記反射器のそれぞれが超音波エネルギーを集束することを特徴とする請求項 16 に記載の超音波治療システム。

【請求項 18】

前記患者組織が前記組織保持装置によって保持されているときに、前記反射器が、前記受けた超音波エネルギーを前記トランスデューサから離れるように反射するように向いていることを特徴とする請求項 16 に記載の超音波治療システム。

40

【請求項 19】

前記第 1 の組織保持部材及び前記第 2 の組織保持部材の一方が、前記第 1 の組織保持部材及び前記第 2 の組織保持部材の他方に対して制御可能に向きを変えることができることを特徴とする請求項 13 に記載の超音波治療システム。

【請求項 20】

前記第 2 の組織保持部材が、前記受けた超音波エネルギーを様々な方向に沿って反射させるべく、前記第 1 の組織保持部材に対して制御可能に向きを変えることができることを特

50

徴とする請求項 19 に記載の超音波治療システム。

【請求項 21】

前記トランスデューサ及び前記反射器のそれぞれが超音波エネルギーを集束することを特徴とする請求項 19 に記載の超音波治療システム。

【請求項 22】

前記エンドエフェクタが長手方向の軸を有しており、前記第 1 の組織保持部材及び前記第 2 の組織保持部材の一方が、前記長手方向の軸に対して実質的に平行な方向に沿って常に向いていることを特徴とする請求項 13 に記載の超音波治療システム。

【請求項 23】

前記一方の組織保持部材が前記第 1 の組織保持部材であることを特徴とする請求項 22 に記載の超音波治療システム。 10

【請求項 24】

請求項 22 の超音波治療システムを用いて患者を超音波治療するための方法であって、
(a) 前記患者の耳、鼻、または喉の中に前記エンドエフェクタを内視鏡的に挿入するステップと、
(b) 前記患者の体内で前記エンドエフェクタを案内するステップと、
(c) 少なくとも部分的に前記トランスデューサを用いて超音波イメージングから、治療のために患者組織を識別するステップと、
(d) 前記組織保持装置を用いて、前記識別された保持組織を保持するステップと、
(e) 前記保持した患者組織を、前記トランスデューサ及び前記反射器を用いて超音波で治療するステップとを含むことを特徴とする方法。 20

【請求項 25】

前記エンドエフェクタが長手方向の軸を有しており、前記第 1 の組織保持部材及び前記第 2 の組織保持部材の一方が、前記長手方向の軸に対して実質的に直交する方向に沿って常に向いていることを特徴とする請求項 13 に記載の超音波治療システム。

【請求項 26】

前記一方の組織保持部材が前記第 1 の組織保持部材であることを特徴とする請求項 25 に記載の超音波治療システム。

【請求項 27】

請求項 25 の超音波治療システムを用いて患者を超音波治療するための方法であって、 30
(a) 前記患者の体内に前記エンドエフェクタを挿入するステップと、
(b) 前記組織保持装置を用いて、前記患者の組織を含む椎間板を保持するステップと、
(c) 前記組織を収縮させるべく、前記トランスデューサ及び前記反射器を用いて超音波で前記保持した椎間板を治療するステップを含むことを特徴とする方法。

【請求項 28】

請求項 25 の超音波治療システムを用いて患者を超音波治療するための方法であって、
(a) 前記患者の体内に前記エンドエフェクタを挿入するステップと、
(b) 前記組織保持装置を用いて、前記患者の組織を含む関節を保持するステップと、
(c) 前記組織を収縮させるべく、前記トランスデューサ及び前記反射器を用いて超音波で前記保持した関節を治療するステップを含むことを特徴とする方法。 40

【請求項 29】

患者の体内に挿入可能なエンドエフェクタを含む超音波治療システムであって、
前記エンドエフェクタが組織保持装置を含み、前記組織保持装置が、超音波イメージング / 治療トランスデューサを有する第 1 の組織保持部材と、超音波反射器を有する第 2 の組織保持部材とを含み、前記第 1 の組織保持部材と前記第 2 の組織保持部材が機能的に連結されていて、協働して前記第 1 の組織保持部材と前記第 2 の組織保持部材との間に患者組織を保持することができ、かつそのように保持した前記患者組織を放すことができ、前記第 1 の組織保持部材及び前記第 2 の組織保持部材が常に実質的に平行な配置に維持されることを特徴とする超音波治療システム。

【請求項 30】

前記第 1 の組織保持部材が第 1 のチューブの先端側部分であって、

(a) 前記第 1 のチューブに対して実質的に平行に向いた第 2 のチューブと、

(b) 第 1 の連結部材及び第 2 の連結部材であって、それぞれ前記第 1 の組織保持部材及び前記第 2 のチューブに回転点で回転可能に取り付けられており、これにより前記第 1 の組織保持部材の基端部分、前記第 2 のチューブの先端部分、前記第 1 の連結部材、及び前記第 2 の連結部材によって変形可能な平行四辺形が画定されており、前記反射器が、前記トランスデューサを向いて前記第 2 の組織保持部材の先端部分に配置されている、前記第 1 の連結部材及び前記第 2 の連結部材と、

(c) 前記変形可能な平行四辺形に機能的に連結されていて、前記第 2 の組織保持部材を前記第 1 の組織保持部材に対して近づけたり離したりすることができるケーブルとを含むことを特徴とする請求項 29 に記載の超音波治療システム。 10

【請求項 31】

外側チューブを更に含み、その外側ケーブル内に前記ケーブル、前記第 1 のチューブ、及び前記第 2 のチューブが配置されていることを特徴とする請求項 30 に記載の超音波治療システム。

【請求項 32】

更にハンドピースを含み、そのハンドピースに前記ケーブル、前記第 1 のチューブ、前記第 2 のチューブ、及び前記外側チューブが機能的に連結されていることを特徴とする請求項 31 に記載の超音波治療システム。

【発明の詳細な説明】 20

【0001】

本願は、米国仮特許出願第 60 / 294 , 135 号の優先権を主張するものであり、この特許出願を参照することを以ってそのすべての開示を本願の一部とするものである。

【0002】

発明の分野

本発明は超音波に関連し、詳細には、超音波治療システム及び／または超音波治療方法に関連する。

【0003】

発明の背景

既知の超音波医療システム及び方法では、患者の超音波画像を用いて治療のために患者の組織を識別し、超音波で識別された組織に熱を加えてその組織を医学的に破壊する。イメージングは低出力で行い、治療は高出力で行う。低出力の超音波イメージングでは、患者組織は医学的影響を受けない。高出力の治療用超音波が超音波源から離れた局所領域に集束すると、その局所領域の患者の組織が実質的に医学的な影響を受ける。しかしながら、集束した治療用超音波は、局所領域の以外の患者組織、例えば超音波源と局所領域の間の患者組織に実質的に医学的な影響を与えない。 30

【0004】

ある既知の例では、トランスデューサ組立体は、患者の超音波画像を撮るため及び識別された患者組織を超音波でアブレーションするために、1つのトランスデューサ要素を備えた1つの超音波トランスデューサまたは一緒に動作するトランスデューサ要素のアレイを含む。超音波治療を監視するために超音波治療中の患者組織の超音波画像データを温度画像データに変換することは周知である。既知のトランスデューサ要素には、超音波エネルギーを集束する凹レンズまたは音響レンズを備えたトランスデューサ要素がある。既知のトランスデューサ要素のアレイには、超音波エネルギーを集束する平面、凹状、または凸状のトランスデューサ要素のアレイがある。既知のトランスデューサ要素のアレイには、そのアレイから放射された超音波を集束領域（大きくてもよいし、米粒ほど小さくてもよい）に配向及び集束して患者組織の3次元超音波治療をするようにトランスデューサ要素が同時に電子制御または機械制御されるアレイが含まれる。ある適用例では、トランスデューサを患者組織の表面に配置して、患者組織内のある領域の超音波イメージング及び／または超音波治療を行う。別の適用例では、トランスデューサをバルーンで覆い、そのバ 40 50

ルーンを生理食塩水などの流体で満たして膨張させて患者の組織表面に接触させ、そのトランスデューサとその患者組織を音響的に結合する。

【 0 0 0 5 】

既知の超音波システム及び方法には、超音波トランスデューサを備えたエンドエフェクタを体外に配置して体内の腎石を医学的に破壊すること、及び超音波トランスデューサを備えたエンドエフェクタを内視鏡的に結腸に挿入して前立腺癌を医学的に破壊すること、及び超音波トランスデューサを備えたエンドエフェクタを腹腔鏡的に腹腔内に挿入して癌性肝腫瘍を医学的に破壊すること、及び超音波トランスデューサを備えたカテーテルエンドエフェクタを腕の静脈内に挿入して心臓に送り、病変心臓組織を医学的に破壊すること、及び超音波トランスデューサ針を備えた針エンドエフェクタを組織を通して舌に挿入し、組織を医学的に破壊してその舌の容量を小さくして鼾を解消することが含まれる。患者の体内でエンドエフェクタを案内する既知の方法には、X線画像、MRI画像、及び超音波トランスデューサで得た超音波画像を用いてエンドエフェクタを案内する方法がある。既知の超音波イメージングには、血流を検出するためのドップラー超音波イメージングがあり、提案されている既知の超音波の利用には、体外で超音波トランスデューサを用いて、病院の救急室に運び込まれた患者の内出血を止める（破裂した血管を塞いで）ことが含まれる。

10

【 0 0 0 6 】

エシコン・エンド・サージェリィ社（Ethicon Endo-Surgery, Inc.（ジョンソン＆ジョンソン社））が製造するMammotome（登録商標）乳房生検システムでチューブを乳房組織内に挿入する。このチューブは、生検切除器具を備えたエンドエフェクタを有する。トランスポンダの位置を算出して患者の体内でトランスポンダを案内する既知の電磁トランスポンダ／3次元システムは、バイオセンス・ウェブスター（Biosense Webster（ジョンソン＆ジョンソン社））が製造するNAVI-STAR（登録商標）カテーテルと共に用いられるCARTO（商標）EPナビゲーションシステムである。更に、超音波治療などの治療による患者の組織の変化が超音波イメージング信号の振幅及び／または位相に影響を及ぼすことが知られている。

20

【 0 0 0 7 】

改良された超音波医療システム及び／または改良された超音波医療方法が求められている。本発明は、超音波医療システム及び／または超音波医療方法の欠点を解消する。

30

【 0 0 0 8 】

本発明の要約

本発明の一実施形態の一表現は、患者の体内に挿入可能なエンドエフェクタを含む超音波治療システムである。このエンドエフェクタは組織保持装置を含む。この組織保持装置は、超音波治療トランスデューサを有する第1の組織保持部材と第2の組織保持部材とを含む。第1の組織保持部材及び第2の組織保持部材は機能的に連結されていて、協働して第1の組織保持部材と第2の組織保持部材との間に患者組織を保持することができ、かつそのように保持した患者組織を放すことができる。一例では、第2の組織保持部材は超音波反射器を有する。同じまたは別の例では、超音波治療トランスデューサは超音波イメージング／治療トランスデューサである。

40

【 0 0 0 9 】

本発明は、限定するものではないが、従来の内視鏡、開放手術器具、並びにロボット支援外科手術に適用できる。

【 0 0 1 0 】

発明の詳細な説明

本発明を詳細に説明する前に、本発明が、その適用及び使用において、添付の図面及び以降の説明に例示されている構造及び構成の細部に限定されるものではないことを理解されたい。本発明の例示されている実施形態は、他の実施形態、変形形態、変更形態で実施したりこれらに含めたりすることができ、様々な方法で実施できる。更に、特段の記載がない限り、本明細書に用いる用語及び表現は、読者が理解し易いように本発明の例示的な実

50

施形態を説明するために選択したものであって、本発明を限定することが目的ではない。

【0011】

1または複数の後述する実施形態、実施形態の表現、例、または方法などを、1または複数の後述する実施形態、実施形態の表現、例、または方法などと組み合わせることができることを理解されたい。例えば、限定するものではないが、任意のエンドエフェクタを任意の方法に、任意のトランスデューサ構造を任意のエンドエフェクタに用いることができ、第17の方法と第18の方法とを組み合わせるように任意の好適な方法を組み合わせることができる。

【0012】

組織保持装置を用いた超音波治療

10

超音波治療用の組織保持システム

図面を参照すると、図1～図3に本発明の第1の実施形態が例示されている。本発明の第1の実施形態の第1の表現は、患者14内に挿入可能なエンドエフェクタ12を備えた超音波治療システム10についてである。エンドエフェクタ12は組織保持装置16を含む。この組織保持装置16は、少なくとも1つの超音波治療トランスデューサ20（トランスデューサ20とも呼ぶ）を備えた第1の組織保持部材18と第2の組織保持部材22を含む。第1の組織保持部材18と第2の組織保持部材22は機能的に連結されていて、協動してそれらの両部材間に患者組織24を保持することができ、かつ保持した患者組織24を放すことができる。

【0013】

20

超音波治療トランスデューサが、限定するものではないが、少なくとも人などの患者の超音波治療ができるように適合された超音波トランスデューサであることを留意されたい。超音波トランスデューサは、当業者に周知の、1つの超音波治療トランスデューサ要素または超音波治療トランスデューサ要素のアレイのいずれかを含む。超音波治療トランスデューサは、患者の超音波イメージングを行うことができるように適合されていても、適合されていなくてもよい。同様に、超音波イメージングトランスデューサは、少なくとも患者の超音波イメージングができるように適合された超音波トランスデューサであり、患者の超音波治療ができるように適合されていても、適合されていなくてもよい。

【0014】

組織保持部材の一方による超音波治療中に2つの組織保持部材の間に患者組織を保持する利点には、1つの器具で患者の組織を超音波的に治療すると共に、治療中にずれないように患者組織を固定できることが含まれる。またある適用例では、組織保持装置は組織を維持及び保持するクランプであり、別の適用例では、組織保持装置はクランプではなく、組織を保持しないが組織が動かないように維持する装置であることに留意されたい。

30

【0015】

図示されていない一変形形態では、第2の組織保持部材22は、超音波イメージングトランスデューサ及び/または治療トランスデューサを有する。図示されていない同じまたは別の変形形態では、組織保持装置16は、少なくとも1つの追加の組織保持部材を有する。2またはそれ以上の部材を遠隔操作で互いに近づけたり遠ざけたりするための機構（図示せず）は当業者の一般的な知識の範囲内であって、限定するものではないが、回動部材アタッチメントの使用及びケーブルやモーターの使用が含まれる。同じまたは別の変形形態では、患者組織24は、超音波治療トランスデューサ20と第2の組織保持部材22との間に保持される。同じまたは別の変形形態では、超音波治療トランスデューサ20は超音波エネルギーを集束するが、このような収束は当業者に周知である。図示されていない同じまたは別の変形形態では、第2の組織保持部材22は実質的に超音波を反射しない。

40

【0016】

本発明の第1の実施形態の第2の表現は、患者14内に挿入可能なエンドエフェクタ12を含む超音波治療システム10についてである。エンドエフェクタ12は組織保持装置16を含む。この組織保持装置16は、少なくとも1つの超音波イメージング/治療トランスデューサ26（トランスデューサ26とも呼ぶ）を有する第1の組織保持部材18と第

50

2の組織保持部材22とを含む。第1の組織保持部材18及び第2の組織保持部材22は機能的に連結されていて、協動してこれらの間に患者組織24を保持することができ、かつそのように保持した患者組織24を放すことができる。

【0017】

超音波イメージング/治療トランスデューサは、少なくとも患者の超音波イメージング及び超音波治療の両方ができるように適合された超音波トランスデューサである。超音波イメージング/治療トランスデューサは、1つの超音波イメージング/治療トランスデューサ要素、または超音波トランスデューサ要素のアレイ(イメージングのための少なくとも1つの個別の要素と治療のための少なくとも1つの個別の要素を有するアレイ、またはそれぞれがイメージングと治療の両方ができるように適合された少なくとも2つの要素を有するアレイを含む)のいずれかを含むが、これは当業者に周知である。一変形形態では、保持された患者組織24は、イメージング/治療トランスデューサ26と第2の組織保持部材22との間に保持される。同じまたは別の変形形態では、超音波イメージング/治療トランスデューサ26は超音波エネルギーを集束する。図示されていない同じまたは別の変形形態では、第2の組織保持部材22は実質的に超音波を反射しない。

10

【0018】

図1~図3に示されている第1の実施形態の第3の表現は、患者14内に挿入可能なエンドエフェクタ12を含む超音波治療システム10についてである。エンドエフェクタ12は組織保持装置16を含む。組織保持装置16は、少なくとも1つの超音波治療トランスデューサ20を有する第1の組織保持部材18と、少なくとも1つの超音波反射器28を有する第2の組織保持部材22とを含む。第1の組織保持部材18及び第2の組織保持部材22は機能的に連結されていて、協動してそれらの両部材間に患者組織24を保持することができ、かつそのように保持した患者組織24を放すことができる。

20

【0019】

第1の組織保持部材の超音波治療トランスデューサ及び第2の組織保持部材の超音波反射器によって超音波治療中に、2つの組織保持部材間に患者組織を保持する利点には、1つの器具で、直接の超音波によって超音波治療でき、反射された超音波によって超音波治療を促進し、更に治療中にずれないように患者組織を固定できることが含まれる。

【0020】

超音波反射器28は、その超音波反射器で反射される直接の超音波によって治療されている間に、少なくとも実質的に医学的な影響を患者組織に与える程度に超音波を反射する物質であることに留意されたい。超音波反射材料として、限定するものではないが、ステンレス鋼(約100%の反射率)及びアルミニウム(約80%の反射率)などの音響的に硬い材料、コーポリン(corporene)(約90%の反射率)などの音響的に柔らかい材料をあげることができる。超音波反射材料は、限定するものではないが、ゴムやプラスチック等の超音波吸収材料等と対照的である。一変形形態では、保持された患者組織24は、超音波治療トランスデューサ20と超音波反射器28との間に保持される。同じまたは別の変形形態では、超音波治療トランスデューサ20及び超音波反射器28はそれぞれ、超音波エネルギーを集束する。このような超音波反射器のエネルギーの集束は、反射器表面の形状または成形することによって達成することができるが、これは当業者の知識の範囲内である。

30

40

【0021】

図1~図3に示されている第1の実施形態の第4の表現は、患者14内に挿入可能なエンドエフェクタ12を含む超音波治療システム10についてである。エンドエフェクタ12は組織保持装置16を含む。組織保持装置16は、少なくとも1つの超音波イメージング/治療トランスデューサ26を有する第1の組織保持部材18と、少なくとも1つの超音波反射器28を有する第2の組織保持部材22とを含む。第1の組織保持部材18及び第2の組織保持部材22は機能的に連結されていて、協動してこれらの両部材間に患者組織24を保持することができ、かつそのように保持した患者組織24を放すことができる。一変形形態では、保持される患者組織24は、超音波イメージング/治療トランスデューサ

50

26と超音波反射器28との間に保持される。同じまたは別の変形形態では、超音波イメージング/治療トランスデューサ26及び超音波反射器28のそれぞれは超音波エネルギーを集束する。

【0022】

第1の実施形態の前記した第3の表現及び第4の表現の一例では、超音波反射器28は、トランスデューサ20及びトランスデューサ26からの超音波エネルギーを受けて、組織保持装置16によって保持されている患者組織24に超音波エネルギーを反射する向きに配置されている。同じまたは別の例では、超音波反射器28は、患者組織14が組織保持装置16によって保持されているときに到達した超音波エネルギーをトランスデューサ20及びトランスデューサ26から離れる方向に反射するように配置されている。この構成の利点は、反射した超音波によるトランスデューサの損傷を回避できるということである。同じまたは別の例では、第1の組織保持部材18及び第2の組織保持部材22の一方を、限定するものではないが図2に示されている両矢印に沿って向きを変えることができるようにして、第1の組織保持部材18及び第2の組織保持部材22の他方に対して制御可能に向きを合わせることができる。一変更形態では、第2の組織保持部材22を、到達した超音波エネルギーを様々な方向に沿って反射するように第1の組織保持部材18に対して制御可能に向きを合わせることができる。第1の代替エンドエフェクタ30が図4に示されており、第2の組織保持部材32を、図4の両矢印によって示されているように第1の組織保持部材34に対して制御可能に向きを合わせることができる。一方の部材を他方の部材に対して制御可能に遠隔的に向きを合わせる機構(図示せず)は当業者の知識の範囲内であり、限定するものではないが、回動部材アタッチメントの使用及びケーブルやモーターの使用が含まれる。一適用例では、トランスデューサ20及びトランスデューサ26は、広い範囲に集束する超音波(図3の第1の組織保持部材18から出た矢印によって示されている)を生成し、超音波反射器28が、狭く集束する超音波(図3の第2の組織保持部材22から出た矢印によって示されている)を生成する。

【0023】

第1の実施形態の前記した第1の表現から第4の表現の一例では、エンドエフェクタ12は、当業者なら理解できる開放手術(open-surgery)エンドエフェクタ、内視鏡エンドエフェクタ、腹腔鏡エンドエフェクタ(図1に示されているような)、カテーテルエンドエフェクタ(限定するものではないが、血管内カテーテルエンドエフェクタ等)、または針エンドエフェクタである。一適用例では、エンドエフェクタ12を用いて血管を保持し、次にその血管を超音波治療して血管を塞ぎ、保持した血管内の血液の流れを止める。別の適用例では、エンドエフェクタ12を用いて患者組織を保持し、次に保持した患者組織の少なくとも一部を超音波アブレーションする。

【0024】

第1の実施形態の上記した第1の表現から第4の表現のあるデザインでは、エンドエフェクタ12は長手方向の軸35を有しており、第1の組織保持部材18及び第2の組織保持部材22の一方が、長手方向の軸35に対して実質的に直交する方向に常に向いている。その一方の組織保持部材が平面であったら、その長手方向の軸がその一方の組織保持部材の平面に対して実質的に平行であることになる。可能な一形態では、その一方の組織保持部材は第1の組織保持部材18である。第2の代替エンドエフェクタ36は、図5の両矢印によって示されているように互いに対して動くように蝶番式に取り付けられた第1の組織保持部材38及び第2の組織保持部材40を有しており、図5に部分的に開いた状態が示されている。第2の代替エンドエフェクタ36は、長手方向の軸42を有しており、第1の組織保持部材38及び第2の組織保持部材40の一方が、その長手方向の軸42に対して実質的に平行な方向に常に向いている。その一方の組織保持部材が平面であったら、その長手方向の軸は、その一方の組織保持部材の平面に対して実質的に直交することになる。可能な一形態では、その一方の組織保持部材は第1の組織保持部材38である。図6に示されているように、第3の代替エンドエフェクタ37は、第1の組織保持部材39及び第2の組織保持部材41を備えており、その一方の部材が他方の部材に対して長手方向

に移動可能（両矢印によって示されているように）である。第３の代替エンドエフェクタ３７は長手方向の軸４３を有しており、第１の組織保持部材３９及び第２の組織保持部材４１の一方が、長手方向の軸４３に対して実質的に平行な方向に常に向いている。可能な一形態では、その一方の組織保持部材は第１の組織保持部材３９である。

【００２５】

図１に示されているように、可能な一形態では、超音波治療システム１０は、当業者なら理解できる、フットペダル電源スイッチ４７に機能的に接続された超音波制御器４６及びエンドエフェクタ１２に機能的に接続されたハンドピース４４を含む。

【００２６】

本発明の第１の方法は、前記した変形形態などを含むまたは含まない第１の実施形態の第１の表現、第２の表現、第３の表現、または第４の表現で説明したような超音波治療システムを用いる患者の超音波治療についてである。第１の方法は、ステップ（ａ）からステップ（ｅ）を含む。ステップ（ａ）は、患者の耳、鼻、または喉の中にエンドエフェクタを内視鏡的に挿入することを含む。ステップ（ｂ）は、患者の体内で内視鏡を案内することを含む。ステップ（ｃ）は、任意選択で少なくとも部分的にトランスデューサを用いて超音波イメージングから治療のために患者組織を識別することを含む。治療のために患者組織を識別する他の方法には、限定するものではないが、当業者に周知のＸ線画像及び／またはＭＲＩ画像が含まれる。ステップ（ｄ）は、組織保持装置を用いて識別した患者組織を保持することを含む。ステップ（ｅ）は、トランスデューサを用いてまたはトランスデューサと超音波反射器を用いて超音波で、保持している患者組織を治療することを含む。一実施態様では、一方の組織保持部材は、エンドエフェクタの長手方向の軸に対して実質的に平行な方向に常に向いている（図５及び図６を参照）。 10 20

【００２７】

本発明の第２の方法は、上記した変形形態などを含むまたは含まない第１の実施形態の第１の表現、第２の表現、第３の表現、または第４の表現で説明したような超音波治療システムを用いる患者の超音波治療についてである。この第２の方法はステップ（ａ）からステップ（ｃ）を含む。ステップ（ａ）は、患者の体内にエンドエフェクタ１２を挿入することを含む。ステップ（ｂ）は、組織保持装置で患者の組織を含む椎間板４８（図３を参照）を保持することを含む。ステップ（ｃ）は、トランスデューサを用いてまたはトランスデューサと超音波反射器を用いて組織を収縮させるために超音波で、保持している椎間板４８を治療することを含む。一実施態様では、一方の組織保持部材は、エンドエフェクタの長手方向の軸に対して実質的に直交する方向に常に向いている（図２及び図４を参照）。本発明の第２の方法の一適用例では、椎間板４８は結合組織及び神経組織を含む。 30 40

【００２８】

本発明の第３の方法は、上記した変形形態等を含むまたは含まない第１の実施形態の第１の表現、第２の表現、第３の表現、または第４の表現で説明したような超音波治療システムを用いる患者の超音波治療についてである。この第３の方法は、ステップ（ａ）からステップ（ｃ）を含む。ステップ（ａ）は、患者の体内にエンドエフェクタを挿入することを含む。ステップ（ｂ）は、組織保持装置で患者の組織を含む関節を保持することを含む。ステップ（ｃ）は、トランスデューサを用いてまたはトランスデューサと超音波反射器を用いて組織を収縮させるために超音波で、保持している関節を治療することを含む。一実施態様では、一方の組織保持部材は、エンドエフェクタの長手方向の軸に対して実質的に直交する方向に常に向いている（図２及び図４を参照）。本発明の第３の方法の一適用例では、関節は結合組織及び神経組織を含む。 40 50

【００２９】

上記したように、第１の実施形態の上記した第１の表現から第４の表現の超音波治療システム１０の一適用例では、組織保持装置を用い血管を保持し、トランスデューサを用いてまたはトランスデューサと超音波反射器を用いてその血管内の血液の流れを実質的に止める。

【００３０】

再び図面を参照すると、図 7 及び図 8 に本発明の第 2 の実施形態が例示されている。この第 2 の実施形態は、患者の体内に挿入可能なエンドエフェクタ 5 2 を含む超音波治療システム 5 0 である。エンドエフェクタ 5 2 は組織保持装置 5 4 を含む。組織保持装置 5 4 は、超音波イメージング / 治療トランスデューサ 5 8 を有する第 1 の組織保持部材 5 6 と、超音波反射器 6 2 を有する第 2 の組織保持部材 6 0 とを含む。第 1 の組織保持部材 5 6 及び第 2 の組織保持部材 6 0 は機能的に連結されていて、協動してこれらの両部材間に患者組織を保持することができ、かつそのように保持した患者組織を放すことができる。第 1 の組織保持部材 5 6 及び第 2 の組織保持部材 6 0 は、常に実質的に平行な配置に維持される。

【 0 0 3 1 】

組織保持部材間を実質的に平行な配置にする利点には、一例では、トランスデューサと超音波反射器を実質的に平行な配置に維持して、組織保持部材に保持したあらゆる厚みの患者組織に対して、反射された超音波による治療が改善できることが含まれる。

【 0 0 3 2 】

第 2 の実施形態の一例では、第 1 の組織保持部材 5 6 は第 1 のチューブ 6 6 の先端部分 6 4 である。超音波治療システム 5 0 はまた、第 2 のチューブ 6 8、第 1 の連結部材 7 0、第 2 の連結部材 7 2、及びケーブル 7 4 を含む。第 2 のチューブ 6 8 は、第 1 のチューブ 6 6 と実質的に平行に向いている。第 1 の連結部材 7 0 及び第 2 の連結部材 7 2 は、回転点 7 6、7 8、8 0 及び 8 2 で第 2 の組織保持部材 6 0 及び第 2 のチューブ 6 8 に回転可能に取り付けられており、第 2 の組織保持部材 6 0 の基端部分 8 4、第 2 のチューブ 6 8 の先端部分 8 6、第 1 の連結部材 7 0、及び第 2 の連結部材 7 2 によって蝶番式平行四辺形が画定されている。超音波反射器 6 2 が、トランスデューサ 5 8 に面するように第 2 の組織保持部材 6 0 の先端部分 8 8 に配置されている。ケーブル 7 4 が、第 2 の組織保持部材 6 0 を第 1 の組織保持部材 5 6 に対して近づけたり離したりできるように蝶番式平行四辺形に機能的に連結されている。

【 0 0 3 3 】

一変形形態では、超音波治療システム 5 0 は外側チューブ 9 0 も含む。外側チューブ 9 0 の中には、ケーブル 7 4、第 1 のチューブ 6 6、及び第 2 のチューブ 6 8 が配置されている。一変更形態では、超音波治療システム 5 0 はハンドピース 9 2 も含む。ハンドピース 9 2 には、ケーブル 7 4、第 1 のチューブ 6 6、第 2 のチューブ 6 8、及び外側チューブ 9 0 が機能的に連結されている。あるデザインでは、第 1 のチューブ 6 6 の長手方向の軸に対する第 1 のチューブ 6 6 の向きを、ハンドピース 9 2 内に配置されたステップモータ（図示せず）をそのハンドピース 9 2 で操作して制御できる。同じまたは別のデザインでは、第 1 のチューブ 6 6 は、トランスデューサの配線（図示せず）が可能となるように中空のチューブであり、第 2 のチューブ 6 8 は硬質チューブ（図示せず）である。用途によって、チューブ 6 6、6 8 及び 9 0 を硬質にすることも柔軟にすることもでき、これが、あらゆるエンドエフェクタのあらゆるチューブ構造（具体的に硬質または柔軟性と開示した、または具体的には開示していない）に当てはまり、また本発明の前記した実施形態または後述する実施形態のあらゆるエンドエフェクタ自体に当てはまる。

【 0 0 3 4 】

特定のトランスデューサ構造を用いた超音波治療
配置可能な超音波治療トランスデューサ

図面を参照すると、図 9 ~ 図 1 1 に本発明の第 3 の実施形態が例示されている。本発明の第 3 の実施形態の第 1 の表現は、チューブ 9 6 と弾力的に可撓性を有する複数のフィンガー 9 8 を含む超音波医療システム 9 4 についてである。チューブ 9 6 は、患者の体内に挿入可能な先端部 1 0 0 と、先端開口 1 0 4 を備えた内腔 1 0 2 とを有する。フィンガー 9 8 は、内腔 1 0 2 の先端開口 1 0 4 から突き出た展開状態（図 1 0 を参照）をとることができる。内腔 1 0 2 の先端開口 1 0 4 内に少なくとも部分的に格納された収納状態（図 1 1 を参照）をとることができる。それぞれのフィンガー 9 8 は超音波トランスデューサ 1 0 6 を含む。近接するフィンガー 9 8 の各超音波トランスデューサ 1 0 6 間の距離は、収納

10

20

30

40

50

状態よりも展開状態で大きい。超音波医療システムは、少なくとも患者の超音波イメージングまたは超音波治療を提供する医療システムである。

【0035】

チューブと伸長可能／格納可能な可撓性フィンガーのアレイ構造の利点には、トランスデューサが展開された状態で共通の集束ゾーンを有する超音波治療トランスデューサである場合、トランスデューサ超音波放射表面積をより大きくすることができ、これにより治療時間を短縮できることが含まれる。この超音波放射表面積は、患者の体内において超音波治療を行う患者組織の部位に対して送る及び戻す際にコンパクトな形状に簡単に収納することができる。

【0036】

一変形形態では、フィンガー98は、収納された状態でその一部のみが内腔102の先端開口104内に格納される(図11を参照)。図示されていない別の変形形態では、フィンガー98は、収納された状態で完全に内腔102の先端開口104内に格納される。フィンガー98が内腔102の先端開口104から伸長可能である展開状態をとることができる。すなわち、フィンガー98は収納された状態(仮にあったとして)よりも伸長した状態で内腔102の先端開口104からより突き出ている。チューブのフィンガーを遠隔操作で伸長させたり格納したりする機構(図示せず)には、限定するものではないが、ハンドピースを圧迫すると前進し、その圧迫を緩めると後退するようにばね付勢された、フィンガーの基端部に取り付けられてチューブの内腔内に配置される普通のシャフトが含まれるが、これは当業者の知識の範囲内である。一変更形態では、内腔102の先端開口104はチューブ96の先端部100と一致する。図示されていない別の変更形態では、内腔の先端開口はチューブの先端部から離間している。一実施態様では、内腔102の先端開口104はチューブ96の先端部100と同じ方向を向いている。例えば、限定するものではないが内腔の先端開口がチューブの先端部に直交するように向いている別の実施態様も当業者には明らかであろう。一例では、少なくとも1つのトランスデューサ106が超音波イメージングトランスデューサである。同じまたは別の例では、少なくとも1つのトランスデューサ106が超音波治療トランスデューサである。同じまたは別の例では、少なくとも1つのトランスデューサ106が超音波イメージング／治療トランスデューサである。

【0037】

第3の実施形態の第2の表現は、チューブ96と、複数のフィンガー98を有するエンドエフェクタ110を含む超音波治療システム108についてである。チューブ96は、患者の体内に挿入可能な先端部100と、先端開口104を備えた内腔102とを有する。フィンガー98は、内腔102の先端開口104から伸長した展開状態をとり(図10を参照)、少なくとも部分的に内腔102の先端開口104内に格納された収納状態をとる(図11を参照)。それぞれのフィンガー98は超音波治療トランスデューサ112を含む。近接するフィンガー98の各治療トランスデューサ112間の距離は、収納状態よりも展開状態で広い。

【0038】

第3の実施形態の第3の表現は、チューブ96と、複数のフィンガー98を有するエンドエフェクタ110とを含む超音波治療システム108についてである。チューブ96は、患者の体内に挿入可能な先端部100と、先端開口104を備えた内腔102とを有する。フィンガー98は、内腔102の先端開口104から伸長した展開状態をとり(図10を参照)、少なくとも部分的に内腔102の先端開口104内に格納された収納状態をとる(図11を参照)。それぞれのフィンガー98は、超音波イメージング／治療トランスデューサ114を含む。近接するフィンガー98の各超音波イメージング／治療トランスデューサ114間の距離は、収納状態よりも展開状態で広い。

【0039】

第3の実施形態の第1の表現について説明した変形形態、変更形態、及び実施態様などは

10

20

30

40

50

、第3の実施形態の第2の表現及び第3の表現に等しく適用できることを理解されたい。

【0040】

第3の実施形態の第1の表現、第2の表現、及び第3の表現の一例では、トランスデューサ106、112及び114はそれぞれ、超音波放射凹面116を有する。図示されていない別の例では、トランスデューサは平坦な超音波放射面を有する。ある構造では、それぞれの凹面116は、対応するフィンガー98に沿って凹状である（図10に最もよく示されている）。図示されていない別の構造では、それぞれの凹面は、対応するフィンガーを横断するような凹状、または対応するフィンガーを横断しかつ沿っているような凹状である（例えば、半球状の凹面など）。あるデザインでは、各凹面116は、フィンガー98が展開された状態のときに実質的に共通の集束ゾーンを有する。図10のエンドエフェクタ110では、フィンガー98はそれぞれ、患者組織119に面している。図示されていない別のデザインでは、集束ゾーンは共通ではない。ある構造では、フィンガー98は、展開した状態でオープンハンド・フィンガーアレイ118を画定する。代替エンドエフェクタ120の形である代替可撓性フィンガー構成が図12に示されており、フィンガー122が展開した状態でクロード（clawed hand）・フィンガーアレイ124を画定している。図12の代替エンドエフェクタ120では、そのフィンガー122は、超音波トランスデューサ128でイメージング及び／または治療をするべく患者組織126を覆っている。図示されていない別のトランスデューサの構造では、1または複数、または全ての超音波トランスデューサは内側ではなく外側を向いている。

10

【0041】

第3の実施形態の第1の表現、第2の表現、及び第3の表現の同じまたは別の例では、フィンガー98の個数は少なくとも4個である。第3の実施形態の第2の表現及び第3の表現の同じまたは別の例では、エンドエフェクタ110（及び代替エンドエフェクタ120）は、当業者なら理解できる開放手術エンドエフェクタ、内視鏡エンドエフェクタ、腹腔鏡エンドエフェクタ（図9を参照）、カテーテルエンドエフェクタ（限定するものではないが、血管内脈カテーテルエンドエフェクタなど）、または針エンドエフェクタである。

20

【0042】

図9に示されているような可能な一形態では、超音波治療システム108は、当業者なら理解できるフットペダル電源スイッチ133に機能的に接続された超音波制御器132及びエンドエフェクタ110に機能的に接続されたハンドピース130も含む。

30

【0043】

多面型超音波治療トランスデューサ組立体

本発明の第4の実施形態が図13～図15に示されている。本発明の第4の実施形態の第1の表現は、患者の体内に挿入可能な超音波トランスデューサ組立体136を含む超音波医療システム134についてである。超音波トランスデューサ組立体136は長手方向の軸138を有する。超音波トランスデューサ組立体136は、P個の超音波トランスデューサ140を含む。それぞれのトランスデューサ140は、超音波放射面142を有する。超音波放射面は、長手方向の軸138に直交するように切断されたトランスデューサ組立体136の断面（図15を参照）を見ると、近接するトランスデューサ140の超音波放射面142から実質的に360°/P度の角度ずれて配置されている。

40

【0044】

このようなトランスデューサ構造の利点には、一例では、円筒状超音波トランスデューサでは不可能な配向即ち集束された治療超音波を提供できることが含まれるが、これは当業者なら理解できるであろう。

【0045】

患者の体内に挿入可能な超音波トランスデューサ組立体136が、超音波イメージングトランスデューサ組立体、超音波治療トランスデューサ組立体、または超音波イメージング／治療トランスデューサ組立体であることを留意されたい。超音波イメージングトランスデューサ組立体は少なくとも1つの超音波イメージングトランスデューサを有しており、超音波治療トランスデューサ組立体は少なくとも1つの超音波治療トランスデューサを有

50

する。超音波イメージング／治療トランスデューサ組立体は、少なくとも１つの超音波イメージングトランスデューサと少なくとも１つの超音波治療トランスデューサを含むか、または少なくとも１つの超音波イメージング／治療トランスデューサを含む。

【００４６】

本発明の第４の実施形態の第２の表現は、患者の体内に挿入可能なエンドエフェクタ１４６を含む超音波治療システム１４４についてである。エンドエフェクタ１４６は、超音波治療トランスデューサ組立体１４８を含む。超音波治療トランスデューサ組立体１４８は長手方向の軸１３８を有する。超音波治療トランスデューサ組立体１４８は、Ｐ個の超音波治療トランスデューサ１５０を有する。それぞれのトランスデューサ１５０は、長手方向の軸１３８から離れる方に向いた超音波放射面１４２を有する。この超音波放射面１４２は、長手方向の軸に対して直交するように切断されたトランスデューサ組立体１４８の断面（図１５を参照）を見ると、近接するトランスデューサ１５０の超音波放射面１４２から実質的に３６０／Ｐ度の角度ずれて配置されている。一例では、少なくとも１つの超音波治療トランスデューサ１５０が、超音波イメージングができるようにも適合されている。

10

【００４７】

本発明の第４の方法は、第４の実施形態の第２の表現で説明したような超音波治療システム１４４を用いる患者の超音波治療についてである。第４の方法はステップ（ａ）及びステップ（ｂ）を含む。ステップ（ａ）は、患者の肝臓内にエンドエフェクタ１４６を挿入することを含む。ステップ（ｂ）は、超音波治療トランスデューサ組立体１４８からの超音波で肝臓内の病変を治療することを含む。一例では、ステップ（ａ）で、エンドエフェクタ１４６を組織を通して病変内に挿入する。別の例では、ステップ（ａ）で、エンドエフェクタ１４６を肝胆導管を介して肝臓内に内視鏡的に挿入する。

20

【００４８】

本発明の第４の実施形態の第３の表現は、患者の体内に挿入可能なエンドエフェクタ１４６を含む超音波治療システム１４４についてである。エンドエフェクタ１４６は、超音波イメージング／治療トランスデューサ組立体１５２を含む。超音波イメージング／治療トランスデューサ組立体１５２は長手方向の軸１３８を有する。超音波イメージング／治療トランスデューサ組立体１５２は、Ｐ個の超音波イメージング／治療トランスデューサ１５４を含む。それぞれのトランスデューサ１５４は超音波放射面１４２を有する。超音波放射面１４２は、長手方向の軸１３８に対して直交するように切断されたトランスデューサ組立体１５２の断面（図１５を参照）を見ると、近接するトランスデューサ１５４の超音波放射面１４２から実質的に３６０／Ｐ度ずれて配置されている。

30

【００４９】

本発明の第５の方法は、第４の実施形態の第３の表現で説明したような超音波治療システム１４４を用いる患者の超音波治療についてである。第４の方法はステップ（ａ）からステップ（ｃ）を含む。ステップ（ａ）は、患者の肝臓内にエンドエフェクタ１４６を挿入することを含む。ステップ（ｂ）は、少なくとも部分的に超音波イメージング／治療トランスデューサ組立体１５２を用いて超音波イメージングから、治療のために肝臓の病変を特定することを含む。ステップ（ｃ）は、超音波イメージング／治療トランスデューサ組立体１５２からの超音波で病変を治療することを含む。一例では、ステップ（ａ）で、エンドエフェクタ１４６を組織を通して病変内に挿入する。別の例では、ステップ（ａ）で、エンドエフェクタ１４６を肝胆導管を介して肝臓内に内視鏡的に挿入する。

40

【００５０】

第４の実施形態の前記した第１の表現、第２の表現、及び第３の表現の一例では、トランスデューサ組立体１３６、１４８及び１５２が先端部１５６及び先端トランスデューサ１５８を有する。あるデザインでは、先端トランスデューサは前方を向いた先端トランスデューサである。別のデザインでは、先端トランスデューサは側面を向いた先端トランスデューサである。一変形形態では、先端トランスデューサは超音波イメージング先端トランスデューサである。別の変形形態では、先端トランスデューサは超音波治療先端トランス

50

デューサである。更なる変形形態では、先端トランスデューサは超音波イメージング／治療先端トランスデューサである。更なる変形形態では、先端トランスデューサは、電磁波または機械波 (mechanical waves)、またはそれら両方を放出するトランスポンダである。

【0051】

第3の実施形態の前記した第1の表現、第2の表現、及び第3の表現の同じまたは別の例では、それぞれの超音波放射面142は、図15に示されているその断面図を見ると実質的に直線状である。図14に示されている一変形形態では、それぞれの超音波放射面142は、長手方向の軸138に平行な方向に超音波放射面142に沿って実質的に凹状であり、それぞれが集束ゾーンを有する。図16に示されている第1の代替トランスデューサ構造では、それぞれの超音波放射面162は実質的に平坦な形状である。図17に示されている第2の代替トランスデューサ構造では、それぞれの超音波放射面164は断面図で見たときに実質的に凹状であり、それぞれの超音波放射面164が集束ゾーンを有する。一変更形態では、それぞれの超音波放射面164は、長手方向の軸に平行な方向に超音波放射面164に沿って実質的に凹状である（例えば、半球状で凹状の超音波放射面164など）。このような超音波放射面の形状は、本発明の他のすべての実施形態で説明した全ての超音波トランスデューサに等しく適用することができる。

10

【0052】

第3の実施形態の前記した第1の表現、第2の表現、及び第3の表現の同じまたは別の例では、Pは4以下である。一変形形態では、Pは図15及び図17に示されているように3である。別の変形形態では、Pは図16に示されているように2である。

20

【0053】

第3の実施形態の前記した第2の表現及び第3の表現の同じまたは別の例では、エンドエフェクタ146は、当業者なら理解できる開放手術エンドエフェクタ、内視鏡エンドエフェクタ、腹腔鏡エンドエフェクタ（図13に示されている）、カテーテルエンドエフェクタ（限定するものではないが、血管内カテーテルエンドエフェクタなど）、または針エンドエフェクタである。図13に示されている可能な一形態では、超音波治療システム144は、当業者なら理解できるフットペダル電源スイッチ169に機能的に接続された超音波制御器168及びエンドエフェクタ146に機能的に接続されたハンドピース166も含む。

30

【0054】

超音波治療の適用

切除／超音波治療システム

本発明の第5の実施形態が図18～図20に示されている。本発明の第5の実施形態の第1の表現では、超音波治療システム170は、チューブ172、第1のエンドエフェクタ174、及び第2のエンドエフェクタ176を含む。チューブ172は、患者180の体内に挿入可能な先端部178及び内腔182を有する。第1のエンドエフェクタ174は、切除器具184を有しており、患者180の外部から挿入されたチューブ172の内腔182の中に導入することができ、挿入されたチューブ172の内腔182を介して患者180の体内に送ることができる。第2のエンドエフェクタ176は、超音波治療トランスデューサ組立体186を有しており、患者180の外部から挿入されたチューブ172の内腔182の中に導入することができ、挿入されたチューブ172の内腔182を介して患者180の体内に送ることができる。一変形形態では、第1のエンドエフェクタ及び第2のエンドエフェクタは、内腔の別々の開口からその内腔内に導入される、または内腔に続いた別々のブランチャネルから導入される。別の変形形態では、第1のエンドエフェクタ及び第2のエンドエフェクタは、内腔の同じ開口からその内腔内に導入される。一変更形態では、内腔の開口がチューブの端部に設けられている。別の変更形態では、内腔の開口は、チューブの端部から離間して設けられている。

40

【0055】

本発明の第5の実施形態の第2の表現は、チューブ172、第1のエンドエフェクタ17

50

4、及び第2のエンドエフェクタ176を含む超音波治療システム170についてである。チューブ172は、患者180の体内に挿入可能な先端部178と、先端開口188及び基端開口190を備えた内腔182とを有する。第1のエンドエフェクタ174は、切除器具184を有しており、基端開口190内に導入することができ、内腔182を介して先端開口188に送ることができる。第2のエンドエフェクタ176は、超音波治療トランスデューサ組立体186を有しており、基端開口190内に導入することができ、内腔182を介して先端開口188に送ることができる。

【0056】

本発明の第5の実施形態の第1の表現及び第2の表現の一例では、内腔182の大きさは、第1のエンドエフェクタ174及び第2のエンドエフェクタ176を一度に一方しか導

10

【0057】

本発明の第5の実施形態の第3の表現は、チューブ172、第1のエンドエフェクタ174、及び第2のエンドエフェクタ176を含む超音波治療システム170についてである。チューブ172は、患者180の乳房組織196内に組織を通して挿入できる先端部178と、先端開口188及び基端開口190を備えた内腔182とを有する。第1のエンドエフェクタ174は、生検切除器具194（または他の切除器具）を有しており、基端開口190内に導入することができ、内腔182を介して先端開口188に送ることができる。第2のエンドエフェクタ176は、超音波治療トランスデューサ組立体186を有しており、基端開口190内に導入することができ、内腔182を介して先端開口188に送ることができる。内腔182の大きさは、第1のエンドエフェクタ174及び第2の

20

【0058】

本発明の第6の方法は、本発明の第5の実施形態の第3の表現で説明したような超音波治療システム170を用いる患者180の超音波治療についてである。この第6の方法はステップ(a)からステップ(h)を含む。ステップ(a)は、癌の可能性のある患者の乳房組織196を識別することを含む。ステップ(b)は、先端開口188が乳房組織196に近接し、基端開口190が患者の外部に位置するように、患者180の体内にチューブ172の先端部178を組織を通して挿入することを含む。ステップ(c)は、基端開口190内に第1のエンドエフェクタ174を導入して、その第1のエンドエフェクタ174を内腔182を介して先端開口188に送ることを含む。ステップ(d)は、生検切除器具194で乳房組織196の生検試料を採取することを含む。ステップ(e)は、内腔182から第1のエンドエフェクタ174を取り出すことを含む。ステップ(f)は、

30

40

【0059】

50

本発明の第５の実施形態の第４の表現では、超音波治療システム１７０は、チューブ１７２、第１のエンドエフェクタ１７４、及び第２のエンドエフェクタ１７６を含む。チューブ１７２は、患者１８０の体内に挿入可能な先端部１７８及び内腔１８２を有する。第１のエンドエフェクタ１７４は切除器具１８４を有しており、患者１８０の外部から挿入されたチューブ１７２の内腔１８２内に導入することができ、導入されたチューブ１７２の内腔１８２を介して患者１８０の体内に送ることができる。第２のエンドエフェクタ１７６は、超音波イメージング／治療トランスデューサ組立体１９８を有しており、患者１８０の外部から挿入されたチューブ１７２の内腔１８２内に導入することができ、挿入されたチューブ１７２の内腔１８２を介して患者１８０の体内に送ることができる。一変形形態では、第１のエンドエフェクタ及び第２のエンドエフェクタは、内腔の別々の孔からその内腔内に導入される、または別のブランチャネルから内腔内に導入される。別の変形形態では、第１のエンドエフェクタ及び第２のエンドエフェクタは、内腔の同じ開口を介してその内腔内に導入される。一変更形態では、内腔の開口はチューブの端部に設けられている。別の変更形態では、内腔の開口はチューブの端部から離間している。

10

【００６０】

本発明の第５の実施形態の第５の表現は、チューブ１７２、第１のエンドエフェクタ１７４、及び第２のエンドエフェクタ１７６を含む超音波治療システム１７０についてである。チューブ１７２は、患者１８０の体内に挿入可能な先端部１７８と、先端開口１８８及び基端開口１９０を備えた内腔１８２とを有する。第１のエンドエフェクタ１７４は、切除器具１８４を有しており、基端開口１９０内に導入することができ、内腔１８２を介して先端開口１８８に送ることができる。第２のエンドエフェクタ１７６は、超音波イメージング／治療トランスデューサ組立体１９８を有しており、基端開口１９０内に導入することができ、内腔１８２を介して先端開口１８８に送ることができる。

20

【００６１】

本発明の第５の実施形態の第４の表現及び第５の表現の一例では、内腔１８２の大きさは、第１のエンドエフェクタ１７４及び第２のエンドエフェクタ１７６を一度に一方しか導入できない大きさである。同じまたは別の例では、チューブ１７２の先端部１７８は、患者１８０の患者組織１９２内に組織を通して挿入することができる。同じまたは別の例では、切除器具１８４は、生検切除器具１９４または他の切除器具である。

【００６２】

本発明の第５の実施形態の第６の表現は、チューブ１７２、第１のエンドエフェクタ１７４、及び第２のエンドエフェクタ１７６を含む超音波治療システム１７０についてである。チューブ１７２は、患者１８０の乳房組織１９６内に組織を通して挿入することができる先端部１７８と、先端開口１８８及び基端開口１９０を備えた内腔１８２とを有する。第１のエンドエフェクタ１７４は、生検切除器具１９４（または他の切除器具）を有しており、基端開口１９０内に導入することができ、内腔１８２を介して先端開口１８８に送ることができる。第２のエンドエフェクタ１７６は、超音波イメージング／治療トランスデューサ組立体１９８を有しており、基端開口１９０内に導入することができ、内腔１８２を介して先端開口１８８に送ることができる。内腔１８２の大きさは、第１のエンドエフェクタ１７４及び第２のエンドエフェクタ１７６を一度に一方しか導入できない大きさである。一適用例では、チューブ１７２及び第１のエンドエフェクタ１７４（吸入機構を含む生検切除器具１９４を備えた）は、エシコン・エンド・サージェリィ社（Ethicon Endo-Surgery, Inc.（ジョンソン＆ジョンソン社））が製造するMammotome（登録商標）乳房生検システムの構成要素をベースにしている。

30

40

【００６３】

本発明の第７の方法は、本発明の第５の実施形態の第６の表現で説明したような超音波治療システム１７０を用いる患者１８０の超音波治療についてである。第７の方法はステップ（a）からステップ（h）を含む。ステップ（a）は、癌の可能性がある患者の乳房組織１９６を識別することを含む。ステップ（b）は、先端開口１８８が乳房組織１９６に近接し、基端開口１９０が患者の外部に位置するように、患者１８０の体内にチューブ１

50

72の先端部178を組織を通して挿入することを含む。ステップ(c)は、第1のエンドエフェクタ174を基端開口190内に導入して、その第1のエンドエフェクタ174を内腔182を介して先端開口188に送ることを含む。ステップ(d)は、乳房組織196の生検試料を生検切除器具194で採取することを含む。ステップ(e)は、内腔182から第1のエンドエフェクタ174を取り出すことを含む。ステップ(f)は、基端開口190内に第2のエンドエフェクタ176を導入して、その第2のエンドエフェクタ176を内腔182を介して先端開口188に送ることを含む。ステップ(g)は、トランスデューサ組立体198を用いて超音波イメージングから、生検試料を採取した乳房組織の出血している領域を特定することを含む。ステップ(h)は、トランスデューサ組立体198を用いて超音波で特定した領域を治療し、出血を実質的に止めることを含む。一適用例では、本発明の第7の方法は、生検試料を癌について検査するステップ、並びに乳房組織に残っている全ての癌をトランスデューサ組立体198を用いて超音波で実質的にアブレーションするステップも含む。このような超音波治療システム及び方法の利点には、最小侵襲性で乳房生検を容易に行うことができ、かつその生検によって生じた出血を容易に抑制できることが含まれる。

10

【0064】

図18に示されている可能な一形態は、超音波治療システム170は、第1のエンドエフェクタ174を備えたチューブ172に取り付けられたハンドピース199も含む。このハンドピース199は、第1のケーブル203を介して超音波制御器201に機能的に接続されている。また、このハンドピース199により、切除器具184を内腔182内で伸長したり、引き戻すことができる。この可能な一形態では、第2のエンドエフェクタ176は、第2のケーブル205を介して超音波制御器201に機能的に接続されており、図18に示されているようにハンドピース199の外部から内腔182内に挿入することができる。

20

【0065】

超音波を用いた治療の実施

本発明の第8の方法は患者の治療についてであり、図21にそのブロック図が示されている。この第8の方法はステップ(a)からステップ(f)を含む。ステップ(a)は、図21のブロック200に「トランスデューサ組立体を用意する」と示されてある。ステップ(a)は、超音波イメージングトランスデューサ組立体を用意することを含む。ステップ(b)は、図21のブロック202に「組立体を胃腸領域内に挿入する」と示されている。ステップ(b)は、トランスデューサ組立体を患者の胃腸領域内に挿入することを含む。ステップ(c)図21のブロック204の「組立体を案内する」と示されている。ステップ(c)は、トランスデューサ組立体を胃腸領域内に案内することを含む。ステップ(d)は、図21のブロック206に「治療のために患者組織を識別する」と示されている。ステップ(d)は、治療のために胃腸領域の患者組織を識別することを含む。ステップ(e)は、図21のブロック208に「超音波イメージングから治療を実施する」と示されている。ステップ(e)は、トランスデューサ組立体を用いて超音波イメージングから治療を実施することを含む。ステップ(f)は、図21のブロック210に「患者を治療する」と示されている。ステップ(f)は、ステップ(e)の治療の実施に応じて患者組織を治療することを含む。第8の方法において、治療は、治療の実施のために用いたトランスデューサ組立体を用いた超音波治療を含まなくてもよく、かつ/または他の任意の超音波トランスデューサ組立体を用いた超音波治療を含まなくてもよいことに留意されたい。病理学的な大きさ及び部位に左右されるある方法では、ステップ(e)で、第1のトランスデューサ組立体を内視鏡的に用いて治療を実施し、ステップ(f)で第2のトランスデューサ組立体を腹腔鏡的に用いて超音波による患者組織の治療を行う。一変形形態では、ステップ(e)で、第1のトランスデューサ組立体を腹腔鏡的に用いて治療を実施し、ステップ(f)で、第2のトランスデューサ組立体を内視鏡的に用いて超音波による患者組織の治療を行う。別の方法では、ステップ(f)の治療が、高周波、レーザー、マイクロ波、または化学アブレーション治療である。別の種類の治療処置も当業者には明らか

30

40

50

である。

【 0 0 6 6 】

人の患者の胃腸（G I）領域には、限定するものではないが、上部 G I 領域の食道及び胃、並びに下部 G I 領域の直腸及び結腸が含まれる。更にこの方法では、G I 領域に肝臓も含まれることを留意されたい。

【 0 0 6 7 】

「超音波イメージングから治療の実施」は、少なくとも超音波イメージを用いて治療する患者組織の 3 次元的大きさ及び形状を決定することを指す。例えば、限定するものではないが、上部 G I 及び下部 G I の腫瘍は、内視鏡的に G I 管内に導入される円筒型、側面放射型、または半凸型の超音波アレイ型、または単一要素トランスデューサを用いて高周波（6 M H z ~ 3 0 M H z）超音波イメージングで視覚化することができる。食道、胃、十二指腸、及び結腸のすべての層を含む G I 管のすべての層は、視覚化することができる。ある方法では、G I 構造の三次元表示が、超音波トランスデューサの軸方向の前進により生成された一連の二次元スキャンを合わせて生成される。この三次元表示から、あらゆる腫瘍成長、その形態学的特徴、及び腫瘍の大きさや形状を容易に決定することができる。

10

【 0 0 6 8 】

このような超音波イメージングからの治療の実施の利点には、一例では、より解像度が高く、更に X 線画像や M R I 画像などの従来の体外治療実施方法または従来の内視鏡光学方法と比べてより実用的な非侵襲性の治療実施方法を提供できることが含まれる。

【 0 0 6 9 】

本発明の第 9 の方法は患者の超音波治療についてであり、ステップ（a）からステップ（f）を含む。この第 9 の方法は、第 8 の方法と同じ図 2 1 のブロック図を用いるが、ブロック 2 0 0 の「トランスデューサ組立体」が「エンドエフェクタ」に代わり、ブロック 2 0 2 及びブロック 2 0 4 の「組立体」が「エンドエフェクタ」に代わっている。ステップ（a）は、超音波イメージング/治療トランスデューサ組立体を有するエンドエフェクタを用意することを含む。ステップ（b）は、患者の胃腸領域内にエンドエフェクタを挿入することを含む。ステップ（c）は、トランスデューサ組立体を胃腸領域内において案内することを含む。ステップ（d）は、治療のために胃腸領域の患者組織を識別することを含む。ステップ（e）は、トランスデューサ組立体を用いて超音波イメージングから治療を実施することを含む。ステップ（f）は、ステップ（e）の治療の実施に応じてトランスデューサ組立体を用いて超音波で患者組織を治療することを含む。

20

30

【 0 0 7 0 】

本発明の第 1 0 の方法は患者の超音波治療についてであり、ステップ（a）からステップ（f）を含む。この第 1 0 の方法は、第 8 の方法と同様に図 2 1 のブロック図を用いるが、ブロック 2 0 0 の「トランスデューサ組立体」が「エンドエフェクタ」に代わり、ブロック 2 0 2 及びブロック 2 0 4 の「組立体」が「エンドエフェクタ」に代わっている。ステップ（a）は、超音波イメージング/治療トランスデューサ組立体を有するエンドエフェクタを用意することを含む。ステップ（b）は、患者の胃腸領域内にエンドエフェクタを挿入することを含む。ステップ（c）は、胃腸領域内においてトランスデューサ組立を案内することを含む。ステップ（d）は、少なくとも部分的にトランスデューサ組立体を用いて超音波イメージから、治療のために胃腸領域の患者組織を識別することを含む。ステップ（e）は、トランスデューサ組立体を用いて超音波イメージングから治療を実施することを含む。ステップ（f）は、ステップ（e）の治療の実施に応じてトランスデューサ組立体を用いて超音波で患者組織を治療することを含む。ある方法では、腹腔鏡により G I 領域にアクセスして、超音波イメージング/治療トランスデューサ組立体を有するエンドエフェクタを用いて大きな G I 腫瘍を特定し、治療を実施し、治療を行う。

40

【 0 0 7 1 】

本発明の第 9 の方法および第 1 0 の方法の一例では、患者組織は病変を含む胃腸組織であり、ステップ（f）で、超音波でその病変を実質的にアブレーションする。一変更形態では、胃腸組織は、その病変に血液を供給する血管を含み、ステップ（f）で、その血管が

50

ら病変への血液の供給を実質的に止めるべくその血管を超音波で治療する。

【0072】

本発明の第9の方法及び第10の方法の別の例では、患者組織は病変及びその病変に血液を供給する血管を含む肝組織であり、ステップ(f)で、その血管から病変への血液の供給を実質的に止めるべくその血管を超音波で治療する。

【0073】

本発明の第9の方法及び第10の方法の別の例では患者組織は病変を含む肝臓組織であり、ステップ(f)で、その病変を超音波で実質的にアブレーションする。一変更形態では、肝臓組織が病変に血液を供給する血管を含み、ステップ(f)ではまた、その病変に血管からの血液の供給を実質的に止めるべくその血管を超音波で治療もする。ある方法では、超音波イメージング/治療トランスデューサ組立体を有するエンドエフェクタをGI管の中に腹腔鏡的に導入し、総胆管の上のファータール膨大部を介して逆方向に前進させ、更に胆管系に進め、そこで、治療が必要な肝実質(例えば胆管癌等)をエンドエフェクタを用いて特定し、治療を実施し、治療を行う。

10

【0074】

超音波を用いた肺病変の治療

本発明の第11の方法は患者の超音波治療についてであり、図22のブロック図に示されている。この第11の方法はステップ(a)からステップ(f)を含む。ステップ(a)は、図22のブロック212に「エンドエフェクタを用意する」と示されている。ステップ(a)は、超音波治療トランスデューサ組立体を有するエンドエフェクタを用意することを含む。ステップ(b)は、図22のブロック214に「エンドエフェクタを挿入する」と示されている。ステップ(b)は、患者の体内にエンドエフェクタを挿入することを含む。ステップ(c)は、図22のブロック216に「エンドエフェクタを肺に案内する」と示されている。ステップ(c)は、患者の体内のエンドエフェクタを患者の肺に案内することを含む。ステップ(d)は、図22のブロック218に「病変を特定する」と示されている。ステップ(d)は、治療のために肺上の病変または肺内部の病変を特定することを含む。ステップ(e)は、図22のブロック220に「トランスデューサ組立体を配置する」と示されている。ステップ(e)は、病変上または病変内にトランスデューサ組立体を配置することを含む。ステップ(f)は、図22のブロック222に「病変を治療する」と示されている。ステップ(f)は、トランスデューサ組立体を用いて超音波で病変を治療することを含む。

20

30

【0075】

本発明の第12の方法は患者の超音波治療についてであり、ステップ(a)からステップ(f)を含む。この第12の方法は、第11の方法と同様に図22のブロック図を用いる。ステップ(a)は、超音波イメージング/治療トランスデューサ組立体を有するエンドエフェクタを用意することを含む。ステップ(b)は、患者の体内にそのエンドエフェクタを挿入することを含む。ステップ(c)は、患者の体内のエンドエフェクタを患者の肺に案内することを含む。ステップ(d)は、少なくとも部分的にトランスデューサ組立体を用いて超音波イメージングから、治療のために肺上または肺内部に病変を特定することを含む。ステップ(e)は、病変上または病変内部にトランスデューサ組立体を配置することを含む。ステップ(f)は、トランスデューサ組立体を用いて超音波でその病変を治療することを含む。

40

【0076】

第11の方法及び第12の方法の一例では、ステップ(f)で超音波で病変を実質的にアブレーションする。一適用例では、エンドエフェクタは内視鏡エンドエフェクタであり、ステップ(b)で患者の体内にエンドエフェクタを経気管支内視鏡的に挿入する。別の適用例では、エンドエフェクタは針エンドエフェクタであり、ステップ(b)で患者の体内にエンドエフェクタを組織を通して挿入する。一実施態様では、ステップ(e)で病変上にトランスデューサ組立体を配置する。別の実施態様では、ステップ(e)で病変内にトランスデューサ組立体を配置する。第11の方法及び第12の方法の一実施例では、ステ

50

ップ(c)で、気管支鏡を用いてエンドエフェクタを患者の肺に案内する。

【0077】

肺の超音波治療は従来から避けられてきた。なぜなら、超音波の殆どを反射して超音波が肺から病変に到達するのを阻止する空気を含む肺の気泡によって、超音波が肺の中の病変に到達できないためである。肺を通過して病変に到達させるために高出力の超音波を用いると、呼吸に必要な気泡を傷つけたり破壊したりすることがある。出願人は、超音波トランスデューサを肺の病変上または病変内に配置することにより気泡を傷つけることなく病変の超音波治療(例えば、腫瘍や梗塞等)が可能になるという理論を立てた。この出願人の方法が病変の表面及び非表面に適用できることに留意されたい。出願人の超音波治療の第11の方法及び第12の方法の利点には、一例では、他の方法で手術や治療ができない肺の癌病変を破壊できることが含まれる。

10

【0078】

超音波を用いた治療のための計測法

本発明の第13の方法は患者の超音波治療についてであり、図23のブロック図に示されている。この第13の方法はステップ(a)からステップ(e)を含む。ステップ(a)は、図23のブロック224に「エンドエフェクタを用意する」と示されている。ステップ(a)は、超音波治療トランスデューサ組立体を有するエンドエフェクタを用意することを含む。ステップ(b)は、図23のブロック226に「エンドエフェクタを挿入する」と示されている。ステップ(b)は、患者の体内にエンドエフェクタを挿入することを含む。ステップ(c)は、図23のブロック228に「エンドエフェクタを案内する」と示されている。ステップ(c)は、患者の体内のエンドエフェクタを病変を含む患者組織の領域に案内することを含む。ステップ(d)は、図23のブロック230に「病変に血液を供給する血管を特定する」と示されている。ステップ(d)は、病変に血液を供給する領域の血管を特定することを含む。ステップ(e)は、図23のブロック232に「超音波を用いて血液の供給を止める」と示されている。ステップ(e)は、トランスデューサ組立体からの超音波で血管を治療してその血管を実質的に閉塞し、その血管から病変への血液の供給を止める。本発明の第13の方法のある実施態様は、病変を実質的にアブレーションするためにトランスデューサ組立体からの超音波でその病変を治療するステップも含む。

20

【0079】

本発明の第14の方法は患者の超音波治療についてであり、ステップ(a)からステップ(g)を含む。この第14の方法は第13の方法に類似している。ステップ(a)は、超音波イメージング/治療トランスデューサ組立体を有するエンドエフェクタを用意することを含む。ステップ(b)は、患者の体内にエンドエフェクタを挿入することを含む。ステップ(c)は、患者の体内のエンドエフェクタを病変を含む患者組織の領域に案内することを含む。ステップ(d)は、少なくとも部分的にトランスデューサ組立体を用いて超音波イメージングから病変を特定することを含む。ステップ(e)は、トランスデューサ組立体を用いて超音波イメージングから、病変に血液を供給する領域の血管を特定することを含む。ステップ(f)は、血管を実質的に閉塞してその血管から病変への血液の供給を実質的に止めるべく、トランスデューサ組立体からの超音波で血管を治療する。ステップ(g)は、病変を実質的にアブレーションするためにトランスデューサ組立体からの超音波で病変を治療することを含む。ドップラー超音波イメージング、グレイスケール超音波イメージング、及びこれらの組み合わせが、血管内の血流をイメージングするための既知の超音波技術であることに留意されたい。

30

40

【0080】

第13の方法及び第14の方法の一適用例では、エンドエフェクタは開放手術エンドエフェクタである。別の適用例では、エンドエフェクタは内視鏡エンドエフェクタである。更なる適用例では、エンドエフェクタは腹腔鏡エンドエフェクタである。更に別の適用例では、エンドエフェクタはカテーテルエンドエフェクタ(限定するものではないが、血管内カテーテルエンドエフェクタなど)である。別の適用例では、エンドエフェクタは針エン

50

ドエフェクタである。

【0081】

本発明の広い意味の第13の方法は、上記した第13の方法の挿入するステップ及び案内するステップを含まず、ステップ(a)からステップ(c)を含む。ステップ(a)は、超音波治療トランスデューサ組立体を有するエンドエフェクタを用意することを含む。ステップ(b)は、病変に血液を供給する患者の血管を特定することを含む。ステップ(c)は、血管を実質的に閉塞してその血管から病変への血液の供給を実質的に止めるべく、トランスデューサ組立体からの超音波で血管を治療することを含む。

【0082】

本発明の広い意味の第14の方法は、上記した第14の方法の挿入するステップ及び案内するステップを含まず、ステップ(a)からステップ(e)を含む。ステップ(a)は、超音波イメージング/治療トランスデューサ組立体を有するエンドエフェクタを用意することを含む。ステップ(b)は、少なくとも部分的にトランスデューサ組立体を用いて超音波イメージングから、患者の病変を特定することを含む。ステップ(c)は、トランスデューサ組立体を用いて超音波イメージングから、病変に血液を供給する血管を特定することを含む。ステップ(d)は、血管を実質的に閉塞してその血管から病変への血液の供給を実質的に止めるべく、トランスデューサからの超音波で血管を治療することを含む。ステップ(e)は、病変を実質的にアブレーションするためにトランスデューサ組立体からの超音波で病変を治療することを含む。

【0083】

広い意味の第13の方法及び第14の方法の一例では、エンドエフェクタは体外エンドエフェクタである。別の例では、エンドエフェクタは体内エンドエフェクタである。更なる例では、エンドエフェクタは体外モード及び体内モードの両方で用いることができる。

【0084】

超音波治療のための出願人の第13の方法及び広い意味の第13の方法の利点には、一例では、癌病変の位置のために他の方法では手術または治療ができない場合に、癌病変に血液を供給する血管を超音波で止血して、直接的に癌を破壊できることが含まれる。超音波治療のための出願人の第14の方法及び広い意味の第14の方法の利点には、一例では、超音波アブレーションによる癌病変の直接的な破壊、並びに超音波アブレーションステップで破壊できなかった癌病変をそこに血液を供給する血管を超音波で止血して間接的にその癌病変を破壊ができることが含まれる。

【0085】

超音波エンドエフェクタの案内及びターゲッティング

治療のための超音波エンドエフェクタの案内

本発明の第6の実施形態が図24に示されている。本発明の第6の実施形態の第1の表現では、超音波治療システム234(一部のみが図24に示されている)は、エンドエフェクタ236及び少なくとも3つのレシーバ238を含む。エンドエフェクタ236は、トランスデューサ242を含むトランスデューサ組立体240を有する。このトランスデューサ242は、治療超音波及び機械波を放出するように適合された少なくとも1つのトランスデューサ要素244を有する。用語「機械波」は、超音波及び非超音波である圧縮(音響)波、並びに超音波及び非超音波である剪断波を含み、これらの波は波パルスを含む。レシーバ238は、トランスデューサ組立体240から離間している。レシーバ238はまた、トランスデューサ組立体240の位置を求めるために放射された機械波を受け取るように適合されている。放出する波が3つのレシーバによって受け取られるトランスポンダの位置を求めるための従来の方法(三角法を含む)は周知である。第6の実施形態の第2の表現は、少なくとも1つのトランスデューサ要素244がイメージング超音波を放出するようにも適合されている点を除けば、第6の実施形態の第1の表現と同一である。第6の実施形態の第1の表現及び第2の表現の一変形形態では、エンドエフェクタ及びレシーバを患者の外部(一変形形態では患者の上)に配置可能である。別の変形形態では、エンドエフェクタを患者の体内に挿入可能であり、レシーバを患者の外部(一変形形態で

は患者の上)に配置可能である。

【0086】

本発明の第7の実施形態が図25に示されている。本発明の第7の実施形態の第1の表現では、超音波治療システム246(一部のみが図25に示されている)はエンドエフェクタ248及び少なくとも3つのレシーバ250を含む。エンドエフェクタ248は、超音波治療トランスデューサ組立体252及びトランスポンダ254を有する。トランスポンダ254は、波を放出するように適合されており、その波には電磁波、機械波、またはその両方が含まれる。レシーバ250はトランスデューサ組立体252から離間している。レシーバ250はまた、トランスポンダ254の位置を求めるために、放出された波を受け取るように適合されている。第7の実施形態の第2の表現では、超音波治療トランスデューサ組立体252は、超音波イメージング/治療トランスデューサ組立体256である。

10

【0087】

第7の実施形態の第1の表現及び第2の表現の一適用例では、エンドエフェクタ248は患者の体内に挿入可能であり、トランスポンダ254は電磁波を放出するように適合されており、レシーバ250は患者の外部に配置可能である。一変形形態では、レシーバ250は患者上に配置可能である。別の適用例では、エンドエフェクタは患者の外部(一変更形態では患者の上)に配置可能であり、レシーバは、患者の外部(一変更形態では患者の上)に配置可能である。

【0088】

第7の実施形態の第1の表現及び第2の表現の一例では、エンドエフェクタ248は内視鏡エンドエフェクタ、腹腔鏡エンドエフェクタ、カテーテルエンドエフェクタ(限定するものではないが、血管内カテーテルエンドエフェクタなど)、または針エンドエフェクタである。第7の実施形態の第1の表現及び第2の表現のあるデザインではエンドエフェクタ248は先端部260を有しており、その先端部260にはトランスポンダ254が配置されている。一変形形態では、トランスデューサ組立体252及びトランスデューサ組立体256はトランスポンダ254に近接して配置される。

20

【0089】

本発明の第15の方法は、第7の実施形態の第1の表現の超音波治療システムを用い、ステップ(a)からステップ(h)を含む。ステップ(a)は、患者の体内にエンドエフェクタ248を挿入することを含む。ステップ(b)は、患者の外部にレシーバ250を配置することを含む。ステップ(c)は、トランスポンダ254から電磁波を放出することを含む。ステップ(d)は、その電磁波を配置されたレシーバ250で受け取ることを含む。ステップ(e)は、その受け取った電磁波からトランスポンダ254の位置を算出することを含む。ステップ(f)は、トランスポンダ254の算出した位置から、患者の体内のエンドエフェクタを所望の位置に案内することを含む。ステップ(g)は、ステップ(f)の後に、治療のために患者組織を識別することを含む。ステップ(h)は、トランスデューサ組立体252を用いて超音波で識別された患者組織を治療することを含む。

30

【0090】

本発明の第16の方法は、第7の実施形態の第2の表現の超音波超音波量システムを用い、ステップ(a)からステップ(h)を含む。ステップ(a)は、患者の体内にエンドエフェクタ248を挿入することを含む。ステップ(b)は、患者の外部にレシーバ250を配置することを含む。ステップ(c)は、トランスポンダ254から電磁波を放出することを含む。ステップ(d)は、配置されたレシーバ250でその電磁波を受け取ることを含む。ステップ(e)は、受け取った電磁波からトランスポンダ254の位置を算出することを含む。ステップ(f)は、トランスポンダ254の算出した位置から所望の位置に、患者の体内のエンドエフェクタを案内することを含む。ステップ(g)は、ステップ(f)の後に、少なくともトランスデューサ組立体256を用いて超音波イメージングから、治療のために患者組織を識別することを含む。ステップ(h)は、トランスデューサ組立体256を用いて超音波で識別された患者組織を治療することを含む。

40

50

【0091】

トランスポンダの位置を算出するため及び患者の体内のトランスポンダ（心臓を監視するための心臓カテーテルに取り付けられている）を案内するための既知の電磁トランスポンダ／3レシーバ・システムは、バイオセンス・ウェブスター（Biosense Webster（ジョンソン＆ジョンソン社））が製造するNAVI-STAR（登録商標）カテーテルと共に用いられるCARTO（商標）EPナビゲーションシステムである。

【0092】

超音波治療及び位置を求めることができるエンドエフェクタの利点には、一例では、患者組織の超音波治療のために患者の体内のエンドエフェクタを患者組織により正確に案内できることが含まれる。

10

【0093】

治療のために超音波の照準を合わせるための方法

本発明の第17の方法は患者の超音波治療についてであり、図26のブロック図に示されている。この第17の方法は、ステップ（a）からステップ（f）を含む。ステップ（a）は、図26のブロック262に「エンドエフェクタを用意する」と示されている。ステップ（a）は、超音波治療トランスデューサ組立体を有するエンドエフェクタを用意することを含む。ステップ（b）は、図26のブロック264に「トランスデューサ組立体の照準を合わせる」と示されている。ステップ（b）は、患者組織の所望の集束ゾーンに超音波エネルギーを集束するためにトランスデューサ組立体の照準を合わせることを含む。一例では、トランスデューサ組立体の照準を合わせることは、トランスデューサ組立体から特定の方向に沿って特定の距離に超音波エネルギーを集束させることを指すことに留意されたい。ステップ（c）は、図26のブロック266に「トランスデューサ組立体を作動させる」と示されている。ステップ（c）は、照準を合わせたトランスデューサ組立体を作動させて、実質的に患者組織に医学的影響を与えることなく、患者組織の温度上昇を達成するのに十分な超音波エネルギーを放出することを含む。ステップ（d）は、図26のブロック268に「実際の集束ゾーンを検出する」と示されている。ステップ（d）は、ステップ（c）の後に、反射された超音波エネルギーから温度が上昇した患者組織の実際の集束ゾーンを検出することを含む。ステップ（e）は、図26のブロック269に「あらゆる照準エラーを修正する」と示されている。ステップ（e）は、所望の集束ゾーンと実際の集束ゾーンとの間のあらゆるエラーを修正することを含む。ステップ（f）は、図26のブロック270に「患者組織を治療する」と示されている。ステップ（f）は、ステップ（e）の後に、トランスデューサ組立体を用いて超音波で患者組織を治療することを含む。一適用例では、ステップ（d）では、ステップ（a）からステップ（c）及びステップ（e）からステップ（f）で用いた超音波トランスデューサ組立体とは別の1または複数の追加の超音波トランスデューサ組立体を用いて、反射された超音波エネルギーから実際の集束ゾーンを検出する。別の適用例では、同じ超音波トランスデューサ組立体をステップ（a）からステップ（f）で用いる。第17の方法の一例では、エンドエフェクタは体外エンドエフェクタである。別の例では、エンドエフェクタは体内エンドエフェクタである。更に別の例では、エンドエフェクタは体外モード及び体内モードの両方で用いることができる。

20

30

40

【0094】

本発明の第18の方法は患者の超音波治療についてであり、ステップ（a）からステップ（f）を含む。この第18の方法は、第17の方法と同様に図26のブロック図を用いる。ステップ（a）は、超音波イメージング／治療トランスデューサ組立体を有するエンドエフェクタを用意することを含む。ステップ（b）は、患者の所望の集束ゾーンに超音波エネルギーを集束させるためにトランスデューサ組立体の照準を合わせることを含む。ステップ（c）は、照準を合わせたトランスデューサ組立体を作動させて、実質的に患者組織に医学的影響を与えることなく、患者組織の温度上昇を達成するのに十分な超音波エネルギーを放出することを含む。ステップ（d）は、ステップ（c）の後にトランスデューサ組立体を用いて、反射された超音波エネルギーから温度が上昇した患者組織の実際の集

50

束ゾーンを検出することを含む。ステップ(e)は、所望の集束ゾーンと実際の集束ゾーンとの間のあらゆるエラーを修正することを含む。ステップ(f)は、ステップ(e)の後に、トランスデューサ組立体を用いて超音波で患者組織を治療することを含む。一例では、エンドエフェクタは体外エンドエフェクタである。別の例では、エンドエフェクタは体内エンドエフェクタである。更なる例では、エンドエフェクタは体外モード及び体内モードの両方で用いることができる。

【0095】

本発明の第19の方法は患者の超音波治療についてであり、ステップ(a)からステップ(i)を含む。この第19の方法は、第17の方法と同様に図26のブロック図を用いるが、第17の方法のブロック262のステップ(a)とブロック264のステップ(b)との間に追加ステップが追加されているという点異なる。第19の方法では、ステップ(a)は、超音波イメージング/治療トランスデューサ組立体を有するエンドエフェクタを用意することを含む。ステップ(b)は、患者の体内にエンドエフェクタを挿入することを含む。ステップ(c)は、患者の体内のエンドエフェクタを案内することを含む。ステップ(d)は、少なくとも部分的にトランスデューサ組立体を用いて超音波イメージングから、患者組織の所望の集束ゾーンを特定することを含む。ステップ(e)は、患者組織の所望の集束ゾーンに超音波エネルギーを集束するためにトランスデューサ組立体の照準を合わせることを含む。ステップ(f)は、照準を合わせたトランスデューサ組立体を作動させて、実質的に患者組織に医学的影響を与えることなく、患者組織の温度上昇を達成するのに十分な超音波エネルギーを放出することを含む。ステップ(g)は、ステップ(f)の後に、トランスデューサ組立体を用いて、反射された超音波エネルギーから温度が上昇した患者組織の実際の集束ゾーンを検出することを含む。ステップ(h)は、所望の集束ゾーンと実際の集束ゾーンとの間のあらゆるエラーを修正することを含む。ステップ(i)は、ステップ(h)の後に、トランスデューサ組立体を用いて超音波で患者組織を治療することを含む。

10

20

【0096】

第17の方法から第19の方法の一例では、エンドエフェクタは体外エンドエフェクタである。別の例では、エンドエフェクタは、腹腔鏡エンドエフェクタである。更なる例では、エンドエフェクタは、カテーテルエンドエフェクタ(限定するものではないが血管内カテーテルエンドエフェクタなど)である。更なる例では、エンドエフェクタは針エンドエフェクタである。

30

【0097】

上昇した温度は時間と共に低下するため、検出した温度上昇は達成した温度上昇と正確には等しくないであろう。第17の方法から第19の方法のある実施態様では、検出ステップで検出された温度上昇は、動作ステップで達成された温度上昇に実質的に等しい。第17の方法から第19の方法の一適用例では、検出された温度上昇は約5以下である。一変形形態では、検出された温度上昇は約2以下である。

【0098】

当業者に知られているように従来の方が超音波イメージデータを温度イメージに変換することに留意されたい。第17の方法から第19の方法の一変形形態では、修正するステップが、当業者なら理解できるように、照準を合わせるステップでトランスデューサ組立体の照準合わせに用いられる同じ機構に対するフィードバック制御により自動的に行われる。上記したように、超音波治療トランスデューサ組立体の照準合わせ用の機構には、当業者に周知の従来電子技術及び/または機械技術が含まれる。

40

【0099】

治療の前に所望の集束ゾーンと実際の集束ゾーンとの間のあらゆるエラーを修正する利点には、患者組織のより正確な超音波治療ができることが含まれる。一例では、よりよいターゲティングにより病変(及びあらゆる好適な縁)のアブレーションを最大にすることができると共に、病変の外側(及びあらゆる好適な縁の外側)の患者組織の治療を最小にすることができる。

50

【 0 1 0 0 】

患者組織の超音波イメージング

治療している患者の超音波フィードバック

本発明の第 20 の方法は患者組織の超音波イメージングについてであり、図 27 のブロック図に示されている。第 20 の方法はステップ (a) からステップ (c) を含む。ステップ (a) は、図 27 のブロック 272 に「第 1 の時間にある位置から第 1 の信号を得る」と示されている。ステップ (a) は、第 1 の時間に患者組織のある位置から反射された第 1 のイメージング超音波の第 1 の信号を得ることを含む。ステップ (b) は、図 27 のブロック 274 に「後の第 2 の時間にその位置から第 2 の信号を得る」と示されている。ステップ (b) は、第 2 の時間までの間に患者が少なくともある治療を受けた、後の第 2 の時間に患者組織のその位置から反射された第 2 のイメージング超音波の第 2 の信号を得ることを含む。ステップ (c) は、図 27 のブロック 276 に「2 つの信号を用いてその位置のイメージを生成する」と示されている。ステップ (c) は、第 1 の信号及び第 2 の信号を用いてその位置のイメージを生成することを含む。用語「イメージを生成する」は、限定するものではないが、例えばモニター上で表示される視覚形態のイメージを生成すること、モニター上に視覚形態で表示されるのではなく、例えばコンピュータによって用いられる電子形態でイメージを生成することが含まれる。本発明の第 20 の方法の可能な一形態では、位置のイメージはモニター上のピクセル位置に表示される。

10

【 0 1 0 1 】

本発明の第 20 の方法の一例では、ステップ (c) は、少なくとも第 1 の信号の振幅及び第 2 の信号の振幅を用いて位置のイメージを生成することを含む。一変形形態では、ステップ (c) は、第 1 の信号と第 2 の信号の振幅の差を算出することを含む。一変更態様では、ステップ (c) で、算出した振幅の差と、第 1 の信号及び第 2 の信号の一方の信号の振幅の 1 つを用いる。一実施態様では、ステップ (c) で、その 1 つの振幅と算出した振幅の差の関数 (function) の合計を算出する。6 の第 1 の信号の振幅及び 7 の第 2 の信号の振幅の一例では、ステップ (c) で、振幅の差を算出し、その差を第 2 の信号に加えて 8 の処理した振幅を生成し、処理した振幅を用いてその位置のイメージを生成する。治療後のその位置のイメージの生成において、第 1 の信号及び第 2 の信号の振幅を用いてあらゆる振幅の差を強調する別のアルゴリズムは当業者には明らかである。

20

【 0 1 0 2 】

本発明の第 20 の方法の別の例では、ステップ (c) は、少なくとも第 1 の信号の位相及び第 2 の信号の位相を用いて位置のイメージを生成することを含む。一変形形態では、ステップ (c) で、第 1 の信号と第 2 の信号の位相差を算出する。一変更形態では、ステップ (c) で、算出した位相差と、第 1 の信号及び第 2 の信号の一方の信号の位相の 1 つを用いる。ある実施態様では、ステップ (c) で、その 1 つの位相と算出した位相差の関数の合計を算出する。6 度の第 1 の信号の位相及び 7 度の第 2 の信号の位相の一例では、ステップ (c) で、位相差を算出して、その位相差を第 2 の信号の位相に加えて、8 度の処理した位相を生成し、その処理した位相を用いて位置のイメージを生成する。治療後のイメージの生成において、第 1 の信号及び第 2 の信号の位相を用いてあらゆる位相差を強調する他のアルゴリズムは当業者には明らかである。

30

40

【 0 1 0 3 】

本発明の第 20 の方法の更なる例では、ステップ (c) は、少なくとも第 1 の信号の振幅及び位相並びに第 2 の信号の振幅及び位相を用いて位置のイメージを生成することを含む。一変形形態では、ステップ (c) で、前記した 2 つのパラグラフの説明を組み合わせるが、これは当業者の知識の範囲内である。

【 0 1 0 4 】

第 20 の方法の一適用例及びその例などでは、ステップ (a) の第 1 の信号は、第 1 の周波数 (例えば、シグマを有する第 1 の中心周波数) を有しており、ステップ (b) の第 2 の信号は、第 1 の周波数とは異なる (すなわち、例えば、中心周波数が異なる) 第 2 の周波数 (例えば、シグマを有する第 2 の中心周波数) を有する。同じまたは別の適用例では

50

、治療は超音波治療である。同じまたは別の適用例では、ステップ（a）からステップ（c）を別の位置で繰り返して、別の位置の患者組織のイメージをとる。この患者組織のイメージには、治療された位置及び治療されていない位置が含まれる。本発明の第20の方法の可能な一形態では、患者組織のイメージをモニター上に表示する。別の可能な形態では、モニター上に表示するのではなくイメージマップとしてコンピュータにイメージが保持される。第20の方法の一派生形態では、ステップ（a）とステップ（b）との間で更なる信号が得られ、この信号もステップ（c）の位置のイメージの生成に用いられる。

【0105】

出願人たちは初めに、超音波イメージング信号の振幅及び／または位相に影響を与える超音波治療などの治療による患者組織の変化を利用して、治療した患者組織と周囲の治療していない組織の超音波イメージの差を強調することができることに気づいた。出願人たちは、2つの信号に対して異なる周波数を用いることにより、治療した組織と治療していない組織の振幅及び／または位相の差を強調することができ、治療した患者組織と周囲の治療していない患者組織との超音波イメージの差を強調することができるという理論をたてた。第20の方法及びその例などの利点には、一適用例では、治療した患者組織と治療していない患者組織の超音波イメージのよりよいコントラストにより、患者治療中によりよい監視ができることが含まれる。

10

【0106】

第20の方法に適用できる他の治療には、限定するものではないが、高周波、レーザー、及びマイクロ波による治療などの他の熱アブレーション技術、並びにエタノールや化学療法薬（抗がん剤を含む）などの化学アブレーション技術が含まれる。第20の方法における他の任意選択のステップには、当業者に周知の信号平滑化技術を用いることが含まれる。

20

【0107】

前記した任意の1または複数の実施形態、実施形態の表現、例、及び方法などを、前記した任意の1または複数の他の実施形態、実施形態の表現、例、及び方法などと組み合わせることができることを理解されたい。例えば、限定するものではないが、いずれの本エンドエフェクタもいずれの本方法に用いることができ、いずれの本トランスデューサの構成もいずれの本エンドエフェクタに用いることができ、いずれの好適な本方法も第17の方法及び第20の方法などと組み合わせできる。

30

【0108】

本発明の方法及び実施形態の幾つかの表現の前記した説明は単に例示目的である。本発明は、非限定的すなわち前記した厳密な形態及び方法に限定されるものではなく、上記した開示から様々な変更形態及び変形形態が明らかであることを理解されたい。例えば、当業者には明らかなように、本発明の明らかな変更形態がロボットシステムに適合することから、ここに記載した超音波システム及び方法の開示をロボット支援外科手術に等しく適用できる。本発明の範囲は添付の特許請求の範囲によって規定されるものとする。

【図面の簡単な説明】

【0109】

【図1】組織保持装置を含む超音波治療システムを示す本発明の第1の実施形態の斜視図である。

40

【図2】図1の超音波治療システムのエンドエフェクタの拡大図である。

【図3】患者の椎間板を保持する図2のエンドエフェクタの立面図である。

【図4】図1の超音波治療システムに用いることができる第1の代替エンドエフェクタの斜視図である。

【図5】図1の超音波治療システムに用いることができる第2の代替エンドエフェクタの斜視図である。

【図6】図1の超音波治療システムに用いることができる第3の代替エンドエフェクタの斜視図である。

【図7】組織保持装置を含む別の超音波治療システムを示す本発明の第2の実施形態の側

50

面図である。

【図 8】図 7 の超音波治療システムのエンドエフェクタの拡大部分破断図である。

【図 9】それぞれが超音波トランスデューサを含む可撓性フィンガーを備えた超音波治療システムを示す本発明の第 3 の実施形態の斜視図である。

【図 10】展開されたファン状の可撓性フィンガーを示す図 9 の超音波治療システムの可撓性フィンガー及びチューブの拡大図である。

【図 11】収納された状態を示す図 10 の可撓性フィンガーの斜視図である。

【図 12】患者組織を覆うように展開されてクロー状 (claw-like) の状態の可撓性フィンガーを示す、図 9 の超音波治療システムに用いることができる代替の可撓性フィンガー構造の斜視図である。

10

【図 13】少なくとも 2 つの超音波トランスデューサを備えた超音波トランスデューサ組立体を含む超音波治療システムを示す本発明の第 4 の実施形態の斜視図である。

【図 14】図 13 の超音波治療システムの超音波トランスデューサ組立体の拡大図である。

【図 15】図 14 のトランスデューサ組立体の断面図である。

【図 16】図 15 の構造の代わりに用いることができる第 1 の代替トランスデューサ構造の断面図である。

【図 17】図 15 の構造の代わりに用いることができる第 2 の代替トランスデューサ構造の断面図である。

【図 18】切除器具及び超音波治療トランスデューサ組立体を含む超音波治療システムを示す本発明の第 5 の実施形態の斜視図である。

20

【図 19】チューブの内腔内に導入された切除器具を示す、図 18 のチューブの拡大断面図である。

【図 20】チューブの内腔内に導入された超音波治療トランスデューサ組立体を示す、図 18 のチューブの拡大断面図である。

【図 21】胃腸領域の患者組織の治療のために超音波を実施することを含む本発明の第 8 の方法のブロック図である。

【図 22】患者の肺上または肺内部の超音波治療を含む本発明の第 11 の方法のブロック図である。

【図 23】血管から病変への血液の供給を止めるために血管を超音波治療することを含む本発明の第 13 の方法のブロック図である。

30


【図 24】本システムのトランスデューサ組立体の位置を求めるためのレシーバを含む超音波治療システムの一部を示す本発明の第 6 の実施形態の斜視図である。

【図 25】本システムのトランスポンダの位置を求めるためのレシーバを含む別の超音波治療システムの一部を示す本発明の第 7 の実施形態の斜視図である。


【図 26】トランスデューサ組立体の照準を合わせることを含む本発明の第 17 の方法のブロック図である。

【図 27】治療前のイメージング超音波及び治療後のイメージング超音波を用いて、治療開始後のイメージを生成することを含む本発明の第 20 の方法のブロック図である。


【図 2】

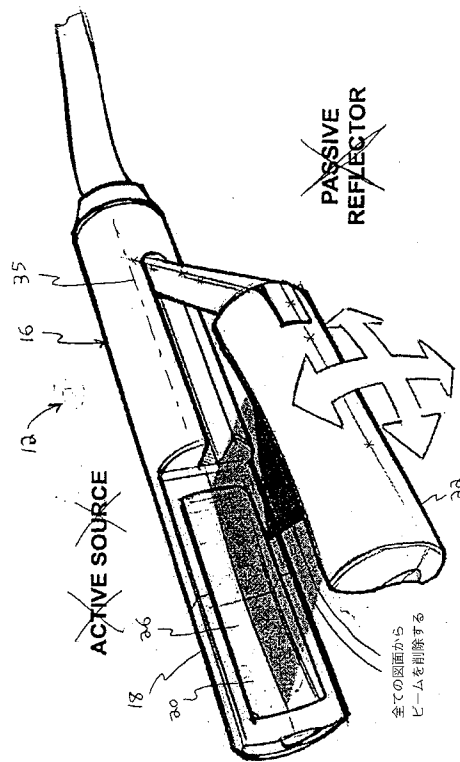


【図 2 1】

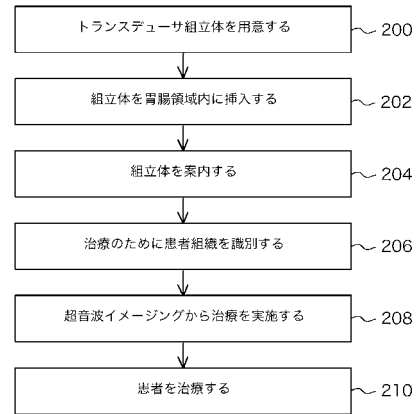


【図 2 2】

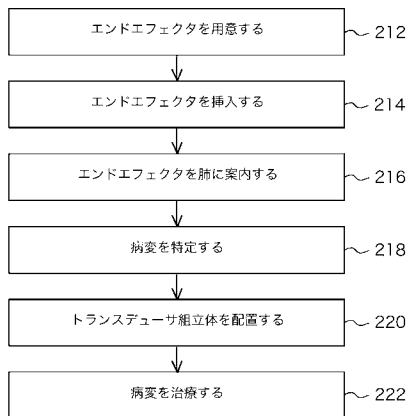


【図 2 3】

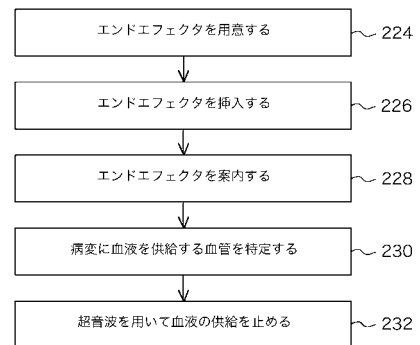

【図 26】

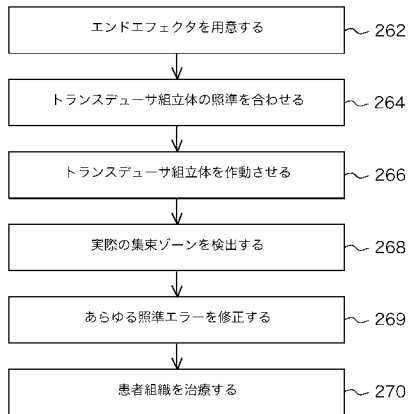

【図 27】

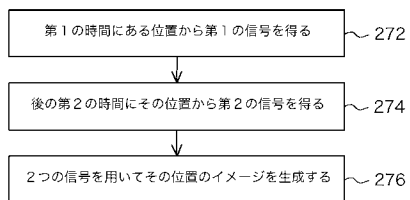

【国際公開パンフレット】

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
5 December 2002 (05.12.2002)

PCT

(10) International Publication Number
WO 02/096506 A2


- (51) International Patent Classification: **A61N** Robert: 4600 Wesley Court, Mason, OH 45040 (US).
PELEGRINO, Richard, C.; 33 Northbridge Road, Mendon, MA 01756 (US).
- (21) International Application Number: PCT/US02/16698
- (22) International Filing Date: 28 May 2002 (28.05.2002) (74) Agents: **JOHNSON, Philip, S.**, et al.; JOHNSON & JOHNSON, One Johnson & Johnson, New Brunswick, NJ 08933 (US).
- (25) Filing Language: English
- (26) Publication Language: English (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PI, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (30) Priority Data:
60/294,135 29 May 2001 (29.05.2001) US
10/000,000 22 May 2002 (22.05.2002) US
- (71) Applicant: **ETHICON ENDO-SURGERY** [US/US]; 4545 Creek Road, Cincinnati, OH 45242 (US).
- (72) Inventors: **MAKIN, Inder, Raj., S.**; 11388 Donwilde Drive, Loveland, OH 45140 (US). **DUNKI-JACOBS,**
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW).

[Continued on next page]

(54) Title: TISSUE-RETAINING SYSTEM FOR ULTRASOUND MEDICAL TREATMENT



WO 02/096506 A2

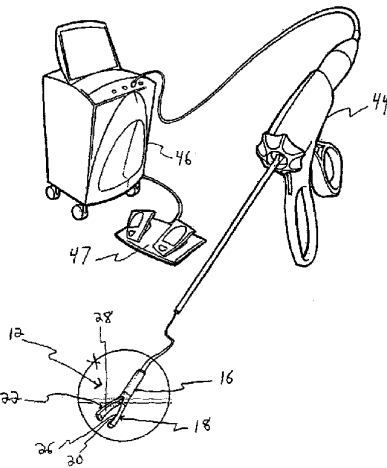

(57) Abstract: An ultrasound medical treatment system includes an end effector insertable into a patient. The end effector includes a tissue-retaining device. The tissue-retaining device includes a first tissue-retaining member having an ultrasound medical-treatment transducer and includes a second tissue-retaining member. The first and second tissue-retaining members are operatively connected together to retain patient tissue between the first and second tissue-retaining members and to release patient tissue so retained. In one example, the second tissue-retaining member has an ultrasound reflector. In the same or a different example, the ultrasound medical-treatment transducer is an ultrasound imaging and medical-treatment transducer.

WO 02/096506 A2

Urnsian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BL, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IL, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:
*without international search report and to be republished
upon receipt of that report*

**TISSUE-RETAINING SYSTEM
FOR ULTRASOUND MEDICAL TREATMENT**

The present application claims priority of U.S. Provisional Application Serial
No. 60/294,135 filed May 29, 2001, the entire disclosure of which is incorporated
5 herein by reference.

Field of the Invention

The present invention relates generally to ultrasound, and more particularly
10 to an ultrasound medical system and/or to an ultrasound medical method.

Background of the Invention

Known ultrasound medical systems and methods include using ultrasound
imaging of patients to identify patient tissue for medical treatment and include using
15 ultrasound to medically destroy identified patient tissue by heating the tissue.
Imaging is done at lower power and medical treatment is done at higher power.
Low power imaging ultrasound will not medically affect patient tissue. High power
medical-treatment ultrasound, when focused at a focal zone a distance away from
the ultrasound source, will substantially medically affect patient tissue in the focal
20 zone. However, focused medical-treatment ultrasound will not substantially
medically affect patient tissue outside the focal zone such as patient tissue located
between the source and the focal zone.

In one known example, a transducer assembly includes a single ultrasound
transducer having a single transducer element, or an array of transducer elements
25 acting together, to ultrasonically image the patient and to ultrasonically ablate
identified patient tissue. It is known to convert ultrasound imaging data into
temperature imaging data for ultrasound-treated patient tissue to monitor the
ultrasound treatment. A known transducer element includes a transducer element
having a concave shape or an acoustic lens to focus ultrasound energy. A known
30 array of transducer elements includes a planar, concave, or convex array of

transducer elements to focus ultrasound energy. A known array of transducer elements includes an array whose transducer elements are electronically or mechanically controlled together to steer and focus the ultrasound emitted by the array to a focal zone (which may be large or which may be as small as, for example, a grain of rice) to provide three-dimensional medical ultrasound treatment of patient tissue. In some applications, the transducer is placed on the surface of patient tissue for ultrasound imaging and/or ultrasound medical treatment of areas within the patient tissue. In other applications, the transducer is surrounded with a balloon which is expanded to contact the surface of patient tissue by filling with a fluid such as a saline solution to provide acoustic coupling between the transducer and the patient tissue.

Known ultrasound medical systems and methods include deploying an end effector having an ultrasound transducer outside the body to break up kidney stones inside the body, endoscopically inserting an end effector having an ultrasound transducer in the colon to medically destroy prostate cancer, laparoscopically inserting an end effector having an ultrasound transducer in the abdominal cavity to medically destroy a cancerous liver tumor, intravenously inserting a catheter end effector having an ultrasound transducer into a vein in the arm and moving the catheter to the heart to medically destroy diseased heart tissue, and interstitially inserting a needle end effector having an ultrasound transducer needle into the tongue to medically destroy tissue to reduce tongue volume to reduce snoring. Known methods for guiding an end effector within a patient include guiding the end effector from x-rays, from MRI images, and from ultrasound images obtained using the ultrasound transducer. Known ultrasound imaging includes Doppler ultrasound imaging to detect blood flow, and a proposed known use of ultrasound includes using an ultrasound transducer outside the body to stop internal bleeding (by sealing ruptured blood vessels) of a patient brought to an emergency room of a hospital.

A Mammotome® Breast Biopsy System manufactured by Ethicon Endo-Surgery, Inc. (a Johnson & Johnson Company) inserts a tube into breast tissue, wherein the tube contains an end effector having a biopsy cutting tool. A known electromagnetic transponder and three-receiver system for calculating the position of the transponder and for guiding the transponder (which is attached to a heart catheter

for monitoring the heart) inside a patient is the CARTO™ EP Navigation System used with a NAVI-STAR® catheter manufactured by Biosense Webster (a Johnson & Johnson Company). Further, it is known that changes in patient tissue because of medical treatment of patient tissue, such as ultrasound medical treatment, affect the amplitude and/or phase of ultrasound imaging signals.

What is needed is an improved ultrasound medical system and/or an improved ultrasound medical method. This invention addresses those needs lacking in an ultrasonic medical system and/or an ultrasonic medical method.

Summary of the Invention

One expression of an embodiment of the invention is an ultrasound medical treatment system including an end effector insertable into a patient. The end effector includes a tissue-retaining device. The tissue-retaining device includes a first tissue-retaining member having an ultrasound medical-treatment transducer and includes a second tissue-retaining member. The first and second tissue-retaining members are operatively connected together to retain patient tissue between the first and second tissue-retaining members and to release patient tissue so retained. In one example, the second tissue-retaining member has an ultrasound reflector. In the same or a different example, the ultrasound medical-treatment transducer is an ultrasound imaging and medical-treatment transducer.

The present invention has, without limitation, application in conventional endoscopic and open surgical instrumentation as well as application in robotic-assisted surgery.

Brief Description of the Drawings

Figure 1 is a perspective view of a first embodiment of the present invention showing an ultrasound medical treatment system which includes a tissue-retaining device;

Figure 2 is an enlarged view of the end effector of the ultrasound medical treatment system of Figure 1;

Figure 3 is a view of the end effector of Figure 2 retaining an intervertebral disk of a patient;

Figure 4 is a perspective view of a first alternate end effector which can be used in the ultrasound medical treatment system of Figure 1;

5 Figure 5 is a perspective view of a second alternate end effector which can be used in the ultrasound medical treatment system of Figure 1;

Figure 6 is a perspective view of a third alternate end effector which can be used in the ultrasound medical treatment system of Figure 1;

Figure 7 is a side elevational view of a second embodiment of the present invention showing another ultrasound medical treatment system which includes a tissue-retaining device;

Figure 8 is an enlarged, partially-cutaway view of the end effector of the ultrasound medical treatment system of Figure 7;

15 Figure 9 is a perspective view of a third embodiment of the present invention showing an ultrasound medical system which includes flexible fingers, wherein each finger includes an ultrasound transducer;

Figure 10 is an enlarged view of the tube and the flexible fingers of the ultrasound medical system of Figure 9 showing the flexible fingers in a deployed fan-like state;

20 Figure 11 is a view of the flexible fingers of Figure 10 shown in a stowed state;

Figure 12 is a perspective view of an alternate flexible finger arrangement which can be used in the ultrasound medical system of Figure 9, showing the flexible fingers in a deployed claw-like state surrounding patient tissue;

25 Figure 13 is a perspective view of a fourth embodiment of the present invention showing an ultrasound medical system which includes an ultrasound transducer assembly which includes at least two ultrasound transducers;

Figure 14 is an enlarged view of the ultrasound transducer assembly of the ultrasound medical system of Figure 13;

30 Figure 15 is a cross-sectional view of the transducer assembly of Figure 14;

Figure 16 is a cross-sectional view of a first alternate transducer arrangement which can be used in place of the arrangement of Figure 15;

Figure 17 is a cross-sectional view of a second alternate transducer arrangement which can be used in place of the arrangement of Figure 15;

Figure 18 is a perspective view of a fifth embodiment of the present invention showing an ultrasound medical treatment system which includes a cutting tool and an ultrasound medical-treatment transducer assembly;

Figure 19 is an enlarged, cross-sectional view of the tube of Figure 18 showing a cutting tool that has been introduced into the lumen of the tube;

Figure 20 is an enlarged, cross-sectional view of the tube of Figure 18 showing an ultrasound medical-treatment transducer assembly that has been introduced into the lumen of the tube;

Figure 21 is a block diagram of an eighth method of the present invention which includes ultrasound staging of medical treatment of patient tissue in the gastrointestinal area;

Figure 22 is a block diagram of an eleventh method of the present invention which includes ultrasound medical treatment of a lesion on or in the lung of a patient;

Figure 23 is a block diagram of a thirteenth method of the present invention which includes ultrasound medical treatment of a blood vessel to stop the supply of blood to a lesion from the blood vessel;

Figure 24 is a perspective view of a sixth embodiment of the present invention showing a portion of an ultrasound medical treatment system which includes receivers for locating the position of the transducer assembly of the system;

Figure 25 is a perspective view of a seventh embodiment of the present invention showing a portion of another ultrasound medical treatment system which includes receivers for locating the position of the transponder of the system;

Figure 26 is a block diagram of a seventeenth method of the present invention which includes aiming the transducer assembly; and

Figure 27 is a block diagram of a twentieth method of the present invention which includes creating an image after starting medical treatment using an imaging ultrasound wave before medical treatment and an imaging ultrasound wave after starting medical treatment.

Detailed Description of the Invention

Before explaining the present invention in detail, it should be noted that the invention is not limited in its application or use to the details of construction and arrangement of parts illustrated in the accompanying drawings and description. The illustrative embodiments of the invention may be implemented or incorporated in other embodiments, variations and modifications, and may be practiced or carried out in various ways. Furthermore, unless otherwise indicated, the terms and expressions employed herein have been chosen for the purpose of describing the illustrative embodiments of the present invention for the convenience of the reader and are not for the purpose of limiting the invention.

It is understood that any one or more of the following-described embodiments, expressions of embodiments, examples, methods, etc. can be combined with any one or more of the other following-described embodiments, expressions of embodiments, examples, methods, etc. For example, and without limitation, any of the end effectors can be used in any of the methods, any of the transducer arrangements can be used in any of the end effectors, and any appropriate methods can be combined such as combining the seventeenth and twentieth methods, etc.

20

Ultrasound Medical Treatment Using Tissue-Retaining Devices

Tissue-Retaining System for Ultrasound Medical Treatment

Referring now to the drawings, Figures 1-3 illustrate a first embodiment of the present invention. A first expression of the first embodiment of the present invention is for an ultrasound medical treatment system 10 including an end effector 12 insertable into a patient 14. The end effector 12 includes a tissue-retaining device 16. The tissue-retaining device 16 includes a first tissue-retaining member 18 having an (i.e., at least one) ultrasound medical-treatment transducer 20 (also called "transducer 20") and includes a second tissue-retaining member 22. The first and second tissue-retaining members 18 and 22 are operatively connected together to

retain patient tissue 24 between the first and second tissue-retaining members 18 and 22 and to release patient tissue 24 so retained.

It is noted that an ultrasound medical-treatment transducer is an ultrasound transducer adapted at least for ultrasound medical treatment of a patient such as, but not limited to, a human patient. An ultrasound medical-treatment transducer includes either a single ultrasound medical-treatment transducer element or an array of ultrasound medical-treatment transducer elements, as is known to those skilled in the art. An ultrasound medical-treatment transducer may or may not also be adapted for ultrasound imaging of a patient. Likewise, an ultrasound imaging transducer is an ultrasound transducer adapted at least for ultrasound imaging of a patient and may or may not also be adapted for ultrasound medical-treatment of a patient.

Advantages of retaining patient tissue between two tissue-retaining members during ultrasound medical treatment by one of the tissue-retaining members include having a single instrument which ultrasonically medically treats patient tissue and at the same time immobilizes patient tissue against undesired movement during the treatment. It is also noted that in one application the tissue-retaining device is a clamp which retains and holds tissue and that in another application the tissue-retaining device retains tissue against movement, but does not hold tissue, and therefore is not a clamp.

In one variation, not shown, the second tissue-retaining member 22 has an ultrasound imaging and/or medical treatment transducer. In the same or a different variation, not shown, the tissue-retaining device 16 has at least one additional tissue-retaining member. Mechanisms, not shown, for remotely moving two (or more) members toward and away from each other are within the ordinary level of skill of the artisan and include, without limitation, the use of pivotal member attachments and the use of cables or motors. In the same or a different variation, the retained patient tissue 24 is retained between the ultrasound medical-treatment transducer 20 and the second tissue-retaining member 22. In the same or a different variation, the ultrasound medical-treatment transducer 20 focuses ultrasound energy, such as focusing being known to those skilled in the art. In the same or a different variation, not shown, the second tissue-retaining member 22 is substantially ultrasonically non-reflective.

A second expression of the first embodiment of the present invention is for an ultrasound medical treatment system 10 including an end effector 12 insertable into a patient 14. The end effector 12 includes a tissue-retaining device 16. The tissue-retaining device 16 includes a first tissue-retaining member 18 having an (i.e., at least one) ultrasound imaging and medical-treatment transducer 26 (also called "transducer 26") and includes a second tissue-retaining member 22. The first and second tissue-retaining members 18 and 22 are operatively connected together to retain patient tissue 24 between the first and second tissue-retaining members 18 and 22 and to release patient tissue 24 so retained.

It is noted that an ultrasound imaging and medical-treatment transducer is an ultrasound transducer adapted at least for both ultrasound imaging and ultrasound medical treatment of a patient. An ultrasound imaging and medical-treatment transducer includes either a single ultrasound imaging and medical-treatment transducer element or an array of ultrasound medical transducer elements (including an array having at least one separate element for imaging and at least one separate element for medical treatment or an array having at least two elements each adapted for both imaging and medical treatment), as is known to those skilled in the art. In one variation, the retained patient tissue 24 is retained between the imaging and medical-treatment transducer 26 and the second tissue-retaining member 22. In the same or a different variation, the ultrasound imaging and medical-treatment transducer 26 focuses ultrasound energy. In the same or a different variation, not shown, the second tissue-retaining member 22 is substantially ultrasonically non-reflective.

A third expression of the first embodiment shown in Figures 1-3 is for an ultrasound medical treatment system 10 including an end effector 12 insertable into a patient 14. The end effector 12 includes a tissue-retaining device 16. The tissue-retaining device 16 includes a first tissue-retaining member 18 having an (i.e., at least one) ultrasound medical-treatment transducer 20 and includes a second tissue-retaining member 22 having an (i.e., at least one) ultrasound reflector 28. The first and second tissue-retaining members 18 and 22 are operatively connected together to retain patient tissue 24 between the first and second tissue-retaining members 18 and 22 and to release patient tissue 24 so retained.

Advantages of retaining patient tissue between two tissue-retaining members during ultrasound medical treatment by an ultrasound medical-treatment transducer ~~of a first tissue-retaining member and an ultrasound reflector of a second tissue-~~ retaining member include having a single instrument which ultrasonically medically
 5 treats patient tissue by direct ultrasound, which enhances the ultrasound medical treatment by reflected ultrasound, and which at the same time immobilizes patient tissue against undesired movement during the treatment.

It is noted that an ultrasound reflector 28 is a material which reflects ultrasound at least to a degree that would substantially medically affect patient tissue
 10 over a treatment period by direct ultrasound which is being reflected back by the ultrasound reflector. Choices of ultrasound reflecting materials include, without limitation, acoustically-rigid materials such as stainless steel (which reflects about 100%) and aluminum (which reflects about 80%) and acoustically-soft materials such as corporene (which reflects about 90%). An ultrasound reflecting material is
 15 contrasted with an ultrasound absorbing material such as, without limitation, rubber or plastic. In one variation, the retained patient tissue 24 is retained between the ultrasound medical-treatment transducer 20 and the ultrasound reflector 28. In the same or a different variation, the ultrasound medical-treatment transducer 20 and the ultrasound reflector 28 each focus ultrasound energy, such ultrasound reflector
 20 focusing being accomplished by the shape of, or by shaping, the reflector surface as is within the ordinary level of skill of the artisan.

A fourth expression of the first embodiment shown in Figures 1-3 is for an ultrasound medical treatment system 10 including an end effector 12 insertable into a patient 14. The end effector 12 includes a tissue-retaining device 16. The tissue-
 25 retaining device 16 includes a first tissue-retaining member 18 having an (i.e., at least one) ultrasound imaging and medical-treatment transducer 26 and includes a second tissue-retaining member 22 having an (i.e., at least one) ultrasound reflector 28. The first and second tissue-retaining members 18 and 22 are operatively connected together to retain patient tissue 24 between the first and second tissue-
 30 retaining members 18 and 22 and to release patient tissue 24 so retained. In one variation, the retained patient tissue 24 is retained between the ultrasound imaging and medical-treatment transducer 26 and the ultrasound reflector 28. In the same or

a different variation, the ultrasound imaging and medical-treatment transducer 26 and the ultrasound reflector 28 each focus ultrasound energy.

In one example of the previously-described third and fourth expressions of the first embodiment, the ultrasound reflector 28 is disposed to receive ultrasound energy from the transducer 20 and 26 and is oriented to reflect the received ultrasound energy back into patient tissue 24 retained by the tissue-retaining device 16. In the same or a different example, the ultrasound reflector 28 is oriented to reflect the received ultrasound energy away from the transducer 20 and 26 when the patient tissue 14 is retained by the tissue-retaining device 16. An advantage of this arrangement is that it avoids damage to the transducer from the reflected ultrasound. In the same or a different example, one of the first and second tissue-retaining members 18 and 22 is controllably orientatable relative to the other of the first and second tissue-retaining members 18 and 22 such as, without limitation, by being orientatable along the double-headed arrows shown in Figure 2. In one modification, the second tissue-retaining member 22 is controllably orientatable relative to the first tissue-retaining member 18 to reflect the received ultrasound energy back along different directions. A first alternate end effector 30 is shown in Figure 4 wherein the second tissue-retaining member 32 is controllably orientatable relative to the first tissue-retaining member 34 as shown by the double-headed arrows in Figure 4. Mechanisms, not shown, for remotely controlling the orientation of one member relative to another member are within the ordinary level of skill of the artisan and include, without limitation, the use of pivotal member attachments and the use of cables or motors. In one application, the transducer 20 and 26 generates wide-focused ultrasound (shown by the two single-headed arrows coming from the first tissue-retaining member 18 in Figure 3) and the ultrasound reflector 28 generates narrow-focused ultrasound (shown by the two single-headed arrows coming from the second tissue-retaining member 22 in Figure 3).

In one example of the previously-described first through fourth expressions of the first embodiment, the end effector 12 is an open-surgery end effector, an endoscopic end effector, a laparoscopic end effector (as shown in Figure 1), a catheter end effector (such as, but not limited to, an intravascular catheter end effector), or a needle end effector, as can be appreciated by those skilled in the art.

In one application, the end effector 12 is used to retain a blood vessel and then to ultrasonically treat the blood vessel to seal the blood vessel stopping the flow of blood in the retained blood vessel. In another application, the end effector 12 is used to retain patient tissue and then to ultrasonically ablate at least a portion of the retained patient tissue.

In one design of the previously-described first through fourth expressions of the first embodiment, the end effector 12 has a longitudinal axis 35, and one of the first and second tissue-retaining members 18 and 22 at all times faces along a direction which is substantially perpendicular to the longitudinal axis 35. If the one tissue-retaining member were planar, this means that the longitudinal axis would be substantially parallel to the plane of the one tissue-retaining member. In one enablement, the one tissue-retaining member is the first tissue-retaining member 18. A second alternate end effector 36 has first and second tissue-retaining members 38 and 40 which are hinged together to relatively move as indicated by the double-headed arrow and which are shown in a partially open configuration in Figure 5. The second alternate end effector 36 has a longitudinal axis 42, and one of the first and second tissue-retaining members 38 and 40 at all times faces along a direction which is substantially parallel to the longitudinal axis 42. If the one tissue-retaining member were planar, this means that the longitudinal axis would be substantially perpendicular to the plane of the one tissue-retaining member. In one enablement, the one tissue-retaining member is the first tissue-retaining member 38. A third alternate end effector 37 having first and second tissue-retaining members 39 and 41 with one member longitudinally movable with respect to the other member (as indicated by the double-headed arrow) is shown in Figure 6. The third alternate end effector 37 has a longitudinal axis 43, and one of the first and second tissue-retaining members 39 and 41 at all times faces along a direction which is substantially parallel to the longitudinal axis 43. In one enablement, the one tissue-retaining member is the first tissue-retaining member 39.

In one enablement, as shown in Figure 1, the ultrasound medical treatment system 10 also includes a handpiece 44 operatively connected to the end effector 12 and to an ultrasound controller 46 operatively connected to a foot-pedal power switch 47, as can be appreciated by those skilled in the art.

A first method of the invention is for ultrasound medical treatment of a patient and uses the ultrasound medical treatment system as previously described in the first, second, third or fourth expression of the first embodiment with or without the previously-described variations, etc. thereof. The first method includes steps a) through e). Step a) includes endoscopically inserting the end effector into an ear, nose, or throat of the patient. Step b) includes guiding the end effector in the patient. Step c) includes identifying patient tissue for medical treatment such as optionally at least in part from ultrasound imaging using the transducer. Other ways of identifying patient tissue for medical treatment include, without limitation, using x-rays and/or MRI imaging, as are known to the artisan. Step d) includes retaining the identified patient tissue using the tissue-retaining device. Step e) includes medically treating the retained patient tissue with ultrasound using the transducer or using the transducer and the ultrasound reflector. In one implementation, one tissue-retaining member at all times faces along a direction which is substantially parallel to the longitudinal axis of the end effector (as seen in Figures 5 and 6).

A second method of the invention is for ultrasound medical treatment of a patient and uses the ultrasound medical treatment system as previously described in the first, second, third or fourth expression of the first embodiment with or without the previously-described variations, etc. thereof. The second method includes steps a) through c). Step a) includes inserting the end effector 12 into the patient. Step b) includes retaining an intervertebral disk 48 (see Figure 3) of the patient with the tissue-retaining device, wherein the intervertebral disk 48 includes tissue. Step c) includes medically treating the retained intervertebral disk 48 with ultrasound to shrink the tissue using the transducer or using the transducer and the ultrasound reflector. In one implementation, one tissue-retaining member at all times faces along a direction which is substantially perpendicular to the longitudinal axis of the end effector (as seen in Figures 2 and 4). In one application of the second method of the invention, the intervertebral disk 48 includes connective and nerve tissue.

A third method of the invention is for ultrasound medical treatment of a patient and uses the ultrasound medical treatment system as previously described in the first, second, third or fourth expression of the first embodiment with or without the previously-described variations, etc. thereof. The third method includes steps a)

through c). Step a) includes inserting the end effector into the patient. Step b) includes retaining a joint of the patient with the tissue-retaining device, wherein the joint includes tissue. ~~Step c) includes medically treating the retained joint with~~ ultrasound to shrink the tissue using the transducer or using the transducer and the ultrasound reflector. In one implementation, one tissue-retaining member at all times faces along a direction which is substantially perpendicular to the longitudinal axis of the end effector (as seen in Figures 2 and 4). In one application of the third method of the invention, the joint includes connective and nerve tissue.

As previously mentioned, one application of the ultrasound medical treatment system 10 of the previously-described first through fourth expressions of the first embodiment uses the tissue-retaining device to retain a blood vessel and uses the transducer, or the transducer and the ultrasound reflector, to substantially stop the flow of blood within the blood vessel.

Referring again to the drawings, Figures 7-8 illustrate a second embodiment of the present invention which is an ultrasound medical treatment system 50 including an end effector 52 insertable into a patient. The end effector 52 includes a tissue-retaining device 54. The tissue-retaining device 54 includes a first tissue-retaining member 56 having an ultrasound imaging and medical-treatment transducer 58 and includes a second tissue-retaining member 60 having an ultrasound reflector 62. The first and second tissue-retaining members 56 and 60 are operatively connected together to retain patient tissue between the first and second tissue-restraining members and to release patient tissue so retained. The first and second tissue-retaining members 56 and 60 always maintain a substantially parallel alignment.

Advantages of having a substantially parallel alignment between the tissue-retaining members include, in one example, having the transducer and the ultrasound reflector maintain a substantially parallel alignment for improved reflected ultrasound medical treatment enhancement for any thickness of patient tissue retained by the tissue-retaining members.

In one example of the second embodiment, the first tissue-retaining member 56 is a distal end portion 64 of a first tube 66. The ultrasound medical treatment system 50 also includes a second tube 68, first and second link members 70 and 72,

and a cable 74. The second tube 68 is oriented substantially parallel to the first tube 66. The first and second link members 70 and 72 are pivotally attached to the ~~second tissue-retaining member 60 and to the second tube 68 at pivot points 76-82.~~ creating a hinged parallelogram defined by a proximal portion 84 of the second tissue-retaining member 60, a distal portion 86 of the second tube 68, and the first and second link members 70 and 72. The ultrasound reflector 62 is disposed at a distal portion 88 of the second tissue-retaining member 60 and faces the transducer 58. The cable 74 is operatively connected to the hinged parallelogram to move the second tissue-retaining member 60 toward and away from the first tissue-retaining member 56.

In one variation, the ultrasound medical treatment system 50 also includes an outer tube 90. The cable 74 and the first and second tubes 66 and 68 are disposed in the outer tube 90. In one modification, the ultrasound medical treatment system 50 also includes a handpiece 92. The cable 74 and the first, second, and outer tubes 66, 68 and 90 are operatively connected to the handpiece 92. In one design, the orientation of the first tube 66 about the longitudinal axis of the first tube 66 is controlled by a step motor (not shown) disposed in, and actuated by, the handpiece 92. In the same or another design, the first tube 66 is a hollow tube allowing for transducer wiring (not shown), and the second tube is a solid tube (not shown). Depending on use, the tubes 66, 68, and 90 may be rigid or flexible which also is true for any tube arrangement (specifically disclosed as rigid or flexible, or not so specifically disclosed) of any end effector and for any end effector itself of any of the previous or following embodiments of the invention.

25 Ultrasound Medical Treatment Using Specific Transducer Arrangements

Deployable Ultrasound Medical Transducers

Referring to the drawings, Figures 9-11 illustrate a third embodiment of the present invention. A first expression of the third embodiment of the present invention is for an ultrasound medical system 94 including a tube 96 and a plurality of resiliently flexible fingers 98. The tube 96 has a distal end 100 insertable into a patient and has a lumen 102 with a distal opening 104. The fingers 98 are

extendable out of the distal opening 104 of the lumen 102 creating a deployed state (seen in Figure 10) and which are at-least-partially retractable into the distal opening 104 of the lumen 102 creating a stowed state (seen in Figure 11). Each finger 98 includes an ultrasound transducer 106. The distance between the ultrasound transducers 106 of adjacent fingers 98 is greater in the deployed state than in the stowed state. It is noted that an ultrasound medical system is a medical system which at least provides ultrasound imaging or ultrasound medical treatment of a patient.

Advantages of the tube and extendable/retractable flexible-finger array arrangement include, when the transducers are ultrasound medical-treatment transducers having a common focal zone in the deployed state, providing faster medical treatment times by allowing for more transducer ultrasound-emitting surface area which can be simply stowed into a compact shape for transport within a patient to and from the site of patient tissue receiving ultrasound medical treatment.

In one variation, the fingers 98 are only partially retracted into the distal opening 104 of the lumen 102 in the stowed state (as seen in Figure 11). In another variation, not shown, the fingers 98 are completely retracted into the distal opening 104 of the lumen 102 in the stowed state. By the fingers 98 being extendable out of the distal opening 104 of the lumen 102 creating the deployed state and being at-least-partially retractable into the distal opening 104 of the lumen 102 creating the stowed state means the fingers 98 protrude more out of the distal opening 104 of the lumen 102 in the extended state than (if at all) in the stowed state. Mechanisms, not shown, for remotely extending and retracting fingers in a tube include, without limitation, a common shaft attached to the proximal ends of the fingers, disposed in the lumen of the tube, and spring-biased to move forward upon squeezing of a handpiece and to return backward upon relaxing of the handpiece, as is within the ordinary level of skill of the artisan. In one modification, the distal opening 104 of the lumen 102 coincides with the distal end 100 of the tube 96. In another modification, not shown, the distal opening of the lumen is spaced apart from the distal end of the tube. In one implementation, the distal opening 104 of the lumen 102 faces in the same direction as the distal end 100 of the tube 96. Other implementations are left to the artisan, such as, without limitation, the distal opening

of the lumen facing perpendicular to the distal end of the tube. In one example, at least one of the transducers 106 is an ultrasound imaging transducer. In the same or ~~a different example, at least one of the transducers 106 is an ultrasound medical-~~ treatment transducer. In the same or a different example, at least one of the transducers 106 is an ultrasound imaging and medical-treatment transducer.

A second expression of the third embodiment is for an ultrasound medical treatment system 108 including a tube 96 and including an end effector 110 having a plurality of fingers 98. The tube 96 has a distal end 100 insertable into a patient and has a lumen 102 with a distal opening 104. The fingers 98 are extendable out of the distal opening 104 of the lumen 102 creating a deployed state (seen in Figure 10) and are at-least-partially retractable into the distal opening 104 of the lumen 102 creating a stowed state (seen in Figure 11). Each finger 98 includes an ultrasound medical-treatment transducer 112. The distance between the ultrasound medical-treatment transducers 112 of adjacent fingers 98 is greater in the deployed state than in the stowed state.

A third expression of the third embodiment is for an ultrasound medical treatment system 108 including a tube 96 and including an end effector 110 having a plurality of fingers 98. The tube 96 has a distal end 100 insertable into a patient and has a lumen 102 with a distal opening 104. The fingers 98 are extendable out of the distal opening 104 of the lumen 102 creating a deployed state (seen in Figure 10) and are at-least-partially retractable into the distal opening 104 of the lumen 102 creating a stowed state (seen in Figure 11). Each finger 98 includes an ultrasound imaging and medical-treatment transducer 114. The distance between the ultrasound imaging and medical-treatment transducers 114 of adjacent fingers 98 is greater in the deployed state than in the stowed state.

It is noted that the variations, modifications, and implementations, etc. previously discussed for the first expression of the third embodiment are equally applicable to the second and third expressions of the third embodiment.

In one example of the first, second and third expressions of the third embodiment, the transducers 106, 112 and 114 each have an ultrasound-emitting concave surface 116. In another example, not shown, the transducers have a planar ultrasound-emitting surface. In one arrangement, each concave surface 116 is

concave as one moves along the corresponding finger 98 (as best seen in Figure 10). In another arrangement, not shown, each concave surface is concave as one moves across the corresponding finger or is concave as one moves both along and across the corresponding finger (such as, for example, with a hemispherically-concave surface). In one design, the concave surfaces 116 together have a substantially common focal zone when the fingers 98 are in the deployed state. The end effector 110 is seen with its fingers 98 facing the patient tissue 119 in Figure 10. In another design, not shown, the focal zones are not common. In one configuration, the fingers 98 define an open-hand finger array 118 in the deployed state. An alternate flexible finger arrangement in the form of a substitute end effector 120 is shown in Figure 12, wherein the fingers 122 define a clawed-hand finger array 124 in the deployed state. The substitute end effector 120 is seen with its fingers 122 surrounding the patient tissue 126 for imaging and/or medical treatment by the ultrasound transducers 128 in Figure 12. In other transducer arrangements, not shown, one or more or all of the ultrasound transducers face outward rather than facing inward.

In the same or another example of the first, second and third expressions of the third embodiment, the fingers 98 are at least four in number. In the same or yet another example of the second and third expressions of the third embodiment, the end effector 110 (as well as the substitute end effector 120) is an open-surgery end effector, an endoscopic end effector, a laparoscopic end effector (as shown in Figure 9), a catheter end effector (such as, but not limited to, an intravascular catheter end effector), or a needle end effector, as can be appreciated by those skilled in the art.

In one enablement, as shown in Figure 9, the ultrasound medical treatment system 108 also includes a handpiece 130 operatively connected to the end effector 110 and to an ultrasound controller 132 operatively connected to a foot-pedal power switch 133, as can be appreciated by those skilled in the art.

Faceted Ultrasound Medical Transducer Assembly

A fourth embodiment of the present invention is shown in Figures 13-15. A first expression of the fourth embodiment of the present invention is for an ultrasound medical system 134 including an ultrasound transducer assembly 136

insertable into a patient. The ultrasound transducer assembly 136 has a longitudinal axis 138. The ultrasound transducer assembly 136 includes a plurality P of ~~ultrasound transducers 140. Each transducer 140 has an ultrasound-emitting surface~~ 142 oriented at an angle of substantially $360/P$ degrees apart from the ultrasound-emitting surface 142 of an adjacent transducer 140 when viewed in a cross section (see Figure 15) of the transducer assembly 136 taken by a cutting plane which is perpendicular to the longitudinal axis 138.

Advantages of such a transducer configuration include, in one example, providing directed or focused medical-treatment ultrasound which is not possible with a cylindrical ultrasound transducer, as can be appreciated by those skilled in the art.

It is noted that an ultrasound transducer assembly 136 insertable into a patient is an ultrasound imaging transducer assembly, an ultrasound medical-treatment transducer assembly, or an ultrasound imaging and medical-treatment transducer assembly. An ultrasound imaging transducer assembly has at least one ultrasound imaging transducer, and an ultrasound medical-treatment transducer assembly has at least one ultrasound medical-treatment transducer. An ultrasound imaging and medical-treatment transducer assembly has at least one ultrasound imaging transducer and at least one ultrasound medical-treatment transducer or has at least one ultrasound imaging and medical-treatment transducer.

A second expression of the fourth embodiment of the present invention is for an ultrasound medical-treatment system 144 including an end effector 146 insertable into a patient. The end effector 146 includes an ultrasound medical-treatment transducer assembly 148. The ultrasound medical-treatment transducer assembly 148 has a longitudinal axis 138. The ultrasound medical-treatment transducer assembly 148 includes a plurality P of ultrasound medical-treatment transducers 150. Each transducer 150 has an ultrasound-emitting surface 142 which faces away from the longitudinal axis 138 and which is oriented at an angle of substantially $360/P$ degrees apart from the ultrasound-emitting surface 142 of an adjacent transducer 150 when viewed in a cross section (see Figure 15) of the transducer assembly 148 taken by a cutting plane which is perpendicular to the longitudinal

axis 138. In one example, at least one of the ultrasound medical-treatment transducers 150 is also adapted for ultrasound imaging.

~~A fourth method of the present invention is for ultrasound medical treatment~~
of a patient and uses the ultrasound medical treatment system 144 as previously
5 described in the second expression of the fourth embodiment. The fourth method
includes steps a) through b). Step a) includes inserting the end effector 146 into the
liver of the patient. Step b) includes medically treating a lesion in the liver with
ultrasound from the ultrasound medical-treatment transducer assembly 148. In one
example, step a) interstitially inserts the end effector 146 into the lesion. In another
10 example, step a) endoscopically inserts the end effector 146 into the liver through
the hepato-biliary duct system.

A third expression of the fourth embodiment of the present invention is for
an ultrasound medical treatment system 144 including an end effector 146 insertable
into a patient. The end effector 146 includes an ultrasound imaging and medical-
15 treatment transducer assembly 152. The ultrasound imaging and medical-treatment
transducer assembly 152 has a longitudinal axis 138. The ultrasound imaging and
medical-treatment transducer assembly 152 includes a plurality P of ultrasound
imaging and medical-treatment transducers 154. Each transducer 154 has an
ultrasound-emitting surface 142 which faces away from the longitudinal axis 138
20 and which is oriented at an angle of substantially $360/P$ degrees apart from the
ultrasound-emitting surface 142 of an adjacent transducer 154 when viewed in a
cross section (see Figure 15) of the transducer assembly 152 taken by a cutting plane
which is perpendicular to the longitudinal axis 138.

A fifth method of the present invention is for ultrasound medical treatment of
25 a patient and uses the ultrasound medical-treatment system 144 as previously
described in the third expression of the fourth embodiment. The fourth method
includes steps a) through c). Step a) includes inserting the end effector 146 into the
liver of the patient. Step b) includes identifying a lesion in the liver for medical
treatment at least in part from ultrasound imaging using the ultrasound imaging and
30 medical-treatment transducer assembly 152. Step c) includes medically treating the
lesion with ultrasound from the ultrasound imaging and medical-treatment
transducer assembly 152. In one example, step a) interstitially inserts the end effector

146 into the lesion. In another example, step a) endoscopically inserts the end effector 146 into the liver through the hepato-biliary duct system.

~~In one example of the previously-described first, second and third~~
expressions of the fourth embodiment, the transducer assembly 136, 148, and 152
5 has a distal tip 156 and has a tip transducer 158. In one design, the tip transducer is
a forward facing tip transducer. In another design, the tip transducer is a sideways
facing tip transducer. In one variation, the tip transducer is an ultrasound imaging
tip transducer. In another variation, the tip transducer is an ultrasound medical-
treatment tip transducer. In a further variation, the tip transducer is an ultrasound
10 imaging and medical-treatment tip transducer. In an additional variation, the tip
transducer is a transponder which emits electromagnetic waves or mechanical waves
or both.

In the same or a different example of the previously-described first, second
and third expressions of the third embodiment, each ultrasound-emitting surface 142
15 is substantially straight when viewed in the cross section, as seen in Figure 15. In
one variation, as seen in Figure 14, each ultrasound-emitting surface 142 has a
substantially concave shape as one moves along the ultrasound-emitting surface 142
in a direction parallel to the longitudinal axis 138, and each ultrasound-emitting
surface 142 has a focal zone. In a first alternate transducer arrangement seen Figure
20 16, each ultrasound-emitting surface 162 has a substantially planar shape. In a
second alternate transducer arrangement seen in Figure 17, each ultrasound-emitting
surface 164 has a substantially concave shape when viewed in the cross section, and
each ultrasound-emitting surface 164 has a focal zone. In one modification, each
ultrasound-emitting surface 164 also has a substantially concave shape as one moves
25 along the ultrasound-emitting surface 164 in a direction parallel to the longitudinal
axis (such as, for example, by the ultrasound-emitting surface 164 having a
hemispherically-concave shape). Such ultrasound-emitting surface shapes are
equally applicable to any ultrasound transducer mentioned in any other embodiment
of the invention.

30 In the same or a different example of the previously-described first, second
and third expressions of the third embodiment, P is no greater than four. In one

variation, P equals three as seen in Figures 15 and 17. In another variation, P equals two as seen in Figure 16.

In the same or a different example of the previously-described second and third expressions of the third embodiment, the end effector 146 is an open-surgery end effector, an endoscopic end effector, a laparoscopic end effector (as shown in Figure 13), a catheter end effector (such as, but not limited to, an intravascular catheter end effector), or a needle end effector, as can be appreciated by those skilled in the art. In one enablement, as shown in Figure 13, the ultrasound medical treatment system 144 also includes a handpiece 166 operatively connected to the end effector 146 and to an ultrasound controller 168 operatively connected to a foot-pedal power switch 169, as can be appreciated by the artisan.

Ultrasound Medical Treatment Applications

Excisional And Ultrasound Medical treatment System

A fifth embodiment of the present invention is shown in Figures 18-20. In a first expression of the fifth embodiment of the present invention, an ultrasound medical treatment system 170 includes a tube 172, a first end effector 174, and a second end effector 176. The tube 172 has a distal end 178 insertable into a patient 180 and has a lumen 182. The first end effector 174 has a cutting tool 184, is introducible into the lumen 182 of the inserted tube 172 from outside the patient 180, and is translatable through the lumen 182 of the inserted tube 172 to inside the patient 180. The second end effector 176 has an ultrasound medical-treatment transducer assembly 186, is introducible into the lumen 182 of the inserted tube 172 from outside the patient 180, and is translatable through the lumen 182 of the inserted tube 172 to inside the patient 180. In one variation, the first and second end effectors are introduced into the lumen through separate openings in the lumen or through separate branch channels leading to the lumen. In another variation, the first and second end effectors are introduced into the lumen through the same opening in the lumen. In one modification, a lumen opening is disposed at the end of the tube. In another modification, a lumen opening is spaced apart from the end of the tube.

A second expression of the fifth embodiment of the present invention is for an ultrasound medical treatment system 170 including a tube 172, a first end effector 174, and a second end effector 176. The tube has a distal end 178 insertable into a patient 180 and has a lumen 182 with a distal opening 188 and a proximal opening 190. The first end effector 174 has a cutting tool 184, is introducible into the proximal opening 190, and is translatable through the lumen 182 to the distal opening 188. The second end effector 176 has an ultrasound medical-treatment transducer assembly 186, is introducible into the proximal opening 190, and is translatable through the lumen 182 to the distal opening 188.

10 In one example of the first and second expressions of the fifth embodiment of the present invention, the lumen 182 is sized to allow introduction of only one of the first and second end effectors 174 and 176 at a time. In the same or another example, the distal end 178 of the tube 172 is interstitially insertable into patient tissue 192 of the patient 180. In the same or a different example, the cutting tool 184 is a biopsy cutting tool 194 or other excisional cutting tool.

A third expression of the fifth embodiment of the present invention is for an ultrasound medical treatment system 170 including a tube 172, a first end effector 174, and a second end effector 176. The tube 172 has a distal end 178 interstitially insertable into breast tissue 196 of a patient 180 and has a lumen 182 with a distal opening 188 and a proximal opening 190. The first end effector 174 has a biopsy cutting tool 194 (or other excisional cutting tool), is introducible into the proximal opening 190, and is translatable through the lumen 182 to the distal opening 188. The second end effector 176 has an ultrasound medical-treatment transducer assembly 186, is introducible into the proximal opening 190, and is translatable through the lumen 182 to the distal opening 188. The lumen 182 is sized to allow introduction of only one of the first and second end effectors 174 and 176 at a time. In one design, the first end effector also includes a suction mechanism to draw in patient tissue to be biopsied by the biopsy cutting tool 194. In one application, the tube 172 and the first end effector 174 (with the biopsy cutting tool 194 including a suction mechanism) are based on components of a Mammotome® Breast Biopsy System manufactured by Ethicon Endo-Surgery, Inc. (a Johnson & Johnson Company).

A sixth method of the invention is for ultrasound medical treatment of a patient 180 and uses the ultrasound medical treatment system 170 as previously described in the third expression of the fifth embodiment of the present invention. The sixth method includes steps a) through h). Step a) includes identifying possibly cancerous breast tissue 196 of the patient. Step b) includes interstitially inserting the distal end 178 of the tube 172 into the patient 180 with the distal opening 188 disposed proximate the breast tissue 196 and with the proximal opening 190 disposed outside the patient. Step c) includes introducing the first end effector 174 into the proximal opening 190 and translating the first end effector 174 through the lumen 182 to the distal opening 188. Step d) includes obtaining a biopsy sample of the breast tissue 196 with the biopsy cutting tool 194. Step e) includes removing the first end effector 174 from the lumen 182. Step f) includes introducing the second end effector 176 into the proximal opening 190 and translating the second end effector 176 through the lumen 182 to the distal opening 188. Step g) includes identifying an area of hemorrhaging in the breast tissue where the biopsy sample was obtained. Step h) includes medically treating the identified area with ultrasound using the transducer assembly 186 to substantially stop the hemorrhaging. In one application, the sixth method of the invention also includes the steps of testing the biopsy sample for cancer and substantially ablating any remaining cancer in the breast tissue with ultrasound using the transducer assembly 186. Advantages of such an ultrasound medical treatment system and method include the ease of obtaining a breast biopsy and the control of hemorrhaging caused by the biopsy procedure coupled together in a minimally invasive manner.

In a fourth expression of the fifth embodiment of the present invention, an ultrasound medical treatment system 170 includes a tube 172, a first end effector 174, and a second end effector 176. The tube 172 has a distal end 178 insertable into a patient 180 and has a lumen 182. The first end effector 174 has a cutting tool 184, is introducible into the lumen 182 of the inserted tube 172 from outside the patient 180, and is translatable through the lumen 182 of the inserted tube 172 to inside the patient 180. The second end effector 176 has an ultrasound imaging and medical-treatment transducer assembly 198, is introducible into the lumen 182 of the inserted tube 172 from outside the patient 180, and is translatable through the lumen

182 of the inserted tube 172 to inside the patient 180. In one variation, the first and second end effectors are introduced into the lumen through separate openings in the lumen or through separate branch channels leading to the lumen. In another variation, the first and second end effectors are introduced into the lumen through the same opening in the lumen. In one modification, a lumen opening is disposed at the end of the tube. In another modification, a lumen opening is spaced apart from the end of the tube.

A fifth expression of the fifth embodiment of the present invention is for an ultrasound medical treatment system 170 including a tube 172, a first end effector 174, and a second end effector 176. The tube has a distal end 178 insertable into a patient 180 and has a lumen 182 with a distal opening 188 and a proximal opening 190. The first end effector 174 has a cutting tool 184, is introducible into the proximal opening 190, and is translatable through the lumen 182 to the distal opening 188. The second end effector 176 has an ultrasound imaging and medical-treatment transducer assembly 198, is introducible into proximal opening 190, and is translatable through the lumen 182 to the distal opening 188.

In one example of the fourth and fifth expressions of the fifth embodiment of the present invention, the lumen 182 is sized to allow introduction of only one of the first and second end effectors 174 and 176 at a time. In the same or another example, the distal end 178 of the tube 172 is interstitially insertable into patient tissue 192 of the patient 180. In the same or a different example, the cutting tool 184 is a biopsy cutting tool 194 or other excisional cutting tool.

A sixth expression of the fifth embodiment of the present invention is for an ultrasound medical treatment system 170 including a tube 172, a first end effector 174, and a second end effector 176. The tube 172 has a distal end 178 interstitially insertable into breast tissue 196 of a patient 180 and has a lumen 182 with a distal opening 188 and a proximal opening 190. The first end effector 174 has a biopsy cutting tool 194 (or other excisional cutting tool), is introducible into the proximal opening 190, and is translatable through the lumen 182 to the distal opening 188. The second end effector 176 has an ultrasound imaging and medical-treatment transducer assembly 196, is introducible into the proximal opening 190, and is translatable through the lumen 182 to the distal opening 188. The lumen 182 is

sized to allow introduction of only one of the first and second end effectors 174 and 176 at a time. In one application, the tube 172 and the first end effector 174 (with the biopsy cutting tool 194 including a suction mechanism) are based on components of a Mammotome® Breast Biopsy System manufactured by Ethicon Endo-Surgery, Inc. (a Johnson & Johnson Company).

5 A seventh method of the invention is for ultrasound medical treatment of a patient 180 and uses the ultrasound medical treatment system 170 as previously described in the sixth expression of the fifth embodiment of the present invention. The seventh method includes steps a) through h). Step a) includes identifying
10 possibly cancerous breast tissue 196 of the patient. Step b) includes interstitially inserting the distal end 178 of the tube 172 into the patient 180 with the distal opening 188 disposed proximate the breast tissue 196 and with the proximal opening 190 disposed outside the patient. Step c) includes introducing the first end effector 174 into the proximal opening 190 and translating the first end effector 174 through
15 the lumen 182 to the distal opening 188. Step d) includes obtaining a biopsy sample of the breast tissue 196 with the biopsy cutting tool 194. Step e) includes removing the first end effector 174 from the lumen 182, Step f) includes introducing the second end effector 176 into the proximal opening 190 and translating the second end effector 176 through the lumen 182 to the distal opening 188. Step g) includes
20 identifying an area of hemorrhaging in the breast tissue where the biopsy sample was obtained from ultrasound imaging using the transducer assembly 198. Step h) includes medically treating the identified area with ultrasound using the transducer assembly 198 to substantially stop the hemorrhaging. In one application, the seventh method of the invention also includes the steps of testing the biopsy sample
25 for cancer and substantially ablating any remaining cancer in the breast tissue with ultrasound using the transducer assembly 198. Advantages of such an ultrasound medical treatment system and method include the ease of obtaining a breast biopsy and the imaging and control of hemorrhaging caused by the biopsy procedure coupled together in a minimally invasive manner.

30 In one enablement, as shown in Figure 18, the ultrasound medical treatment system 170 also includes a handpiece 199 which is attached to the tube 172, which contains the first end effector 174 for extending the cutting tool 184 into, and

withdrawing it from, the lumen 182, and which is operatively connected to an ultrasound controller 201 via a first cable 203. The second end effector 176, in this ~~enablement, is operatively connected to the ultrasound controller 201 via a second~~ cable 205 and is inserted into the lumen 182 from outside the handpiece 199 as shown in Figure 18.

Staging Medical Treatment Using Ultrasound

An eighth method of the invention is shown in block diagram form in Figure 21 and is for medical treatment of a patient. The eighth method includes steps a) through f). Step a) is labeled "Obtain Transducer Assembly" in block 200 of Figure 21. Step a) includes obtaining an ultrasound imaging transducer assembly. Step b) is labeled "Insert Assembly Into Gastrointestinal Area" in block 202 of Figure 21. Step b) includes inserting the transducer assembly into a gastrointestinal area of the patient. Step c) is labeled "Guide Assembly" in block 204 of Figure 21. Step c) includes guiding the transducer assembly within the gastrointestinal area. Step d) is labeled "Identify Patient Tissue For Treatment" in block 206 of Figure 21. Step d) includes identifying patient tissue in the gastrointestinal area for medical treatment. Step e) is labeled "Stage Treatment From Ultrasound Imaging" in block 208 of Figure 21. Step e) includes staging the medical treatment from ultrasound imaging using the transducer assembly. Step f) is labeled as "Medically Treat Patient" in block 210 of Figure 21. Step f) includes medically treating the patient tissue according to the staging of step e). It is pointed out that in the eighth method the medical treatment need not include ultrasound medical treatment with the transducer assembly used for staging and/or need not include ultrasound medical treatment with any other ultrasound transducer assembly. In one procedure depending on the pathology size and site, a first transducer assembly is used endoscopically to stage the medical treatment in step e) and a second transducer assembly is used laparoscopically to medically treat the patient tissue with ultrasound in step f). In one variation, the first transducer assembly is used laparoscopically to stage the medical treatment in step e) and the second transducer assembly is used endoscopically to medically treat the patient tissue with ultrasound in step f). In another procedure, the medical treatment in step f) is radio-frequency, laser,

microwave, or chemical ablation medical treatment. Other types of medical treatment are left to the artisan.

It is noted that the gastrointestinal (GI) area of a human patient includes, without limitation, the esophagus and the stomach of the upper GI area and the rectum and the colon of the lower GI area. It further is noted that the liver is also considered to be in the GI area for purposes of this method.

By "staging the medical treatment from ultrasound imaging" is meant at least using ultrasound images to determine the three-dimensional size and shape of the patient tissue that is to receive medical treatment. For example, and without limitation, upper and lower GI tumors can be visualized with high frequency (6-30 MHz) ultrasound imaging using a cylindrical, side-firing, or half-convex ultrasound array or single-element transducer introduced endoscopically into the GI tract. All layers of the GI tract can be visualized including all layers of the esophagus, stomach, duodenum, colon, etc. In one procedure, a three-dimensional representation of the GI structures is created by collating a series of two-dimensional scans generated by axially advancing the ultrasound transducer. Any neoplastic growth, its morphological characteristics, as well as the tumor's size and shape can easily be determined from the three-dimensional representation.

Advantages of such medical-treatment staging from ultrasound imaging include, in one example, providing a non-invasive medical-treatment staging technique which has greater resolution and which is more practical compared to conventional extracorporeal medical-treatment staging techniques such as using x-rays or MRI imaging or compared to using conventional endoscopic optical techniques.

A ninth method of the invention is for ultrasound medical treatment of a patient and includes steps a) through f). The ninth method uses the same block diagram of Figure 21 as does the eighth method but with "end effector" replacing "transducer assembly" in block 200 and with "end effector" replacing "assembly" in blocks 202 and 204. Step a) includes obtaining an end effector having an ultrasound imaging and medical-treatment transducer assembly. Step b) includes inserting the end effector into a gastrointestinal area of the patient. Step c) includes guiding the transducer assembly within the gastrointestinal area. Step d) includes identifying

patient tissue in the gastrointestinal area for medical treatment. Step e) includes staging the medical treatment from ultrasound imaging using the transducer assembly. Step f) includes medically treating the patient tissue with ultrasound using the transducer assembly according to the staging of step e).

5 A tenth method of the invention is for ultrasound medical treatment of a patient and includes steps a) through f). The tenth method uses the same block diagram of Figure 21 as does the eighth method but with "end effector" replacing "transducer assembly" in block 200 and with "end effector" replacing "assembly" in blocks 202 and 204. Step a) includes obtaining an end effector having an ultrasound
10 imaging and medical-treatment transducer assembly. Step b) includes inserting the end effector into a gastrointestinal area of the patient. Step c) includes guiding the transducer assembly within the gastrointestinal area. Step d) includes identifying patient tissue in the gastrointestinal area for medical treatment at least in part from ultrasound imaging using the transducer assembly. Step e) includes staging the
15 medical treatment from ultrasound imaging using the transducer assembly. Step f) includes medically treating the patient tissue with ultrasound using the transducer assembly according to the staging of step e). In one procedure, large GI tumors are staged through a laparoscopic access to the GI area, whereby the tumors are identified, staged and treated using an end effector having an ultrasound imaging
20 and medical-treatment transducer assembly.

In one example of the ninth and tenth methods of the invention, the patient tissue is gastroesophageal tissue containing a lesion, and step f) ultrasonically substantially ablates the lesion. In one modification, the gastroesophageal tissue contains a blood vessel supplying blood to the lesion, and step f) ultrasonically treats
25 the blood vessel to substantially stop the supply of blood to the lesion from the blood vessel.

In another example of the ninth and tenth methods of the invention, the patient tissue is liver tissue containing a lesion and a blood vessel supplying blood to the lesion, and step f) ultrasonically treats the blood vessel to substantially stop the
30 supply of blood to the lesion from the blood vessel.

In an additional example of the ninth and tenth methods of the invention, the patient tissue is liver tissue containing a lesion, and step f) ultrasonically

substantially ablates the lesion. In one modification, the liver tissue contains a blood vessel supplying blood to the lesion, and step f) also ultrasonically treats the blood vessel to substantially stop the supply of blood to the lesion from the blood vessel.

5 In one procedure, an end effector having an ultrasound imaging and medical-treatment transducer assembly is introduced endoscopically into the GI tract, is advanced retrogradely through the ampulla of Vater up the common bile duct, and is advanced further into the hepatic duct system where liver parenchyma requiring medical treatment (such as cholangio-carcinomas) are identified, staged, and treated using the end effector.

10

Treatment Of Lung Lesions Using Ultrasound

An eleventh method of the invention is shown in block diagram form in Figure 22 and is for ultrasound medical treatment of a patient. The eleventh method includes steps a) through f). Step a) is labeled "Obtain End Effector" in block 212 of Figure 22. Step a) includes obtaining an end effector having an ultrasound medical-treatment transducer assembly. Step b) is labeled "Insert End Effector" in block 214 of Figure 22. Step b) includes inserting the end effector into the patient. Step c) is labeled "Guide End Effector To Lung" in block 216 of Figure 22. Step c) includes guiding the end effector within the patient to a lung of the patient. Step d) is labeled "Identify Lesion" in block 218 of Figure 22. Step d) includes identifying a lesion on or in the lung for medical treatment. Step e) is labeled "Position Transducer Assembly" in block 220 of Figure 22. Step e) includes positioning the transducer assembly on or in the lesion. Step f) is labeled "Medically Treat Lesion" in block 222 of Figure 22. Step f) includes medically treating the lesion with ultrasound using the transducer assembly.

25 A twelfth method of the invention is for ultrasound medical treatment of a patient and includes steps a) through f). The twelfth method uses the same block diagram of Figure 22 as does the eleventh method. Step a) includes obtaining an end effector having an ultrasound imaging and medical-treatment transducer assembly. Step b) includes inserting the end effector into the patient. Step c) includes guiding the end effector within the patient to a lung of the patient. Step d) includes identifying a lesion on or in the lung for medical treatment at least in part

from ultrasound imaging using the transducer assembly. Step e) includes positioning the transducer assembly on or in the lesion. Step f) includes medically treating the lesion with ultrasound using the transducer assembly.

In one example of the eleventh and twelfth methods, step f) ultrasonically substantially ablates the lesion. In one application, the end effector is an endoscopic end effector and step b) transbronchial-endoscopically inserts the end effector into the patient. In another application, the end effector is a needle end effector and step b) interstitially inserts the end effector into the patient. In one implementation, step e) positions the transducer assembly on the lesion. In another implementation, step e) positions the transducer assembly in the lesion. In one practice of the eleventh and twelfth methods, step c) a bronchoscope is used to guide the end effector to a lung of the patient.

Ultrasound medical treatment of the lung has conventionally been avoided because such ultrasound is prevented from reaching a lesion within the lung by the alveoli of the lung which contain air which reflect back most of the ultrasound preventing the ultrasound from effectively penetrating the lung to the lesion. Using higher power ultrasound for effective penetration of the lung to reach the lesion would injure or destroy the alveoli which are needed for breathing. Applicants theorized that positioning the ultrasound transducer on or in a lesion of the lung would allow ultrasound medical treatment of the lesion (such as a tumor or an infarct) without injury to the alveoli. It is noted that Applicants' method is applicable to surface lesions as well as non-surface lesions. Advantages of Applicants' eleventh and twelfth methods for ultrasound medical treatment include, in one example, the destruction of lung cancer lesions in cases which otherwise would be inoperable or incurable.

Ultrasound-Based Occlusive Procedure For Medical Treatment

A thirteenth method of the invention is shown in block diagram form in Figure 23 and is for ultrasound medical treatment of a patient. The thirteenth method includes steps a) through e). Step a) is labeled "Obtain End Effector" in block 224 of Figure 23. Step a) includes obtaining an end effector having an ultrasound medical-treatment transducer assembly. Step b) is labeled "Insert End

Effector" in block 226 of Figure 23. Step b) includes inserting the end effector into the patient. Step c) is labeled "Guide End Effector" in block 228 of Figure 23. Step c) includes guiding the end effector within the patient to a region of patient tissue containing a lesion. Step d) is labeled "Identify Blood Vessel Supplying Lesion" in block 230 of Figure 23. Step d) includes identifying a blood vessel in the region which supplies blood to the lesion. Step e) is labeled "Stop Blood Supply Using Ultrasound" in block 232 of Figure 23. Step e) includes medically treating the blood vessel with ultrasound from the transducer assembly to substantially seal the blood vessel to stop the supply of blood to the lesion from the blood vessel. One implementation of the thirteenth method of the invention also includes the step of medically treating the lesion with ultrasound from the transducer assembly to substantially ablate the lesion.

A fourteenth method of the invention is for ultrasound medical treatment of a patient and includes steps a) through g). The fourteenth method is similar to the thirteenth method. Step a) includes obtaining an end effector having an ultrasound imaging and medical-treatment transducer assembly. Step b) includes inserting the end effector into the patient. Step c) includes guiding the end effector within the patient to a region of patient tissue containing a lesion. Step d) includes identifying the lesion at least in part from ultrasound imaging using the transducer assembly. Step e) includes identifying a blood vessel in the region which supplies blood to the lesion from ultrasound imaging using the transducer assembly. Step f) includes medically treating the blood vessel with ultrasound from the transducer assembly to substantially seal the blood vessel to substantially stop the supply of blood to the lesion from the blood vessel. Step g) includes medically treating the lesion with ultrasound from the transducer assembly to substantially ablate the lesion. It is noted that Doppler ultrasound imaging alone, gray-scale ultrasound imaging alone, and a combination of Doppler and gray-scale ultrasound imaging are known ultrasound techniques to image blood flow in blood vessels.

In one application of the thirteenth and fourteenth methods, the end effector is an open-surgery end effector. In another application, the end effector is an endoscopic end effector. In a further application, the end effector is a laparoscopic end effector. In an additional application, the end effector is a catheter end effector

(such as, but not limited to, an intravascular catheter end effector). In a different application, the end effector is a needle end effector.

A broadened thirteenth method of the invention eliminates the inserting into and guiding within steps of the above-described thirteenth method and includes steps a) through c). Step a) includes obtaining an end effector having an ultrasound medical-treatment transducer assembly. Step b) includes identifying a blood vessel in the patient which supplies blood to a lesion. Step c) includes medically treating the blood vessel with ultrasound from the transducer assembly to substantially seal the blood vessel to substantially stop the supply of blood to the lesion from the blood vessel.

A broadened fourteenth method of the invention eliminates the inserting into and guiding within steps of the above-described fourteenth method and includes steps a) through e). Step a) includes obtaining an end effector having an ultrasound imaging and medical-treatment transducer assembly. Step b) includes identifying a lesion in the patient at least in part from ultrasound imaging using the transducer assembly. Step c) includes identifying a blood vessel which supplies blood to the lesion from ultrasound imaging using the transducer assembly. Step d) includes medically treating the blood vessel with ultrasound from the transducer assembly to substantially seal the blood vessel to substantially stop the supply of blood to the lesion from the blood vessel. Step e) includes medically treating the lesion with ultrasound from the transducer assembly to substantially ablate the lesion.

In one example of the broadened thirteenth and fourteenth methods, the end effector is an extracorporeal end effector. In another example, the end effector is an intracorporeal end effector. In a further example, the end effector can be used in both an extracorporeal mode and in an intracorporeal mode.

Advantages of Applicants' thirteenth and broadened thirteenth methods for ultrasound medical treatment include, in one example, the indirect destruction of cancer lesions by ultrasound hemostasis in blood vessels supplying the cancer lesions in cases which otherwise would be inoperable or incurable because the location of the cancer lesions prevents medical treatment of the lesions themselves. Advantages of Applicants' fourteenth and broadened fourteenth methods for ultrasound treatment include, in one example, direct destruction of cancer lesions by

ultrasound ablation of the cancer lesions together with the indirect destruction of any cancer lesions missed in the ultrasound ablation step by ultrasound hemostasis in blood vessels supplying blood to the missed cancer lesions.

5 Guiding and Targeting Ultrasound End Effectors

Guiding Ultrasound End Effector for Medical Treatment

A sixth embodiment of the present invention is shown in Figure 24. In a first expression of the sixth embodiment of the present invention, an ultrasound medical treatment system 234 (only a portion of which is shown in Figure 24) includes an end effector 236 and at least three receivers 238. The end effector 236 has a transducer assembly 240 including a transducer 242 having at least one transducer element 244 adapted for emitting medical-treatment ultrasound waves and for emitting mechanical waves. It is noted that the terminology "mechanical waves" includes ultrasound and non-ultrasound compression (acoustic) waves and ultrasound and non-ultrasound shear waves, and that waves include wave pulses. The receivers 238 are spaced apart from the transducer assembly 240, and the receivers 238 are adapted to receive the emitted mechanical waves for use in locating the position of the transducer assembly 240. Conventional methods (including triangulation methods) for locating the position of a transponder emitting waves which are received by three receivers are well known. A second expression of the sixth embodiment is identical to the first expression of the sixth embodiment except that the at-least-one transducer element 244 is also adapted for emitting imaging ultrasound waves. In one variation of the first and second expressions of the sixth embodiment, the end effector and the receivers are disposable outside (including in one modification on) the patient. In another variation, the end effector is insertable into the patient and the receivers are disposable outside (including in one modification on) the patient.

A seventh embodiment of the present invention is shown in Figure 25. In a first expression of the seventh embodiment of the present invention, an ultrasound medical treatment system 246 (only a portion of which is shown in Figure 25) includes an end effector 248 and at least three receivers 250. The end effector 248

has an ultrasound medical-treatment transducer assembly 252 and has a transponder 254. The transponder 254 is adapted to emit waves, and the waves include ~~electromagnetic waves or mechanical waves or both. The receivers 250 are spaced~~ apart from the transducer assembly 252, and the receivers 250 are adapted to receive
5 the emitted waves for use in locating the position of the transponder 254. In a second expression of the seventh embodiment, the ultrasound medical-treatment transducer assembly 252 is an ultrasound imaging and medical-treatment transducer assembly 256.

In one application of the first and second expressions of the seventh
10 embodiment, the end effector 248 is insertable into a patient, the transponder 254 is adapted to emit electromagnetic waves, and the receivers 250 are disposable outside the patient. In one variation, the receivers 250 are disposable on the patient. In another application, the end effector is disposable outside (including in one modification on) the patient and the receivers are disposable outside (including in
15 one modification on) the patient.

In one example of the first and second expressions of the seventh embodiment, the end effector 248 is an endoscopic end effector, a laparoscopic end effector, a catheter end effector (such as, but not limited to, an intravascular catheter end effector), or a needle end effector. In one design of the first and second
20 expressions of the seventh embodiment, the end effector 248 has a distal tip 260, and the transponder 254 is disposed at the distal tip 260 of the end effector 248. In one variation, the transducer assembly 252 and 256 is disposed proximate the transponder 254.

A fifteenth method of the invention uses the ultrasound medical treatment
25 system of the first expression of the seventh embodiment and includes steps a) through h). Step a) includes inserting the end effector 248 into the patient. Step b) includes disposing the receivers 250 outside the patient. Step c) includes emitting electromagnetic waves from the transponder 254. Step d) includes receiving the electromagnetic waves with the disposed receivers 250. Step e) includes calculating
30 the position of the transponder 254 from the received electromagnetic waves. Step f) includes guiding the end effector within the patient to a desired location from the calculated position of the transponder 254. Step g) includes, after step f), identifying

patient tissue for medical treatment. Step h) includes medically treating the identified patient tissue with ultrasound using the transducer assembly 252.

~~A sixteenth method of the invention uses the ultrasound medical treatment~~
system of the second expression of the seventh embodiment and includes steps a)
5 through h). Step a) includes inserting the end effector 248 into the patient. Step b)
includes disposing the receivers 250 outside the patient. Step c) includes emitting
electromagnetic waves from the transponder 254. Step d) includes receiving the
electromagnetic waves with the disposed receivers 250. Step e) includes calculating
the position of the transponder 254 from the received electromagnetic waves. Step
10 f) includes guiding the end effector within the patient to a desired location from the
calculated position of the transponder 254. Step g) includes, after step f), identifying
patient tissue for medical treatment at least in part from ultrasound imaging using
the transducer assembly 256. Step h) includes medically treating the identified
patient tissue with ultrasound using the transducer assembly 256.

15 A known electromagnetic transponder and three-receiver system for
calculating the position of the transponder and for guiding the transponder (which is
attached to a heart catheter for monitoring the heart) inside a patient is the
CARTO™ EP Navigation System used with a NAVI-STAR® catheter
manufactured by Biosense Webster (a Johnson & Johnson Company).

20 Advantages of an end effector with ultrasound medical treatment and
position-location capabilities include, in one example, more accurately guiding the
end effector inside a patient to patient tissue for ultrasound medical treatment of the
patient tissue.

25 Method For Aiming Ultrasound For Medical Treatment

A seventeenth method of the invention is shown in block diagram form in
Figure 26 and is for ultrasound medical treatment of a patient. The seventeenth
method includes steps a) through f). Step a) is labeled "Obtain End Effector" in
block 262 of Figure 26. Step a) includes obtaining an end effector having an
30 ultrasound medical-treatment transducer assembly. Step b) is labeled "Aim
Transducer Assembly" in block 264 of Figure 26. Step b) includes aiming the
transducer assembly to focus ultrasound energy at a desired focal zone of patient

tissue. It is noted that, in one example, to aim a transducer assembly means to focus ultrasound energy at a particular distance from the transducer assembly and along a particular direction. Step c) is labeled "Activate Transducer Assembly" in block 266 of Figure 26. Step c) includes activating the aimed transducer assembly to emit ultrasound energy sufficient to achieve a temperature increase in the patient tissue essentially without medically affecting the patient tissue. Step d) is labeled "Detect Actual Focal Zone" in block 268 of Figure 26. Step d) includes after step c) detecting, from reflected ultrasound energy, an actual focal zone of patient tissue having a temperature increase. Step e) is labeled "Correct For Any Aiming Error" in block 269 of Figure 26. Step e) includes correcting for any error between the desired focal zone and the actual focal zone. Step f) is labeled "Medically Treat Patient Tissue" in block 270 of Figure 26. Step f) includes after step e), medically treating the patient tissue with ultrasound using the transducer assembly. In one application, step d) uses one or more additional ultrasound transducer assemblies, separate from the ultrasound transducer assembly used in steps a) through c) and e) through f), to detect, from reflected ultrasound energy, the actual focal zone. In another application, the same ultrasound transducer assembly is used for steps a) through f). In one example of the seventeenth method, the end effector is an extracorporeal end effector. In another example, the end effector is an intracorporeal end effector. In a further example, the end effector can be used in both an extracorporeal mode and in an intracorporeal mode.

An eighteenth method of the invention is for ultrasound medical treatment of a patient and includes steps a) through f). The eighteenth method uses the same block diagram of Figure 26 as does the seventeenth method. Step a) includes obtaining an end effector having an ultrasound imaging and medical-treatment transducer assembly. Step b) includes aiming the transducer assembly to focus ultrasound energy at a desired focal zone of patient tissue. Step c) includes activating the aimed transducer assembly to emit ultrasound energy sufficient to achieve a temperature increase in the patient tissue essentially without medically affecting the patient tissue. Step d) includes after step c) detecting, from reflected ultrasound energy using the transducer assembly, an actual focal zone of patient tissue having a temperature increase. Step e) includes correcting for any error

between the desired focal zone and the actual focal zone. Step f) includes after step e), medically treating the patient tissue with ultrasound using the transducer assembly. In one example, the end effector is an extracorporeal end effector. In another example, the end effector is an intracorporeal end effector. In a further example, the end effector can be used in both an extracorporeal mode and in an intracorporeal mode.

A nineteenth method of the invention is for ultrasound medical treatment of a patient and includes steps a) through i). The nineteenth method uses the same block diagram of Figure 26 as does the seventeenth method but with three extra steps added between block 262's step a) and block 264's step b) of the seventeenth method. In the nineteenth method, step a) includes obtaining an end effector having an ultrasound imaging and medical-treatment transducer assembly. Step b) includes inserting the end effector into the patient. Step c) includes guiding the end effector inside the patient. Step d) includes identifying a desired focal zone of patient tissue at least in part from ultrasound imaging using the transducer assembly. Step e) includes aiming the transducer assembly to focus ultrasound energy at the desired focal zone of patient tissue. Step f) includes activating the aimed transducer assembly to emit ultrasound energy sufficient to achieve a temperature increase in the patient tissue essentially without medically affecting the patient tissue. Step g) includes after step f) detecting, from reflected ultrasound energy using the transducer assembly, an actual focal zone of patient tissue having a temperature increase. Step h) includes correcting for any error between the desired focal zone and the actual focal zone. Step i) includes after step h), medically treating the patient tissue with ultrasound using the transducer assembly.

In one example of the seventeenth through nineteenth methods, the end effector is an endoscopic end effector. In another example, the end effector is a laparoscopic end effector. In a further example, the end effector is a catheter end effector (such as, but not limited to, an intravascular catheter end effector). In an additional example, the end effector is a needle end effector.

It is noted that the achieved temperature increase will decrease over time so that the detected temperature increase may not exactly equal the achieved temperature increase. In one implementation of the seventeenth through nineteenth

It is noted that conventional methods are known to the artisan to convert ultrasound image data into temperature images. In one variation of the seventeenth through nineteenth methods, the correcting step is performed automatically by a feedback control on the same mechanism used to aim the transducer assembly in the aiming step, as can be appreciated by the artisan. As previously noted, mechanisms for aiming an ultrasound medical-treatment transducer assembly include conventional electronic and/or mechanical techniques as are known to those skilled in the art.

20 Ultrasound Imaging Of Patient Tissue

A twentieth method of the invention is shown in block diagram form in Figure 27 and is for ultrasound imaging of patient tissue of a patient. The twentieth method includes steps a) through c). Step a) is labeled "Obtain A First Signal From A Location At A First Time" in block 272 of Figure 27. Step a) includes obtaining a first signal of a first imaging ultrasound wave which has been reflected back from a location in the patient tissue at a first time. Step b) is labeled "Obtain A Second Signal From The Location At A Later Second Time" in block 274 of Figure 27. Step b) includes obtaining a second signal of a second imaging ultrasound wave which has been reflected back from the location in the patient tissue at a later second time wherein the patient has received at least some medical treatment by the second

time. Step c) is labeled "Create An Image Of The Location Using The Two Signals" in block 276 of Figure 27. Step c) includes creating an image of the location using the first signal and the second signal. It is understood that the terminology "creating an image" includes, without limitation, creating an image in visual form displayed, for example, on a monitor and creating an image in electronic form which, for example, is used by a computer without being displayed in visual form on a monitor. In one embodiment of the twentieth method of the invention, the image of the location is visually displayed at a pixel location on a monitor.

In one example of the twentieth method of the invention, step c) includes creating an image of the location using at least the amplitude of the first signal and the amplitude of the second signal. In one variation, step c) calculates the difference in the amplitudes between the first and second signals. In one modification, step c) uses the calculated amplitude difference and uses one of the amplitudes of one of the first and second signals. In one implementation, step c) calculates the sum of the one amplitude and a function of the calculated amplitude difference. In one illustration for a first signal amplitude of 6 and a second signal amplitude of 7, step c) calculates the amplitude difference, adds the difference to the second signal amplitude creating a processed amplitude of 8, and creates the image of the location using the processed amplitude. Other algorithms for using the amplitude of the first and second signals to enhance any amplitude difference in creating the image of the location after medical treatment are left to the artisan.

In another example of the twentieth method of the invention, step c) includes creating an image of the location using at least the phase of the first signal and the phase of the second signal. In one variation, step c) calculates the difference in the phase between the first and second signals. In one modification, step c) uses the calculated phase difference and uses one of the phases of one of the first and second signals. In one implementation, step c) calculates the sum of the one phase and a function of the calculated phase difference. In one illustration of a first signal phase of 6 degrees and a second signal phase of 7 degrees, step c) calculates the phase difference, adds the difference to the second signal phase creating a processed phase of 8 degrees, and creates the image of the location using the processed phase. Other

algorithms for using the phase of the first and second signals to enhance any phase difference in creating the image after medical treatment are left to the artisan.

In an additional example of the twentieth method of the invention, step c) includes creating an image of the location using at least the amplitude and the phase of the first signal and the amplitude and phase of the second signal. In one variation step c) combines the discussions in the previous two paragraphs, as is within the ordinary level of skill of the artisan.

In one application of the twentieth method and examples, etc. thereof, the first signal of step a) has a first frequency (e.g., a first center frequency having a sigma) and the second signal of step b) has a second frequency (e.g., a second center frequency having a sigma) which is different from the first frequency (meaning, for example, that the center frequencies are different). In the same or a different application, the medical treatment is ultrasound medical treatment. In the same or a different application, steps a) through c) are repeated for different locations to image the patient tissue, wherein the image of the patient tissue includes medically-treated locations and medically-untreated locations. In one enablement of the twentieth method of the invention, the image of the patient tissue is visually displayed on a monitor. In another enablement, the image remains as an image map in a computer without being displayed on a monitor. In one extension of the twentieth method, additional signals are obtained between steps a) and b) which are also used in creating the image of the location in step c).

Applicants were the first to realize that changes in patient tissue because of medical treatment of patient tissue, such as ultrasound medical treatment, which affect the amplitude and/or phase of ultrasound imaging signals can be used to enhance the ultrasound image differences of medically-treated patient tissue from surrounding untreated tissue. Applicants have theorized that using different frequencies for the two signals can enhance amplitude and/or phase differences for medically treated and untreated tissue and can be used to enhance the ultrasound image differences of medically-treated patient tissue from surrounding untreated tissue. Advantages of the twentieth method and examples, etc. thereof include, in one application, better ultrasound image contrast between treated and untreated patient tissue providing better monitoring during patient treatment.

Other medical treatments applicable to the twentieth method include, without limitation, other thermal ablation techniques such as radio-frequency, laser, and microwave medical treatments and chemical ablation techniques such as ethanol and chemo-therapeutics (including anti-cancer drugs). Other optional steps in the
5 twentieth method include using signal smoothing techniques, as are known to those skilled in the art.

It is understood that any one or more of the previously-described embodiments, expressions of embodiments, examples, methods, etc. can be combined with any one or more of the other previously-described embodiments,
10 expressions of embodiments, examples, methods, etc. For example, and without limitation, any of the end effectors can be used in any of the methods, any of the transducer arrangements can be used in any of the end effectors, and any appropriate methods can be combined such as combining the seventeenth and twentieth methods, etc.

15 The foregoing description of several expressions of embodiments and methods of the invention has been presented for purposes of illustration. It is not intended to be exhaustive or to limit the invention to the precise forms and procedures disclosed, and obviously many modifications and variations are possible in light of the above teaching. For example, as would be apparent to those skilled in
20 the art, the disclosures herein of the ultrasonic systems and methods have equal application in robotic assisted surgery taking into account the obvious modifications of the invention to be compatible with such a robotic system. It is intended that the scope of the invention be defined by the claims appended hereto.

WHAT IS CLAIMED IS:

1. An ultrasound medical treatment system comprising an end effector insertable
into a patient, wherein the end effector includes a tissue-retaining device, wherein
5 the tissue-retaining device includes a first tissue-retaining member having an
ultrasound medical-treatment transducer and includes a second tissue-retaining
member, and wherein the first and second tissue-retaining members are operatively
connected together to retain patient tissue between the first and second tissue-
retaining members and to release patient tissue so retained.
10
2. The ultrasound medical treatment system of claim 1, wherein the retained patient
tissue is retained between the transducer and the second tissue-retaining member.
3. An ultrasound medical treatment system comprising an end effector insertable
15 into a patient, wherein the end effector includes a tissue-retaining device, wherein
the tissue-retaining device includes a first tissue-retaining member having an
ultrasound imaging and medical-treatment transducer and includes a second tissue-
retaining member, and wherein the first and second tissue-retaining members are
operatively connected together to retain patient tissue between the first and second
20 tissue-retaining members and to release patient tissue so retained.
4. The ultrasound medical treatment system of claim 3, wherein the retained patient
tissue is retained between the transducer and the second tissue-retaining member.
- 25 5. The ultrasound medical treatment system of claim 3, wherein the end effector is
an open-surgery end effector, an endoscopic end effector, a laparoscopic end
effector, a catheter end effector, or a needle end effector.
6. The ultrasound medical treatment system of claim 3, wherein the transducer
30 focuses ultrasound energy.

7. A method for ultrasound medical treatment of a patient using the ultrasound medical treatment system of claim 3 comprising the steps of:
- a) endoscopically inserting the end effector into an ear, nose, or throat of the patient;
 - 5 b) guiding the end effector in the patient;
 - c) identifying patient tissue for medical treatment at least in part from ultrasound imaging using the transducer;
 - d) retaining the identified patient tissue using the tissue-retaining device; and
 - 10 e) medically treating the retained patient tissue with ultrasound using the transducer.
8. A method for ultrasound medical treatment of a patient using the ultrasound medical treatment system of claim 3 comprising the steps of:
- 15 a) inserting the end effector into the patient;
 - b) retaining an intervertebral disk of the patient with the tissue-retaining device, wherein the intervertebral disk includes tissue; and
 - c) medically treating the retained intervertebral disk with ultrasound to shrink the tissue using the transducer.
- 20 9. A method for ultrasound medical treatment of a patient using the ultrasound medical treatment system of claim 3 comprising the steps of:
- a) inserting the end effector into the patient;
 - b) retaining a joint of the patient with the tissue-retaining device, wherein
 - 25 the joint includes tissue; and
 - c) medically treating the retained joint with ultrasound to shrink the tissue using the transducer.
10. The ultrasound medical treatment system of claim 3, wherein the second tissue-retaining member is substantially ultrasonically non-reflective.
- 30

11. An ultrasound medical treatment system comprising an end effector insertable into a patient, wherein the end effector includes a tissue-retaining device, wherein ~~the tissue-retaining device includes a first tissue-retaining member having an~~ ultrasound medical-treatment transducer and includes a second tissue-retaining member having an ultrasound reflector, and wherein the first and second tissue-retaining members are operatively connected together to retain patient tissue between the first and second tissue-retaining members and to release patient tissue so retained.
12. The ultrasound medical treatment system of claim 11, wherein the retained patient tissue is retained between the transducer and the reflector.
13. An ultrasound medical treatment system comprising an end effector insertable into a patient, wherein the end effector includes a tissue-retaining device, wherein the tissue-retaining device includes a first tissue-retaining member having an ultrasound imaging and medical-treatment transducer and includes a second tissue-retaining member having an ultrasound reflector, and wherein the first and second tissue-retaining members are operatively connected together to retain patient tissue between the first and second tissue-retaining members and to release patient tissue so retained.
14. The ultrasound medical treatment system of claim 13, wherein the retained patient tissue is retained between the transducer and the reflector.
15. The ultrasound medical treatment system of claim 13, wherein the end effector is an open-surgery end effector, an endoscopic end effector, a laparoscopic end effector, a catheter end effector, or a needle end effector.
16. The ultrasound medical treatment system of claim 13, wherein the reflector is disposed to receive ultrasound energy from the transducer and is oriented to reflect the received ultrasound energy back into patient tissue retained by the tissue-retaining device.

17. The ultrasound medical treatment system of claim 16, wherein the transducer and the reflector each focus ultrasound energy.
- 5 18. The ultrasound medical treatment system of claim 16, wherein the reflector is oriented to reflect the received ultrasound energy away from the transducer when the patient tissue is retained by the tissue-retaining device.
19. The ultrasound medical treatment system of claim 13, wherein one of the first
10 and second tissue-retaining members is controllably orientatable relative to the other of the first and second tissue-retaining members.
20. The ultrasound medical treatment system of claim 19, wherein the second tissue-retaining member is controllably orientatable relative to the first tissue-
15 retaining member to reflect the received ultrasound energy back along different directions.
21. The ultrasound medical treatment system of claim 19, wherein the transducer and the reflector each focus ultrasound energy.
- 20 22. The ultrasound medical treatment system of claim 13, wherein the end effector has a longitudinal axis, and wherein one of the first and second tissue-retaining members at all times faces along a direction which is substantially parallel to the longitudinal axis.
- 25 23. The ultrasound medical treatment system of claim 22, wherein the one tissue-retaining member is the first tissue-retaining member.

24. A method for ultrasound medical treatment of a patient using the ultrasound medical treatment system of claim 22 comprising the steps of:
- a) endoscopically inserting the end effector into an ear, nose, or throat of the
patient;
 - 5 b) guiding the end effector in the patient;
 - c) identifying patient tissue for medical treatment at least in part from
ultrasound imaging using the transducer;
 - d) retaining identified patient tissue using the tissue-retaining device; and
 - e) medically treating the retained patient tissue with ultrasound using the
10 transducer and the reflector.
25. The ultrasound medical treatment system of claim 13, wherein the end effector has a longitudinal axis, and wherein one of the first and second tissue-retaining members at all times faces along a direction which is substantially perpendicular to
15 the longitudinal axis.
26. The ultrasound medical treatment system of claim 25, wherein the one tissue-retaining member is the first tissue-retaining member.
- 20 27. A method for ultrasound medical treatment of a patient using the ultrasound medical treatment system of claim 25 comprising the steps of:
- a) inserting the end effector into the patient;
 - b) retaining an intervertebral disk of the patient with the tissue-retaining
device, wherein the intervertebral disk includes tissue; and
 - 25 c) medically treating the retained intervertebral disk with ultrasound to
shrink the tissue using the transducer and the reflector.
28. A method for ultrasound medical treatment of a patient using the ultrasound medical treatment system of claim 25 comprising the steps of:
- 30 a) inserting the end effector into the patient;
 - b) retaining a joint of the patient with the tissue-retaining device, wherein
the joint includes tissue; and

c) medically treating the retained joint with ultrasound to shrink the tissue using the transducer and the reflector.

29. An ultrasound medical treatment system comprising an end effector insertable
5 into a patient, wherein the end effector includes a tissue-retaining device, wherein
the tissue-retaining device includes a first tissue-retaining member having an
ultrasound imaging and medical-treatment transducer and includes a second tissue-
retaining member having an ultrasound reflector, wherein the first and second tissue-
retaining members are operatively connected together to retain patient tissue
10 between the first and second tissue-restraining members and to release patient tissue
so retained, and wherein the first and second tissue-retaining members always
maintain a substantially parallel alignment.

30. The ultrasound medical treatment system of claim 29, wherein the first tissue-
15 retaining member is a distal end portion of a first tube, and also including:

a) a second tube oriented substantially parallel to the first tube;

b) first and second link members pivotally attached to the first tissue-
retaining member and to the second tube at pivot points creating a hinged
parallelogram defined by a proximal portion of the first tissue-retaining member, a
20 distal portion of the second tube, and the first and second link members, wherein the
reflector is disposed at a distal portion of the second tissue-retaining member and
faces the transducer; and

c) a cable operatively connected to the hinged parallelogram to move the
second tissue-retaining member toward and away from the first tissue-retaining
25 member.

31. The ultrasound medical treatment system of claim 30, also including an outer
tube, and wherein the cable and the first and second tubes are disposed in the outer
tube.

32. The ultrasound medical treatment system of claim 31, also including a handpiece, and wherein the cable and the first, second, and outer tubes are ~~operatively connected to the handpiece.~~






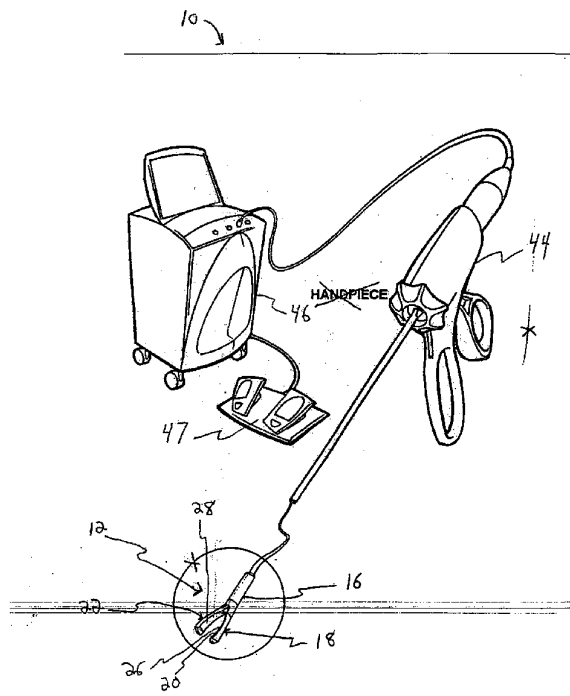


Fig. 1

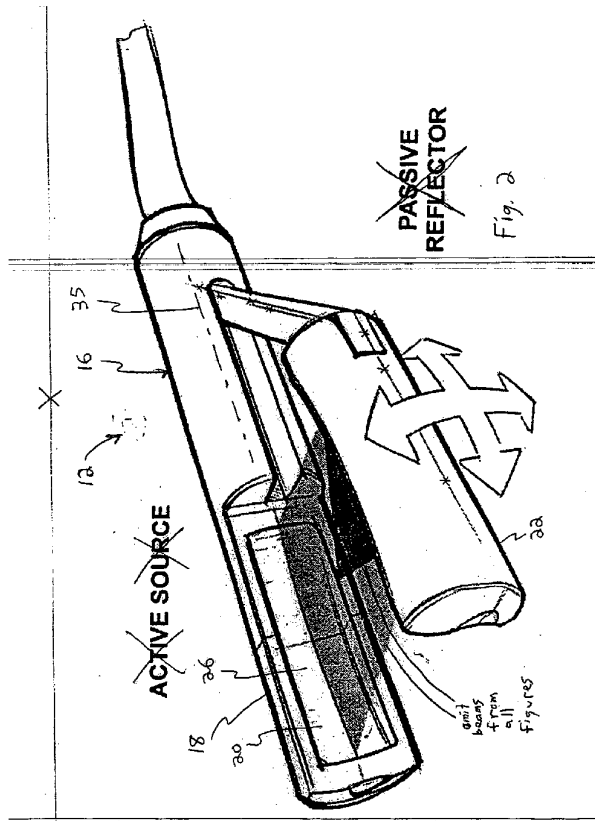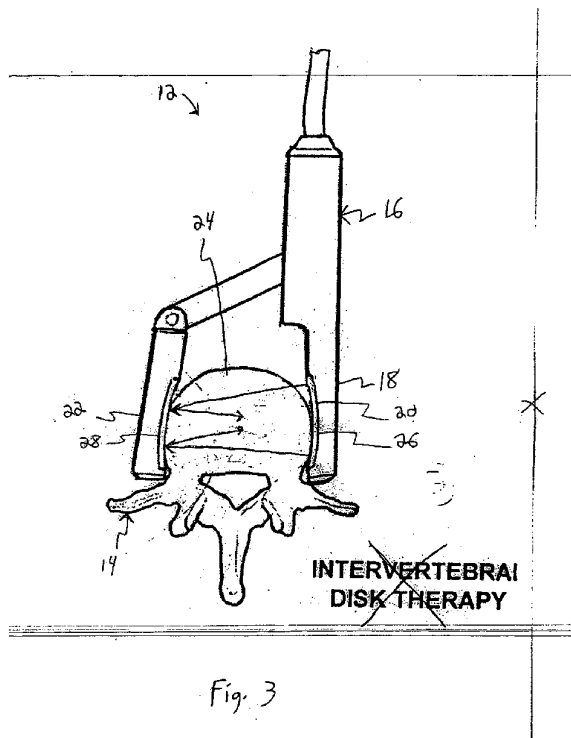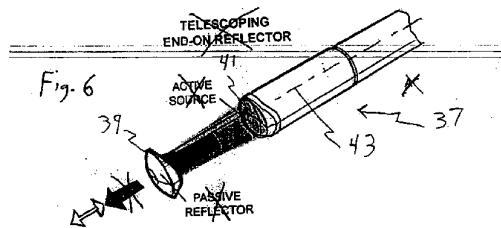

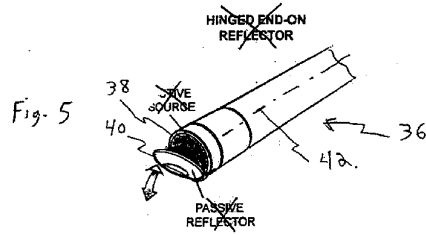


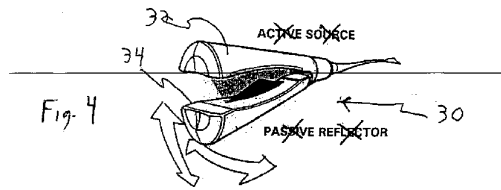


WO 02/096506

5/15

PCT/US02/16698

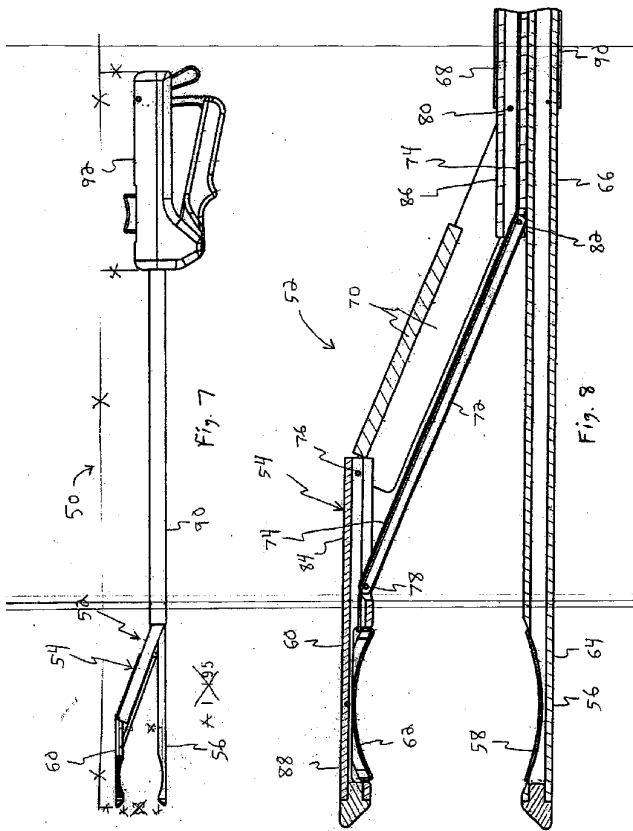


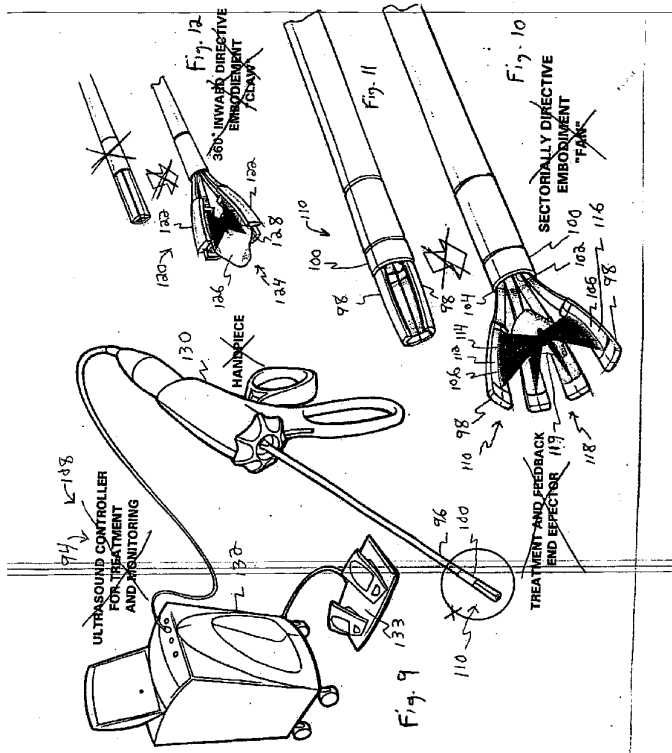



WO 02/096506

7/15

PCT/US02/16698

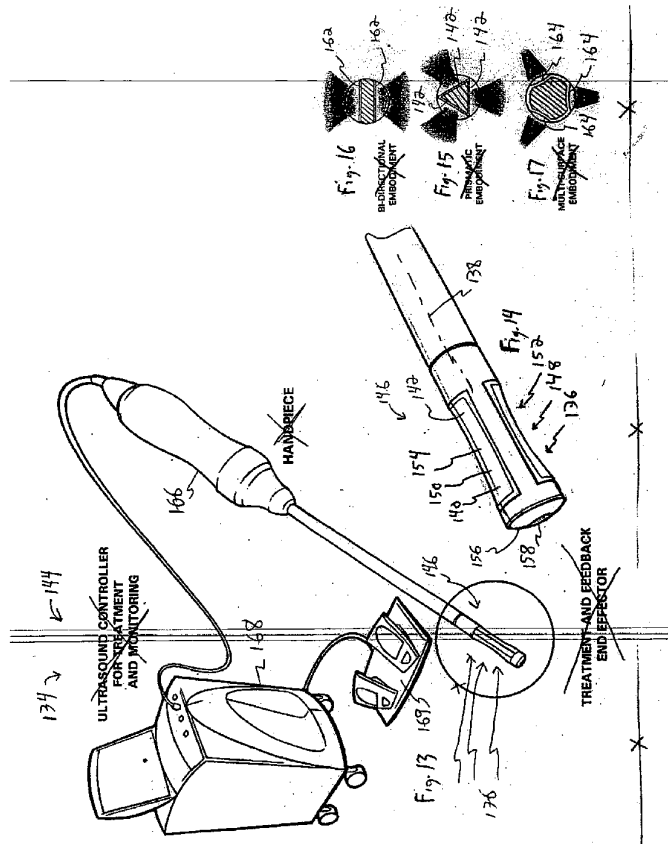

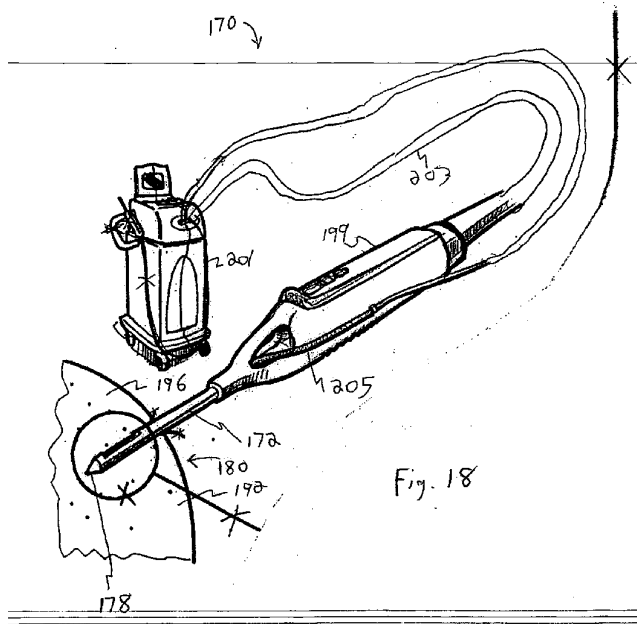

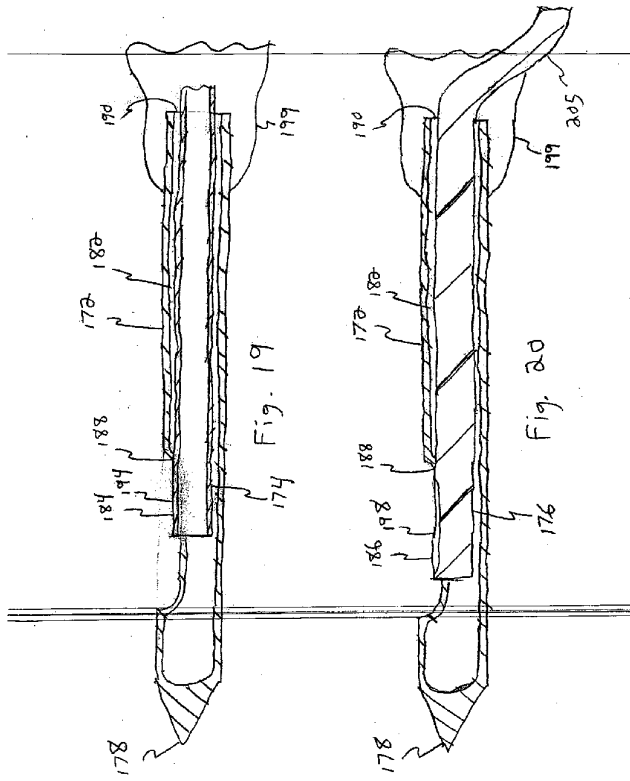

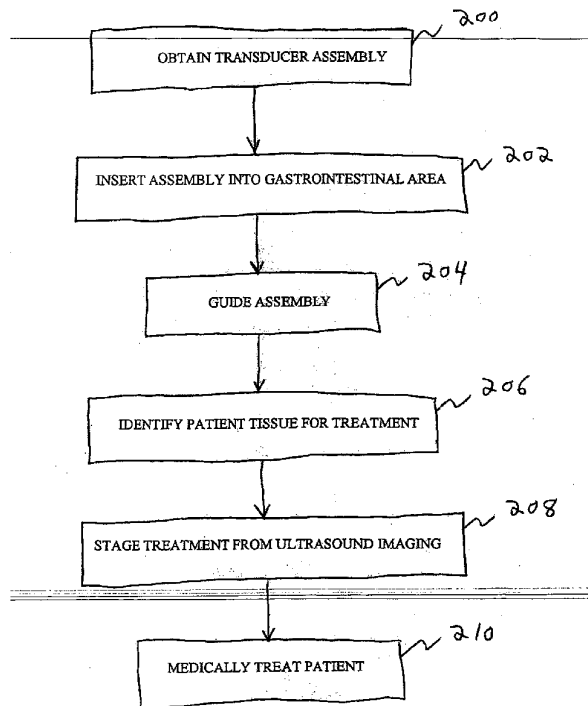


FIG. 21

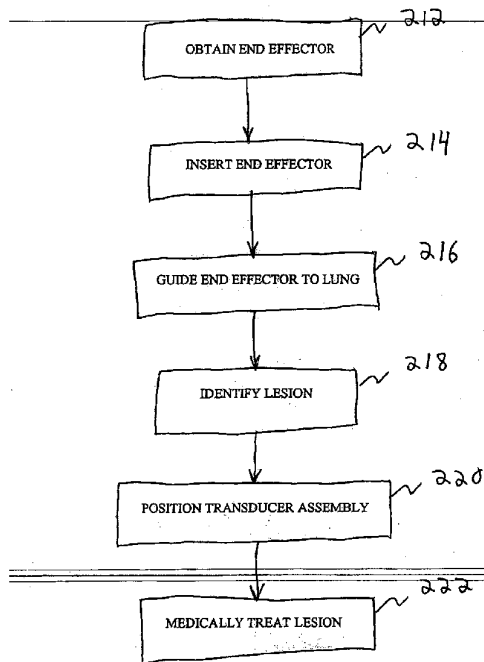


FIG. 22

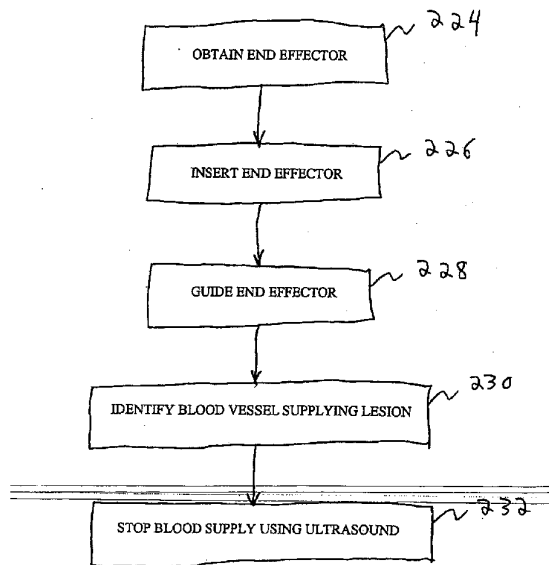
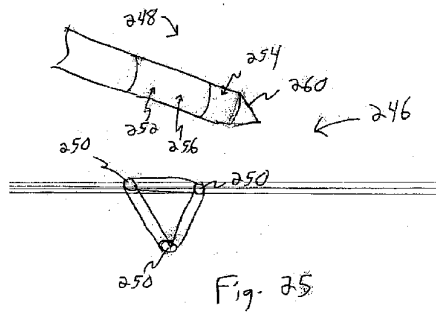

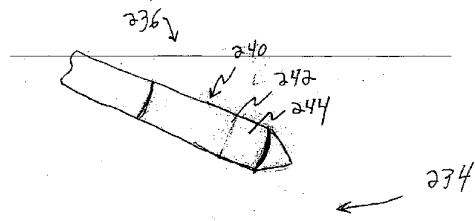


FIG. 23



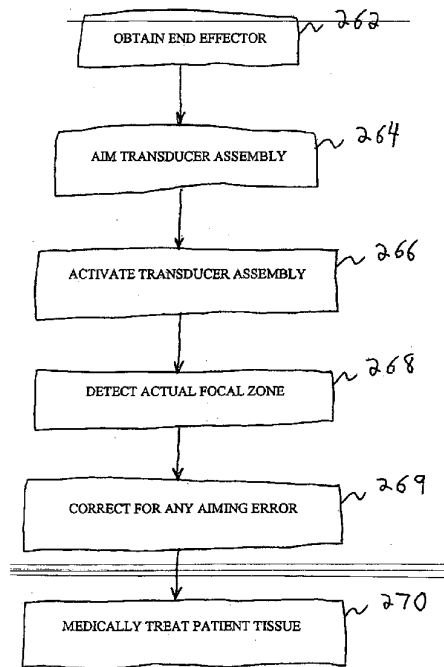


FIG. 26

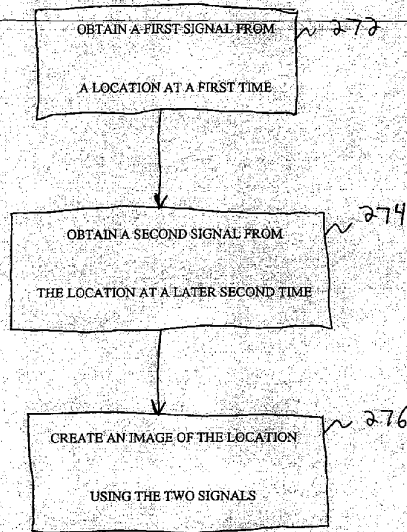


FIG. 27

【国際公開パンフレット（コレクトバージョン）】

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
5 December 2002 (05.12.2002)

PCT

(10) International Publication Number
WO 02/096506 A2

(51) International Patent Classification: A61N

(72) Inventors: MAKIN, Inder, Raj, S.; 11388 Donwid-
dle Drive, Loveland, OH 45140 (US); DUNKI-JACOBS,
Robert.; 4600 Wesley Court, Mason, OH 45040 (US);
PELEGRINO, Richard, C.; 33 Northbridge Road, Men-
don, MA 01756 (US).

(21) International Application Number: PCT/US02/16698

(22) International Filing Date: 28 May 2002 (28.05.2002)

(25) Filing Language: English

(74) Agents: JOHNSON, Philip, S., et al.; JOHNSON &
JOHNSON, One Johnson & Johnson, New Brunswick, NJ
08933 (US).

(26) Publication Language: English


(30) Priority Data:
60/294,135 29 May 2001 (29.05.2001) US
10/152,766 22 May 2002 (22.05.2002) US(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PI, PL, PT, RO, RU, SD, SE, SG,(71) Applicant: ETHICON ENDO-SURGERY [US/US];
4545 Creek Road, Cincinnati, OH 45242 (US).

[Continued on next page]

(54) Title: TISSUE-RETAINING SYSTEM FOR ULTRASOUND MEDICAL TREATMENT



WO 02/096506 A2

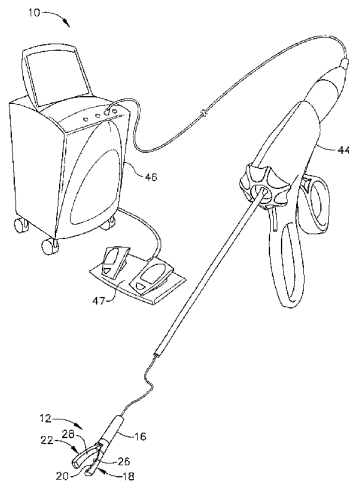

(57) Abstract: An ultrasound medical treatment system includes an end effector insertable into a patient. The end effector includes a tissue-retaining device. The tissue-retaining device includes a first tissue-retaining member having an ultrasound medical-treatment transducer and includes a second tissue-retaining member. The first and second tissue-retaining members are operatively connected together to retain patient tissue between the first and second tissue-retaining members and to release patient tissue so retained. In one example, the second tissue-retaining member has an ultrasound reflector. In the same or a different example, the ultrasound medical-treatment transducer is an ultrasound imaging and medical-treatment transducer.

WO 02/096506 A2 

SL, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN,
YU, ZA, ZM, ZW.

Published:
— without international search report and to be republished
upon receipt of that report

(48) Date of publication of this corrected version:
15 May 2003

(84) Designated States (regional): ARIPO patent (GH, GM,
KI, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CI, CG, CL, CM, GA, GN, GQ, GW, ML, MR,
NI, SN, TD, TG).

(15) Information about Correction:
see PCT Gazette No. 20/2003 of 15 May 2003, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

【国際公開パンフレット（コレクトバージョン）】

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
5 December 2002 (05.12.2002)

PCT

(10) International Publication Number
WO 02/096506 A3

(51) International Patent Classification: A61B 8/14

(21) International Application Number: PCT/US02/16698

(22) International Filing Date: 28 May 2002 (28.05.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/294,135 29 May 2001 (29.05.2001) US
10/152,766 22 May 2002 (22.05.2002) US(71) Applicant: ETHICON ENDO-SURGERY [US/US];
4545 Creek Road, Cincinnati, OH 45242 (US).

(72) Inventors: MAKIN, Inder, Raj., S., 11388 Dorwilde Drive, Loveland, OH 45140 (US). DUNKI-JACOBS, Robert., 4600 Wesley Court, Mason, OH 45040 (US). PELEGRIANO, Richard, C., 35 Northbridge Road, Mendon, MA 01756 (US).


(74) Agents: JOHNSON, Philip, S., et al.; JOHNSON & JOHNSON, One Johnson & Johnson, New Brunswick, NJ 08933 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, FR, GB, GR, GU, HK, HM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PT, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PL, SE, TR), OAPI patent (BH, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: TISSUE-RETAINING SYSTEM FOR ULTRASOUND MEDICAL TREATMENT

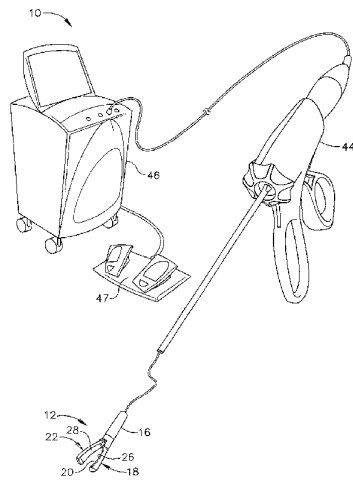

(57) Abstract: An ultrasound medical treatment system (10) includes an end effector (12) insertable into a patient (14). The end effector (12) includes a tissue-retaining device (16). The tissue-retaining device (16) includes a first tissue-retaining member (18) having an ultrasound medical-treatment transducer (26) and includes a second tissue-retaining member (22). The first and second tissue-retaining members (18, 22) are operatively connected together to retain patient tissue (24) between the first and second tissue-retaining members (18, 22) and to release patient tissue (24) so retained. In one example, the second tissue-retaining member (22) has an ultrasound reflector (28). In the same or a different example, the ultrasound medical-treatment transducer (26) is an ultrasound imaging and medical-treatment transducer.

WO 02/096506 A3

WO 02/096506 A3 **Published:**

— with international search report

Previous Correction:

see PCT Gazette No. 20/2003 of 15 May 2003, Section II

(88) Date of publication of the international search report:

30 October 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(15) Information about Correction:

【国際調査報告】

INTERNATIONAL SEARCH REPORT		International application No. PCT/US02/16698
A. CLASSIFICATION OF SUBJECT MATTER IPC(7) : A61B 8/14 US CL : 600/466 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 600/407-471; 604/22; 606/128; 601/2-4; 607/122; 128/899 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Please See Continuation Sheet		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of documents, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6,159,207 A (Yoon) 12 December 2000 (12.12.2000), col. 4, line 64 - col. 14, line 38.	1-32
Y	US 6,156,029 A (Mueller) 05 December 2000 (05.12.2000), the entire document.	1-32
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent published on or after the international filing date "L" document which may throw doubts on priority claims or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combinations being obvious to a person skilled in the art "Z" document member of the same patent family		
Date of the actual completion of the international search 22 October 2002 (22.10.2002)		Date of mailing of the international search report 16 DEC 2002
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20531 Facsimile No. (703)305-3220		Authorized officer Ali Imran Telephone No. 703-308-1148

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT

PCT/US02/16698

Continuation of B. FIELDS SEARCHED Item 3:

EAST

search terms: effector, effector, ultrasound, transducer, biopsy, therapy, treatment

フロントページの続き

(81)指定国 AP(GH,GM,KE,LS,MW,MZ,SD,SL,SZ,TZ,UG,ZM,ZW),EA(AM,AZ,BY,KG,KZ,MD,RU,TJ,TM),EP(AT, BE,CH,CY,DE,DK,ES,FI,FR,GB,GR,IE,IT,LU,MC,NL,PT,SE,TR),OA(BF,BJ,CF,CG,CI,CM,GA,GN,GQ,GW,ML,MR,NE,SN, TD,TG),AE,AG,AL,AM,AT,AU,AZ,BA,BB,BG,BR,BY,BZ,CA,CH,CN,CO,CR,CU,CZ,DE,DK,DM,DZ,EC,EE,ES,FI,GB,GD,GE, GH,GM,HR,HU,ID,IL,IN,IS,JP,KE,KG,KP,KR,KZ,LC,LK,LR,LS,LT,LU,LV,MA,MD,MG,MK,MN,MW,MX,MZ,NO,NZ,OM,PH,P L,PT,RO,RU,SD,SE,SG,SI,SK,SL,TJ,TM,TN,TR,TT,TZ,UA,UG,UZ,VN,YU,ZA,ZM,ZW

(74)代理人 100101133

弁理士 濱田 初音

(72)発明者 メーキン・インデル・ラジ・エス

アメリカ合衆国、4 5 1 4 0 オハイオ州、ラブランド、ドンウィドル・ドライブ 1 1 3 8 8

(72)発明者 ダンキ - ジェイコブス・ロバート

アメリカ合衆国、4 5 0 4 0 オハイオ州、メーソン、ウェズリー・コート 4 6 0 0

(72)発明者 ペレグリノ・リチャード・シー

アメリカ合衆国、0 1 7 5 6 マサチューセッツ州、メンドン、ノースブリッジ・ロード 3 3

Fターム(参考) 4C060 JJ12 JJ13 JJ22 JJ23 JJ27 MM24

4C601 EE09 EE16 FE02 FE03 FE04 FF02 FF03 GA01 GA03

专利名称(译)	用于超声治疗的组织保持系统		
公开(公告)号	JP2004528925A	公开(公告)日	2004-09-24
申请号	JP2002593014	申请日	2002-05-28
[标]申请(专利权)人(译)	伊西康内外科公司		
申请(专利权)人(译)	爱惜康完 - Sajeryi公司		
[标]发明人	メーキンインデルラジエス ダンキジェイコブスロバート ペレグリノリチャードシー		
发明人	メーキン・インデル・ラジ・エス ダンキ・ジェイコブス・ロバート ペレグリノ・リチャード・シー		
IPC分类号	A61B18/00 A61B8/12 A61B10/00 A61B10/02 A61B17/22 A61B17/28 A61B17/32 A61B17/34 A61B19/00 A61N7/00 A61N7/02 H04R17/00		
CPC分类号	A61B8/445 A61B8/12 A61B8/4488 A61B10/0233 A61B17/22012 A61B17/2202 A61B17/29 A61B2017/320093 A61B2090/378 A61B2090/3784 A61B2090/3929 A61B2090/3975 A61N7/022 A61N2007/0078		
FI分类号	A61B17/36.330 A61B8/12		
F-TERM分类号	4C060/JJ12 4C060/JJ13 4C060/JJ22 4C060/JJ23 4C060/JJ27 4C060/MM24 4C601/EE09 4C601/EE16 4C601/FE02 4C601/FE03 4C601/FE04 4C601/FF02 4C601/FF03 4C601/GA01 4C601/GA03		
优先权	60/294135 2001-05-29 US 10/000,000 2002-05-22 US		
外部链接	Espacenet		

摘要(译)

超声医学治疗系统包括可插入患者体内的末端执行器。末端执行器包括组织保持装置。组织保持装置包括具有超声医疗处理换能器的第一组织保持构件，并且包括第二组织保持构件。第一和第二组织保持构件可操作地连接在一起，以将患者组织保持在第一和第二组织保持构件之间，并释放如此保留的患者组织。在一个示例中，第二组织保持构件具有超声反射器。在相同或不同的示例中，超声医学治疗换能器是超声成像和医学治疗换能器。

