

(19)



(11)

EP 1 204 380 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

10.12.2008 Bulletin 2008/50

(21) Application number: **00954742.3**

(22) Date of filing: **21.08.2000**

(51) Int Cl.:

A61B 17/28 (2006.01)

(86) International application number:

PCT/GB2000/003229

(87) International publication number:

WO 2001/013803 (01.03.2001 Gazette 2001/09)

(54) **LAPAROSCOPIC FORCEPS**

LAPAROSKOPISCHE ZANGE

FORCEPS POUR LAPAROSCOPIE

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: **20.08.1999 GB 9919722**

(43) Date of publication of application:

15.05.2002 Bulletin 2002/20

(73) Proprietor: **Surgical Innovations Limited**

Leeds, West Yorkshire LS16 6RF (GB)

(72) Inventors:

- **MORAN, Peter**
Leeds LS13 4RN (GB)

- **MORAN, Stuart**

Leeds LS16 9HH (GB)

- **WHITE, Michael**

**Horsforth,
Leeds LS18 5QH (GB)**

(74) Representative: **Belcher, Simon James et al**

Urquhart-Dykes & Lord LLP

Tower North Central

Merrion Way

Leeds LS2 8PA (GB)

(56) References cited:

FR-A- 2 682 278

FR-A- 2 688 681

US-A- 5 176 702

US-A- 5 251 638

US-A- 5 938 667

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to laparoscopic forceps, particularly to the handle of such forceps.

[0002] Laparoscopic forceps conventionally comprise a handle, a tubular housing carrying an actuator mechanism and a forceps jaws mechanism located at the remote end of the tubular housing. Manual actuation of the handle opens or closes the jaws. The shaft and jaws mechanism may be rotated relative to the handle and a ratchet mechanism may be provided to allow clamping of the jaws. A monopolar diathermy connection may be provided to facilitate cauterisation of tissue clamped by the jaws. In conventional laparoscopic forceps, the handle comprises a pistol grip arrangement wherein the diathermy connection extends upwardly so that the power cable extends from the handle over a surgeon's hand adjacent the knuckles or thumb. The pistol grip arrangement makes it necessary for a surgeon to raise or lower the elbow in order to rotate the forceps in use.

[0003] This is inconvenient and can be tiring, particularly as the diathermy cable may pass over the surgeon's elbow.

[0004] FR-A-2688681 discloses a handle for a surgical instrument, which comprises left and right arms which are pivotally connected to a mounting core in a scissors-like arrangement, for engaging a user's finger and thumb. A tubular housing extends from the handle and carries an actuator rod. A toothed rack is provided on one of the arms to engage teeth on the other arm.

[0005] The present invention provides a laparoscopic forceps which comprises:

- a handle which comprises left and right bow members pivotally connected to a mounting core in a scissors-like arrangement, and adapted to engage a user's finger and thumb in use;
- a tubular housing extending from the handle and carrying an actuator rod, defining the forceps axis;
- a jaws mechanism disposed at the end of the tubular housing remote from the handle engaged to the actuator rod and arranged so that the jaws may be opened or closed by actuation of the handle;
- a switchable ratchet mechanism which can be moved between locked and unlocked positions, and which, when locked, allows closure and prevents opening of the jaws and, when unlocked, allows free opening and closing of the jaws, in which the ratchet mechanism includes a switch member which extends longitudinally of the handle and is mounted on the handle by means of a pivot at the rear end thereof between the bow members, so that it can be moved laterally relative to the forceps axis about the pivot between a first position in which the ratchet mechanism is locked and a second position in which the ratchet mechanism is unlocked, and in which the switch member is secured by the pivot to a release member which can slide relative to the mounting core

between a forward first position in which the ratchet mechanism is locked and a rearward second position in which the ratchet mechanism is unlocked.

[0006] Laparoscopic forceps in accordance with the present invention confer the advantage that the operation and positioning of the jaws may be controlled by the thumb and one finger of the surgeon, leaving fingers free for operation of the switchable ratchet mechanism or other tasks.

[0007] The construction and function of the forceps of this invention may be considered conveniently with the scissor-like bows generally horizontal so that a surgeon's hand is in the prone position with palm downwards during use.

[0008] The switch member is preferably located on the upper side of the mounting core of the handle. In preferred embodiments the switch extends longitudinally of the handle, and is engaged by a pivot at the rear end thereof between the bows, the front end being pivotable laterally to switch the mechanism between the first and second positions.

[0009] The switch member may be conveniently actuated by a surgeon's index or second finger without losing control of the jaws of the forceps. Preferred embodiments are symmetrical and can be used by right or left handed surgeons.

[0010] The ratchet mechanism may conveniently include a rack carried by a first bow member and a pawl carried by the second bow member, the rack and pawl being engaged in the locked position of the mechanism and disengaged in the unlocked position.

[0011] A spring is preferably arranged to urge the pawl into engagement with the ratchet.

[0012] Alternatively a spring may urge the ratchet to engagement with the pawl.

[0013] In preferred embodiments the switch member includes a formation adapted to form a cam surface extending rearwardly of the pivot to engage a surface of the pawl adapted to form a cam follower; arranged so that the movement of the switch member from the locked to unlocked position urges the pawl away from the ratchet against the action of the spring to disengage the pawl and ratchet. The cam surface may be conveniently provided by a pin or stud depending from the body of the switch.

[0014] In an alternative arrangement the cam surface of the switch member may engage the ratchet to urge the latter out of engagement with the pawl.

[0015] It is desirable that a surgeon can quickly or temporarily release the locking mechanism without need to actuate the switch.

[0016] The release member may have an upward projection defining a forwardly facing finger grip or other manual engagement surface. Thus a surgeon may easily retract the release member to temporarily disengage the ratchet and pawl. Removal of the surgeon's finger re-engages the locking mechanism.

[0017] It is important to note that a single spring acting on the pawl not only engages the pawl with the ratchet but also provides the restoring force urging the sliding member into the forward rest position. This economy of construction facilitates assembly and reduces the number of stressed components employed.

[0018] The release member and switch are conveniently disposed longitudinally on the upper centre portion of the handle, to allow easy access. The forward facing engagement surface and upper surface of the switch preferably define a continuous, smooth profile.

[0019] The forward end of the switch may abut with the release member and cooperate with it to provide a click-stop mechanism or over centre arrangement to prevent accidental dislodgement of the switch during use.

[0020] The convenient manipulation of the scissor-like handle and controls afforded by the forceps of this invention gives a surgeon greater freedom to manipulate rotation of the jaws. Rotation through 180° as a single movement is facilitated. As the jaws are bilaterally symmetrical complete freedom of angular orientation of the jaws is thereby attained.

[0021] This object is achieved by provision of a rotatable sleeve forward of the switch release member, the sleeve being connected to the actuation rod so that rotation of the sleeve causes rotation of the jaws. The sleeve is preferably provided with radial projections dimensioned to define finger engaging recesses between adjacent projections.

[0022] In this way the rotation of the jaws is responsive without any slackness to the movement of a surgeon's finger.

[0023] A connection for engagement of the forceps to a diathermy power supply may be provided. In preferred embodiments of this invention the diathermy connection member is disposed on the lower side of the mounting core. In this way the power cable may pass unobtrusively beneath the surgeon's wrist and under the arm, rather than over the hand as in previously known arrangements. The diathermy connection extends in a plane generally parallel and below the finger engaging bow portions of the handle.

[0024] The invention is further described by means of example but not in any limitative sense with reference to the accompanying drawings of which:

Figure 1 is a plan view of a laparoscopic forceps handle in accordance with the present invention;
 Figure 2 is a side elevation of the forceps shown in Figure 1;
 Figure 3 is an isometric view of the forceps shown in Figure 1;
 Figure 4 is a front elevation of the forceps shown in Figure 1;
 Figure 5 is a cross-sectional view on AA-AA;
 Figure 6 is a series of partial views illustrating operation of the ratchet mechanism; and
 Figure 7 is an exploded view of forceps in accord-

ance with this invention.

[0025] A laparoscopic forceps in accordance with this invention is illustrated in Figures 1 to 7. The handle described in greater detail below, is connected to the tubular support 41 which carries a conventional jaws assembly (not shown) wherein a pair of jaws mounted on a yoke are actuated by an actuation rod 42 extending within the tubular support 41 from a coupling with a core index sleeve 2. The tubular support and jaws assembly may be obtained from various commercial sources. The tubular support is releasably fastened to the handle by a universal nut 35.

[0026] The handle comprises a core 1 defining a longitudinal channel within which the electro-cautery connection 21, 22 passes. This allows transmission of RF energy from a power supply to the jaws in conventional manner. The core index sleeve 2 includes a rotatable bearing and releasable coupling to the actuation rod 42.

[0027] Moulded plastics right and left scissor bows 8, 15 are secured to the core 1 by pins 7, 6. Linkages 10, 17 connected to the bows by pins 13, 20 are connected to the connection piece 21 by means of a pin 24 so that opening of the bows causes the actuation rod to be retracted and the jaws to open.

[0028] The bows 8, 9 extend downwardly from the horizontal axis of the handle as shown in Figures 2 and 4. The angle is selected so that the forceps extend generally coaxially of a user's forearm. This is convenient because the forceps can be rotated simply by rotation of the surgeon's wrist.

[0029] The cautery insert rod 22 extends downwards from the centre of the handle generally parallel to the bows 8, 15. The power supply cable connected to rod 22 passes conveniently below a surgeon's wrist in use.

[0030] A conical sleeve 32 disposed forwardly of the core 1 and switch assembly is coupled by a pin 34 to the bearing 2. Radial projections 40 are dimensioned so that the index finger may fit snugly between adjacent projections to facilitate rotation of the forceps jaws through an angle up to 180° in a single movement.

[0031] The profile 43, 44 of the switch and release members 25, 27 forms a smooth contour. The forward edge of switch 27 is disposed behind a complementary surface 46 of the slideable member 25. A plunger 28 and spring 29 engage recesses in surface 46 to provide positive engagement of the switch in the left and right positions.

[0032] Ratchet 19 and pawl 12 are received in recesses in the bars 8 and 15 respectively. Ratchet 19 is fixed but pawl 12 is pivotally connected by a pin 13 and bias forwardly by the pawl return spring 14. The teeth of the ratchet 19 are arranged so that when pawl 12 engages the ratchet the jaws may be closed but not opened.

[0033] The ratchet may be released by rearward movement of the slideable release member 25 which carries a switch 27 secured to the rear end thereof by pin 31.

The member 25 is slidably mounted on longitudinal formations on each side of core 1. Rearward movement of member 25 by pressure on the forward facing surface 43 moves the switch 22 rearwardly.

[0034] Switch 27 has a downwardly depending pin or stud 30 which acts as a pawl release guide. The pin 30 is laterally offset so that left to right movement of the switch moves the pin rearwardly and movement from right to left moves the pin forwardly. The pin 30 engages the forward surface of pawl member 12 to form a cam and cam follower arrangement.

[0035] The operation of the forceps handle is described with reference to Figures 6 and 7. Figures 6a to 6d show partial views of the switch assembly B.

[0036] In Figure 6a the switch 27 is in the right-hand position. The plunger 28 is engaged in the right hand recess 47 in surface 46.

[0037] The pin 30 is at the most rearwardly position and bears against the forward surface of pawl member 12 disengaging the latter from the ratchet 19.

[0038] Movement of the switch 27 to the left, as shown in Figure 6c moves pin 30 forwardly allowing spring 14 to urge the pawl into engagement with the ratchet preventing opening of the forceps jaws. Movement of the switch 27 to the right as shown in Figure 6d releases the pawl permitting opening of the jaws.

[0039] Figure 6b illustrates a quick temporary release of the pawl by sliding member 25 in a rearward direction. Pin 30 pushes pawl 12 directly rearwardly allowing free use of the jaws. Release of the member 25 re-engages the ratchet mechanism.

Claims

1. A laparoscopic forceps which comprises:

a handle which comprises left and right bow members (15, 8) pivotally connected to a mounting core (1) in a scissors-like arrangement, and adapted to engage a user's finger and thumb in use;
a tubular housing (41) extending from the handle and carrying an actuator rod (42) (42), defining the forceps axis;
a switchable ratchet mechanism (12, 19) which can be moved between locked and unlocked positions, and which, when locked, allows closure and prevents opening of the jaws and, when unlocked, allows free opening and closing of the jaws, in which the ratchet mechanism includes a switch member (27),

wherein the forceps includes a jaws mechanism disposed at the end of the tubular housing remote from the handle engaged to the actuator rod and arranged so that the jaws may be opened or closed by actuation of the handle;

characterised in that the switch member (27) extends longitudinally of the handle and is mounted on the handle by means of a pivot at the end thereof which is closest to the user between the bow members, so that it can be moved laterally relative to the forceps axis about the pivot between a first position in which the ratchet mechanism is locked and a second position in which the ratchet mechanism is unlocked, and in which the switch member is secured by the pivot to a release member (25) which can slide relative to the mounting core between a forward first position in which the ratchet mechanism is locked and a rearward second position closer to the user in which the ratchet mechanism is unlocked.

2. A laparoscopic forceps as claimed in claim 1, wherein the ratchet mechanism includes a ratchet (19) carried by the first bow member (15) and a pawl (12) carried by the second bow member (8), the ratchet and pawl being engaged in the locked position of the mechanism and disengaged in the unlocked position.
3. A laparoscopic forceps as claimed in claim 2, wherein a spring (14) is arranged to urge the pawl (12) into engagement with the ratchet (19).
4. A laparoscopic forceps as claimed in claim 3, wherein the switch member (27) includes a formation adapted to form a cam surface extending rearwardly of the pivot to engage a surface of the pawl (12) adapted to form a cam follower; arranged so that the movement of the switch member from the locked to unlocked position urges the pawl away from the ratchet (19) against the action of the spring (14) to disengage the pawl and ratchet.
5. A laparoscopic forceps as claimed in claim 4, wherein the cam surface comprises a pin or stud (30) depending from the body of the switch member.
6. A laparoscopic forceps as claimed in any of claims 1 to 3, wherein the switch member (27) engages the ratchet (19) in use to urge the latter out of engagement with the pawl (12).
7. A laparoscopic forceps as claimed in claim 1, wherein the release member (25) has an upward projection defining a forwardly facing finger grip or other manual engagement surface.
8. A laparoscopic forceps as claimed in claim 7, wherein the release member (25) and switch member (27) are disposed longitudinally on the upper centre portion of the handle.
9. A laparoscopic forceps as claimed in claim 8, wherein the forward facing engagement surface of the re-

lease member and upper surface of the switch member (27) define a continuous, smooth profile.

10. A laparoscopic forceps as claimed in any preceding claim, including a rotatable sleeve (32) forward of the switch and release members (25), the sleeve being connected to the actuator rod (42) so that rotation of the sleeve causes rotation of the jaws.
11. A laparoscopic forceps as claimed in claim 10, wherein the sleeve (32) is provided with radial projections dimensioned to define finger engaging recesses between adjacent projections.

Patentansprüche

1. Laparoskopische Zange, umfassend:

- einen Griff, der linke und rechte Bügelbauteile (15, 18) umfasst, die in einer scherenartigen Anordnung schwenkbar mit einem Befestigungsmittelteil (1) verbunden und ausgelegt sind, bei Verwendung mit einem Finger und dem Daumen eines Benutzers zusammen zu wirken;
- ein röhrenförmiges Gehäuse (41), das sich ausgehend von dem Griff erstreckt und eine Betätigungsstange (42) führt, die die Zangenachse definiert;
- einen schaltbaren Ratschenmechanismus (12, 19), der zwischen verriegelten und entriegelten Positionen bewegt werden kann und der, wenn er verriegelt ist, ein Schließen der Backen ermöglicht und ein Öffnen derselben verhindert und, wenn er entriegelt ist, ein freies Öffnen und Schließen der Backen ermöglicht, wobei der Ratschenmechanismus ein Schaltbauteil (27) aufweist,

wobei die Zange einen an dem Ende des röhrenförmigen Gehäuses entfernt von dem Griff angeordneten Backenmechanismus aufweist, der mit der Betätigungsstange in Wirkverbindung steht und so ausgelegt ist, dass die Backen durch Betätigung des Griffs geöffnet oder geschlossen werden können; **dadurch gekennzeichnet, dass** das Schaltbauteil (27) sich in Längsrichtung des Griffs erstreckt und mittels einer Schwenkeinrichtung an dem Griff an dessen Ende befestigt ist, das sich am nächsten zu dem Benutzer zwischen den Bügelbauteilen befindet, so dass er lateral relativ zu der Zangenachse um die Schwenkeinrichtung zwischen einer ersten Position, in der der Ratschenmechanismus verriegelt ist, und einer zweiten Position, in der der Ratschenmechanismus entriegelt ist, bewegt werden kann, und wobei das Schaltbauteil mittels der Schwenkeinrichtung an einem Freigabebauteil (25) gesichert ist, der relativ zu dem Befestigungsmittel-

teil zwischen einer vorderen ersten Position, in der der Ratschenmechanismus verriegelt ist, und einer rückwärtigen zweiten Position näher zu dem Benutzer, in der der Ratschenmechanismus entriegelt ist, gleiten kann.

2. Laparoskopische Zange nach Anspruch 1, wobei der Ratschenmechanismus eine Ratsche (19), die von dem ersten Bügelbauteil (15) getragen ist, und eine Klinke (12) umfasst, die von dem zweiten Bügelbauteil (8) getragen ist, wobei die Ratsche und Klinke in der verriegelten Position des Mechanismus in Wirkverbindung stehen und in der entriegelten Position voneinander gelöst sind.

3. Laparoskopische Zange nach Anspruch 2, wobei eine Feder (14) angeordnet ist, um die Klinke (12) in Wirkverbindung mit der Ratsche (19) zu drängen.

4. Laparoskopische Zange nach Anspruch 3, wobei das Schaltbauteil (27) eine Gestalt aufweist, die ausgelegt ist, um eine sich rückwärtig der Schwenkeinrichtung erstreckende Kurvenfläche zu bilden, um mit einer Fläche der Klinke (12) zusammen zu wirken, die ausgebildet ist, um eine Kurvenfolgeeinrichtung zu bilden, die ausgelegt, so dass die Bewegung des Schaltbauteils von der verriegelten in die entriegelte Position die Klinke gegen die Wirkung der Feder (14) weg von der Ratsche (19) drängt, um die Klinke und die Ratsche voneinander zu trennen.

5. Laparoskopische Zange nach Anspruch 4, wobei die Kurvenfläche abhängig von dem Körper des Schaltbauteils einen Stift oder Zapfen (30) umfasst.

6. Laparoskopische Zange nach einem der Ansprüche 1 bis 3, wobei das Schaltbauteil (27) bei Verwendung mit der Ratsche (19) in Wirkverbindung steht, um die letztere aus der Wirkverbindung mit der Klinke (12) heraus zu drängen.

7. Laparoskopische Zange nach Anspruch 1, wobei das Freigabebauteil (25) einen nach oben ragenden Vorsprung aufweist, der einen nach vorne weisenden Halt für Finger oder eine andere manuelle Wirkverbindungsfläche definiert.

8. Laparoskopische Zange nach Anspruch 7, wobei das Freigabebauteil (25) und das Schaltbauteil (27) in Längsrichtung auf dem oberen mittleren Teil des Griffs angeordnet sind.

9. Laparoskopische Zange nach Anspruch 8, wobei die nach vorne weisende Wirkverbindungsfläche des Freigabebauteils und eine obere Fläche des Schaltbauteils (27) ein kontinuierliches, glattes Profil definieren.

10. Laparoskopische Zange nach einem vorherigen Anspruch, mit einer drehbaren Hülse (32) vor den Schalt- und Freigabebauteilen (25), wobei die Hülse mit der Betätigungsstange (42) verbunden ist, so dass eine Drehung der Hülse eine Drehung der Backen bewirkt.
11. Laparoskopische Zange nach Anspruch 10, wobei die Hülse (32) mit radialen Vorsprüngen ausgestattet ist, die dimensioniert sind, um Fingerwirkverbindungsabweichungen zwischen benachbarten Vorsprüngen zu definieren.

Revendications

1. Pince laparoscopique comprenant :

une poignée qui comprend des éléments en forme d'anse gauche et droit (15, 8) raccordés de manière pivotante à une âme de montage (1) selon un agencement en forme de ciseaux, et adaptés pour recevoir un doigt et le pouce d'un utilisateur lors de l'utilisation ;
un boîtier tubulaire (41) s'étendant à partir de la poignée et supportant une tige d'actionneur (42), définissant l'axe de la pince ;
un mécanisme d'encliquetage pouvant être commuté (12, 19) qui peut passer de la position bloquée à la position débloquée, et qui, lorsqu'il est bloqué, permet la fermeture et empêche l'ouverture des mâchoires et, lorsqu'il est débloqué, permet d'ouvrir et de fermer librement les mâchoires, dans lequel le mécanisme d'encliquetage comprend un élément de commutation (27),

dans lequel la pince comprend un mécanisme de mâchoires disposé à l'extrémité du boîtier tubulaire à distance de la poignée mise en prise par la tige d'actionneur et agencée de sorte que les mâchoires peuvent être ouvertes ou fermées par l'actionnement de la poignée ;

caractérisée en ce que l'élément de commutation (27) s'étend de manière longitudinale par rapport à la poignée et est monté sur la poignée au moyen d'un pivot au niveau de son extrémité qui est la plus proche de l'utilisateur entre les éléments en forme d'anse, de sorte qu'il peut être déplacé latéralement par rapport à l'axe de pince autour du pivot entre une première position dans laquelle le mécanisme d'encliquetage est bloqué et une seconde position dans laquelle le mécanisme d'encliquetage est débloqué, et dans laquelle l'élément de commutation est fixé par le pivot à un élément de déblocage (25) qui peut coulisser par rapport au moyeu de montage entre une première position vers l'avant dans laquelle le mécanisme d'encliquetage est bloqué et une secon-

de position vers l'arrière plus près de l'utilisateur, dans laquelle le mécanisme d'encliquetage est débloqué.

2. Pince laparoscopique selon la revendication 1, dans laquelle le mécanisme d'encliquetage comprend un rochet (19) supporté par le premier élément en forme d'anse (15) et un cliquet (12) supporté par le second élément en forme d'anse (8), le rochet et le cliquet étant mis en prise dans la position bloquée du mécanisme et dégagés dans la position débloquée.
3. Pince laparoscopique selon la revendication 2, dans laquelle un ressort (14) est agencé pour pousser le cliquet (12) en mise en prise avec le rochet (19).
4. Pince laparoscopique selon la revendication 3, dans laquelle l'élément de commutation (27) comprend une formation adaptée pour former une surface de came s'étendant vers l'arrière du pivot pour coopérer avec une surface du cliquet (12) adaptée pour former un poussoir de came ; agencée de sorte que le mouvement de l'élément de commutation de la position bloquée à la position débloquée éloigne le cliquet du rochet (19) contre l'action du ressort (14) pour dégager le cliquet et le rochet.
5. Pince laparoscopique selon la revendication 4, dans laquelle la surface de came comprend une broche ou goujon (30) dépendant du corps de l'élément de commutation.
6. Pince laparoscopique selon l'une quelconque des revendications 1 à 3, dans laquelle l'élément de commutation (27) coopère avec le rochet (19) lors de l'utilisation pour pousser ce dernier hors de mise en prise d'avec le cliquet (12).
7. Pince laparoscopique selon la revendication 1, dans laquelle l'élément de déblocage (25) a une saillie ascendante définissant une prise de doigt orientée vers l'avant ou une autre surface de mise en prise manuelle.
8. Pince laparoscopique selon la revendication 7, dans laquelle l'élément de déblocage (25) et l'élément de commutation (27) sont disposés longitudinalement sur la partie centrale supérieure de la poignée.
9. Pince laparoscopique selon la revendication 8, dans laquelle la surface de mise en prise orientée vers l'avant de l'élément de déblocage et la surface supérieure de l'élément de commutation (27) définissent un profil continu lisse.
10. Pince laparoscopique selon l'une quelconque des revendications précédentes, comprenant un manchon rotatif (32) vers l'avant des éléments de com-

mutation et de déblocage (25), le manchon étant raccordé à la tige d'actionneur (42) de sorte que la rotation du manchon provoque la rotation des mâchoires.

5

11. Pince laparoscopique selon la revendication 10, dans laquelle le manchon (32) est muni de saillies radiales dimensionnées pour définir des évidements de réception de doigt entre des saillies adjacentes.

10

15

20

25

30

35

40

45

50

55

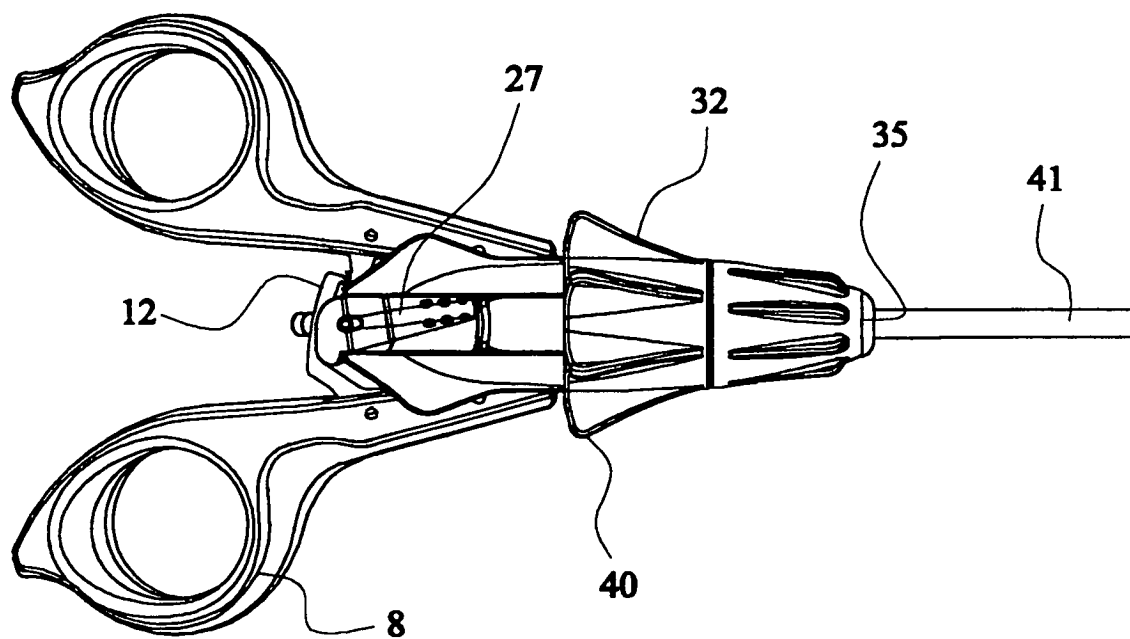


FIG. 1

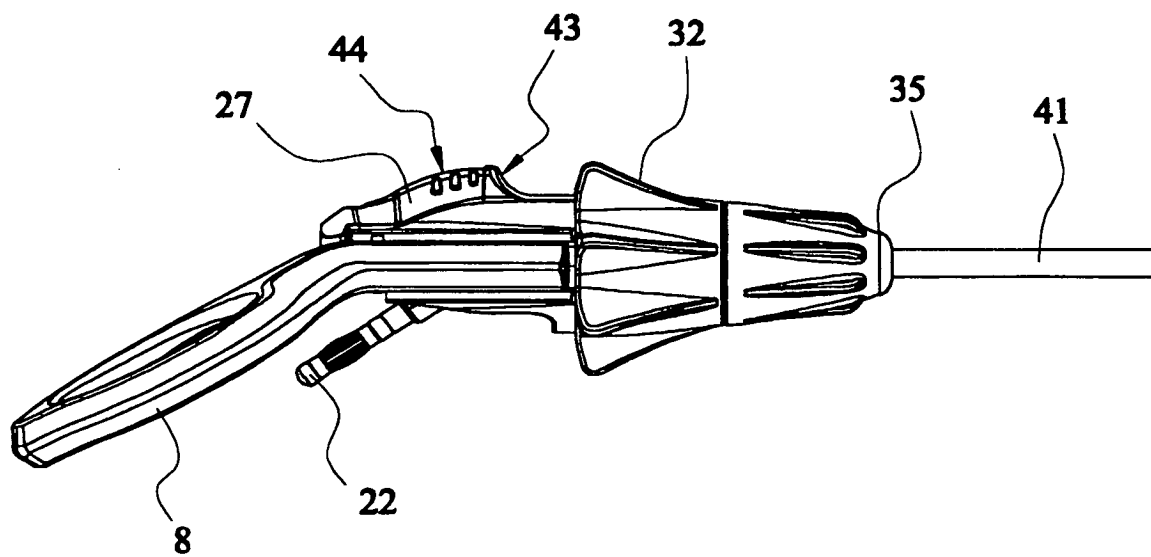


FIG. 2

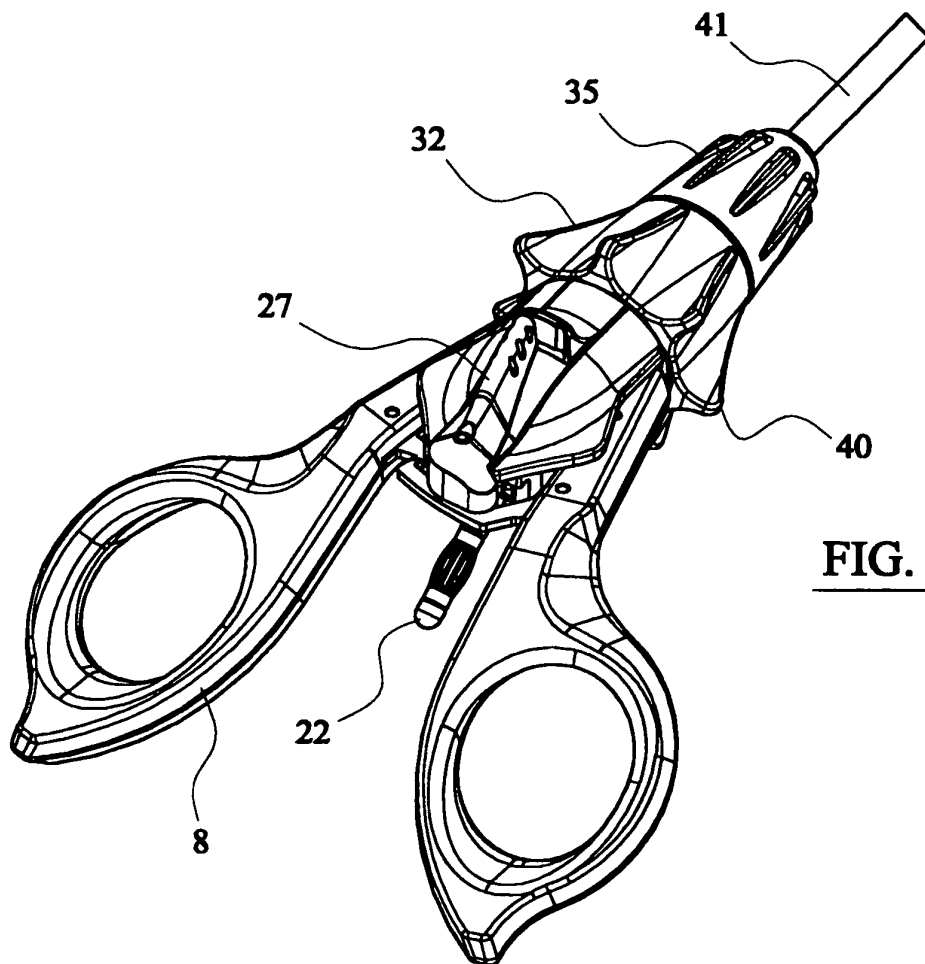


FIG. 3

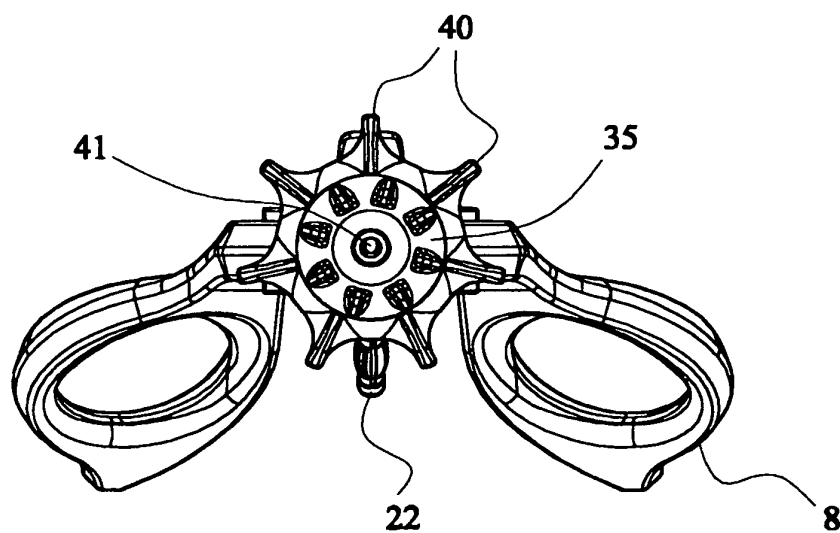


FIG. 4

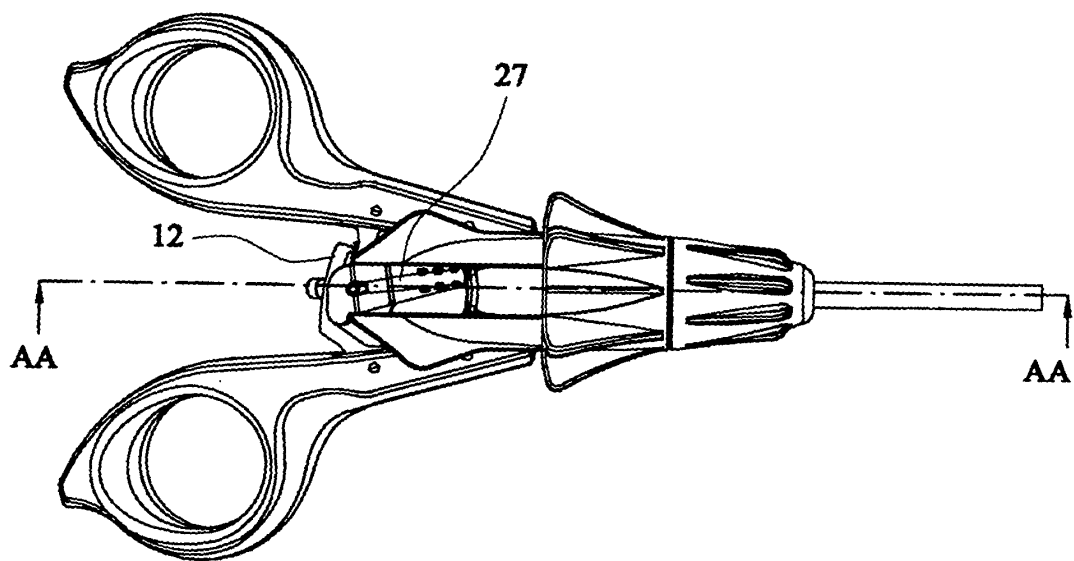


FIG. 5A

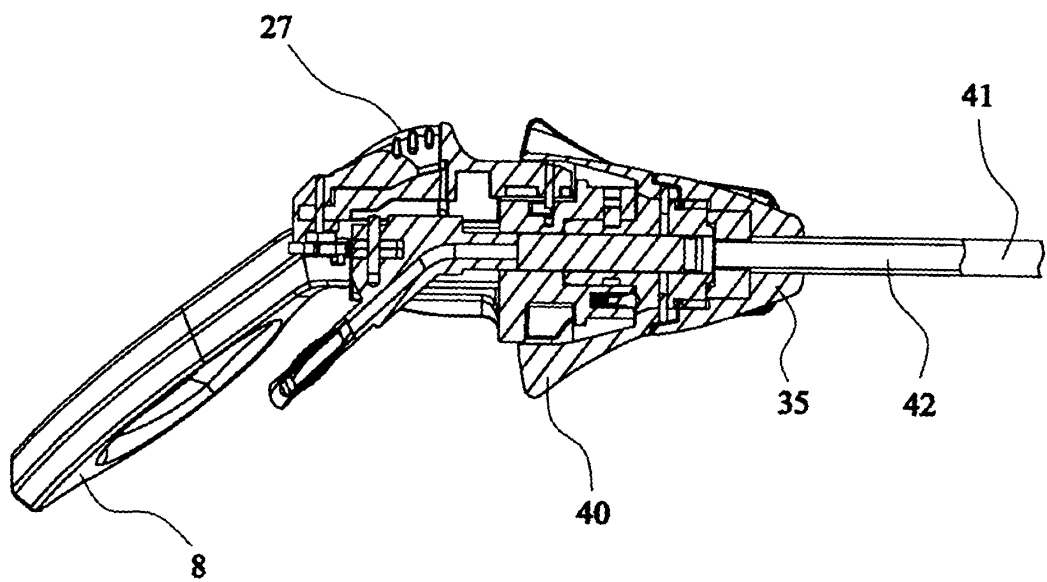


FIG. 5B

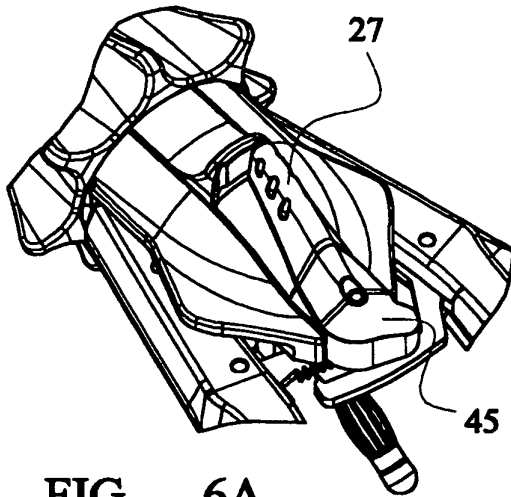


FIG. 6A

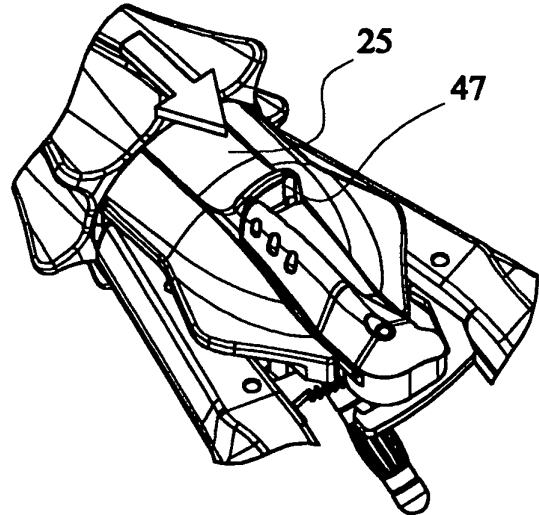


FIG. 6B

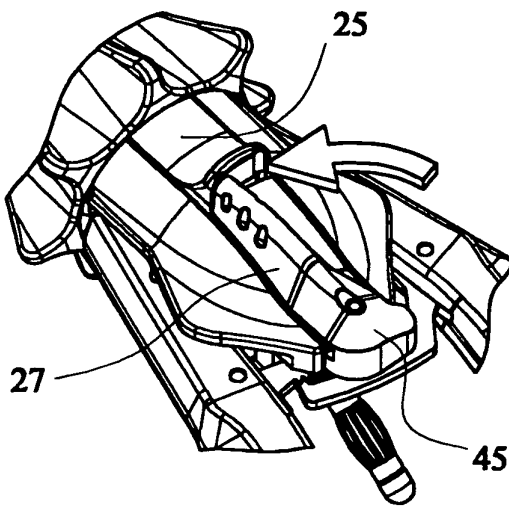


FIG. 6C

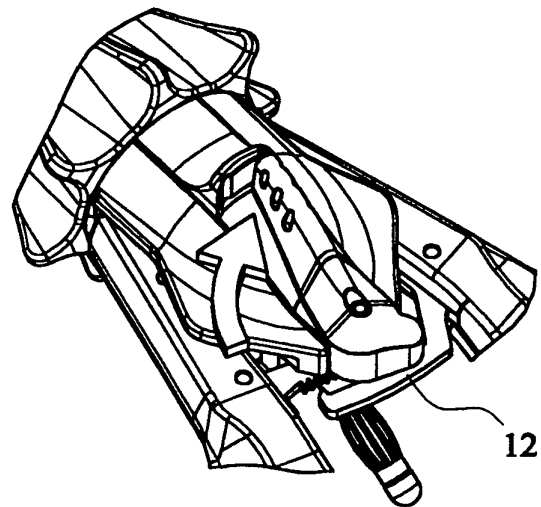


FIG. 6D

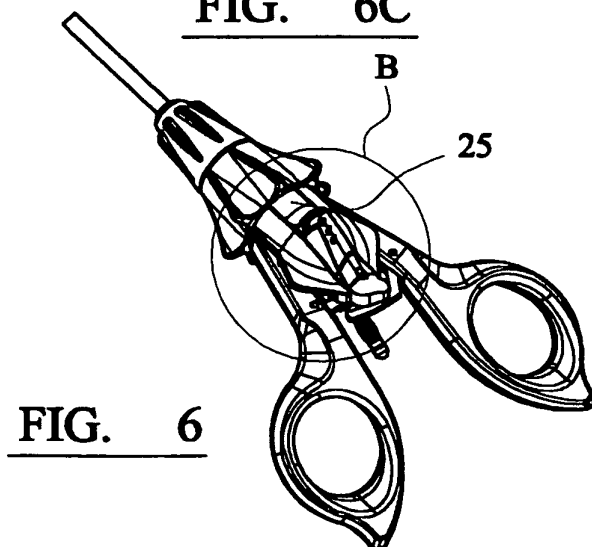


FIG. 6

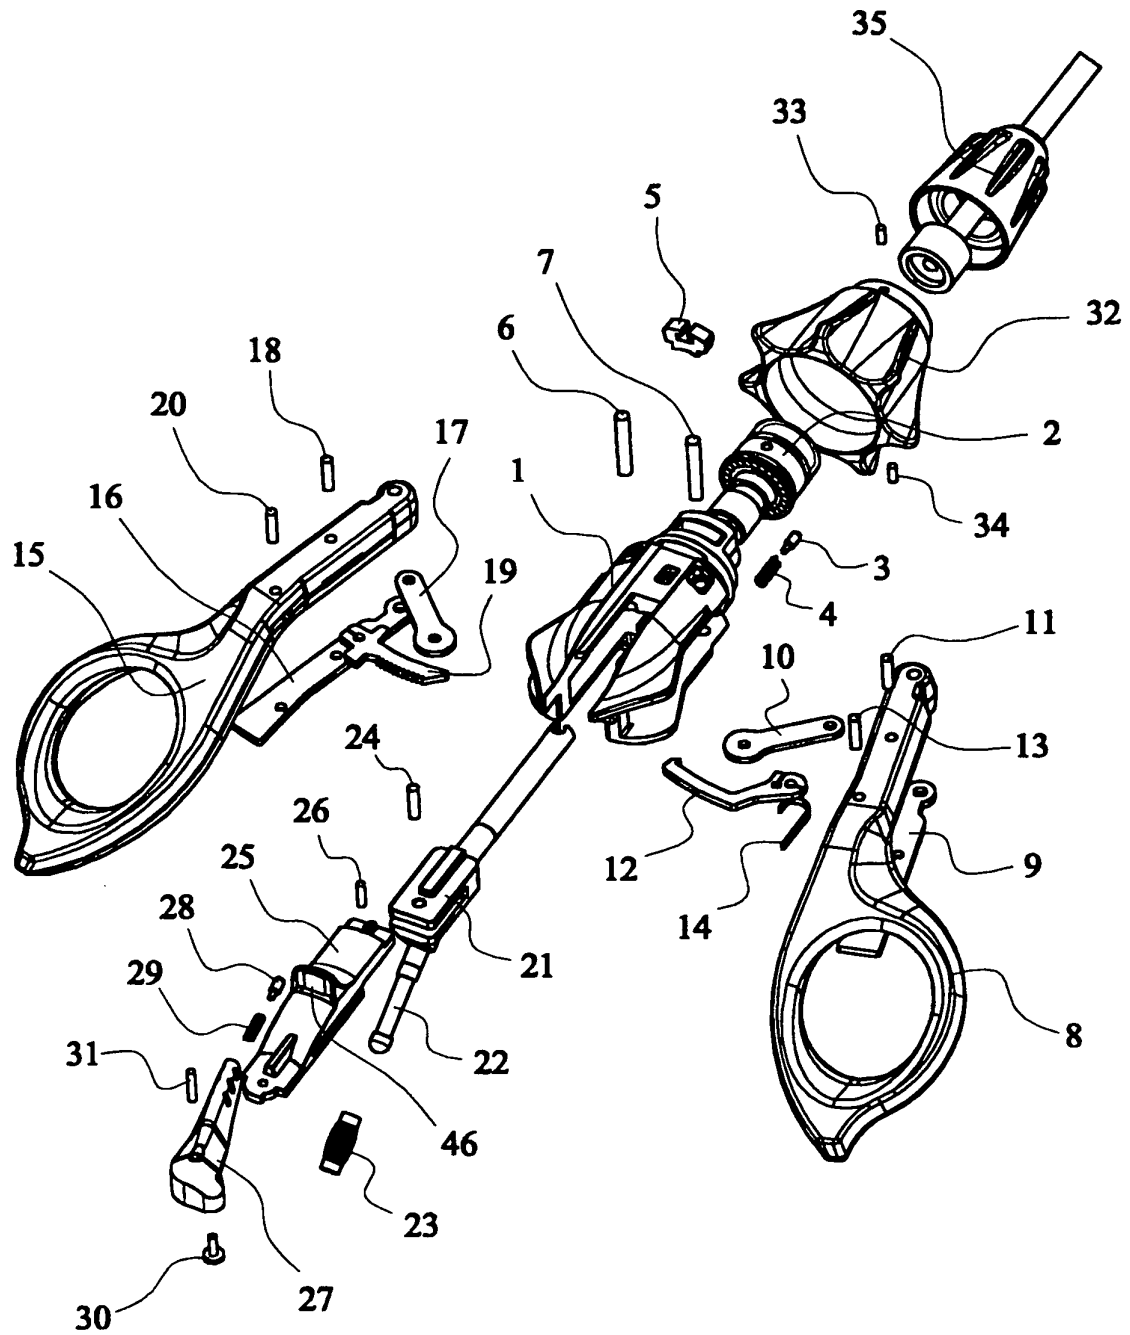


FIG. 7

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- FR 2688681 A [0004]

专利名称(译)	腹腔镜钳		
公开(公告)号	EP1204380B1	公开(公告)日	2008-12-10
申请号	EP2000954742	申请日	2000-08-21
申请(专利权)人(译)	手术INNOVATIONS LIMITED		
当前申请(专利权)人(译)	手术INNOVATIONS LIMITED		
[标]发明人	MORAN PETER MORAN STUART WHITE MICHAEL		
发明人	MORAN, PETER MORAN, STUART WHITE, MICHAEL		
IPC分类号	A61B17/28 A61B1/00		
CPC分类号	A61B17/2909 A61B2017/2946		
优先权	1999019722 1999-08-20 GB		
其他公开文献	EP1204380A1		
外部链接	Espacenet		

摘要(译)

一种腹腔镜钳，包括手柄；管状壳体，从手柄轴向延伸并带有致动杆；钳口机构设置在管状壳体的远离手柄的端部处，该手柄接合到致动杆并且布置成使得钳口可以通过手柄的致动而打开或关闭；其中手柄包括左和右弓形件，它们以类似剪刀的方式可枢转地连接到安装芯上，并适于在使用中接合使用者的手指和拇指；所述钳子包括可切换的棘轮机构，所述可切换的棘轮机构可在锁定位置和解锁位置之间移动，适于在锁定时允许闭合并防止钳口打开，并且在解锁时允许自由打开和闭合钳口。

