

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 241 975 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

09.03.2005 Bulletin 2005/10

(21) Application number: **00987581.6**

(22) Date of filing: **28.12.2000**

(51) Int Cl.⁷: **A61B 1/07**

(86) International application number:
PCT/GB2000/005008

(87) International publication number:
WO 2001/049164 (12.07.2001 Gazette 2001/28)

(54) **LIGHT SOURCE FOR BORESCOPES AND ENDOSCOPES**

LICHTQUELLE FÜR BOROSKOPE UND ENDOSKOPE

SOURCE LUMINEUSE POUR ENDOSCOPES

(84) Designated Contracting States:
DE FR GB

(30) Priority: **29.12.1999 GB 9930784**

(43) Date of publication of application:
25.09.2002 Bulletin 2002/39

(73) Proprietor: **KEYMED
(MEDICAL & INDUSTRIAL EQUIPMENT) LIMITED
Southend-on-Sea Essex SS2 5QH (GB)**

(72) Inventors:
• **ROSS, Ian Michael
Leigh-on-Sea, Essex SS9 3QF (GB)**

• **PARIS, Nicki John
Westcliff-on-Sea, Essex SS0 8AA (GB)**
• **ROBINSON, Christopher Paul
Basildon, Essex SS16 4BE (GB)**

(74) Representative: **Merrifield, Sarah Elizabeth et al
Boulton Wade Tennant
Verulam Gardens
70 Gray's Inn Road
London WC1X 8BT (GB)**

(56) References cited:
**WO-A-95/15060 WO-A-99/66830
GB-A- 2 276 032 US-A- 5 241 170
US-A- 5 660 461 US-A- 5 733 246**

EP 1 241 975 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates generally to borescopes and endoscopes, which are well-known optical devices for viewing objects at remote or inaccessible locations. Borescopes and endoscopes usually incorporate means to illuminate the field of view. This typically consists of a bundle of optical fibres for transmitting light from a light source, located externally of the device, through the device and out of an illumination port. The present invention relates to an improved means of providing illumination of the field of view.

[0002] WO95/15060 discloses an illumination system for an endoscope comprising an annular array of individual LEDs each in a reflector cup. The array may be mounted at the proximal end of the endoscope with optical fibres extending along a sheath to the distal end of the endoscope.

[0003] The present invention provides apparatus for use as a borescope or endoscope for viewing an object at a remote or inaccessible location, comprising a tube having a proximal end and a distal end, means in the tube for obtaining an image of an object and transmitting it to a viewing device, and illumination means comprising a plurality of optical fibres for transmitting light through the tube from the proximal end to the distal end, the fibres arranged in annular form and presenting an annular end face at the proximal end of the tube, wherein the illumination means further comprises an annular array of light emitting diodes (LEDs) mounted on a substrate and encased in a common protective shield of optically clear material and positioned at the proximal end of the tube facing the annular end face of the fibres, and an annular light pipe is positioned between the annular array and the annular end face for transmitting light from the array to the optical fibres.

[0004] In this way, an external light source and a conventional light guide for transmitting its light to a bundle of optical fibres in the tube is unnecessary. This greatly reduces the light losses, ensuring that more of the light from the light source is available to illuminate the field of view.

[0005] The protective shield may be shaped so as to form a lens to focus light produced by the LEDs.

[0006] Alternatively, a separate lens may be positioned in front of the array in order to focus light produced by the light emitting diodes.

[0007] The distal end of the light pipe may be shaped to form a lens to focus light onto the end face of the fibres.

[0008] Alternatively, a separate lens may be positioned between the light pipe and the end face of the optical fibres.

[0009] Cooling means may be provided to dissipate any heat produced by the array of LEDs.

[0010] The LEDs may emit white light. Alternatively, they may emit blue light, in which case the protective shield preferably incorporates white or yellow phosphor,

whereby the array as a whole provides white light.

[0011] Alternatively, the array may comprise a plurality of differently coloured LEDs operable in continuation to produce white light.

[0012] In particular, the array may comprise a mixture of LEDs operable to produce red, green or blue light and means to operate the LEDs so as to provide light which sequentially alternates between red, green and blue.

[0013] In further alternative embodiments, the LEDs may produce infra red light or ultraviolet light.

[0014] Preferably, the array includes at least fifty LEDs, and more preferably at least eighty LEDs.

[0015] If the array is provided at the proximal end of the tube, it may be incorporated in an assembly which is detachable from the tube.

[0016] The invention will now be described in detail, by way of example only, with reference to the accompanying drawings in which Figures 7-9 show embodiments of the invention and Figures 1-6, 10 and 11 are included for explanatory purposes.

Figure 1 illustrates in cross section part of an array of LEDs;

Figure 2 illustrates a side and end view of a first array at the distal end of a borescope or endoscope;

Figure 3 illustrates a perspective view of a second array at the distal end;

Figure 4 illustrates a side and end view of a third array at the distal end;

Figure 5 illustrates a side and end view of a fourth array at the distal end;

Figure 6 illustrates a perspective view of a fifth array at the proximal end of the borescope or endoscope;

Figure 7 illustrates a cross sectional view of a first embodiment of the invention, with the array at the proximal end;

Figure 8 illustrates a cross sectional view of a second embodiment of the invention, with the array at the proximal end;

Figure 9 illustrates a cross sectional view of a third embodiment of the invention, with the array at the proximal end;

Figure 10 illustrates a cross sectional view of a fourth embodiment of the invention, with the array at the proximal end;

Figure 11 illustrates a cross sectional view of an alternative array at the proximal end.

[0017] A typical borescope or endoscope comprises a tube, which may be rigid or flexible, having a distal end which is inserted in use into, for example, a machine or a human body. A viewing port is provided in the distal end of the tube through which an object may be viewed. An optical train may be provided in the tube for transferring an image of the object from the distal end to the proximal end. An ocular assembly at the proximal end focuses the image onto the eye of an observer or onto a camera attachment for display on a screen. Alternatively, an image to video conversion device, such as a CCD chip may be provided in the distal end of the tube, with appropriate wiring passing from the chip along the tube.

[0018] To enable viewing of the object, it is usually necessary to provide some form of illumination. Typically, this consists of a bundle of optical fibres running through the tube to an illumination port adjacent the viewing port.

[0019] In conventional horoscopes or endoscopes, the bundle of optical fibres runs down one side of the insertion tube, with an optical train extending down the other side of the tube, both being eccentric to the longitudinal axis of the tube. An external light source is connected to the bundle of optical fibres by means of a light guide. In conventional orbital scan scopes in which the insertion tube is rotatable about its longitudinal axis, this arrangement can lead to misalignment of the light guide with the optical bundle during rotation.

[0020] The external light source is typically a conventional high wattage bulb producing very bright light and a light guide for transmitting this light into the scope and to the optical fibres. Because the bulb is linked to the optical fibres by a conventional light guide there can be light losses of up to 70%, dramatically reducing the illumination available at the distal end of the scope.

[0021] The present invention employs an alternative light source within the borescope or endoscope, to avoid the need for an external light source and light guide. In particular, the present invention employs a dense array of light emitting diodes (LEDs) as the light source.

[0022] Conventionally, an LED is thought of as a tiny silicon chip with metal connections which is encapsulated in a clear epoxy substance to provide a lens. In the present invention, in order to increase the density of LEDs which can be mounted on a substrate, a stripped down version of an LED is used, as illustrated in Figure 1. This is essentially the LED chip 10 without the epoxy encapsulation. These LED chips 10 are mounted on a ceramic substrate 12 by means of a thermally and electrically conductive glue 14 which serves as one of the connections for the LED chip 10. A gold bond wire 16 is attached to the top of each LED chip 10 and connected with gold circuit tracks (not shown) on the substrate 12 to provide the other connection for the LED chip 10.

[0023] A protective layer 18 of optically clear glue such as epoxy is then provided to cover all of the LED chips 10 mounted on the same substrate.

[0024] In Figure 2, here, an array 20 of LED chips 10 is provided at the distal end of the insertion tube 22 of a borescope or endoscope 24, adjacent to the viewing port 26. In this example, the scope 24 is a lateral viewing scope in which the field of view is to the side and thus the LED array 20 is also arranged to direct light to the side. It will be apparent that, although the array 20 is shown positioned distally of the viewing port 26 it could also be positioned proximally.

[0025] To dissipate any heat generated by the array 20, a heat sink and cooling means, such as fins (not shown) may be provided on the substrate 12 of the array 20 and/or a portion 28 of the insertion tube 22 on which the substrate 12 itself is mounted.

[0026] In a second arrangement shown in Figure 3 a forward viewing scope 24 is provided with a viewing port 26 providing a field of view in the direction of the longitudinal axis of the insertion tube 22. In this case, the LED array 20 may conveniently be in annular form, surrounding the viewing port 26.

[0027] It may be desirable to focus the light produced by the array 20. Focussing can be achieved in a number of ways. As shown in Figure 4, the protective layer of optically clear glue 18 which covers the LED chips 10 may be shaped to act as a lens 30.

[0028] Alternatively, as shown in Figure 5, a separate lens 32 may be provided in front of the array 20. Although not illustrated, either of these focussing methods can be incorporated in the forward viewing arrangement as shown in Figure 3.

[0029] In some cases, it may be preferred not to place the array 20 at the distal end of the scope 24 but at the proximal end. One example of such an arrangement is illustrated in Figure 6 which shows the proximal end of scope 24. In this arrangement, an optical train 34, e.g. a series of lenses, transmits an image from the distal end (not shown) of the scope 24 to the proximal end and onto, in this case, a camera attachment 36 (or an eyepiece assembly for direct viewing).

[0030] To illuminate the field of view, a bundle of optical fibres 40 is provided in annular form extending along the scope 24 surrounding and concentric with the optical train 34. Thus, the fibres present an annular end face 38 at the proximal end of the scope 24. To provide illumination, an annular LED array is provided adjacent to the end face 38. As shown, the substrate 12 of the array 20 is also annular to allow the camera attachment 36 or eyepiece components etc to be positioned aligned with the optical train 34.

[0031] In the present invention, an annular light pipe 42 is provided between the array 20 and the end face 38 as shown in Figure 7 to collect light produced by the array 20 and transmit it to the fibres 40. Figure 7 (and Figures 8-11) shows one side of the proximal end of the scope, the other side corresponding so as to be symmetrical about the longitudinal axis X-X of the tube 22. A light pipe 42 usually consists of a hollow tube of optical grade material such as plastic or glass which transmits

light with very few losses due to total internal reflection.

[0032] The distal end of the light pipe 42 may be shaped to form a lens 44 as seen in Figure 8, in order to focus the light onto the end face 38 of the fibres. Alternatively, a separate focussing ring lens 32 may be provided between the light pipe 42 and the end face 38 as seen in Figure 9.

[0033] As another alternative, the light pipe 42 may be dispensed with altogether and a separate ring lens 32 alone may be provided between the array 20 and the end face 38 as shown in Figure 10.

[0034] Another possibility is for the protective layer 18 of the array 20 to be shaped so as to form a focussing lens 30, as shown in Figure 11.

[0035] In the arrangements of Figures 6-11, the LED chips 10 are typically arranged in a single circle with the diameter of a circle running through the centres of the chips in the order of 15 mm. The array preferably includes at least 50 and more preferably between 80 and 90 LEDs. Each LED chip 10 is typically in the order of 0.3 mm sq.

[0036] The LED chips 10 used in the array 20 may be those which emit white light from the semi-conductor itself. Alternatively, LED chips 10 which produce blue light can be used, in which case white or yellow phosphor is incorporated in the protective shield 18 with the result that the white light is emitted from the array 20 overall.

[0037] It is also possible to use a mixture of red, green and blue LEDs on the same substrate 12 which act in combination to provide white light from the array 20 as a whole. Using red, green and blue LEDs also provides the possibility of strobing the light. In some conventional endoscope systems it is known to use a white light source with a rotating filter wheel carrying red, green and blue filters positioned between the light source and the optical fibres. The result is that light transmitted from the end of the scope over the field of view alternates between red, green and blue. A monochrome camera is then used to gather an image of the field of view and a special processor converts the picture provided by the camera into colour. This known arrangement provides very high resolution pictures with good colour, but requires sufficient space to accommodate the filter wheel and motor as well as complicated synchronisation circuitry. It is therefore relatively expensive.

[0038] In the present invention, the filter wheel, drive motor and synchronisation circuitry can be avoided by using red, green and blue LEDs which are strobed, i.e. operated sequentially, typically about 50 Hz, by a specialised power supply system. As before, this provides alternating red, green and blue light at the distal end of the scope and a monochrome camera and suitable processor can be used to provide full colour images. This arrangement is cheaper and more compact than the prior art and usually produce better colours and resolution than a system using white light and a colour imager.

[0039] Other types LED could also be employed. For

example, LED chips 10 producing infra red light could be used to form a type of thermal image with appropriate specialised image equipment.

Alternatively, LED chips 10 producing ultraviolet light could be employed to allow the use of the borescope or endoscope in dye penetrant and magnetic particle testing.

[0040] In those embodiments in which the array 20 is provided at the proximal end of the scope, the array and focussing lens or light pipe etc may be included as an integral part of the scope 24. Alternatively, they may be provided as components in a separate module which is detachable from the scope 24 as required.

[0041] As those skilled in the art will appreciate, the present invention provides an improved arrangement for providing illumination via a borescope or endoscope, which reduces light losses, is very compact and does not interfere with positioning of the other components in the scope. It will be apparent that a number of variations and modifications may be made to the particular embodiments described, without departing from the scope of the present invention.

Claims

1. Apparatus for use as a borescope or endoscope (24) for viewing an object at a remote or inaccessible location, comprising a tube (22) having a proximal end and a distal end, means in the tube (22) for obtaining an image of an object and transmitting it to a viewing device, and illumination means comprising a plurality of optical fibres (40) for transmitting light through the tube (22) from the proximal end to the distal end, the fibres (40) arranged in an annular form and presenting an annular end face (38) at the proximal end of the tube (22), wherein the illumination means further comprises an annular array (20) of light emitting diodes (LEDs)(10) mounted on a substrate (12) and encased in a common protective shield (18) of optically clear material and positioned at the proximal end of the tube (22) facing the annular end (38) face of the fibres, and an annular light pipe (42) is positioned between the annular array (20) and the annular end face (38) for transmitting light from the array (20) to the optical fibres (40).
2. Apparatus as claimed in any of claim 1, wherein the protective shield (18) is shaped to form a lens (30) to focus light produced by the LEDs (10).
3. Apparatus as claimed in claim 1 or claim 2, wherein a lens (32) is positioned in front of the array (20) to focus light produced by the LEDs(10).
4. Apparatus as claimed in claim 1, wherein the proximal end of the light pipe (42) is shaped so as to

form a lens (44) to focus light onto the end face (38) of the fibres (40).

5. Apparatus as claimed in claim 1, wherein a separate lens (32) positioned between the light pipe (42) and the end face (38) of the fibres (40) to focus light onto the end face (38). 5
6. Apparatus as claimed in any preceding claim, further comprising cooling means to dissipate heat produced by the array (20). 10
7. Apparatus as claimed in any preceding claim, wherein the LEDs (10) emit white light. 15
8. Apparatus as claimed in any of claims 1-6, wherein the LEDs (10) emit blue light and the protective shield (18) incorporates white or yellow phosphor whereby the array (20) produces white light. 20
9. Apparatus as claimed in any of claims 1-6, wherein the array (30) comprises LEDs (10) emitting different colours, operable in combination to produce white light. 25
10. Apparatus as claimed in claim 9, wherein the array (20) includes LEDs (10) operable to produce red, green and blue light and means to operate the LEDs (10) sequentially so as to provide light which sequentially alternates between red, green and blue. 30
11. Apparatus as claimed in any of claims 1-6 wherein the LEDs (10) produce infra-red light.
12. Apparatus as claimed in any of claims 1-6 wherein which the LEDs (10) produce ultra-violet light. 35
13. Apparatus as claimed in any preceding claim, wherein the array (20) includes at least 50 LEDs (10). 40
14. Apparatus as claimed in any preceding claim, wherein the array (20) includes at least 80 LEDs (10).
15. Apparatus as claimed in claim 1, wherein the array (20) is incorporated in an assembly detachable from the tube (22). 45

Patentansprüche

1. Vorrichtung zur Verwendung als Boreskop oder Endoskop (24) zum Betrachten eines Objekts an einer entfernten oder unzugänglichen Stelle, umfassend ein Rohr (22) mit einem proximalen Ende und einem distalen Ende. Mittel in dem Rohr (22), um ein Bild eines Objekts zu erhalten und es zu einer Sichtvor-

richtung zu übertragen, und Beleuchtungsmittel, welche eine Vielzahl optischer Fasern (40) zum Übertragen von Licht durch das Rohr (22) vom proximalen Ende zum distalen Ende umfassen, wobei die Fasern (40) ringförmig angeordnet sind und am proximalen Ende des Rohrs (22) eine ringförmige Endfläche (38) präsentieren, wobei das Beleuchtungsmittel ferner eine ringförmige Anordnung (20) von Licht emittierenden Dioden (LEDs) (10) umfasst, welche an einem Träger (12) angebracht sind, von einem üblichen Schutzschild (18) aus optisch klarem Material umgeben sind und am proximalen Ende des Rohrs (22) gegenüber der ringförmigen Endfläche (38) der Fasern positioniert sind, und wobei ein ringförmiger Lichtleiter (42) zwischen der ringförmigen Anordnung (20) und der ringförmigen Endfläche (38) zum Übertragen von Licht von der Anordnung (20) zu den optischen Fasern (40) positioniert ist.

2. Vorrichtung nach Anspruch 1, wobei der Schutzschild (18) zum Bilden einer Linse (30) gestattet ist, um von den LEDs (10) erzeugtes Licht zu fokussieren.
3. Vorrichtung nach Anspruch 1 oder Anspruch 2, wobei eine Linse (32) vor der Anordnung (20) positioniert ist, um von den LEDs (10) erzeugtes Licht zu fokussieren.
4. Vorrichtung nach Anspruch 1, wobei das proximale Ende des Lichtleiters (42) zum Bilden einer Linse (44) gestaltet ist, um Licht auf die Endfläche (38) der Fasern (40) zu fokussieren.
5. Vorrichtung nach Anspruch 1, wobei eine separate Linse (32) zwischen dem Lichtleiter (42) und der Endfläche (38) der Fasern (40) positioniert ist, um Licht auf die Endfläche (38) zu fokussieren.
6. Vorrichtung nach einem der vorangehenden Ansprüche, welche ferner Kühlmittel umfasst, um von der Anordnung (20) erzeugte Wärme abzuführen.
7. Vorrichtung nach einem der vorangehenden Ansprüche, wobei die LEDs (10) weißes Licht emittieren.
8. Vorrichtung nach einem der Ansprüche 1-6, wobei die LEDs (10) blaues Licht emittieren und der Schutzschild (18) weißen oder gelben Phosphor umfasst, wodurch die Anordnung (20) weißes Licht erzeugt.
9. Vorrichtung nach einem der Ansprüche 1-6, wobei die Anordnung (30) LEDs (10) umfasst, welche verschiedene Farben emittieren und in Kombination zum Erzeugen weißen Lichts betreibbar sind.

10. Vorrichtung nach Anspruch 9, wobei die Anordnung (20) LEDs (10) umfasst, welche betreibbar sind, um rotes, grünes und blaues Licht zu erzeugen, und Mittel zum sequenziellen Betreiben der LEDs (10) zum Vorsehen von Licht, welches sequenziell zwischen rot, grün und blau alterniert. 5
11. Vorrichtung nach einem der Ansprüche 1-6, wobei die LEDs (10) infrarotes Licht erzeugen. 10
12. Vorrichtung nach einem der Ansprüche 1-6, wobei die LEDs (10) ultraviolettes Licht erzeugen.
13. Vorrichtung nach einem der vorangehenden Ansprüche, wobei die Anordnung (20) wenigstens 50 LEDs (10) umfasst. 15
14. Vorrichtung nach einem der vorangehenden Ansprüche, wobei die Anordnung (20) wenigstens 80 LEDs (10) umfasst. 20
15. Vorrichtung nach Anspruch 1, wobei die Anordnung (20) in einem Bauteil integriert ist, welches von dem Rohr (22) lösbar ist. 25

Revendications

1. Appareil destiné à être utilisé en tant qu'endoscope (24) pour visualiser un objet situé à un emplacement éloigné ou inaccessible, comprenant un tube (22) ayant une extrémité proximale et une extrémité distale, des moyens dans le tube (22) pour obtenir une image d'un objet et la transmettre à un dispositif de visualisation, et des moyens d'éclairage comprenant une pluralité de fibres optiques (40) pour transmettre de la lumière à travers le tube (22) depuis l'extrémité proximale jusqu'à l'extrémité distale, les fibres (40) étant agencées selon une forme annulaire et présentant une face d'extrémité annulaire (38) au niveau de l'extrémité proximale du tube (22), dans lequel les moyens d'éclairage comprennent en outre un ensemble annulaire (20) de diodes électroluminescentes (DEL) (10) montées sur un substrat (12) et encastrées dans un blindage protecteur commun (16) en matériau optiquement transparent et positionné au niveau de l'extrémité proximale du tube (22) tournée vers la face d'extrémité annulaire (38) des fibres, et un conduit de lumière annulaire (42) est positionné entre l'ensemble annulaire (20) et la face d'extrémité annulaire (38) pour transmettre la lumière depuis l'ensemble (20) jusqu'aux fibres optiques (40). 30 35 40 45 50
2. Appareil selon la revendication 1, dans lequel le blindage protecteur (18) est façonné pour former une lentille (30) afin de focaliser la lumière produite par les DEL (10). 55

3. Appareil selon la revendication 1 ou la revendication 2, dans lequel une lentille (32) est positionnée devant l'ensemble (20) pour focaliser la lumière produite par les DEL (10).
4. Appareil selon la revendication 1, dans lequel l'extrémité proximale du conduit de lumière (42) est façonnée de manière à former une lentille (44) pour focaliser la lumière sur la face d'extrémité (38) des fibres (40).
5. Appareil selon la revendication 1, dans lequel une lentille distincte (32) est positionnée entre le conduit de lumière (42) et la face d'extrémité (38) des fibres (40) pour focaliser la lumière sur la face d'extrémité (38).
6. Appareil selon l'une quelconque des revendications précédentes, comprenant en outre des moyens refroidisseurs pour dissiper la chaleur produite par l'ensemble (20).
7. Appareil selon l'une quelconque des revendications précédentes, dans lequel les DEL (10) émettent une lumière blanche.
8. Appareil selon l'une quelconque des revendications 1 à 6, dans lequel les DEL (10) émettent une lumière bleue et le blindage protecteur (18) incorpore du phosphore blanc ou jaune, l'ensemble (20) produisant une lumière blanche.
9. Appareil selon l'une quelconque des revendications 1 à 6, dans lequel l'ensemble (30) comprend des DEL (10) émettant différentes couleurs, qui peuvent fonctionner de manière combinée pour produire une lumière blanche.
10. Appareil selon la revendication 9, dans lequel l'ensemble (20) inclut des DEL (10) pouvant fonctionner pour produire une lumière rouge, verte et bleue et des moyens pour faire fonctionner les DEL (10) de manière séquentielle afin de donner une lumière qui alterne de manière séquentielle entre le rouge, le vert et le bleu.
11. Appareil selon l'une quelconque des revendications 1 à 6, dans lequel les DEL (10) produisent une lumière infrarouge.
12. Appareil selon l'une quelconque des revendications 1 à 6, dans lequel les DEL (10) produisent une lumière ultraviolette.
13. Appareil selon l'une quelconque des revendications précédentes, dans lequel l'ensemble (20) inclut au moins 50 DEL (10).

14. Appareil selon l'une quelconque des revendications précédentes, dans lequel l'ensemble (20) inclut au moins 80 DEL (10).

15. Appareil selon la revendication 1, dans lequel l'ensemble (20) est incorporé dans un équipement détachable du tube (22).

10

15

20

25

30

35

40

45

50

55

FIG. 1.

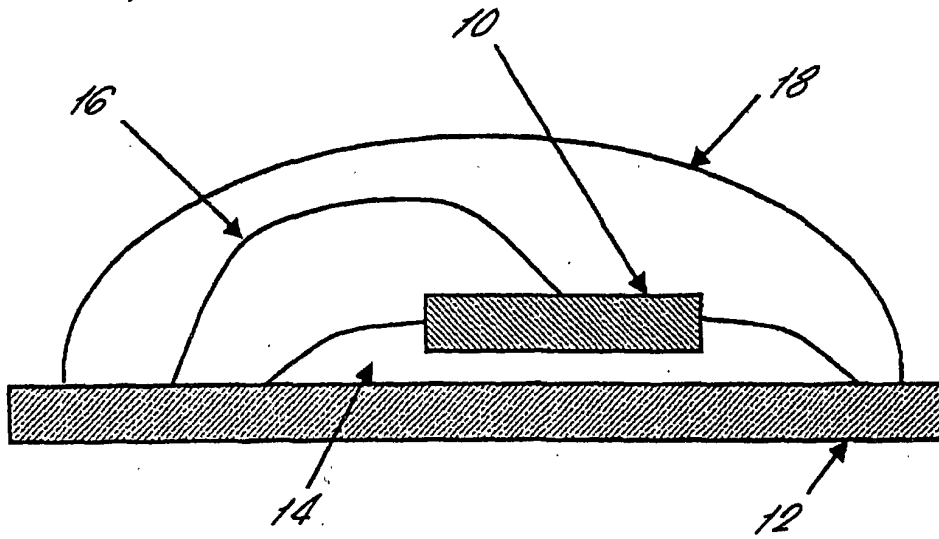


FIG. 2.

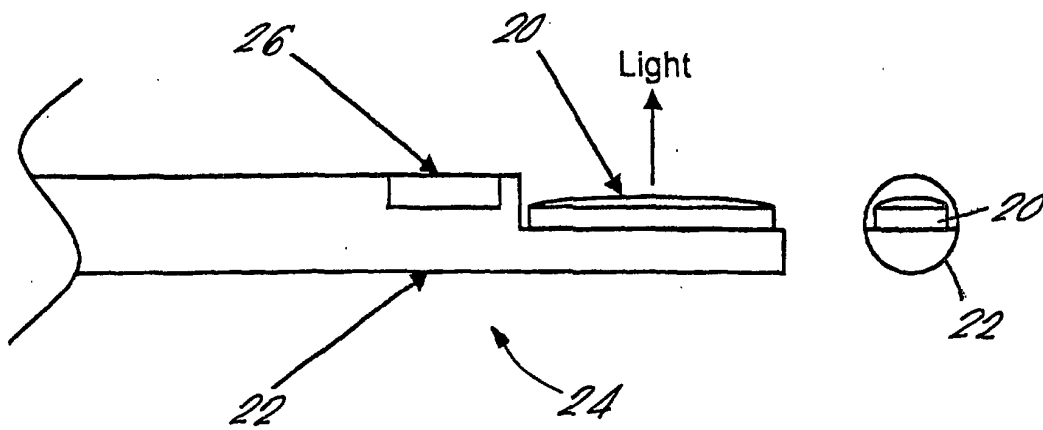


FIG. 3.

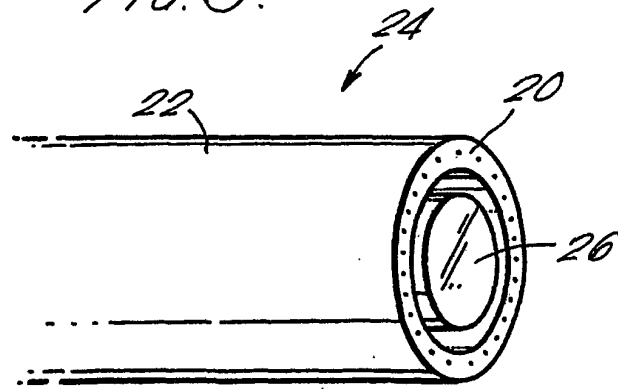


FIG. 4.

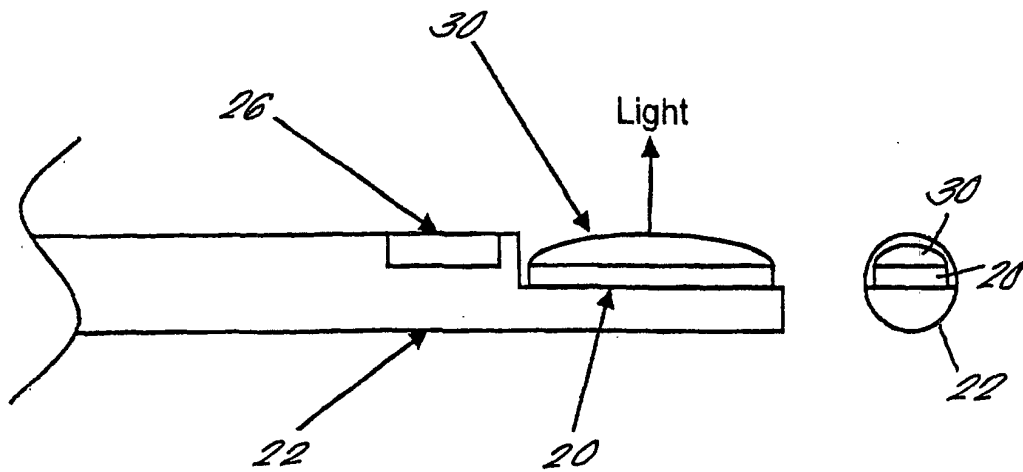


FIG. 5.

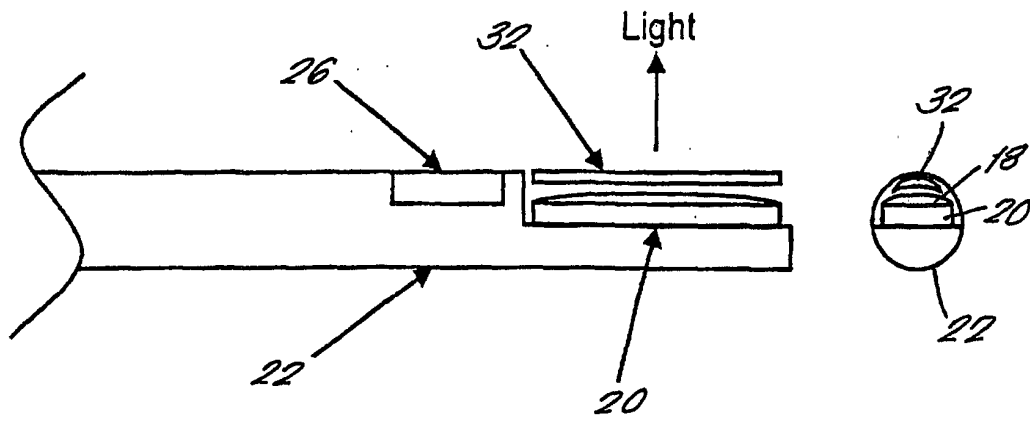


FIG. 6.

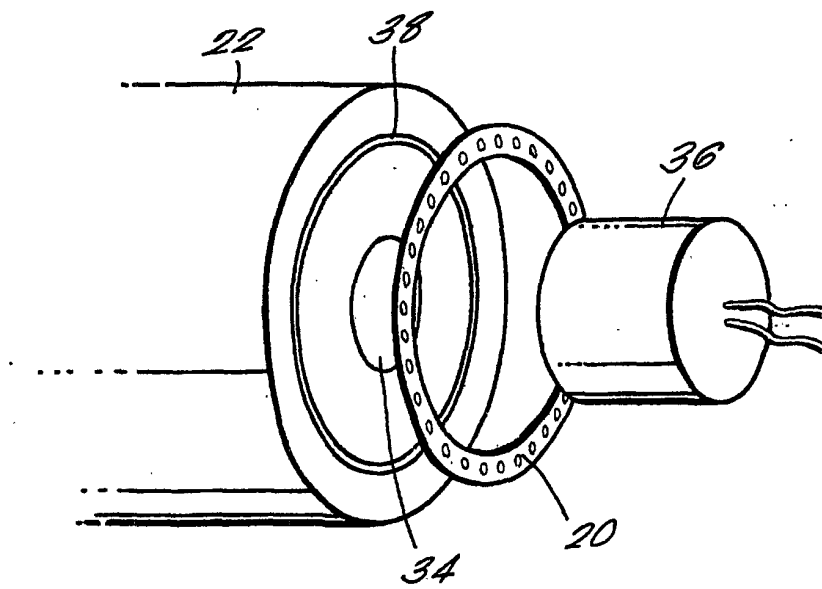


FIG. 7.

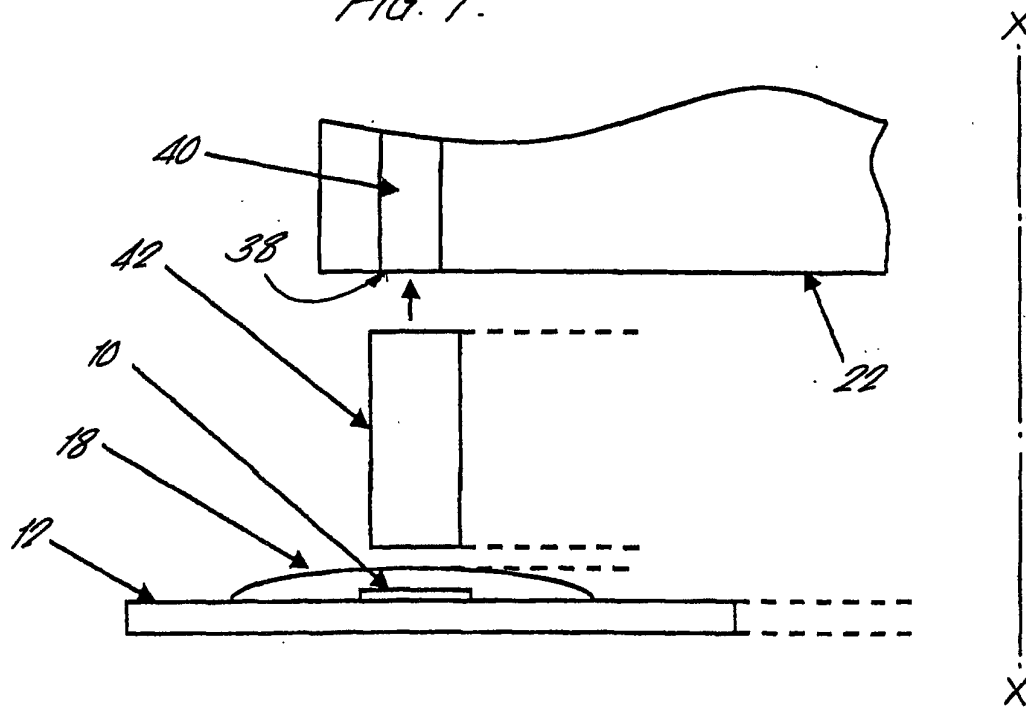


FIG. 8.

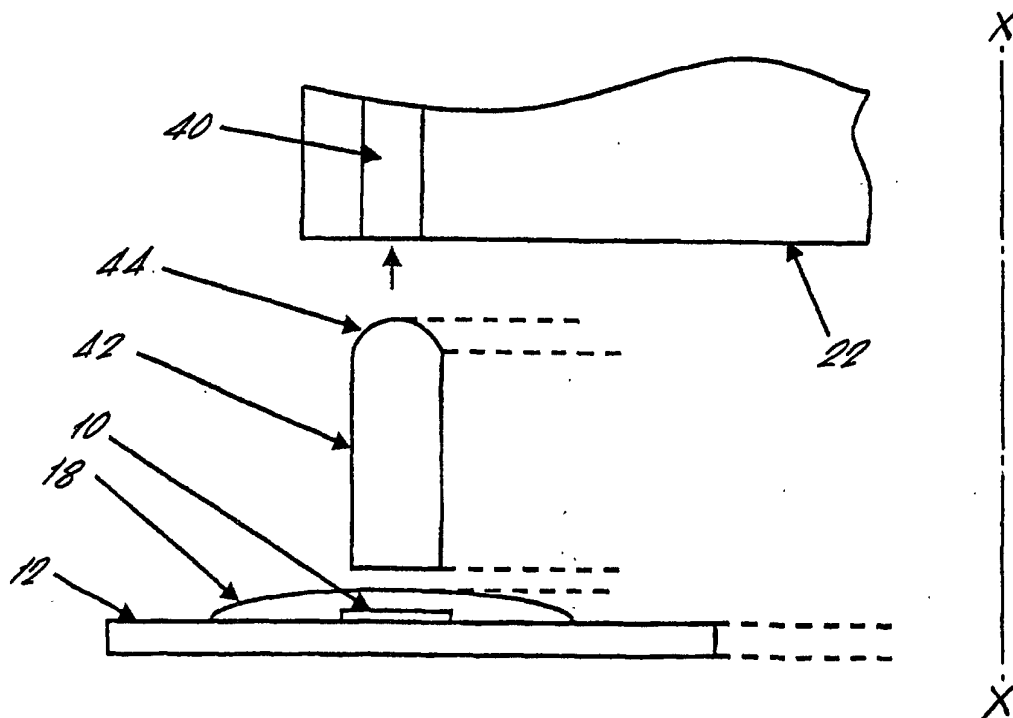


FIG. 9.

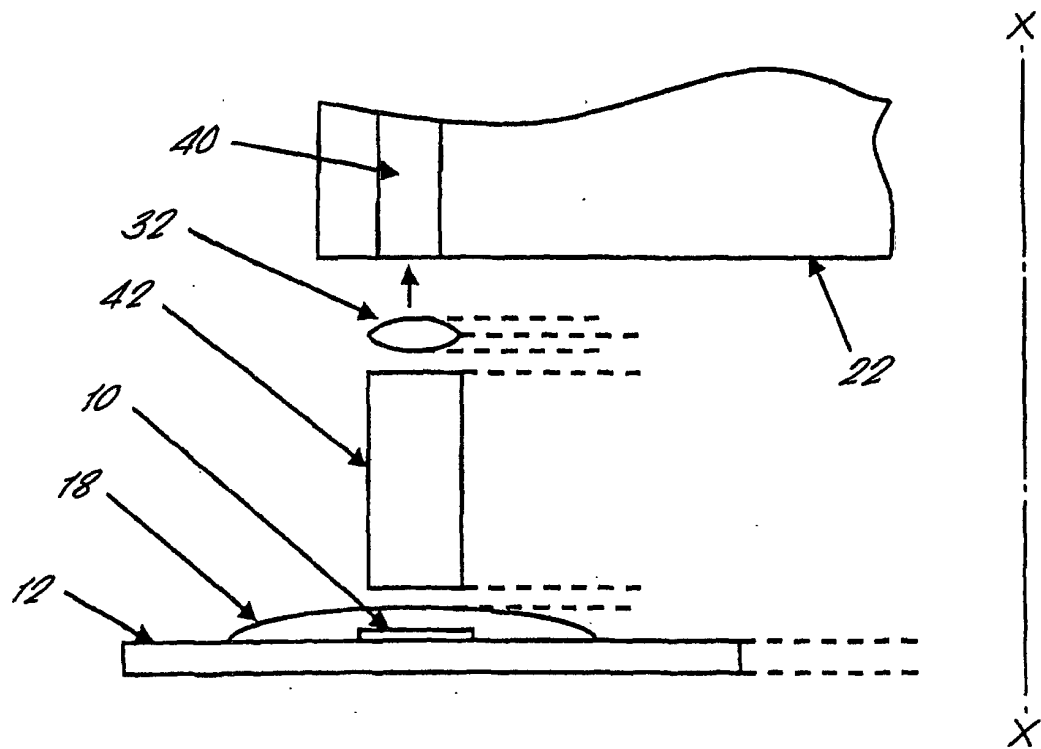


FIG. 10.


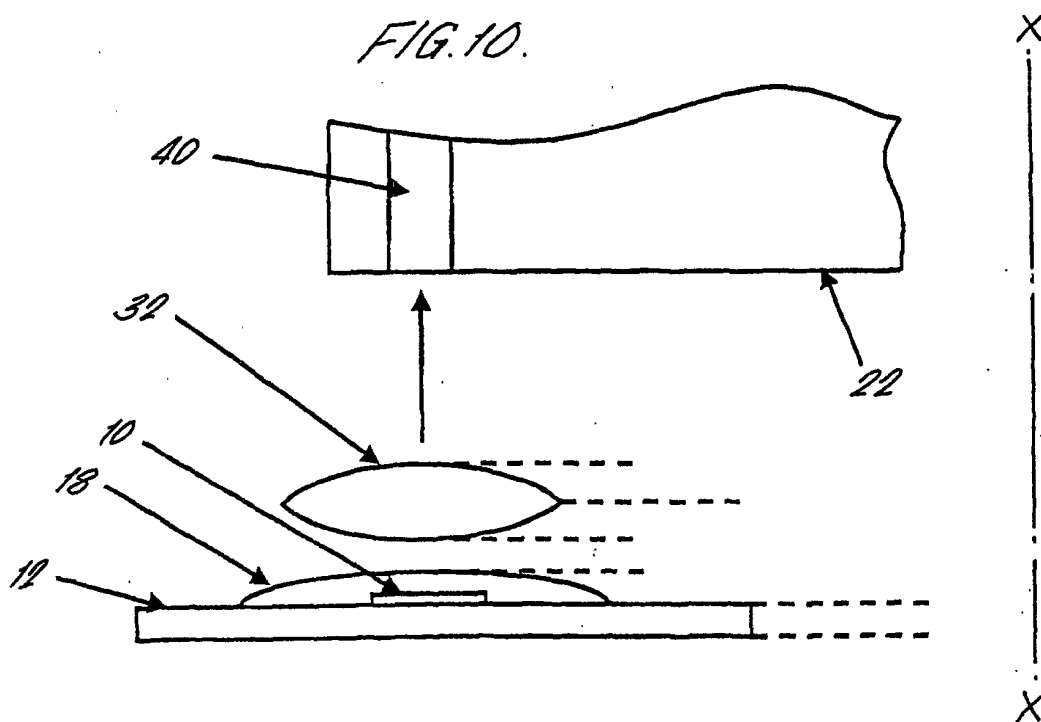


FIG. 14.

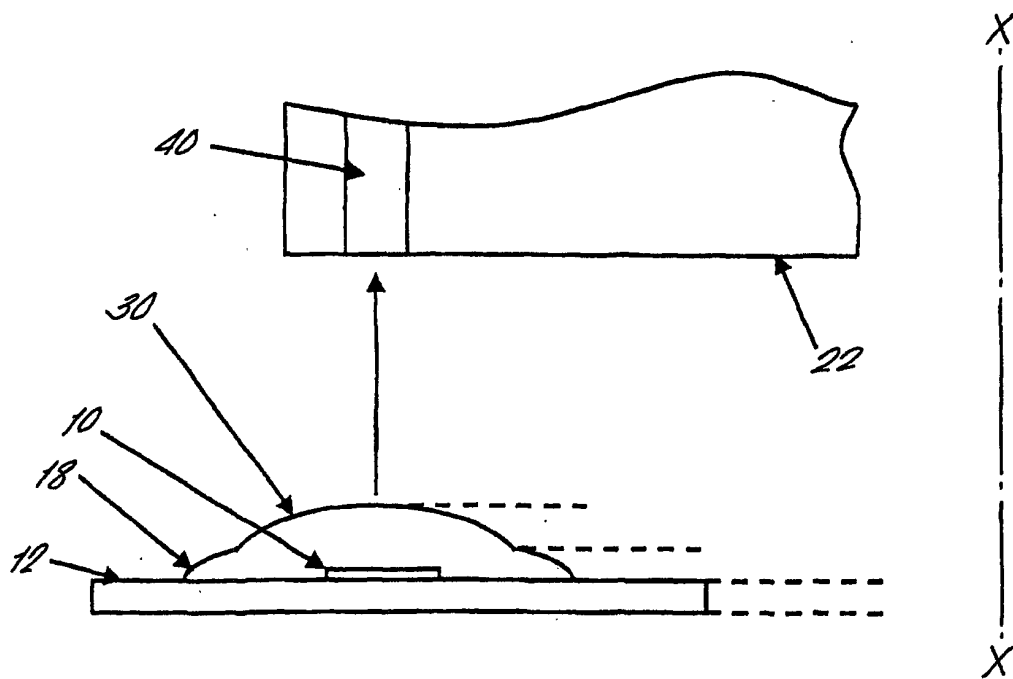

专利名称(译)	管道镜和内窥镜的光源		
公开(公告)号	EP1241975B1	公开(公告)日	2005-03-09
申请号	EP2000987581	申请日	2000-12-28
[标]申请(专利权)人(译)	卡麦德(医疗器械)有限公司		
申请(专利权)人(译)	KEYMED (医疗及工业设备) 有限公司		
当前申请(专利权)人(译)	KEYMED (医疗及工业设备) 有限公司		
[标]发明人	ROSS IAN MICHAEL PARIS NICKI JOHN ROBINSON CHRISTOPHER PAUL		
发明人	ROSS, IAN MICHAEL PARIS, NICKI JOHN ROBINSON, CHRISTOPHER PAUL		
IPC分类号	G02B23/26 A61B1/06 G02B23/24 A61B1/07		
CPC分类号	A61B1/0607 A61B1/0676 A61B1/0684 G02B23/2461 H01L24/45 H01L2224/45144 H01L2224/48091 H01L2924/01014 H01L2924/01058 H01L2924/01079 H01L2924/10253 H01L2924/12041 H01L2924/15787 H01L2924/3025		
优先权	1999030784 1999-12-29 GB		
其他公开文献	EP1241975A1		
外部链接	Espacenet		

摘要(译)

本发明提供了一种用作管道镜或内窥镜的装置 (24) , 用于在远程或难以接近的位置观察物体。该装置 (24) 包括具有近端和远端的管 (22) 以及在管中用于获得物体的图像并将其传输到观察装置的装置。该装置 (24) 还包括照明装置, 该照明装置包括安装在基板 (12) 上并由光学透明材料的共同保护罩 (18) 覆盖的发光二极管 (10) 阵列 (20) 。阵列 (20) 可以安装在邻近观察口 (26) 的管 (22) 的远端。或者, 阵列 (20) 可以安装在管的近端, 邻近光纤束的端面 (38) , 光纤束将光传输到管 (22) 的远端。该布置消除了对外部光源和光导的需要, 从而减少了光损失并使设备更紧凑。

