

(19)



(11)

EP 1 494 573 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
23.02.2011 Bulletin 2011/08

(21) Application number: **03726349.8**

(22) Date of filing: **17.04.2003**

(51) Int Cl.:
A61B 17/00 (2006.01)

(86) International application number:
PCT/US2003/012094

(87) International publication number:
WO 2003/088815 (30.10.2003 Gazette 2003/44)

(54) **TACKING TOOL**

HEFTINSTRUMENT

INSTRUMENT DE FIXATION

(84) Designated Contracting States:
DE ES FR GB IE IT

(30) Priority: **17.04.2002 US 373710 P**

(43) Date of publication of application:
12.01.2005 Bulletin 2005/02

(73) Proprietor: **Tyco Healthcare Group LP**
New Haven, CT 06511 (US)

(72) Inventor: **KAYAN, Helmut**
Redwood City, CA 94062 (US)

(74) Representative: **HOFFMANN EITLE**
Patent- und Rechtsanwälte
Arabellastraße 4
81925 München (DE)

(56) References cited:
WO-A-00/67643 WO-A-01/41625
US-A- 4 453 661 US-A- 5 417 700
US-A- 5 499 990 US-A- 5 989 268
US-A- 5 989 268

EP 1 494 573 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND

1. Technical Field

[0001] The present disclosure relates generally to surgical apparatus for fastening objects to body tissue and, more particularly, to a surgical tacking tool configured to apply a loop fastener to a surgical mesh and underlying tissue during surgical procedures to repair body tissue, such as hernia repair.

2. Background of Related Art

[0002] A number of surgical procedures require instruments that are capable of applying a surgical fastener to tissue in order to form tissue connections or to secure objects to tissue. For example, during hernia repair it is often desirable to fasten a surgical mesh to the underlying body tissue. In certain hernias, such as direct or indirect inguinal hernias, a part of the intestine protrudes through a defect or an opening in the supporting abdominal wall to form a hernial sac. The opening can be repaired using an open surgery procedure in which a relatively large incision is made in the patient and the hernia is closed off outside the abdominal wall by suturing. Alternatively, a mesh is attached with sutures over the opening to provide reinforcement.

[0003] Less invasive surgical procedures are currently available for hernia repair. In laparoscopic procedures, surgery is performed in the abdomen through a small incision, while in endoscopic procedures surgery is performed through narrow endoscopic tubes inserted through small incisions in the body. Laparoscopic and endoscopic procedures generally require long and narrow instruments capable of reaching deep within the body and configured to form a seal with the incision or tube through which they are inserted.

[0004] Currently, endoscopic techniques for hernia repair utilize fasteners, such as surgical staples or clips, to secure the mesh to the tissue in order to provide reinforcement to the repair and in order to provide structure for encouragement of tissue ingrowth. These staples or clips need to be compressed against the tissue and mesh in order to secure the two together thereby requiring a tool which is positioned on each side of the mesh and tissue in order to deform the staple or clip. Another type of fastener suited for use in affixing mesh to tissue, during procedures such as hernia repair, is a coil fastener having a helically coiled body portion terminating in a tissue penetrating tip, which helical fastener is screwed into the mesh and body tissue. An example of this type of fastener is disclosed in U. S. Patent No. 5,258, 000. Thus, the need exists for an improved surgical fastening apparatus that applies a fastener to surgical mesh and body tissue for effectively securing the mesh to the body tissue.

[0005] US 5,989,268, WO 01/41625, WO 00 676 43

and US 4 453 661 disclose various the documents fastening surgical apparatuses. The pre-ambles of claim 1 is based on WO 01/41625.

[0006] It is an object of the present disclosure to provide a tacking tool for securing a tack to both surgical mesh and body tissue.

[0007] Another object of the present disclosure is to provide a tacking tool that can apply a tack linearly to both surgical mesh and body tissue.

SUMMARY

[0008] This invention is directed to a tacking apparatus for applying fasteners to body tissue as defined in claim 1 that includes a housing, an actuation mechanism, a supply of an elongated wire, an elongated tubular portion having a proximal end and a distal end, the proximal end being in communication with the housing, and the distal end having a nose having an interior portion adapted for shaping a length of the wire into an annular shape, a wire advancer for advancing the wire from the supply to and through the nose portion of the elongated tubular portion, the wire advancer being actuated by the actuation mechanism and cooperable with the wire shaping portion of the nose to shape the length of the wire into an annular shape, and a cutter for severing the annular shaped portion of the wire to form an annular fastener. The actuation mechanism can include a trigger operatively coupled to the housing. In one preferred embodiment, the interior portion of the nose can be concavely curved or may have a semi-circular configuration. The fastener can have a body that is substantially planar. The interior portion of the nose can be shaped to provide a fastener with an inwardly disposed end, and an outwardly disposed end that overlaps the inwardly disposed end. The cutter is operatively coupled to the actuation mechanism, it can be adapted to provide the inwardly disposed end of the fastener with a sharp tip, and it may be adapted to sever the length of wire at or near the distal end of the nose of the tubular portion, to thereby form the annular fastener. Further still, the supply of wire can be a spool having an endless length of the wire wound thereon for providing a multitude of fasteners. The wire can be formed from a shape memory material. The tubular portion can be adapted to fit through a body incision for a laparoscopic procedure. The nose can include a divider having a channel to pass the wire to the shaping portion in the nose.

[0009] There is also disclosed herein, but not recited in the claims, a tack for fastening surgical mesh to body tissue. The tack can include a biocompatible substantially planar annular wire body, the body having a first end and a second end, the first end being disposed inwardly of the second end and having a tip suitable for penetrating body tissue, and the second end being disposed outwardly of and overlapping the first end.

[0010] The first end of the tack may be sharpened. In another embodiment of the tack, the wire may be formed from either a shape memory material or a bioabsorbable

material.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] By way of example only, preferred embodiments of the disclosure will be described with reference to the accompanying drawings, in which:

FIG. 1 is a perspective view of a preferred embodiment of a surgical tacking tool according to the present disclosure;

FIG. 2 is an enlarged perspective view of the distal tip of the surgical tacking tool shown in FIG. 1;

FIG. 3 is a cross-sectional side elevational view with portions broken away as would be taken through a portion of the surgical tacking tool of FIG. 1;

FIG. 4 is a front elevational view of a wire ring formed by the surgical tacking tool shown in FIG. 1;

FIG. 5 is a side elevational view of the wire ring shown in FIG. 4; and

FIG. 6 is a perspective view of an alternative embodiment of a housing portion for a surgical tacking tool in accordance with the present disclosure.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0012] Referring now in detail to FIGS. 1-3, in which like reference numerals identify similar or identical elements, a surgical tacking apparatus or tool in accordance with the present disclosure is generally designated as 100. As used herein, the term "distal" refers to that portion of the tool, or component thereof which is further from the user while the term "proximal" refers to that portion of the tool or component thereof which is closer to the user.

[0013] Tacking tool 100 is configured to apply a ring fastener to tissue or to secure surgical mesh to tissue during surgical procedures such as hernia repair. Tacking tool 100 generally includes a housing including a handle portion 104 extending from the housing 102. Tacking tool 100 includes an actuation mechanism, e. g. a trigger 106 pivotally connected to housing 102, with a free end of trigger 106 being spaced from a free end of handle 104. Tacking tool 100 also includes an elongated tubular portion 108 extending distally from housing 102. Elongated tubular portion 108 is preferably dimensioned to fit through conventional laparoscopic incisions and respective 15 mm, 10 mm, and 5 mm trocar cannula structures. As seen in FIG. 2, a distal end 107 of the tubular portion 108 is provided with a hollow down turned semi-circular or arcuate nose 110 oriented along the longitudinal axis of tubular portion 108. Nose 110 preferably includes a divider 112 defining a channel 114 therethrough for channeling wire 132 to nose 110 (see FIG. 3).

[0014] Turning now to FIG. 3, the internal structure of elongated tubular portion 108 is shown in detail. Elongated tubular portion 108 includes a reciprocable wire

advancer 116 internally disposed therewithin. Wire advancer 116 includes an elongated shaft, here shown as having a substantially circular body portion with an elongated flattened, or otherwise shaped surface portion 118 that defines a passage 120 between an inner surface of tubular portion 108 and wire advancer 116. Wire advancer 116 includes structure for engaging and distally advancing wire 134. A plurality of teeth 122 formed along the periphery of wire advancer 116, preferably distally of flattened surface portion 118. While it is preferred that teeth 122 are formed near the distal end of wire advancer 116, it is envisioned that teeth 122 can be formed at any suitable location on or along wire advancer 116.

[0015] Preferably, wire advancer 116 is provided with a chamber 124 preferably in substantial transverse alignment with teeth 122, chamber 124 being opened along a side radially opposite to flattened surface 118 of wire advancer 116. Chamber 124 defines an elongated centrally disposed camming surface 126 that is more deeply internally or centrally disposed within wire advancer 116 near the surface's distal end and than its proximal end. A bearing structure 128 is disposed within chamber 124. Bearing structure 128 is sized to contact camming surface 126 near its distal end and to contact the inner surface of tubular portion 108. In this manner, as wire advancer 116 is advanced through elongated tubular portion 108, camming surface 126 rides along bearing structure 128 thereby pressing advancer 116 and teeth 122 oppositely, radially outward toward the inner surface of tubular portion 108. Although chamber 124 of this embodiment is shown disposed substantially transversely aligned with teeth 122, it is envisioned that chamber 124 can be formed at any suitable location along the length of wire advancer 116 to effect engagement and advancement of wire 134. In addition, while a ball-like bearing structure is shown which is free to rotate longitudinally distally and proximally, it is envisioned that any shaped bearing structure, fixed or relatively moveable, can be employed

[0016] Elongated tubular portion 108 includes a cutter. Preferably, wire advancer 116 includes the cutter, 130, extending distally therefrom. Cutter 130 is configured and adapted for slidable engagement preferably along an elongated surface of divider 112 as wire advancer 116 is advanced distally through tubular portion 108. FIG. 3 shows wire advancer 116 in a proximal position. As cutter 130 moves distally along the distal end portion of divider 112, at or adjacent down turned nose 110 of tubular portion 108, cutter 130 shears through wire 134, preferably where or near where it projects out of channel 114. Preferably, the shearing action forms a distal end 146 that facilitates ease of entry into the tissue. Preferably, distal end 146 is sharpened.

[0017] Tacking tool 100 includes a replaceable wire source or supply, here shown as wire spool 132 located within handle portion 104 and operatively coupled to wire advancer 116.

Wire spool 132 is provided with a straight "endless" sur-

gical grade wire 134 wound thereon. By "endless" it is meant that wire 134 has ends, but is very long to provide a multitude of fasteners without replacing wire spool 132. Wire 134 is threaded through tubular portion 108 by passing wire 134 through passage 120, over teeth 122, preferably at least into channel 114. From there, prior to use, wire 134 can be advanced further into channel 114, and prior to or even with the edge of nose 110 of tubular portion 108. In operation, wire advancer 116 is moved distally through tubular portion 108, such that camming surface 126 rides along bearing surface 128 and causes teeth 120 to grip wire 134, thereby advancing a selected portion or length of wire 134 through tubular portion 108 and out through nose 110. As wire 134 is advanced along and out of nose 110, the interior concave portion 109 of nose 110, deforms wire 134 and causes it to turn arcuately 360° or more in onto itself forming an annular fastener, here shown as a wire loop or ring 136 (FIG. 4). Finally, as wire advancer 116 is advanced to its most distal position, cutter 130 shears through wire 134 preferably at or near where it exits channel 114, thereby separating wire ring 136 from the remainder of wire 134. As seen in FIG. 3, prior to or as wire 134 is being advanced, nose 110 of tacking tool 100 is pressed into a suitable surgical mesh 138 and into underlying tissue 140. Thus, as wire ring 136 is formed, it fastens surgical mesh 138 to the underlying tissue 140. While wire 134 has been disclosed as being a straight wire wound on a spool, it is envisioned that a wire formed from a shape memory material and having a shape memory, e.g. Nitinol, can be used, which shape memory wire will automatically cause the wire to curve as it is ejected through nose 110 of tubular portion 108. If shape memory wire is employed that is restrained and predetermined to curve and form a ring as it is freed from a restraint, a curved nose may not be needed. The same applies if a temperature triggerable shape memory metal is employed and the tacking tool is employed at the triggering temperature, for example, by use of body tissue temperature. It will be understood that wire 134 can be made of any suitable biocompatible material, for example, metals, metal alloys, shape memory or not, and polymeric materials, preferably bioabsorbable. As shown in FIG. 3, to apply wire ring 136, nose 110 of tubular portion 108 is inserted into tissue 140 through mesh 138. Wire 134 is then advanced through tubular portion 108 and out of nose 110, beginning the formation of ring 136. As more wire 134 is advanced through nose 110, more of ring 136 is formed. As ring 136 is formed, a first, inwardly disposed end 146 of wire 134 first penetrates through tissue 140, and follows an arcuate path as it exits tissue 140, passes into the underside of surgical mesh 138, and then distally back through surgical mesh 138 and back into tissue 140, thereby completing the formation of wire ring 136 and the fastening of mesh 138 to tissue 140.

[0018] In a preferred embodiment, one complete squeeze of trigger 106 will result in the formation of a complete wire ring 136. In order to ensure that a complete

wire ring 136 is formed with the squeezing of trigger 106, preferably a latch and pawl mechanism (not shown) is provided in the handle 102. In operation, as trigger 106 is squeezed wire advancer 116 is moved distally through tubular portion 108 thereby commencing the formation of wire ring 136. Once trigger 106 is depressed slightly, the latch and pawl mechanism is configured to prohibit trigger 106 from backstroking until trigger 106 has been completely depressed and wire ring 136 is completely formed. Upon complete depression of trigger 106, the pawl clears the gear teeth (not shown) and the pawl rotates away from the teeth due to a spring biasing (not shown), thereby allowing trigger 106 to return to its unsqueezed or undepressed condition.

[0019] Upon complete depression of trigger 106, wire advancer 116 travels a predetermined distance through tubular portion 108, causing wire 134 to be ejected a predetermined amount or length which is substantially equal to the circumference of a wire ring 136 thereby resulting in the formation of a complete wire ring 136. Moreover, where trigger 106 is only partially depressed, the spring-loaded pawl (not shown) operates to hold trigger 106 stationary and will continue to function to hold trigger 106 stationary until trigger 106 has been completely depressed. In this way, the formation of wire ring 136 into body tissue 140 and surgical mesh 138 is controlled so that a single wire ring 136 at a time may be completely formed and fastened to body tissue 140 and surgical mesh 138. The above arrangement prevents formation of only partly formed fasteners.

[0020] In FIGS. 4 and 5, wire ring 136 is further shown and described. Wire ring 136 includes a body portion 142 preferably having a first, inwardly disposed end 146 and a second outwardly disposed trailing end 144. As seen in FIG. 4, after formation of a complete wire ring 136, sharpened end 146 underlaps (laps radially inside of) second trailing end 144. It is envisioned, however, that depending on the radius and extent or length of curvature of the shaping portion of nose 110 of tubular portion 108, trailing end 144 can be made to overlap leading end 146, or leading end 146 can be made to overlap trailing end 144. As seen in FIG. 5, after complete formation, wire ring 136 is substantially planar (i.e., proximal end 144 and distal end 146 lie on the same plane with one another). Further, it is seen in FIG. 5 that wire 134 making up wire ring 136 has a circular cross section. However, it is envisioned that any suitable cross-sectional shape or configuration of the wire can be used to form wire ring 136 although a wire having a cross section without sharpened edges is preferred in order to eliminate the possibility of the sharpened edges cutting into the tissue or cutting through the surgical mesh.

[0021] Turning now to FIG. 6, an alternative embodiment of a tacking tool according to the present disclosure is generally shown as 200. Tacking tool 200 includes a handle or a housing 202 and a tubular portion 204 projecting from a distal end thereof. The housing 202 includes a handle portion 206 and a trigger 208 slidably

coupled thereto and spaced a distance from the handle portion 206. Housing 202 further includes a dual rack and pinion arrangement wherein a pinion 210 is pivotably coupled to housing 202, a lower rack 212 is pivotably coupled to the trigger 208 and slidably coupled to the handle portion 206, and an upper rack 214 being slidably coupled to housing 202 and rigidly coupled to wire advancer 116 (not shown in FIG. 6, see FIG. 3). In this manner, as trigger 208 is depressed, lower rack 212 is moved proximally thereby rotating pinion 210 counter clockwise which in turn moves upper rack 214 and wire advancer 116 distally. Tacking tool 200 forms a wire ring 136 in the same manner as tacking tool 100.

[0022] Tacking tool 200 can be provided with a spool 232 of wire and a latch and pawl mechanism (not shown), like that employed in tacking tool 100, which limits movement of trigger 208 in a distal direction until a complete wire ring 136 is formed, at which time the pawl can be released and trigger 208 allowed to return to its distalmost position.

[0023] It is envisioned that the tacking tools disclosed herein can be adapted to be activated and operated remotely, for example robotically. In such instances, for example, the activation mechanism can be located and operated from a remote control box. The same can apply to the wire supply.

[0024] It will be understood that various modifications may be made to the embodiments disclosed herein. Therefore, the above description should not be construed as limiting, but merely as an exemplification of preferred embodiments. Those skilled in the art will envision other modifications within the scope of the claims appended hereto.

Claims

1. A tacking apparatus (100) for applying fasteners to body tissue comprising:

a housing (102);
 an actuation mechanism (106);
 a supply (132) of an elongated wire (134);
 an elongated tubular portion (108) having a proximal end and a distal end, the proximal end being in communication with the housing (102), and the distal end having a nose (110) having an interior portion (109) adapted for shaping a length of the wire (134) into an annular shape;
 a wire advancer (116) for advancing the wire (134) from the supply (132) to and through the nose portion of the elongated tubular portion (108), the wire advancer (116) being actuated by the actuation mechanism and cooperable with the wire shaping portion (109) of the nose (110) to shape the length of the wire (134) into an annular shape; and
 a cutter (130) for severing the annular shaped

portion of the wire (134) to form an annular fastener (136); **characterised in that** the wire advancer (116) includes a plurality of teeth (122) formed along a periphery thereof for engaging and distally advancing the wire (134); and that the cutter (130) is a digital extension of the wire wire advancer (116).

2. The tacking apparatus (110) of claim 1, wherein the actuation mechanism includes a trigger (106) operatively coupled to the housing (102).
3. The tacking apparatus (100) of claim 1 or 2, wherein the interior portion of the nose (110) is concavely curved.
4. The tacking apparatus (100) of claim 1 or 2, wherein the interior portion of the nose (110) has a semi-circular configuration.
5. The tacking apparatus (100) of any one of the preceding claims, wherein the fastener has a body that is substantially planar.
6. The tacking apparatus (100) of any one of the preceding claims, wherein the interior portion of the nose (110) is shaped to provide a fastener with an inwardly disposed end (146), and an outwardly disposed end (144) that overlaps the inwardly disposed end (146).
7. The tacking apparatus (100) of claim 6, wherein the cutter (130) is adapted to provide the inwardly disposed end (146) of the fastener with a sharp tip.
8. The tacking apparatus (100) of any one of the preceding claims, wherein the supply (132) of wire (134) is a spool having an endless length of the wire (134) wound thereon for providing a multitude of fasteners.
9. The tacking apparatus (100) of any one of the preceding claims, wherein the wire (134) is formed from a shape memory material.
10. The tacking apparatus (100) of any one of the preceding claims, wherein the tubular portion (108) is adapted to fit through a body incision for a laparoscopic procedure.
11. The tacking apparatus (100) of any one of the preceding claims, wherein the cutter (130) is adapted to sever the length of wire (134) at or near the distal end of the nose (110) of the tubular portion (108), to thereby form the annular fastener.
12. The tacking apparatus (100) of any one of the preceding claims, wherein the nose (110) includes a

divider (112) having a channel to pass the wire (134) to the shaping portion (109) in the nose (110).

13. The tacking apparatus (100) of claim 12, wherein the cutter (130) is configured and adapted for slidable engagement along an elongated surface of said divider (112) as the wire advancer (116) is advanced distally through the tubular portions (108).
14. The tacking apparatus (100) of claim 2 or any one of claims 3 to 13 as dependent on claim 2 arranged so that upon complete depression of the trigger (106), wire advancer (116) travels a predetermined distance through the tubular portion (108), thereby causing the wire (134) to be ejected a predetermined length that is substantially equal to the circumference of the annular fastener, thereby resulting in the formation of a complete annular fastener in the form of a wire ring (136).
15. The tacking apparatus (100) of any one of the preceding claims, comprising a camming surface (126) and a bearing surface (128) arranged so that as the wire advancer (116) is moved distally through the tubular portion (108), the camming surface (136) rides along the bearing surface (128) to cause the teeth (122) to grip the wire (134), thereby advancing a length of the wire (134) through the tubular portion (108) and out through the nose (110).
16. The tacking apparatus (100) of any one of claims 1 to 14, wherein the wire advancer (116) is provided with a chamber (124) that is opened along a side radially opposite to said teeth (122), wherein the chamber (124) defines an elongate centrally disposed camming surface (126) that is more deeply disposed within the wire advancer (116) near the surface's distal end than its proximal end, wherein a bearing structure (128) is disposed within the chamber (124) that is sized to contact the camming surface (126) near its distal end and to contact an inner surface of the tubular portion (108), so that as the wire advancer (116) is advanced through the tubular portion (118), the camming surface (126) rides along the bearing structure (128) to cause teeth (122) to grip the wire (134), thereby advancing a selected length of the wire (134) through the tubular portion (108) and out through the nose (110).

Patentansprüche

1. Heftungsvorrichtung (100) zum Anbringen von Heftungen an Körpergewebe, umfassend:
ein Gehäuse (102);
einen Betätigungsmechanismus (106);
eine Zuführung (132) eines länglichen Drahtes

(134);

einen länglichen Röhrenabschnitt (108) mit einem proximalen Ende und einem distalen Ende, wobei das proximale Ende in Verbindung mit dem Gehäuse (102) ist und das distale Ende eine Nase (110) mit einem Innenabschnitt (109) aufweist, der dazu angepasst ist, eine Länge des Drahtes (134) in eine Ringform umzuformen;

einen Drahtschieber (116) zum Vorschieben des Drahtes (134) von der Zuführung (132) zu und durch den Nasenabschnitt des länglichen Röhrenabschnitts (108), wobei der Drahtschieber (116) durch den Betätigungsmechanismus betätigt wird und mit dem Drahtumformungsabschnitt (109) der Nase (110) verbindbar ist, um die Länge des Drahtes (134) in eine Ringform umzuformen; und

eine Schneide (130) zum Abtrennen des ringförmig geformten Abschnitts des Drahtes (134), um eine ringförmige Heftung (136) zu bilden; **dadurch gekennzeichnet, dass** der Drahtschieber (116) mehrere Zähne (122) aufweist, die entlang seines Umfangs ausgebildet sind, um den Draht (134) zu ergreifen und in distaler Richtung vorzuschieben; und dass die Schneide (130) eine distale Verlängerung des Drahtschiebers (116) ist.

2. Heftungsvorrichtung (100) nach Anspruch 1, wobei der Betätigungsmechanismus einen Auslöser (106) aufweist, der an das Gehäuse (102) wirkgekoppelt ist.
3. Heftungsvorrichtung (100) nach Anspruch 1 oder 2, wobei der Innenabschnitt der Nase (110) konkav gekrümmt ist.
4. Heftungsvorrichtung (100) nach Anspruch 1 oder 2, wobei der Innenabschnitt der Nase (110) eine Halbkreisform aufweist.
5. Heftungsvorrichtung (100) nach einem der vorhergehenden Ansprüche, wobei die Heftung einen Körper aufweist, der im Wesentlichen eben ist.
6. Heftungsvorrichtung (100) nach einem der vorhergehenden Ansprüche, wobei der Innenabschnitt der Nase (110) so geformt ist, dass er eine Heftung mit einem innen angeordneten Ende (146) und einem außen angeordneten Ende (144), das das innerhalb angeordnete Ende (146) überlappt, bereitstellt.
7. Heftungsvorrichtung (100) nach Anspruch 6, wobei die Schneide (130) dazu angepasst ist, das innen vorstehende Ende (146) der Heftung mit einer scharfen Spitze bereitzustellen.

8. Heftungsvorrichtung (100) nach einem der vorhergehenden Ansprüche, wobei die Zuführung (132) des Drahtes (134) eine Spule mit einer Endloslänge des Drahtes (134) ist, der darauf gewickelt ist, um mehrere Heftungen zur Verfügung zu stellen. 5
9. Heftungsvorrichtung (100) nach einem der vorhergehenden Ansprüche, wobei der Draht (134) aus einem Formgedächtnismaterial gebildet ist. 10
10. Heftungsvorrichtung (100) nach einem der vorhergehenden Ansprüche, wobei der Röhrenabschnitt (108) dazu angepasst ist, durch einen Körpereinschnitt für eine laparoskopische Operation zu passen. 15
11. Heftungsvorrichtung (100) nach einem der vorhergehenden Ansprüche, wobei die Schneide (130) dazu angepasst ist, die Länge des Drahtes (134) an oder nahe dem distalen Ende der Nase (110) des Röhrenabschnitts (108) abzutrennen, um **dadurch** die ringförmige Heftung zu bilden. 20
12. Heftungsvorrichtung (100) nach einem der vorhergehenden Ansprüche, wobei die Nase (110) einen Teiler (112) aufweist, der einen Kanal aufweist, um den Draht (134) zu dem Formungsabschnitt (109) in der Nase (110) zu leiten. 25
13. Heftungsvorrichtung (100) nach Anspruch 12, wobei die Schneide (130) für einen verschiebbaren Eingriff entlang einer ausgedehnten Oberfläche des Teilers (112) ausgestaltet und angepasst ist, wenn der Drahtschieber (116) in distaler Richtung durch den Röhrenabschnitt (108) vorgeschoben wird. 30 35
14. Heftungsvorrichtung (100) nach Anspruch 2 oder einem der Ansprüche 3 bis 13 in Abhängigkeit von Anspruch 2, die so angeordnet ist, dass bei vollständigem Eindrücken des Auslösers (106) der Drahtschieber (116) über einen vorbestimmten Weg durch den Röhrenabschnitt (108) verfährt, wodurch der Draht (134) dazu gebracht wird, um eine vorbestimmte Länge ausgestoßen zu werden, die im Wesentlichen gleich dem Umfang der ringförmigen Heftung ist, wodurch das Bilden einer vollständig ringförmigen Heftung in der Form eines Drahttrings (186) bewirkt wird. 40 45
15. Heftungsvorrichtung (100) nach einem der vorhergehenden Ansprüche, die eine Nockenoberfläche (126) und eine Lageroberfläche (128) aufweist, die so angeordnet sind, dass, während der Drahtschieber (116) in distaler Richtung durch den Röhrenabschnitt (108) bewegt wird, die Nockenoberfläche (126) entlang der Lageroberfläche (128) verläuft, um die Zähne (122) dazu zu bringen, den Draht (134) zu ergreifen, wodurch eine Länge des Drahtes (134) 50 55

durch den Röhrenabschnitt (108) und durch die Nase (110) heraus vorgeschoben wird.

16. Heftungsvorrichtung (100) nach einem der Ansprüche 1 bis 14, wobei der Drahtschieber (116) mit einer Kammer (124) versehen ist, die entlang einer Seite geöffnet ist, die den Zähnen (122) radial gegenüber liegt, wobei die Kammer (124) eine längliche, zentral angeordnete Nockenoberfläche (126) definiert, die tiefer innerhalb des Drahtschiebers (116) in der Nähe des distalen Endes der Oberfläche als ihr proximales Ende angeordnet ist, wobei eine Lagerstruktur (128) innerhalb der Kammer (124) dazu angeordnet ist, die Nockenoberfläche (126) in der Nähe ihres distalen Endes zu kontaktieren und eine innere Oberfläche des Röhrenabschnitts (108) zu kontaktieren, so dass die Nockenoberfläche (126), wenn der Drahtschieber (116) durch den Röhrenabschnitt (118) vorgeschoben wird, entlang der Lagerstruktur (128) verläuft, um Zähne (122) dazu zu bringen, den Draht (134) zu ergreifen, wodurch eine ausgewählte Länge des Drahts (134) durch den Röhrenabschnitt (108) und durch die Nase (110) heraus vorgeschoben wird.

Revendications

1. Appareil d'agrafage (100) pour appliquer des attaches à du tissu corporel comprenant:
- un boîtier (102);
 - un mécanisme d'actionnement (106);
 - une alimentation (132) en fil allongé (134);
 - une portion tubulaire oblongue (108) ayant une extrémité proximale et une extrémité distale, l'extrémité proximale étant en communication avec le boîtier (102), et l'extrémité distale ayant un ergot (110) ayant une portion intérieure (109) apte à configurer une longueur du fil (134) en une forme annulaire;
 - un organe d'avancement de fil (116) pour faire avancer le fil (134) de l'alimentation (132) à et à travers la portion d'ergot de la portion tubulaire oblongue (108), l'organe d'avancement de fil (116) étant actionné par le mécanisme d'actionnement et pouvant coopérer avec la portion de configuration de fil (109) de l'ergot (110) pour configurer la longueur du fil (134) en une forme annulaire; et
 - un organe de coupe (130) pour couper la portion annulaire configurée du fil (134) pour former une attache annulaire (136); **caractérisé en ce que** l'organe d'avancement de fil (116) comporte une pluralité de dents (122) formées le long d'une périphérie de celui-ci pour la mise en prise avec et l'avancement distal du fil (134); et **en ce que** l'organe de coupe (130) est une extension dis-

- tale de l'organe d'avancement de fil (116).
2. Appareil d'agrafage (100) selon la revendication 1, dans lequel le mécanisme d'actionnement comporte une gachette (106) fonctionnellement couplée au boîtier (102).
 3. Appareil d'agrafage (100) selon la revendication 1 ou 2, dans lequel la portion intérieure de l'ergot (110) est courbée d'une manière concave.
 4. Appareil d'agrafage (100) selon la revendication 1 ou 2, dans lequel la portion intérieure de l'ergot (110) a une configuration semi-circulaire.
 5. Appareil d'agrafage (100) selon l'une quelconque des revendications précédentes, dans lequel l'attache a un corps qui est sensiblement plan.
 6. Appareil d'agrafage (100) selon l'une des revendications précédentes, dans lequel la portion intérieure de l'ergot (110) est configurée pour réaliser une attache avec une extrémité disposée vers l'intérieur (146) et une extrémité disposée vers l'extérieur (144) qui chevauche l'extrémité disposée vers l'intérieur (146).
 7. Appareil d'agrafage (100) selon la revendication 6, dans lequel l'organe de coupe (130) est apte à munir l'extrémité disposée vers l'intérieur (146) de l'attache d'une pointe tranchante.
 8. Appareil d'agrafe (100) selon l'une quelconque des revendications précédentes, dans lequel l'alimentation (132) en fil (134) est une bobine ayant une longueur sans fin du fil (134) enroulé sur celle-ci pour réaliser une multitude d'attaches.
 9. Appareil d'agrafage (100) selon l'une quelconque des revendications précédentes, dans lequel le fil (134) est réalisé à partir d'un matériau à mémoire de forme.
 10. Appareil d'agrafage (100) selon l'une quelconque des revendications précédentes, dans lequel la portion tubulaire (108) est apte à s'ajuster à travers une incision dans le corps en vue d'une procédure laparoscopique.
 11. Appareil d'agrafage (100) selon l'une quelconque des revendications précédentes, dans lequel l'organe de coupe (130) est apte à couper la longueur du fil (134) à ou près de l'extrémité distale de l'ergot (110) de la portion tubulaire (108) pour former ainsi l'attache annulaire.
 12. Appareil d'agrafage (100) selon l'une quelconque des revendications précédentes, dans lequel l'ergot (110) comporte un diviseur (112) ayant un canal pour faire passer le fil (134) à la portion de configuration (109) dans l'ergot (110).
 13. Appareil d'agrafage (100) selon la revendication 12, dans lequel l'organe de coupe (130) est configuré et conçu pour un engagement coulissant le long d'une surface oblongue dudit diviseur (112) lorsque l'organe d'avancement de fil (116) est avancé distalement à travers la portion tubulaire (108).
 14. Appareil d'agrafage (100) selon la revendication 2 ou l'une quelconque des revendications 3 à 13 dépendant de la revendication 2, agencé de façon que lors d'un enfoncement complet de la gachette (106), l'organe d'avancement de fil (116) se déplace sur une distance prédéterminée à travers la portion tubulaire (108) en amenant ainsi le fil (134) à être éjecté sur une longueur prédéterminée qui est sensiblement égale à la circonférence de l'attache annulaire, ce qui se traduit par la formation d'une attache annulaire complète sous la forme d'un anneau de fil (136).
 15. Appareil d'agrafage (100) selon l'une quelconque des revendications précédentes, comprenant une surface de came (126) et une surface de palier (128) agencée de façon que lorsque l'organe d'avancement de fil (116) est déplacé distalement à travers la portion tubulaire (108), la surface de came (126) se déplace le long de la surface de palier (128) pour amener les dents (122) à saisir le fil (134) en faisant ainsi avancer une longueur du fil (134) à travers la portion tubulaire (108) et hors de l'ergot (110).
 16. Appareil d'agrafage (100) selon l'une quelconque des revendications 1 à 14, dans lequel l'organe d'avancement de fil (116) est muni d'une chambre (124) qui est ouverte le long d'un côté radialement opposé auxdites dents (122), où la chambre (124) définit une surface de came oblongue centralement disposée (126) qui est disposée plus profondément dans l'organe d'avancement de fil (116) près de l'extrémité distale de la surface qu'à son extrémité proximale, où une structure de palier (128) est disposée dans la chambre (124) qui est dimensionnée pour venir en contact avec la surface de came (126) près de son extrémité distale et pour venir en contact avec une surface intérieure de la portion tubulaire (108) de sorte que l'organe d'avancement de fil (116) est avancé à travers la portion tubulaire (118), la surface de came (126) se déplace le long de la structure de palier (128) pour amener les dents (122) à saisir le fil (134) en faisant avancer ainsi une longueur sélectionnée du fil (134) à travers la portion tubulaire (108) et hors de l'ergot (110).

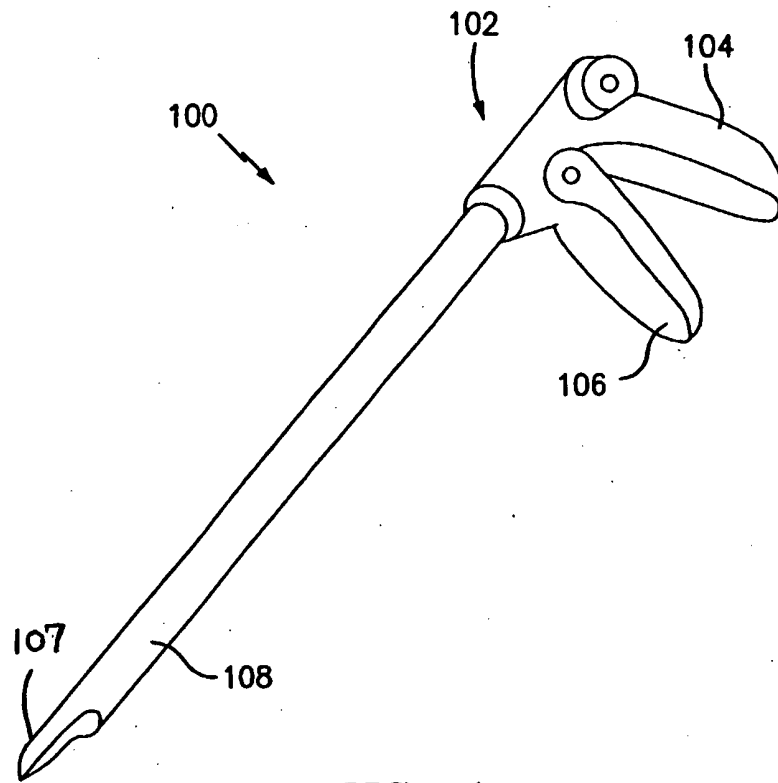


FIG. 1




FIG. 2




FIG. 4




FIG. 5

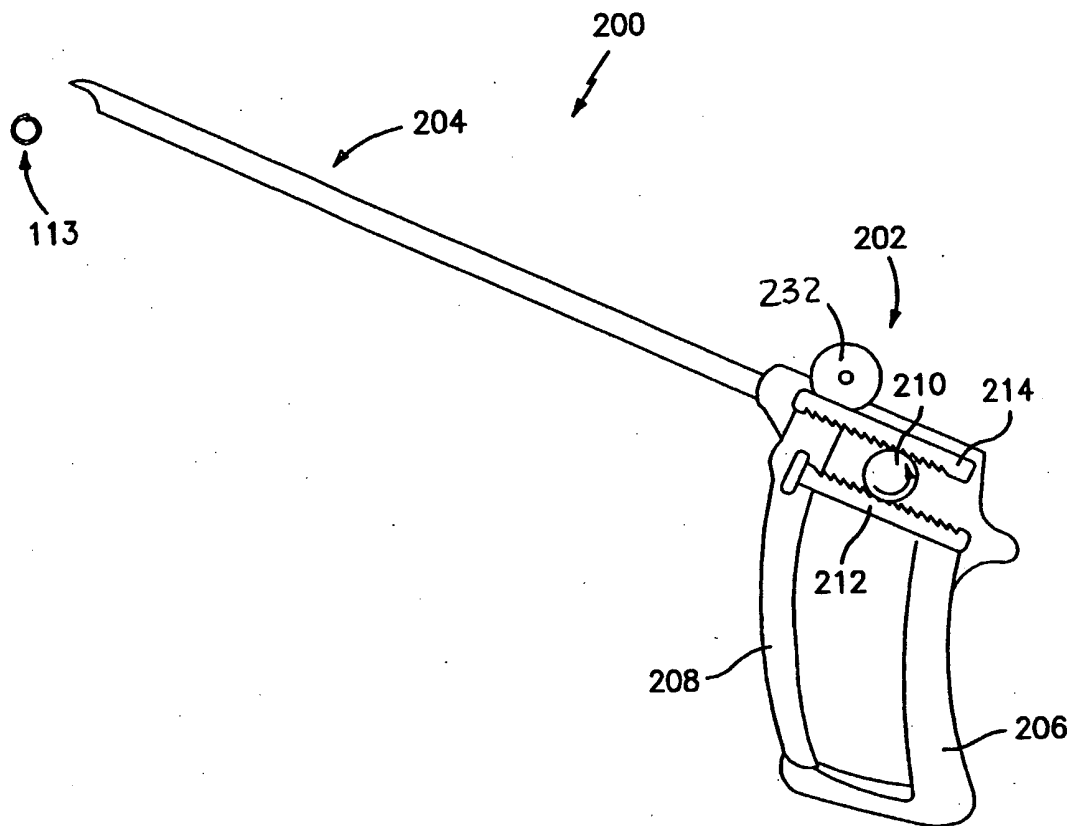


FIG. 6

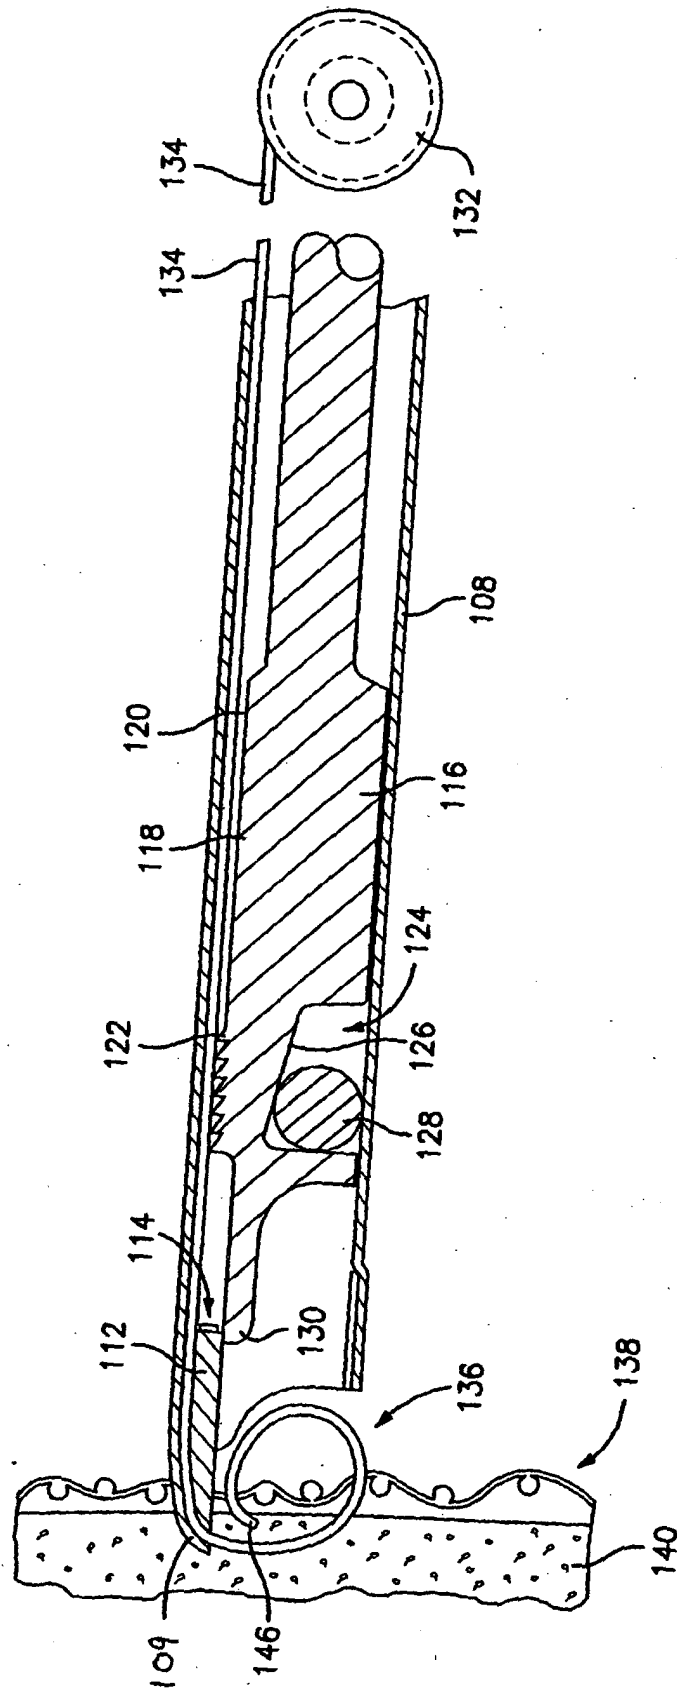


FIG. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5258000 A [0004]
- US 5989268 A [0005]
- WO 0141625 A [0005]
- WO 0067643 A [0005]
- US 4453661 A [0005]

专利名称(译)	解决工具和大头钉		
公开(公告)号	EP1494573A4	公开(公告)日	2008-03-12
申请号	EP2003726349	申请日	2003-04-17
[标]申请(专利权)人(译)	柯惠有限合伙公司		
申请(专利权)人(译)	泰科医疗集团LP		
当前申请(专利权)人(译)	泰科医疗集团LP		
[标]发明人	KAYAN HELMUT		
发明人	KAYAN, HELMUT		
IPC分类号	A61B17/00 A61B A61B1/00 A61B17/06 A61B17/064 A61B17/068 A61B17/08 A61B17/10 A61B17/122		
CPC分类号	A61B17/0644 A61B17/0682 A61B2017/00867 A61B2017/06052 A61B2017/0649		
优先权	60/373710 2002-04-17 US		
其他公开文献	EP1494573B1 EP1494573A2		
外部链接	Espacenet		

摘要(译)

公开了一种用于在腹腔镜或内窥镜手术期间形成和施加外科紧固件的外科钉合设备 (100)。它包括具有手柄 (104) 的壳体 (102)，从壳体 (102) 延伸的细长管状部分 (108)，线材推进器 (116) 和在其远端处的线材成形鼻部 (110)。还公开了一种环形紧固件 (136)。

