



Europäisches
Patentamt
European
Patent Office
Office européen
des brevets



(11)

EP 2 544 596 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
03.08.2016 Bulletin 2016/31

(21) Application number: **11709785.7**

(22) Date of filing: **07.03.2011**

(51) Int Cl.:
A61B 17/00 (2006.01) **A61B 17/34** (2006.01)

(86) International application number:
PCT/GB2011/050442

(87) International publication number:
WO 2011/110836 (15.09.2011 Gazette 2011/37)

(54) MEDICAL DEVICE

MEDIZINISCHE VORRICHTUNG

DISPOSITIF MÉDICAL

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **08.03.2010 GB 201003817**

(43) Date of publication of application:
16.01.2013 Bulletin 2013/03

(73) Proprietor: **Ashford & St. Peter's Hospitals
Chertsey, Surrey KT16 0PZ (GB)**

(72) Inventor: **COLLINS, Justin
Surrey KT16 0PZ (GB)**

(74) Representative: **Swan, Elizabeth Mary
Withers & Rogers LLP
4 More London Riverside
London SE1 2AU (GB)**

(56) References cited:
**EP-A1- 0 739 604 WO-A2-2009/117435
GB-A- 2 371 991 US-A- 5 037 379
US-A- 5 611 803 US-A- 5 618 296
US-A1- 2007 135 780 US-A1- 2008 103 508
US-B1- 6 319 246 US-B1- 6 350 267**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention relates to a laparoscopic bag, a laparoscopic port and a sheath and in particular to their use in laparoscopic surgery. Also described is a method of laparoscopic surgery that involves the medical device, and a method of using the medical device.

BACKGROUND OF THE INVENTION

[0002] Laparoscopic surgery, also known as minimal access, minimally invasive or keyhole surgery, is a modern surgical technique. During laparoscopic surgery operations are performed through small incisions, usually 0.5 to 1.5 cm in length. This is in contrast to traditional open surgery where a much longer incision would be made to perform the same operation.

[0003] Laparoscopic surgery is becoming increasingly popular, with more and more routine operations such as nephrectomy and cystectomy being carried out with this type of surgery.

[0004] Laparoscopic surgery has many advantageous over traditional surgery, which are mainly due to its minimally invasive nature and small incision length. These advantages include reduced pain, reduced blood loss, reduced scarring, fewer postoperative infections and shorter recovery times.

[0005] However, one of the limitations of laparoscopic surgery concerns the removal of a relatively large specimen. This is particularly common in oncological procedures such as laparoscopic radical nephrectomy, colectomy, cystectomy and hysterectomy. In most oncological and many other laparoscopic procedures, the specimen to be removed from the patient's body is too large to be able to remove it easily through the normal incision made for a laparoscopic port (called a port incision). In this situation the surgeon currently has two options.

[0006] The first option is to make a further, larger, incision or to enlarge the port incision so that the specimen can be removed as a whole. Usually this requires an incision of 10cm long or longer, and sometimes the incision can be as long as 20cm. Hence, this reduces the advantages of using laparoscopic surgery, which are listed above, and in some cases means that there is actually minimal benefit in performing laparoscopic surgery, over traditional open surgery.

[0007] The second option is to morcellate the specimen inside the body cavity into pieces that are small enough to be removed through the port incision. A major concern with this approach is that it is not always possible to ensure that every trace of the morcellated specimen is removed. Where the specimen is benign, leaving a part of the specimen in the body cavity may lead to infection as the tissue breaks down and acts as a source for infection. There is even more risk involved in this method when the specimen is malignant, since any es-

cape of malignant cells can lead to tumour seeding. Tumour seeding can occur at the site from which the specimen is removed. In addition, since the surgical plume travels throughout the surgical site, metastasis can occur at any point where 'raw' areas are, such as any of the port sites.

[0008] There have been some attempts to reduce the risks associated with morcellating the specimen inside the body cavity, by placing a bag around the specimen before it is morcellated. Such a device is generally known as an Endo-Bag. Endo-Bags normally comprise a plastic bag, with an opening at one end. They are inserted through the port incision, the specimen is then passed into the bag and can be pulled through the incision in the bag, optionally after being cut up. Some Endo-Bags, such as that shown in US 6,270,505 comprise a plastic tube with an opening at both ends. A drawstring is provided at one end, which is closed once the specimen is inside the tube. Most large specimens are still extracted in one piece through a separate incision. The most common type of morcellation is via a blunt instrument which crushes the tissue and it is then pulled out in pieces through the smaller incision the bag sits in. Morcellation using devices with rotating blades and suction is becoming increasingly common.

[0009] While the use of Endo-Bags can reduce the risks, Endo-Bags do not enclose the whole surgical plume, particularly when they are closed only by means of a drawstring at one end. Therefore, the risk of tumour seeding and port site metastasis remains. In addition, Endo-Bags are normally made from one or two layers of a thin flexible film of a polymer such as polyethylene or polyurethane. These can be ruptured by a sharp instrument, including those needed to morcellate the specimen. This possibility also presents the danger of tumour seeding.

[0010] The present invention is concerned with addressing these problems and with providing an improved solution for the removal of large specimens during laparoscopic surgery. In particular, the present invention aims to provide a device for use in minimal access surgery, and a method of laparoscopic surgery which allows for morcellation of a specimen inside the body cavity, without the risk of tumour seeding.

[0011] Document WO-A-2009/117435 describes a port for obtaining percutaneous access and discloses the features of the preamble of claim 1.

SUMMARY OF THE INVENTION

[0012] Described is a laparoscopic bag, wherein the laparoscopic bag comprises one opening which is in a top portion, and a body portion, wherein the laparoscopic bag comprises an inner layer which is waterproof, a middle layer which is resistant to morcellation, and an outer layer which is waterproof.

[0013] According to the invention a laparoscopic port is provided that comprises a tubular housing, an inflatable

cuff around the distal end of the housing, an insufflation nozzle which is in fluid communication with the inflatable cuff, and a locking ring, which can be passed over the proximal end of the housing, and secured relative to the housing at different points along the length of the housing, wherein the laparoscopic port comprises two channels running through the length of the housing.

[0014] A further aspect of the invention provides a sheath comprising a tube of medical-grade waterproof material that has at one end attaching means for attaching it to a laparoscopic bag for use during laparoscopic surgery.

[0015] A further aspect of the invention provides a kit comprising a laparoscopic bag according to the first aspect of the invention, and a sheath according to the third aspect of the invention.

[0016] Further described is a method of carrying out laparoscopic surgery to remove a specimen from the body of a patient, the method comprising the steps of:

- (i) providing a laparoscopic port and positioning the laparoscopic port through the skin of the patient so that the distal end of the laparoscopic port is in a body cavity and the proximal end of the laparoscopic port is outside the patient;
- (ii) providing a laparoscopic bag according to any of claims 1 to 6, and passing the laparoscopic bag through the laparoscopic port into the body cavity;
- (iii) placing the specimen into the body portion of the laparoscopic bag;
- (iv) passing the top portion of the laparoscopic bag through the laparoscopic port;
- (v) passing a morcellator through the top portion of the laparoscopic bag, morcellating the specimen in the body portion of the laparoscopic bag; and
- (vi) removing the morcellated specimen from the body of the patient through the top portion of the laparoscopic bag.

[0017] Also described is the use of a laparoscopic bag, a laparoscopic port, a sheath and/or a kit in laparoscopic surgery to remove a specimen from the body of a patient.

[0018] The laparoscopic bag of the present invention addresses the problems associated with the removal of large specimens from the body during laparoscopic surgery by comprising three layers and by comprising one opening only, and thereby allows for morcellation of the large specimen within the body cavity, without risk of tumour seeding.

[0019] The use of a three-layered bag with an inner layer that is waterproof, a middle layer which is resistant to morcellation, and an outer layer which is waterproof, is highly advantageous since it provides an enclosed environment for safe morcellation of large specimens from which traces of specimen cannot escape. In previous Endo-Bags with two waterproof layers there is a risk that the layers will be ruptured by a sharp instrument, such as that needed to morcellate the specimen. However,

with the laparoscopic bag of the present invention, the middle layer is resistant to morcellation, so will not be ruptured during normal use. Therefore, even if the inner layer is ruptured, the outer layer will be protected from rupture by the middle layer and will still provide an enclosed environment from which traces of the specimen cannot escape.

[0020] In addition, having only one opening, which is in the top portion, means that when the top portion is

10 passed out of the body cavity through a port, the body portion of the laparoscopic bag that remains in the body will be entirely enclosed. The laparoscopic bag is not vulnerable to rupture due to the three layers so provides an environment that is safe for morcellation. This represents a significant advantage over previous Endo-Bags that comprise a tube with a drawstring closure at one end.

[0021] The fact that the laparoscopic bag allows for the safe morcellation of a large specimen in the body cavity means that laparoscopic surgery can be carried out using this bag without either having to make a large incision to remove a specimen, or risking tumour seeding. This represents a significant advance in medical technology and will bring widespread patient benefits, meaning that patients can benefit fully from the advantages of minimally invasive laparoscopic surgery, without risking tumour seeding or port-site metastasis.

[0022] In more detail, the laparoscopic bag comprises a top portion and a body portion, which are defined in that there is an opening in the top portion, but not in the 20 bottom portion. It is preferred that the bag comprises a rectangular shape when flat, and a tubular shape when open, with one end sealed. The body portion is the section of the bag adjacent the sealed end, with the top portion being the section of the bag at the end which comprises the opening. Having a rectangular shaped bag is advantageous since, during use, the bag can be rolled up and passed through a laparoscopic port. A rectangular shaped bag is able to be rolled up neatly and efficiently in terms of space, compared to a bag of another shape.

[0023] The top portion will, during use, become neck-shaped as a result of the top of the bag being pulled back through the port after the bag is opened. Where the cross-sectional area of the body portion and top portion is the same, which is preferred, the bag can be a tubular shape. 30 When in use, the top portion is approximately tubular, and the body portion shape is caused by the specimen and the pressure differences caused by the morcellation process.

[0024] As noted above, the top portion of the laparoscopic bag comprises an opening. This is the only opening in the bag, there are no other openings. 40 **[0025]** The laparoscopic bag comprises three layers. The inner and outer layers are waterproof, and can be made of any suitable material. The inner and outer layers 45 are usually made from a thin flexible film of a polymer such as polyethylene or polyurethane. The inner and outer layers can be made of the same or different material from one another. Such films are well known to the person

skilled in the art. The inner layer may be white in colour to reflect light and aid visibility when the bag is in use in the body cavity.

[0026] The middle layer may be brightly coloured, for example an unnatural luminous colour which could be orange or green, so that if the white inner layer is breached the colour of the middle layer shows through and it is evident that the inner layer has been breached. The middle layer is resistant to morcellation. By this we mean that the middle layer is made of a material that can not be penetrated by the morcellation process carried out by a morcellator of the type used in laparoscopic surgery which can mean an electric motorised morcellator or a hand held device that is used to break down the specimen.

[0027] Any material that is resistant to morcellation can be used as the middle layer. Suitable materials for use as the middle layer that are resistant to morcellation include a woven mesh of synthetic material such as polyurethane, a film or mesh of heavy-duty plastic, a mesh of metallic wires or a mesh of carbon fibres. In a preferred embodiment, the middle layer comprises a mesh.

[0028] With the laparoscopic bag if the inner layer is ruptured, the middle layer will protect the outer layer from also being ruptured, so the specimen will still be enclosed as noted above. It would, however, be advantageous for the surgeon to know that the inner layer has been ruptured, so that they can document the incident, check the outer layer, and ensure that there has been no escape of the specimen.

[0029] Accordingly, the inner layer is white and the middle layer is coloured, textured, or patterned or the middle layer is transparent and the outer layer is coloured, textured, or patterned. This means that if the inner layer is ruptured, the middle layer or the outer layer will be visible to a camera which is usually used during laparoscopic surgery, to enable the surgeon to take appropriate action. Preferably the middle layer is brightly coloured, most preferably luminous green or the middle layer is transparent and the outer layer is brightly coloured, preferably luminous green.

[0030] The present invention also relates to a sheath, in particular a sheath that has at one end attaching means for attaching it to a laparoscopic bag for use during laparoscopic surgery. This is advantageous, since the sheath can be attached to the neck of a laparoscopic bag so that a morcellated specimen can be removed through the neck of the bag, and through the sheath that will enable safe transportation of the specimen and the whole surgical plume away from the patient.

[0031] The sheath of the present invention comprises a tube of medical-grade waterproof material. By medical grade, we mean suitable for use in medical applications, such as laparoscopic surgery. The waterproof material can be the same as the waterproof material used for the inner and outer layers of the laparoscopic bag or can be different. The sheath material should be such that it acts as an effective barrier keeping the surgical plume within

the bag and sheath. The surgical plume consists of small particles, tumour cells, liquids, aerosols and any other materials including biological materials that may move out of the bag during the laparoscopic procedure and specimen removal.

[0032] The sheath has at one end attaching means for attaching it to a laparoscopic bag for use during laparoscopic surgery. Any suitable attaching means can be used that maintain a waterproof connection between the sheath and the laparoscopic bag. In one preferred embodiment, the attaching means is either a ridge that is capable forming a zip-lock fit with housing on a laparoscopic bag, or housing that is capable of forming a zip-lock fit with a ridge on a laparoscopic bag i.e. a freezer-bag style attachment. In another preferred embodiment, the attaching means could be adhesive such that the sheath opening and the bag opening both have an adhesive strip which is made accessible after pulling off protective tape. The sheath and the bag are sealed by pressing the adhesive strips together. In another preferred embodiment, the attaching means could be through locking rings such as in an embroidery hoop where both the sheath and the bag are secured between two rings of only slightly different circumference which are then tightened and locked in place by a screw or other locking mechanism.

[0033] When a sheath is used, the laparoscopic bag also has attaching means on the top portion which co-operate with the attaching means on the sheath. As above, in a preferred embodiment the laparoscopic bag has attaching means that comprises either a ridge that is capable of forming a zip-lock fit with housing on a sheath, or housing that is capable of forming a zip-lock fit with a ridge on a sheath.

[0034] The present invention relates to a laparoscopic port. This can advantageously be used with the laparoscopic bag to secure the bag in place in the body during a laparoscopic procedure.

[0035] The laparoscopic port comprises tubular housing often with two ports with an oval cross section. One port is used for the morcellator and the other is used for irrigation. Laparoscopic ports are known in the art, as they are used in all laparoscopic operations. Accordingly, the basic housing of a port is well known to a person skilled in the art.

[0036] The tubular housing of the port of the present invention is preferably oval, and can be anything from 5mm to 4 cm along the longest diameter, but is preferably around 2cm along the longest diameter.

[0037] The tubular housing has an inflatable cuff around the distal end of the housing and an insufflation nozzle which is in fluid communication with the inflatable cuff. By distal end of the housing we mean the end portion, usually the end third, that would be furthest into the patient during an operation. By the proximal end we mean the end portion, usually the end third, that would be furthest away from the patient during an operation.

[0038] When inflated, the inflatable cuff resembles a

ring around the outside of the distal end of the housing, that can abut the tissue between the abdominal cavity and the skin through which the housing is inserted.

[0039] The laparoscopic port of the present invention may also comprise a locking ring, which can be passed over the proximal end of the housing, and secured relative to the housing at different points along the length of the housing with a ring which overlaps and then locks in place with a clasp similar to a watch bracelet clasp.

[0040] The locking ring is positioned relative to the inflatable cuff so that they grip the skin, thereby securing the housing in place. The advantage of having an adjustable locking ring is to secure it to provide a tight seal in patients with varying depths of subcutaneous fat or abdominal muscle so that the bag is secured and the irrigation part of the morcellation process can be enclosed within the bag.

[0041] The laparoscopic port comprises two channels running through the length of the housing. Instrumentation such as a morcellator, irrigator and camera can be passed through the channels. It is preferred that the channels are removable from the housing, so that they can be removed leaving the oval shaped frame of the housing, to allow bigger objects, such as a rolled-up laparoscopic bag, to pass through the port.

[0042] The present invention also relates to a kit comprising the laparoscopic bag and a laparoscopic port according to the invention. The kit is preferably provided as a single use disposable kit. The laparoscopic bag is preferably in a collapsed state in the kit ready for use and is most preferably rolled up.

[0043] Described is a method of carrying out laparoscopic surgery to remove a specimen from the body of a patient, as set out above. The method comprises the following steps.

(i) Providing a laparoscopic port and positioning the laparoscopic port through the skin of the patient so that the distal end of the laparoscopic port is in a body cavity and the proximal end of the laparoscopic port is outside the patient. Any laparoscopic port can be used, but it is preferred that a port according to the second aspect of the invention is used.

(ii) Providing a laparoscopic bag and passing the laparoscopic bag through the laparoscopic port into the body cavity. When a laparoscopic port according to the present invention with removable channels is used, the channels can be removed before the bag is passed through.

(iii) Placing the specimen into the body portion of the laparoscopic bag. This is done using conventional manipulation devices. A camera is provided on the laparoscopic equipment, so that the surgeon can see the specimen and guide it into the bag.

(iv) Passing the top portion of the laparoscopic bag through the laparoscopic port.

(v) Passing a morcellator through the top portion of the laparoscopic bag, and morcellating the specimen

in the body portion of the laparoscopic bag. A conventional morcellator is used for this step. In a preferred embodiment the specimen is irrigated under low pressure during morcellation, by circulating a fluid around the bag. This causes the bag to gently inflate and the specimen to float and rotate in the irrigation fluid and keeps it away from the sides of the bag. This is an important safety feature, as it makes it less likely for the inner layer of the bag to be ruptured by the morcellator. When the laparoscopic port comprises two channels, the morcellator with the camera is passed through one channel, and an irrigator is passed through the other channel. The specimen is morcellated until it is small enough to be removed via the port site.

(vi) Removing the morcellated specimen from the body of the patient through the top portion of the laparoscopic bag.

[0044] The method additionally comprises the step of attaching the top portion of the laparoscopic bag to one end of a sheath so that the morcellated specimen is removed from the body of the patient through the top portion of the laparoscopic bag and the sheath.

[0045] In a method, where a laparoscopic port according to the invention is used, the method preferably additionally comprises the steps of; removing the laparoscopic port from the patient's body once the top portion of the laparoscopic bag has passed through it in step (iv); inserting the laparoscopic port back inside the top portion of the laparoscopic bag so that the distal end of the housing is in the body cavity; inflating the inflatable cuff using the insufflation nozzle; passing the locking ring over the proximal end of the housing; and locking the locking ring

against the housing so that the tissue between the abdominal cavity and the skin of the patient is gripped between the inflatable cuff and the locking ring.

BRIEF DESCRIPTION OF THE DRAWINGS

[0046] Embodiments of the invention will now be described with reference to the accompanying drawings, in which:

Figure 1 shows a perspective view of a laparoscopic port according to a preferred embodiment of the present invention;

Figure 2 shows a perspective view of a locking ring according to a preferred embodiment of the present invention;

Figure 3 shows a cross sectional view of a laparoscopic bag and a laparoscopic port according to a preferred embodiment of the present invention;

Figure 4 shows a schematic view of a laparoscopic bag, a sheath and a laparoscopic port and

Figure 5 view of a laparoscopic bag, a sheath and a laparoscopic port according to a preferred embodiment of the present invention.

DETAILED DESCRIPTION OF EMBODIMENT(S)

[0047] Figure 1 shows the tubular housing 1 of a laparoscopic port, through which there are two channels, 2 and 3. The housing 1 is oval in cross section, with a largest diameter of around 20cm. The housing has an insufflation nozzle, 4, at its proximal end which is in fluid communication with the inflatable cuff, 5. The locking ring 6, shown in Figure 2, can be passed over the proximal end of the housing 1 and secured next to the skin 7, as shown in Figure 3. The function of the port is to make a watertight seal around the incision and to hold the bag in place and allow access for the morcellator, tools for morcellation and irrigation.

[0048] Figures 3, 4 and 5, show the laparoscopic bag of a preferred embodiment of the present invention with inner layer 8, middle layer 9, and outer layer 10.

[0049] In Figures 3, 4 and 5, the laparoscopic port housing 1 is through the skin 7 of a patient and inside the top portion 11 of the laparoscopic bag. The laparoscopic bag body portion 12 is substantially spherical. The inflatable cuff 5 is inflated. In Figures 3 and 5, the locking ring 6 is in place against the skin, so that the inflatable cuff 5 and the locking ring 6 grip the skin 7 and hold the port housing 1 in place.

[0050] In Figure 3 the port housing 1 is attached to a retrieval tube 13 which allows for endoscope and morcellator access to the specimen (not shown). This is in addition to the sheath. The retrieval tube has a waterproof quick attach/release joint 14 which is used after the edges of the bag are out of the incision site and the port is put in place.

[0051] In Figures 4 and 5 the outer layer 10 of the laparoscopic bag is attached to the sheath 15. During use, the laparoscopic bag 11 12 would be passed through the port housing 1 in collapsed form, usually rolled up, and opened inside the body cavity. The specimen, not shown, would be inserted through the top portion 11 and into the body portion 12. The port would then be removed, and reinserted inside the top portion 11 of the laparoscopic bag. The inflatable cuff 5 would be inflated, and the locking ring 6 secured over the housing, so as to grip the skin 7. A morcellator not shown would be passed through one of the channels 2 3 of the housing 1 and an irrigator 16 would be passed down the other channel. Irrigation would ensure that the specimen floats and is rotated and kept away from the inner wall 8 of the laparoscopic bag, as shown by the arrows in Figure 5, while the specimen is morcellated.

[0052] Although the invention has been described above with reference to one or more preferred embodiments, it will be appreciated that various changes or modifications may be made without departing from the scope of the invention as defined in the appended claims.

Claims

1. A laparoscopic port that comprises tubular housing (1), an inflatable cuff (5) around the distal end of the housing, an insufflation nozzle (4) which is in fluid communication with the inflatable cuff, and a locking ring (6) which can be passed over the proximal end of the housing, and secured relative to the housing at different points along the length of the housing, **characterized in that** the laparoscopic port additionally comprises two channels (2, 3) running through the length of the housing.
2. The laparoscopic port according to claim 1, wherein the channels are removable from the housing.
3. A kit comprising the laparoscopic port according to claim 1, and a laparoscopic bag, wherein the laparoscopic bag comprises one opening which is in a top portion, and a body portion, wherein the laparoscopic bag comprises an inner layer which is waterproof, a middle layer which is resistant to morcellation, and an outer layer which is waterproof.
4. The kit according to claim 3, wherein the middle layer of the laparoscopic bag comprises a film or mesh, preferably wherein the middle layer comprises a mesh, and most preferably wherein the film or mesh is made of heavy-duty plastic, metallic wires or carbon fibres.
5. The kit according to claim 3 or 4 wherein the inner layer of the laparoscopic bag is white and the middle layer is coloured, textured, or patterned, preferably wherein the middle layer is brightly coloured, most preferably wherein the middle layer is luminous green.
6. The kit according to any of claims 3 to 5, wherein the top portion of the laparoscopic bag is tubular, and the body portion is substantially spherical.
7. The kit according to any of claims 3 to 6, wherein the laparoscopic bag has attaching means on the top portion for attaching the laparoscopic bag to a sheath.
8. The kit according to claim 7, wherein the attaching means comprises either a ridge that is capable of forming a zip-lock fit with housing on a sheath, or housing that is capable of forming a zip-lock fit with a ridge on a sheath.
9. A kit comprising the laparoscopic port according to claim 1 or 2 and a sheath, wherein the sheath comprises a tube of medical-grade waterproof material that has at one end attaching means for attaching it to a laparoscopic bag for use during laparoscopic

surgery.

10. A kit according to claim 9, wherein the attaching means is either a ridge that is capable forming a zip-lock fit with housing on a laparoscopic bag, or housing that is capable of forming a zip-lock fit with a ridge on a laparoscopic bag. 5

11. A kit according to claim 9 or 10, additionally comprising the laparoscopic bag according to any of claims 3 to 8. 10

12. A kit according to any of claims 3 to 8 or 11, which is provided as a single use disposable kit, preferably wherein the laparoscopic bag is rolled up. 15

Patentansprüche

1. Laparoskopischer Anschluss, der ein röhrenförmiges Gehäuse (1), eine aufblasbare Manschette (5) um das distale Ende des Gehäuses, eine Insufflationsdüse (4), die in Fluidverbindung mit der aufblasbaren Manschette ist, und einen Schließring (6) aufweist, der über das proximale Ende des Gehäuses geschoben und an verschiedenen Punkten entlang der Länge des Gehäuses relativ zu dem Gehäuse gesichert werden kann, **dadurch gekennzeichnet, dass** der laparoskopische Anschluss zusätzlich zwei Kanäle (2, 3) aufweist, die durch die Länge des Gehäuses verlaufen. 20

2. Laparoskopischer Anschluss nach Anspruch 1, wobei die Kanäle aus dem Gehäuse entfernt werden können. 25

3. Kit mit einem laparoskopischen Anschluss nach Anspruch 1 und einem laparoskopischen Beutel, wobei der laparoskopische Beutel eine Öffnung, die sich in einem oberen Bereich befindet, und einen Körperbereich hat, wobei der laparoskopische Beutel eine innere Lage, die wasserdicht ist, eine mittlere Lage, die zerstückerungsresistent ist, und eine äußere Lage aufweist, die wasserdicht ist. 30

4. Kit nach Anspruch 3, wobei die mittlere Lage des laparoskopischen Beutels eine Folie oder ein Netz aufweist, wobei die mittlere Lage vorzugsweise ein Netz aufweist, und wobei die Folie oder das Netz am meisten bevorzugt aus hochbelastbarem Kunststoff, Metalldrähten oder Karbonfasern hergestellt ist. 40

5. Kit nach Anspruch 3 oder 4, wobei die innere Lage des laparoskopischen Beutels weiß ist und die mittlere Lage mit Farbe versehen, strukturiert oder gemustert ist, wobei die mittlere Lage vorzugsweise mit Leuchtfarben versehen ist, wobei die mittlere Lage am meisten bevorzugt leuchtend grün ist. 45

6. Kit nach einem der Ansprüche 3 bis 5, wobei der obere Bereich des laparoskopischen Beutels röhrenförmig und der Körperbereich im Wesentlichen sphärisch ist. 50

7. Kit nach einem der Ansprüche 3 bis 6, wobei der laparoskopische Beutel ein Befestigungsmittel an dem oberen Bereich hat, um den laparoskopischen Beutel mit einer Hülle zu verbinden. 55

8. Kit nach Anspruch 7, wobei das Befestigungsmittel entweder ein Grat ist, der dazu in der Lage ist, mit einer Umwandlung auf einer Hülle eine Zip-Lock-Passung zu bilden, oder eine Umwandlung aufweist, das dazu in der Lage ist, mit einem Grat an einer Hülle eine Zip-Lock-Passung zu bilden.

9. Kit mit dem laparoskopischen Anschluss nach Anspruch 1 oder 2 und einer Hülle, wobei die Hülle eine Röhre aus für medizinische Anwendungen geeignetem, wasserdichtem Material aufweist, die an einem Ende ein Befestigungsmittel aufweist, um sie an einem laparoskopischen Beutel zur Verwendung bei einer laparoskopischen Operation zu befestigen. 60

10. Kit nach Anspruch 9, wobei das Befestigungsmittel entweder ein Grat, der dazu in der Lage ist, um eine Zip-Lock-Passung mit einer Umwandlung an einem laparoskopischen Beutel einzugehen, oder eine Umwandlung ist, die dazu in der Lage ist, eine Zip-Lock-Passung mit einem Grat an einem laparoskopischen Beutel zu bilden. 65

11. Kit nach Anspruch 9 oder 10, das zusätzlich den laparoskopischen Beutel nach einem der Ansprüche 3 bis 8 aufweist. 70

12. Kit nach einem der Ansprüche 3 bis 8 oder 11, das als einmal verwendbares Wegwerfkit bereitgestellt ist, wobei der laparoskopischen Beutel vorzugsweise aufgerollt ist. 75

Revendications

1. Port laparoscopique qui comprend un logement tubulaire (1), un brassard gonflable (5) autour de l'extrémité distale du logement, un buse de soufflage (4) qui est en communication de fluide avec le brassard gonflable, et une bague de verrouillage (6) qui peut être passée par-dessus l'extrémité proximale du logement, et fixée par rapport au logement à différents points le long du logement, **caractérisé en ce que** le port laparoscopique comprend en outre deux canaux (2, 3) le long du logement. 80

2. Port laparoscopique selon la revendication 1, dans lequel les canaux peuvent être retirés du logement. 85

3. Kit qui comprend le port laparoscopique selon la revendication 1, et un sac laparoscopique, dans lequel le sac laparoscopique comprend une ouverture qui se trouve dans une partie supérieure, et une partie de corps, dans lequel le sac laparoscopique comprend une couche intérieure qui est étanche à l'eau, une couche intermédiaire qui est résistante à la mordellation, et une couche extérieure qui est étanche à l'eau. 10

4. Kit selon la revendication 3, dans lequel la couche intermédiaire du sac laparoscopique comprend un film ou un maillage, dans lequel, de préférence, la couche intermédiaire comprend un maillage, et dans lequel, encore plus de préférence, le film ou le maillage est composé de plastique résistant, de fils métalliques ou de fibres de carbone. 15

5. Kit selon la revendication 3 ou 4, dans lequel la couche intérieure du sac laparoscopique est blanche et la couche intermédiaire est de couleur, texturée ou à motifs, dans lequel, de préférence, la couche intermédiaire est de couleur lumineuse, et dans lequel, encore plus de préférence, la couche intermédiaire est de couleur vert lumineux. 20 25

6. Kit selon l'une quelconque des revendications 3 à 5, dans lequel la partie supérieure du sac laparoscopique est tubulaire, et la partie de corps est sensiblement sphérique. 30

7. Kit selon l'une quelconque des revendications 3 à 6, dans lequel le sac laparoscopique possède un moyen de fixation sur la partie supérieure, destinée à fixer le sac laparoscopique sur une gaine. 35

8. Kit selon la revendication 7, dans lequel le moyen de fixation comprend soit une arête capable de former une fermeture à glissière avec le logement sur une gaine, soit un logement qui est capable de former une fermeture à glissière avec une arête située sur une gaine. 40

9. Kit qui comprend le port laparoscopique selon la revendication 1 ou 2 et une gaine, dans lequel la gaine comprend un tube en matériau médical étanche à l'eau qui possède, à une extrémité, un moyen de fixation destiné à la fixer sur un sac laparoscopique afin de l'utiliser pendant une chirurgie laparoscopique. 45 50

10. Kit selon la revendication 9, dans lequel le moyen de fixation est soit une crête qui est capable de former une fermeture à glissière avec le logement sur un sac laparoscopique, soit un logement qui est capable de former une fermeture à glissière avec une crête sur un sac laparoscopique. 55

11. Kit selon la revendication 9 ou 10, qui comprend en outre le sac laparoscopique selon l'une quelconque des revendications 3 à 8.

5 12. Kit selon l'une quelconque des revendications 3 à 8 ou 11, qui est prévu comme un kit jetable à usage unique, et dans lequel, de préférence, le sac laparoscopique est enroulé.

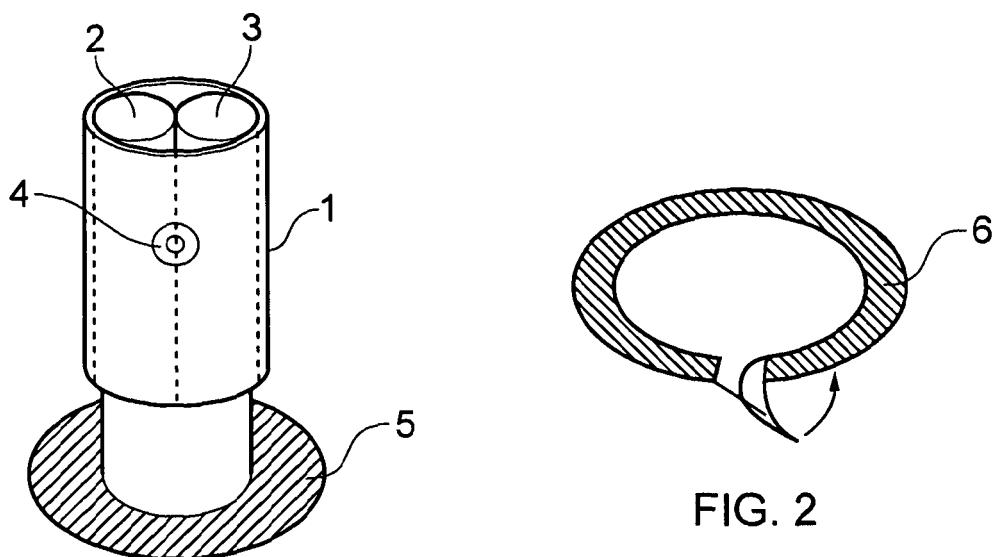


FIG. 1

FIG. 2

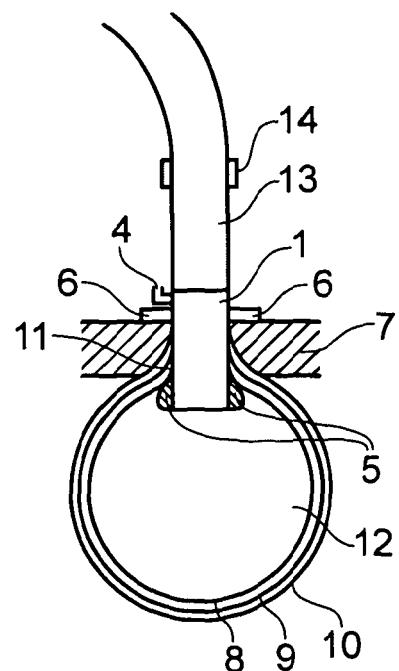


FIG. 3

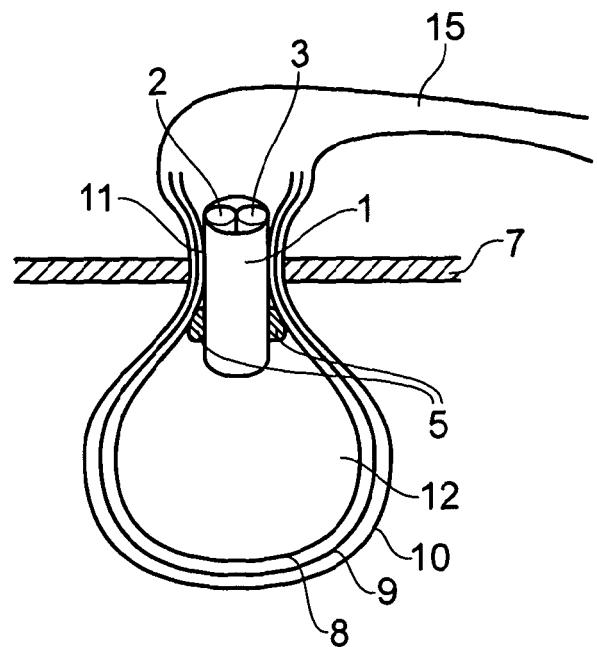


FIG. 4

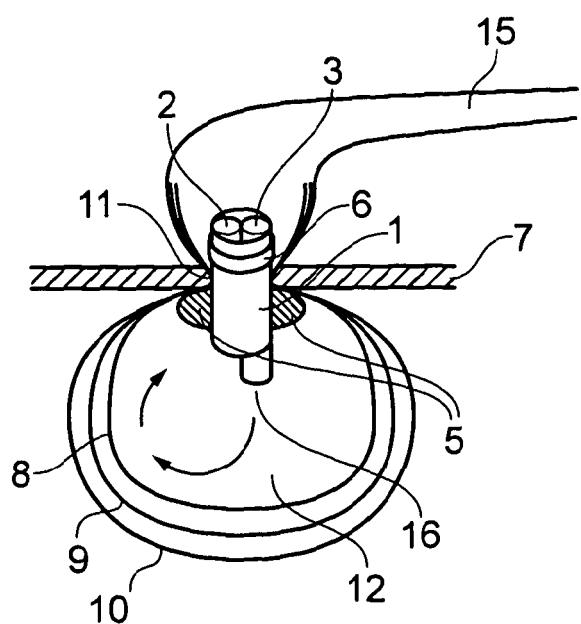


FIG. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6270505 B [0008]
- WO 2009117435 A [0011]

专利名称(译)	医疗装置		
公开(公告)号	EP2544596B1	公开(公告)日	2016-08-03
申请号	EP2011709785	申请日	2011-03-07
[标]申请(专利权)人(译)	ASHFORD和圣彼得医院		
申请(专利权)人(译)	ASHFORD & ST.彼得的医院		
当前申请(专利权)人(译)	ASHFORD & ST.彼得的医院		
[标]发明人	COLLINS JUSTIN		
发明人	COLLINS, JUSTIN		
IPC分类号	A61B17/00 A61B17/34		
CPC分类号	A61B17/00234 A61B17/3423 A61B2017/00287 A61B2017/348 A61B2017/3486 A61B17/221		
优先权	2010003817 2010-03-08 GB		
其他公开文献	EP2544596A2		
外部链接	Espacenet		

摘要(译)

一种腹腔镜袋，其中腹腔镜袋包括位于顶部的一个开口和主体部分，其中腹腔镜袋包括防水内层，耐粉碎的中间层和外层。防水。




FIG. 1




FIG. 2




FIG. 3