

(19)



(11)

EP 2 323 564 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.07.2013 Bulletin 2013/28

(51) Int Cl.:
A61B 17/00 (2006.01) **A61B 17/29** (2006.01)
A61B 18/14 (2006.01)

(21) Application number: **09789663.3**

(86) International application number:
PCT/US2009/043546

(22) Date of filing: **12.05.2009**

(87) International publication number:
WO 2010/008663 (21.01.2010 Gazette 2010/03)

(54) MODULAR TOOL WITH SIGNAL FEEDBACK

MODULARES WERKZEUG MIT SIGNAL-FEEDBACK

OUTIL MODULAIRE AVEC RÉTROACTION DE SIGNAL

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

(30) Priority: **15.07.2008 US 173177**

(43) Date of publication of application:
25.05.2011 Bulletin 2011/21

(73) Proprietor: **Immersion Corporation
San Jose, CA 95131 (US)**

(72) Inventors:
• **RAMSTEIN, Christophe
San Francisco
CA 94133 (US)**

• **ULLRICH, Christopher, J.
Santa Cruz
CA 95060 (US)**
• **DEGHEEST, Anne
Los Altos Hills
CA 94022 (US)**

(74) Representative: **Hofstetter, Schurack & Partner
Patent- und Rechtsanwaltskanzlei
Partnerschaft
Balanstrasse 57
81541 München (DE)**

(56) References cited:
**US-A1- 2003 045 888 US-A1- 2004 153 124
US-A1- 2005 113 821 US-A1- 2007 023 477**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 323 564 B1

Description

TECHNICAL FIELD

[0001] The embodiments of the present disclosure generally relate to modular tools and more particularly relate to mechanical and electrical communication between different portions of a modular tool.

BACKGROUND

[0002] In the field of surgery, open surgical procedures involve creating a relatively large incision in the abdomen of a patient allowing the surgeon to access various organs. On the other hand, laparoscopic surgical procedures involve accessing organs through one or more small incisions, which makes these procedures less invasive than open surgery. Since laparoscopic procedures are less invasive, hospitalization times are typically reduced, patients require less therapy, patients experience less pain, scarring is reduced, and the likelihood of complications is reduced.

[0003] In laparoscopic procedures, a miniature camera can be introduced into the body of the patient through an incision. The camera transmits images to a video monitor enabling the surgeon to view the patient's organs for diagnosing and treating the patient as needed. The surgeon can also introduce surgical instruments and auxiliary devices, such as irrigation and drainage devices, through one or more additional small incisions. US 2004/153124 A1 discloses a medical tool comprising an electromechanical driver and a surgical instrument attachment for use in invasive surgery, including a handle coupled to a flexible sheath which is in turn coupled to a surgical attachment. The handle of the driver includes the electromechanical driver and at least one processor element which controls the actions of the electromechanical driver. US 2007/023477 A1 discloses a surgical device that includes a jaw portion with a first jaw and a second jaw moveable relative to the first jaw. The surgical device also includes a shaft portion coupled to a proximal end of the jaw portion. A driver is configured to cause relative movement of the jaw portion and the shaft portion. US 2003/045888 A1 describes an articulated apparatus that includes a first link member, a second link member, and a third link member. The second link member is coupled to the first link member at a proximal end of the second link member by a first joint having a first axis of rotation. The third link member is coupled to a distal end of the second link member by a second joint. Finally, US 2005/113821 A1 discloses an actuation mechanism which is provided for replaceable or exchangeable clamping heads. The actuation mechanism provides a first actuation member for controlling a clamping head that can be removably coupled to the actuation mechanism.

[0004] One challenge regarding the use of surgical tools is sterilization, since surgical tools must be sterile

in order to be used in an operating context. One school of thought is to always use disposable tools, which are used once and then discarded. Although this may seem wasteful, there are some benefits to this methodology.

5 For instance, a surgeon has the assurance that new tools will be sterile. New tools are at the beginning of their effective life and are therefore more reliable. Among other benefits, there can be reduction in a hospital's liability since the transfer of pathogens from one patient to another is essentially eliminated.

10 [0005] Another school of thought is that many tools can be sterilized after use and should therefore be reused. Particularly, this methodology can be beneficial with respect to more expensive tools or those that are very reliable. By sterilizing tools, waste can be minimized. Some tools can be autoclaved, which is a sterilizing procedure that involves exposing the tools to high pressure and high temperature steam, which kills any biological matter on the tools. However, since only certain types of tools, such as stainless steel tools, can be autoclaved, other tools should be sterilized using other methods. For example, tools that contain parts that are sensitive to heat or moisture, such as electronic circuitry, can often be sterilized using other sterilization procedures. A difficulty with sterilization methodologies, however, is that a hospital will be required to dedicate a facility within the hospital for sterilization practices and must follow an effective program to ensure proper enforcement of sterilization procedures.

25 [0006] Based on the advantages and disadvantages of the two schools of thought as mentioned above, there is a trade-off between the concepts of using disposable tools and using tools that can be sterilized after use. An intermediate position can be taken between disposable tools and reusable tools, referred to herein as "reposable" tools. Repposable tools are designed such that a portion of the tool is disposable and a portion of the tool is reusable.

40 SUMMARY

[0007] The present disclosure describes embodiments of modular tools and further describes methods of operating modular tools. In one embodiment, among others, a modular tool comprises a handle portion and a distal portion, where the distal portion is configured to be attached to the handle portion. The handle portion is configured to be manipulated by a user. Although the distal portion can be attached to the handle portion, it is further configured to be removable from the handle portion by the user. Manipulation of the handle portion causes movement of one or more components of the distal portion. The distal portion is further configured to sense one or more parameters and transmit the sensed parameters to the handle portion.

55 [0008] Other features, advantages, and implementations of the present disclosure, not expressly disclosed herein, will be apparent to one of ordinary skill in the art

upon examination of the following detailed description and accompanying drawings. It is intended that such implied implementations of the present disclosure be included herein.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] The components of the following figures are illustrated to emphasize the general principles of the present disclosure and are not necessarily drawn to scale. Reference characters designating corresponding components are repeated as necessary throughout the figures for the sake of consistency and clarity.

[0010] FIG. 1 is a diagram illustrating a modular tool according to one embodiment.

[0011] FIGS. 2A and 2B are diagrams illustrating the interface portion shown in FIG. 1 according to one embodiment.

[0012] FIG. 3 is a flow diagram of a method of operating a modular tool according to one embodiment.

DETAILED DESCRIPTION

[0013] A surgeon performing a laparoscopic procedure is usually unable to directly view the interaction between the surgical instruments and the tissues and organs of the patient. However, by inserting image capturing devices to observe the distal ends of the tools, a surgeon can rely on visual feedback to identify the anatomy of the patient. To achieve a greater chance of success in laparoscopic procedures, the surgeon should manipulate the surgical tools with dexterity and sensitivity. In some cases, the distal end of a tool may include sensors to provide multimodal (i.e. visual, auditory, and/or tactile) feedback to the surgeon. With this multimodal feedback, a surgeon can better monitor forces applied by the tools to reduce injuries and trauma to the tissues and organs, thereby reducing complications associated with laparoscopic procedures.

[0014] Another aspect that correlates to the success of surgical procedures is proper sterilization of instruments. With respect to reusable tools, one or more portions of a reusable tool can be sterilized after use and reused while one or more other portions of the tool can be discarded. Reusable tools therefore include different portions that can be assembled together, used as an assembled tool, and then disconnected from each other. The reusable portions are sterilized for further use and the disposable portions are thrown out. One of the many advantages of reusable tools is that the different portions can be assembled in any number of possible combinations. For example, depending on a surgeon's preferences, certain handle portions may be selected and can be used with certain distal portions that contain elements designed to act upon the tissues and organs. Therefore, a variety of ends or tips can be connected to a variety of handles to create diverse combinations of modular tools.

[0015] For the portions of the modular tools that can be sterilized for later use, any suitable type of sterilization procedure can be used, depending on the particular design of the portion and the materials or components contained in the portion. For example, a handle portion may include electronic circuitry that may be sensitive to heat and/or moisture. Therefore, hot steam sterilization might not be an acceptable practice in this case, unless the sensitive portions are covered or sealed with a suitable protective device. Other sterilization techniques may also be used, such as exposing the reusable portions to ethylene oxide, using a hydrogen peroxide gas plasma technology, gamma irradiation, electron-beam irradiation, etc.

[0016] The embodiments of the present disclosure describe distinct portions of modular tools that can be assembled together to form a usable tool. In some embodiments, an interface portion or adapter is connected intermediately between a handle portion and a distal portion. Whether designed with or without the interface portion, the embodiments herein allow communication between the handle portion and the distal portion. Specifically, the communication is in the form of mechanical translation from the handle portion to the one or more components of the distal portion. In this way, the surgeon can manipulate the handle in such a way to cause the distal portion to perform specific functions on the tissues and organs. In addition, communication described herein includes electrical communication between the handle portion and the distal portion. For example, electrical communication may include providing high voltage from the handle portion to the distal portion, such as for cauterization. Electrical communication may also include providing low voltage, such as approximately 5V, from the handle portion to the distal portion. This voltage can be used to power the sensing elements of the distal portion as needed. Furthermore, electrical communication includes the transmission of sensor signals from the distal portion to the handle portion representing sensed parameters at the distal portion.

[0017] Although many of the examples described herein relate to modular surgical tools and more specifically modular laparoscopic surgical tools, it should be understood that the teachings of the present disclosure also encompass any suitable type of modular hand tools. Other implementations and advantages will become apparent to one of ordinary skill in the art from an understanding of the present disclosure.

[0018] FIG. 1 is a diagram illustrating an embodiment of a modular tool 10 having at least two portions. In particular, modular tool 10 is shown in FIG. 1 as a modular laparoscopic surgical tool. In other embodiments, however, modular tool 10 may be configured as any type of modular hand tool for performing any type of functions and furthermore is designed with suitable means for mechanically translating forces and electrically communicating signals between a handle portion and a distal portion.

[0019] In the embodiment of FIG. 1, modular tool 10

includes a handle portion 12, an adapter or interface portion 14, and a distal portion 16. In some embodiments, interface portion 14 may be omitted such that handle portion 12 can be connected directly to distal portion 16. In other embodiments, the elements of interface portion 14, as described in more detail below, may be incorporated partially or entirely into handle portion 12 and/or distal portion 16. Handle portion 12, interface portion 14, and distal portion 16 can be attached together to form modular tool 10. When attached, modular tool 10 can be used as designed. After use, handle portion 12, interface portion 14, and/or distal portion 16 can be removed or disconnected from the other portions. In the case where one portion, e.g., distal portion 16, is a disposable item, this portion can be removed from modular tool 10 and discarded.

[0020] Modular tool 10 is designed such that handle portion 12 can be selected from a plurality of handle portions. Also, distal portion 16 can be selected from a plurality of distal portions. With compatible interconnections between the different handle portions and distal portions, a user can connect the portions in any number of combinations, depending on the particular preferences or needs of the user. Interface portion 14 may be used to connect different families or classes of handle portions with different families or classes of distal portions. In some embodiments, however, handle portions and distal portions can be designed such that they can be connected to each other using a single interface portion 14 having a universal design for all types of handle portions and distal portions.

[0021] When a user physically manipulates handle portion 12, mechanical forces applied to handle portion 12 are translated to cause movement of one or more components of distal portion 16. As needed, this mechanical translation is communicated through or by way of interface portion 14. Furthermore, parameters that are sensed at distal portion 16 can be electrically transmitted back to handle portion 12. The types of parameters that can be sensed by distal portion 16 may include, for example, optical images, pressure, force, temperature, biological information, flexibility, tissue identification, tip resistance, trajectory information, Doppler information, active or passive piezoelectric transducer ("PZT") information, polyvinylidene fluoride ("PVDF") sensor information, strain gauge measurements, ultrasound, etc.

[0022] Handle portion 12 may include certain processing elements as needed, such as, for example, filters, analyzing circuitry, amplifiers, etc. Also, handle portion 12 may include a display device for displaying the sensed parameters. In addition, handle portion 12 may include a haptic actuator, such as, for example, a vibrotactile actuator, kinesthetic actuator, deformable surface actuator, electromagnetic actuator, eccentric rotating mass ("ERM"), linear resonant actuator ("LRA"), "smart material", piezoelectric material, electro-active polymer, shape memory alloys, etc. With a haptic actuator, handle portion 12 can invoke a haptic effect to the hands of the

user. Also, handle portion 12 can include handle mounted sensors, such as, for example, user grip force sensors, gripper angle sensors, etc.

[0023] In some embodiments, handle portion 12 may include a wireless transmitter configured to transmit wireless signals to a remote haptic actuating device. In this respect, signals from distal portion 16 can be transmitted to the remote device for actuating haptic effects on the user or even on another person. For example, signals can be transmitted to a body-mounted actuator assembly located on the surgeon, such as around the surgeon's wrist, inside the gown, etc. The body-mounted actuator does not necessarily need to be sterile. Wireless transmission in this sense may be for short range communication, such as using Bluetooth® or other similar technology.

[0024] Handle portion 12 can provide power to distal portion 16 as needed to power any sensors of distal portion 16. For example, a low voltage, e.g., 5V, may be sufficient to power many sensing elements. In this case, handle portion 12 can include an internal power source, such as, for example, rechargeable batteries. When sensors of distal portion 16 are powered, distal portion 16 can also transmit signals from the respective sensors back to handle portion 12. In response to receiving the feedback signal from distal portion 16, handle portion 12 can process the signals to indicate the results to the user in any suitable manner. For example, handle portion 12 may include a haptic actuator for invoking a haptic effect upon the user. In additional or alternative examples, handle portion 12 may also include a display device for visually displaying results of the sensors of distal portion 16. With a power source contained within handle portion 12, the power source can supply power as needed to the various output devices, e.g., haptic actuators, display devices, etc., maintained with respect to handle portion 12.

[0025] In some embodiments, handle portion 12 may also provide a large amount of AC or DC power to distal portion 16. For example, when modular tool 10 is used as a cauterization device, approximately 50 watts of power may be needed to cauterize an organ. With the capability to supply such a high power, modular tool 10 includes proper insulating material to minimize crosstalk or electromagnetic interference of the high power with other electronics. For cauterization, an external power source may be used in conjunction with modular tool 10 to provide a proper amount of power. The external power source in this case may be configured to provide power to distal portion 16 via any suitable connection mechanisms on handle portion 12 and/or interface portion 14.

[0026] Distal portion 16 may include any suitable type of tip or end piece for performing any number of functions. For example, regarding surgical tools, distal portion 16 may include a clamp, grasper, forceps, scissors, cautery, tissue identifying probe, tip resistance sensor, trajectory sensor, Doppler sensor, active or passive PZT sensor, PVDF strain gauge, ultrasound detector, blood flow sensor, pulse sensor, temperature sensor, sensor for mon-

itoring other patient vitals, etc. Some examples of non-surgical distal portion 16 elements may include drills, screwdrivers, saws, hammers, etc.

[0027] FIGS. 2A and 2B are diagrams of an embodiment of interface portion 14 shown in FIG. 1, where FIG. 2A is an end view of interface portion 14 and FIG. 2B is a cross-sectional side view of interface portion 14. In this embodiment, interface portion 14 includes a substrate 18 containing any suitable material for providing support for the other elements. In some embodiments, substrate 18 is formed having a hollow cylindrical shaft having a length of approximately 2-3 cm and a diameter of approximately 2-3 cm. Interface portion 14 also includes power conductors 20, signal communication conductors 22, a processing device 24, sensors 26, insulating material 28, and latching mechanisms 30. Insulating material 28 forms a layer between substrate 18 and a cylindrical channel 32 formed coaxially with interface portion 14.

[0028] In general, interface portion 14 is designed as an adapter to connect to handle portion 12 and distal portion 16 to provide support for forming a relatively rigid modular tool 10 that can be used as designed. Also, interface portion 14 is an electromechanical interface device designed to enable mechanical translation and electrical communication between handle portion 12 and distal portion 16. Interface portion 14 allows a mechanical and high voltage electrical connection through channel 32 to distal portion 16. In some embodiments, connection can be made to a laparoscopic tip having standard diameter dimensions of 3mm, 5mm, or 10mm. One of any number of handle portions can be selected for attachment with one of any number of distal portions. Selection of handle portion 12 and distal portion 16 may be based on a surgeon's preference or to support advances in technology of handle portions, interface portions, and/or distal portions. The selected portions can be attached by way of interface portion 14.

[0029] Two power conductors 20 are illustrated in FIG. 2, where the potential difference between the two creates an electrical current at the terminating sensor of distal portion 16 that completes the circuit. In some embodiments, however, more than one pair of power conductors can be incorporated in interface portion 14 for supplying power for additional sensors in distal portion 16 and/or for supplying different voltage or current levels as needed by different types of sensors. Similarly, two signal communicating conductors 22 are illustrated in FIG. 2 for creating a circuit along which signals can be transmitted between handle portion 12 and distal portion 16. Power conductors 20, signal communication conductors 22, and any other conductors of interface portion 14 can be embedded in substrate, which can act as an insulator for the conductors. Also, these conductors extend the length of interface portion 14 to transmit signals or power from one end to the other.

[0030] Interface portion 14 can include any suitable contact elements for creating an adequate electrical connection between contact elements of the conductors of

handle portion 12 and/or distal portion 16 with conductors 20 and 22. For example, the contact elements may include spring contact, corresponding male and female connector contacts, etc. Also, the contact elements and conductors can be used for carrying digital and/or analog signals. Conductors 20 and 22 can be designed to carry low voltage signals compared to the high voltage signals transmitted through channel 32. In some embodiments, the low voltage may be approximately 5V.

[0031] Processing device 24 may be a general-purpose or specific-purpose processor or microcontroller, depending on the particular use. In some embodiments, processing device 24 can be implemented using discrete logic circuitry, an application specific integrated circuit (ASIC), a programmable gate array (PGA), a field programmable gate array (FPGA), etc., or any combination thereof.

[0032] Sensors 26 may be implemented to detect any number of parameters associated with interface portion 14. Two sensors 26 are shown for illustrative purposes only, but it should be recognized that any number of sensors 26 may be incorporated in interface portion 14 as needed and depending on the particular design. In some embodiments, one or more sensors 26 may be configured as shaft sensors. For example, sensors may include an optical encoder for monitoring shaft position when a shaft of distal portion 16 is inserted into or removed from channel 32. Sensors 26 may also be configured as inductive sensors for monitoring when a high current is flowing through a cautery or other similar high power device inserted in channel 32.

[0033] The layer of insulating material 28, positioned between substrate 18 and channel 32, is configured to minimize or eliminate crosstalk or electromagnetic interference of a high power or current flowing through channel 32. For example, when modular tool 10 is configured as a cauterization device or other similar tool in which high power is conducted from handle portion 12 to distal portion 16, insulating material 28 insulates the other conductors, e.g., low voltage conductors 20 and 22, from the high power cautery in channel 32.

[0034] In general, latching mechanisms 30 can include any suitable structure and are illustrated in FIG. 2A to merely convey the concept of physically latching interface portion 14 with either or both of handle portion 12 and/or distal portion 16. Latching mechanisms 30 are located on both ends of interface portion 14 for assembling with both handle portion 12 and distal portion 16. Likewise, handle portion 12 and distal portion 16 include compatible latching devices for enabling engagement of portions together. Although four latching mechanisms 30 are shown, it should be recognized that any number of latching mechanisms 30 can be included on each end of interface portion 14. Latching mechanisms 30 can be configured in any suitable manner with any suitable size or shape and can be used to connect the different portions together to form modular tool 10. Latching mechanisms 30 are designed to provide sufficient strength and

stability to allow the user of modular tool 10 to easily and effectively perform the intended functions without inadvertent disconnection of the portions during use.

[0035] Furthermore, latching mechanisms 30 are designed to properly align the contact elements of the conductors of handle portion 12 and/or distal portion 16 with corresponding contact elements and conductors of interface portion 14. With proper alignment, power conductors of handle portion 12 and distal portion 16 can be connected to power conductors 20 of interface portion 14 to properly supply power as needed. Also, signal communication conductors 22 can properly carry signals between corresponding signal communication conductors of handle portion 12 and distal portion 16. It should be noted that handle portion 12 and distal portion 16 can be designed to include corresponding latching components for engaging latching mechanisms 30 of interface portion 14 to properly latch the portions together.

[0036] Channel 32 is designed to allow a mechanical connection between handle portion 12 and distal portion 16. For example, distal portion 16 may include a rod that is inserted through channel 32 and connected to corresponding mechanisms for translating mechanical forces.

[0037] Depending on the particular need or design of interface portion 14, more or fewer elements of interface portion 14 may be included. For example, interface portion 14 may further comprise a digital interface for digital communication or integrated sensing. Interface portion 14 may be configured to support different types of shafts and sensors of distal portion 16. Therefore, interface portion 14 may include any suitable shape or design, with differently sized or shaped channels 32 as needed for particular types of shafts and sensors.

[0038] FIG. 3 is a flow diagram showing an embodiment of a method of operation of a modular tool. In this embodiment, the method comprises providing distinct tool portions that can be assembled into a modular tool, as indicated in block 34. In some embodiments, the modular tool comprises a handle portion and a distal portion, where manipulation of one or more components of the handle portion causes movement of one or more components of the distal portion. According to many embodiments described herein, the method may include providing an interface portion to be assembled with the handle portion and distal portion and positioned between the two other portions. In this respect, interface portion may be used for connected different types of handle portions with different types of distal portions.

[0039] As indicated in block 36, the modular tool reacts to forces applied upon the tool, such as forces applied by a user. In response to mechanical manipulation of the first portion, e.g., handle portion, of the modular tool, mechanical forces are translated to a second portion, e.g., distal portion, of the modular tool. As indicated in block 38, one or more parameters are sensed at the second portion of the modular tool. As indicated in block 40, the sensed parameters are electrically transmitted from the second portion of the modular tool to the first portion of

the modular tool. In some embodiments, the method of FIG. 3 may further comprise utilizing the signals at the handle portion in any suitable manner. For example, the signals may be used to display the sensed parameters on a display device and/or can be used to actuate haptic effect via a haptic actuating device associated with the handle portion.

[0040] Therefore, it should be recognized that the modular tool, which includes portions that can be connected together and can be removed from each other, includes mechanical and electrical communication between the portions of the tool. With such a method, it is possible to interchange any number of handle portions with any number of distal portions of the modular tool. This allows great flexibility with respect to the user's selection of different types of handle portions and distal portions based on preference and/or need. While manipulating the handle portion, causing the distal portion to mechanically react, the distal portion can also sense one or more parameters that can be transmitted back to the handle portion for indicating the sensed parameters to the user. It should be understood that one or more of the steps, processes, and/or operations described herein may be executed substantially simultaneously or in a different order than explicitly described, as would be understood by one of ordinary skill in the art.

Claims

1. An interface mechanism (14) comprising:

a substrate (18);
means (30) for latching the substrate (18) to a handle portion (12) of a modular tool (10);
means (30) for latching the substrate to a distal portion (16) of the modular tool (10);
means for conducting electrical signals from the distal portion (16) to the handle portion (12),

characterized in that

the interface mechanism (14) further comprising a through channel (32) through which a mechanical connection between the handle portion (12) and the distal portion (16) can be made, wherein movement of one or more components of the handle portion (12) causes movement of one or more components of the distal portion (16) via the mechanical connection and a shaft sensor (26) configured to detect the presence of a shaft of the distal portion (16) when the shaft is inserted in the channel (32).

2. The interface mechanism of claim 1, further comprising a processing device (24).

3. The interface mechanism of claim 1, further comprising a layer of insulating material (28) positioned between the substrate (18) and the channel (32),

wherein the insulating material (28) is configured to minimize electromagnetic interference from high electrical power flowing through the channel (32).

4. The interface mechanism of claim 1, wherein the means for conducting electrical signals comprises a pair of electrical conductors (20, 22) embedded in the substrate (18) and running the length of the interface mechanism (14).

5. The interface mechanism of claim 1, further comprising means for supplying power from the handle portion (12) to the distal portion (16).

6. The interface mechanism of claim 5, wherein the means for supplying power comprises a pair of electrical conductors (20, 22) embedded in the substrate (18) and running the length of the interface mechanism (14).

7. The interface mechanism of claim 1, wherein the means (30) for latching the substrate (18) to the handle portion (12) is further configured to latch the substrate (18) to a handle portion (12) of a modular laparoscopic hand tool, and the means (30) for latching the substrate (18) to the distal portion (16) is further configured to latch the substrate (18) to a distal portion (16) of the modular laparoscopic hand tool.

8. A modular tool (10) comprising:

a handle portion (12) configured to be manipulated by a user; and

a distal portion (16) configured to be attached to the handle portion (12), the distal portion (16) further configured to be removable from the handle portion (12) by the user;

wherein manipulation of the handle portion (12) causes movement of one or more components of the distal portion (16); and

wherein the distal portion (16) is further configured to sense one or more physical properties and to transmit the sensed physical properties to the handle portion (12),

characterized in that

the modular tool (10) further comprising an interface mechanism (14) as described in claims 1 to 7.

9. The modular tool of claim 8, wherein the interface mechanism (14) enabling the user to attach different types of handle portions (12) with different types of distal portions (16).

10. The modular tool of claim 9, wherein the handle portion (12) is configured to supply a relatively small voltage to the distal portion (16) to power one or more sensors of the distal portion (16) that are configured

to sense the one or more physical properties.

11. The modular tool of claim 9, wherein the handle portion (12) is configured to supply a relatively high voltage to the distal portion (16).

12. The modular tool of claim 11, wherein the distal portion (16) is configured to use the high voltage for cauterization.

13. The modular tool of claim 8, wherein the handle portion (12) comprises a wireless transmission device for wirelessly communicating the sensed parameters to a remote device.

14. The modular tool of claim 8, wherein the handle portion (12) is reusable and the distal portion (16) is disposable, and wherein the distal portion (16) can be removed from the handle portion (12) after use and discarded.

15. The modular tool of claim 8, wherein the handle portion (12) comprises a haptic actuator configured to invoke a haptic effect on the user in response to the signals transmitted from the distal portion (16) or wherein the handle portion (12) comprises a display device configured to display a value of the one or more sensed parameters.

Patentansprüche

1. Schnittstellenmechanismus (14), der umfasst:

ein Substrat (18);

eine Einrichtung (30) zum Verriegeln des Substrats (18) an einem Griffabschnitt (12) eines modularen Instruments (10);

eine Einrichtung (30) zum Verriegeln des Substrats an einem distalen Abschnitt (16) des modularen Instruments (10);

eine Einrichtung zum Leiten von elektrischen Signalen vom distalen Abschnitt (16) zum Griffabschnitt (12),

dadurch gekennzeichnet, dass

der Schnittstellenmechanismus (14) ferner einen Durchgangskanal (32), durch den eine mechanische Verbindung zwischen dem Griffabschnitt (12) und dem distalen Abschnitt (16) hergestellt werden kann, wobei die Bewegung von einer oder mehreren Komponenten des Griffabschnitts (12) eine Bewegung von einer oder mehreren Komponenten des distalen Abschnitts (16) über die mechanische Verbindung bewirkt, und einen Schaftsensor (26), der dazu konfiguriert ist, die Anwesenheit eines Schafts des distalen Abschnitts (16) zu detektieren, wenn der Schaft in den Kanal (32) eingesetzt

ist, umfasst.

2. Schnittstellenmechanismus nach Anspruch 1, der ferner eine Verarbeitungsvorrichtung (24) umfasst.
3. Schnittstellenmechanismus nach Anspruch 1, der ferner eine Schicht aus Isolationsmaterial (28) umfasst, die zwischen dem Substrat (18) und dem Kanal (32) angeordnet ist, wobei das Isolationsmaterial (28) dazu konfiguriert ist, eine elektromagnetische Interferenz durch hohe elektrische Leistung, die durch den Kanal (32) fließt, zu minimieren.
4. Schnittstellenmechanismus nach Anspruch 1, wobei die Einrichtung zum Leiten von elektrischen Signalen ein Paar von elektrischen Leitern (20, 22) umfasst, die in das Substrat (18) eingebettet sind und die Länge des Schnittstellenmechanismus (14) durchlaufen.
5. Schnittstellenmechanismus nach Anspruch 1, der ferner eine Einrichtung zum Zuführen von Leistung vom Griffabschnitt (12) zum distalen Abschnitt (16) umfasst.
6. Schnittstellenmechanismus nach Anspruch 5, wobei die Einrichtung zum Zuführen von Leistung ein Paar von elektrischen Leitern (20, 22) umfasst, die in das Substrat (18) eingebettet sind und die Länge des Schnittstellenmechanismus (14) durchlaufen.
7. Schnittstellenmechanismus nach Anspruch 1, wobei die Einrichtung (30) zum Verriegeln des Substrats (18) am Griffabschnitt (12) ferner dazu konfiguriert ist, das Substrat (18) an einem Griffabschnitt (12) eines modularen Laparoskophandinstruments zu verriegeln, und die Einrichtung (30) zum Verriegeln des Substrats (18) am distalen Abschnitt (16) ferner dazu konfiguriert ist, das Substrat (18) an einem distalen Abschnitt (16) des modularen Laparoskophandinstruments zu verriegeln.
8. Modulares Instrument (10), das umfasst:
 - einen Griffabschnitt (12), der zur Bedienung durch einen Benutzer konfiguriert ist; und
 - einen distalen Abschnitt (16), der so konfiguriert ist, dass er am Griffabschnitt (12) befestigt wird, wobei der distale Abschnitt (16) ferner so konfiguriert ist, dass er vom Griffabschnitt (12) durch den Benutzer entfernbare ist;
 - wobei die Bedienung des Griffabschnitts (12) eine Bewegung von einer oder mehreren Komponenten des distalen Abschnitts (16) bewirkt; und
 - wobei der distale Abschnitt (16) ferner dazu konfiguriert ist, eine oder mehrere physikalische Eigenschaften zu erfassen und die erfassten physikalischen Eigenschaften zum Griffabschnitt

(12) zu übertragen,

dadurch gekennzeichnet, dass

das modulare Instrument (10) ferner einen Schnittstellenmechanismus (14), wie in den Ansprüchen 1 bis 7 beschrieben, umfasst.

9. Modulares Instrument nach Anspruch 8, wobei der Schnittstellenmechanismus (14) ermöglicht, dass der Benutzer verschiedene Typen von Griffabschnitten (12) an verschiedenen Typen von distalen Abschnitten (16) befestigt.
10. Modulares Instrument nach Anspruch 9, wobei der Griffabschnitt (12) dazu konfiguriert ist, eine relativ kleine Spannung zum distalen Abschnitt (16) zuzuführen, um einen oder mehrere Sensoren des distalen Abschnitts (16) zu speisen, die dazu konfiguriert sind, die eine oder die mehreren physikalischen Eigenschaften zu erfassen.
11. Modulares Instrument nach Anspruch 9, wobei der Griffabschnitt (12) dazu konfiguriert ist, eine relativ hohe Spannung zum distalen Abschnitt (16) zuzuführen.
12. Modulares Instrument nach Anspruch 11, wobei der distale Abschnitt (16) dazu konfiguriert ist, die hohe Spannung für die Kauterisation zu verwenden.
13. Modulares Instrument nach Anspruch 8, wobei der Griffabschnitt (12) eine drahtlose Übertragungsvorrichtung zum drahtlosen Übermitteln der erfassten Parameter zu einer entfernten Vorrichtung umfasst.
14. Modulares Instrument nach Anspruch 8, wobei der Griffabschnitt (12) wiederverwendbar ist und der distale Abschnitt (16) wegwerfbar ist, und wobei der distale Abschnitt (16) vom Griffabschnitt (12) nach der Verwendung entfernt und weggeworfen werden kann.
15. Modulares Instrument nach Anspruch 8, wobei der Griffabschnitt (12) einen haptischen Aktuator umfasst, der dazu konfiguriert ist, einen haptischen Effekt beim Benutzer in Reaktion auf die vom distalen Abschnitt (16) übertragenen Signale hervorzurufen, oder wobei der Griffabschnitt (12) eine Anzeigevorrichtung umfasst, die dazu konfiguriert ist, einen Wert des einen oder der mehreren erfassten Parameter anzuzeigen.

Revendications

1. Mécanisme (14) d'interface, comprenant :
 - un substrat (18) ;
 - un moyen (30), destiné à bloquer le substrat (18)

sur une partie (12) de poignée d'un outil modulaire (10) ;

un moyen (30), destiné à bloquer le substrat sur une partie distale (16) de l'outil modulaire (10) ;
un moyen, destiné à diriger des signaux électriques depuis la partie distale (16) vers la partie (12) de poignée,

caractérisé en ce que

le mécanisme (14) d'interface comprend, en outre, un canal traversant (32), à travers lequel peut être faite une connexion mécanique entre la partie (12) de poignée et la partie distale (16), dans lequel le déplacement d'un ou de plusieurs composants de la partie (12) de poignée provoque le déplacement d'un ou de plusieurs composants de la partie distale (16) par l'intermédiaire de la connexion mécanique et d'un détecteur (26) d'arbre, configuré pour détecter la présence d'un arbre de la partie distale (16), lorsque l'arbre est inséré dans le canal (32).

2. Mécanisme d'interface selon la revendication 1, comprenant, en outre, un dispositif (24) de traitement.
3. Mécanisme d'interface selon la revendication 1, comprenant, en outre, une couche de matériau isolant (28), positionné entre le substrat (18) et le canal (32), dans lequel matériau isolant (28) est configuré pour réduire l'interférence électromagnétique de la part du courant électrique fort, qui circule à travers le canal (32).
4. Mécanisme d'interface selon la revendication 1, dans lequel le moyen, destiné à diriger les signaux électriques, comprend une paire de conducteurs électriques (20, 22), encastrés dans le substrat (18) et courant le long du mécanisme (14) d'interface.
5. Mécanisme d'interface selon la revendication 1, comprenant, en outre, un moyen, destiné à fournir du courant depuis la partie (12) de poignée à la partie distale (16).
6. Mécanisme d'interface selon la revendication 5, dans lequel le moyen, destiné à fournir du courant, comprend une paire de conducteurs électriques (20, 22), encastrés dans le substrat (18) et courant le long du mécanisme (14) d'interface.
7. Mécanisme d'interface selon la revendication 1, dans lequel le moyen (30), destiné à bloquer le substrat (18) sur la partie (12) de poignée, est configuré, en outre, pour bloquer le substrat (18) sur une partie (12) de poignée d'un outil à main laparoscopique modulaire et le moyen (30), destiné à bloquer le substrat (18) sur la partie distale (16) est configuré, en outre, pour bloquer le substrat (18) sur une partie

distale (16) de l'outil à main laparoscopique modulaire.

8. Outil modulaire (10), comprenant :

une partie (12) de poignée, configurée pour être manipulée par un utilisateur et
une partie distale (16), configurée pour être fixée à la partie (12) de poignée, la partie distale (16) étant configurée, en outre, pour pouvoir être enlevée par l'utilisateur de la partie (12) de poignée ;
dans lequel la manipulation de la partie (12) de poignée provoque le déplacement d'un ou de plusieurs composants de la partie distale (16) et dans lequel la partie distale (16) est configurée, en outre, pour détecter une ou plusieurs propriétés physiques et pour transmettre les propriétés physiques détectées à la partie (12) de poignée ;

caractérisé en ce que

l'outil modulaire (10) comprend, en outre, un mécanisme (14) d'interface, tel que décrit dans les revendications 1 à 7.

9. Outil modulaire selon la revendication 8, dans lequel le mécanisme (14) d'interface permet à l'utilisateur de fixer différents types de parties (12) de poignée à différents types de parties distales (16).
10. Outil modulaire selon la revendication 9, dans lequel la partie (12) de poignée est configurée pour fournir une tension relativement basse à la partie distale (16), pour alimenter un ou plusieurs détecteurs de la partie distale (16), qui sont configurés pour détecter les une ou plusieurs propriétés physiques.
11. Outil modulaire selon la revendication 9, dans lequel la partie (12) de poignée est configurée pour fournir une tension relativement haute à la partie distale (16).
12. Outil modulaire selon la revendication 11, dans lequel la partie distale (16) est configurée pour utiliser la haute tension pour la cautérisation.
13. Outil modulaire selon la revendication 8, dans lequel la partie (12) de poignée comprend un dispositif de transmission sans fil, pour communiquer sans fil les paramètres détectés à un dispositif distant.
14. Outil modulaire selon la revendication 8, dans lequel la partie (12) de poignée peut être réutilisée et la partie distale (16) est jetable et dans lequel la partie distale (16) peut être enlevée de la partie (12) de poignée après usage et jetée.
15. Outil modulaire selon la revendication 8, dans lequel la partie (12) de poignée comprend un actionneur

haptique, configuré pour appeler un effet haptique sur l'utilisateur, en réponse aux signaux, émis depuis la partie distale (16) ou dans lequel la partie (12) de poignée comprend un dispositif d'affichage, configuré pour afficher une valeur des un ou plusieurs paramètres.

5

10

15

20

25

30

35

40

45

50

55

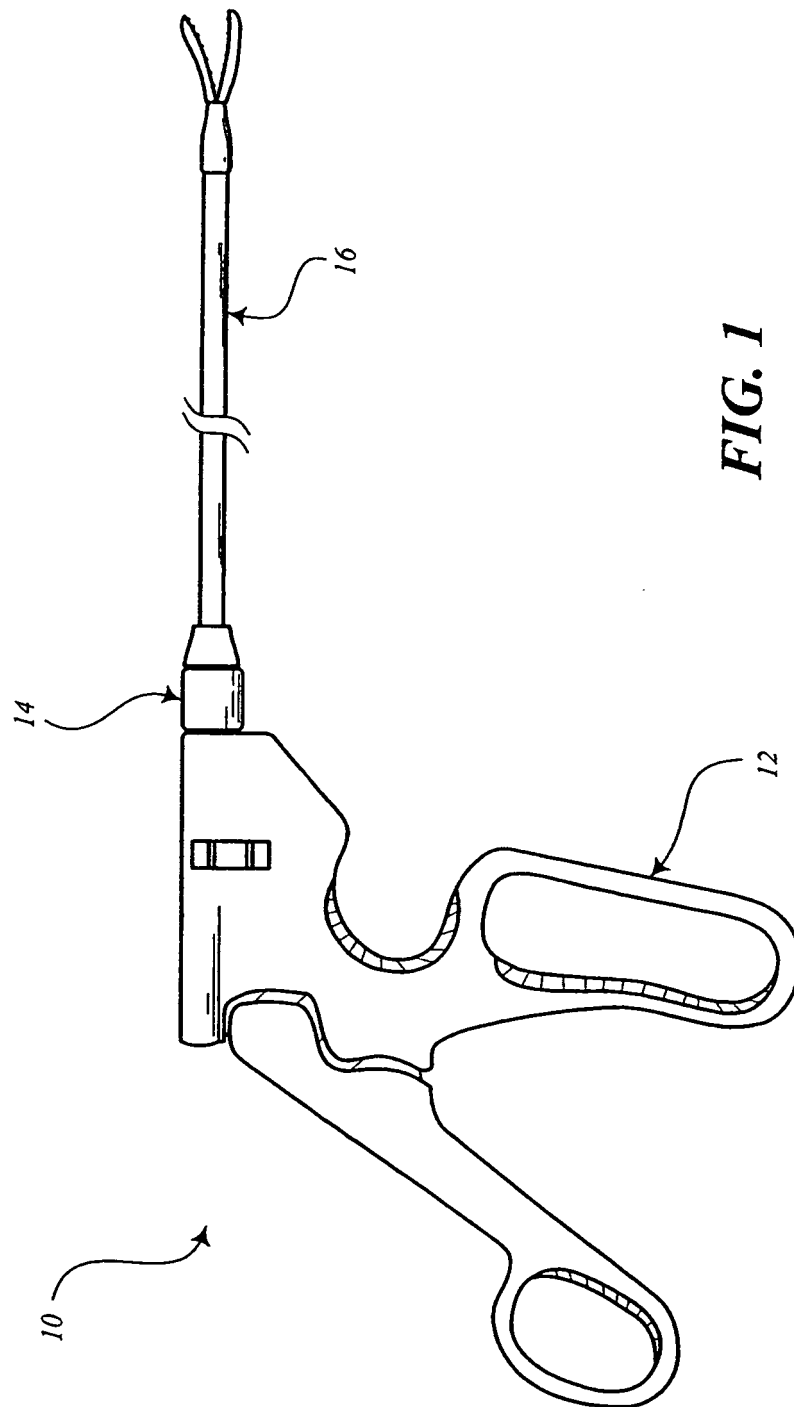


FIG. 1

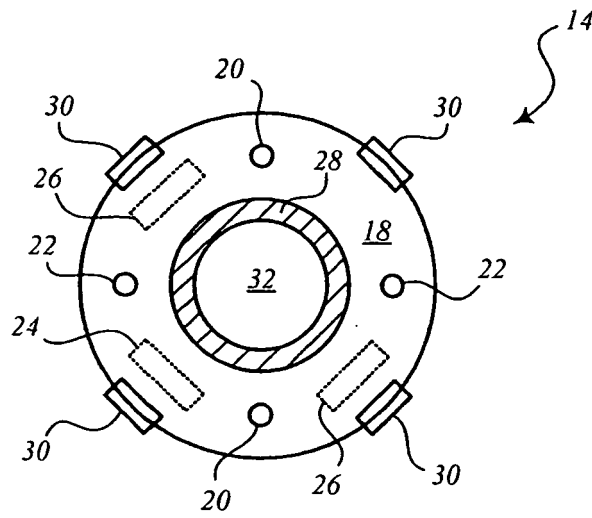


FIG. 2A

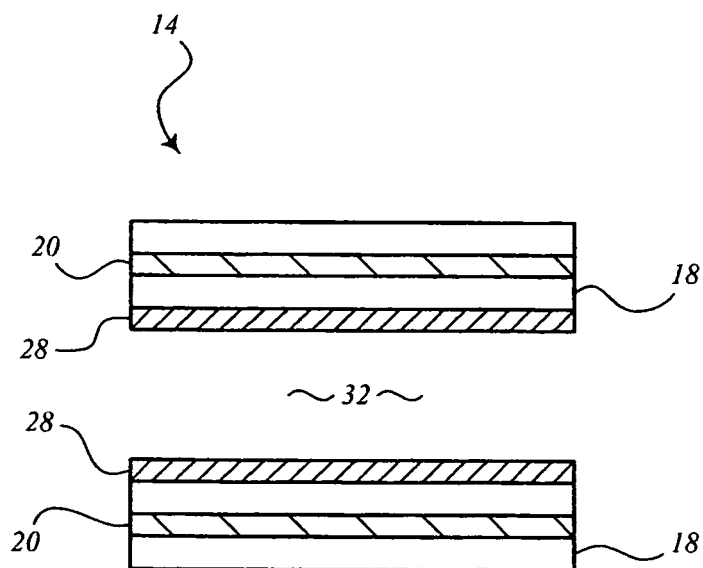


FIG. 2B

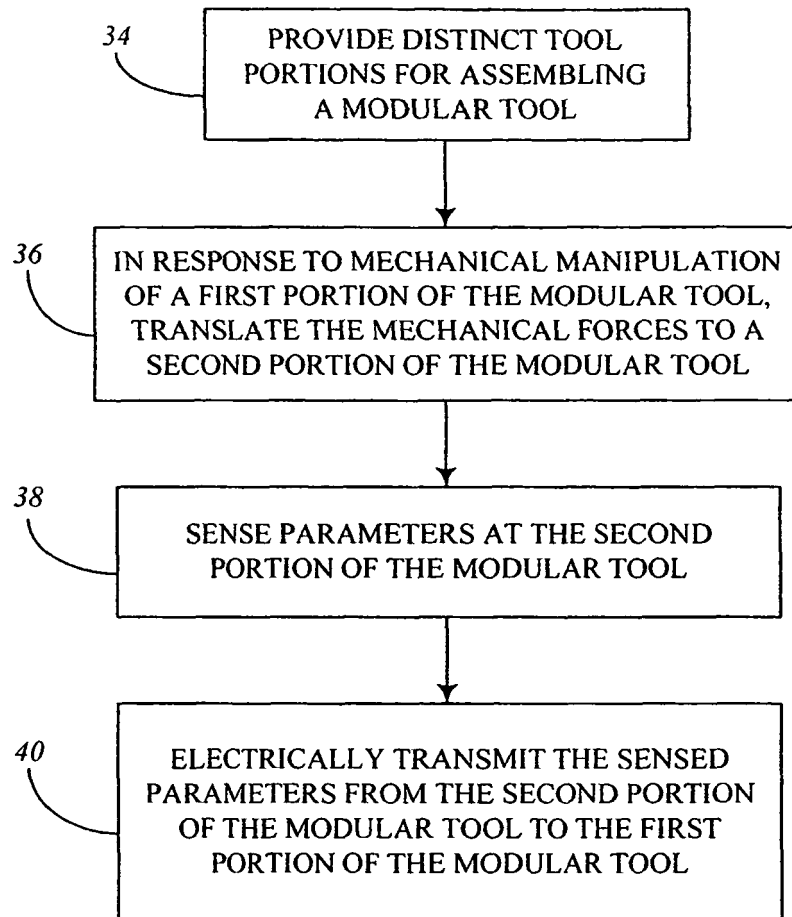


FIG. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2004153124 A1 [0003]
- US 2007023477 A1 [0003]
- US 2003045888 A1 [0003]
- US 2005113821 A1 [0003]

专利名称(译)	带信号反馈的模块化工具		
公开(公告)号	EP2323564B1	公开(公告)日	2013-07-10
申请号	EP2009789663	申请日	2009-05-12
[标]申请(专利权)人(译)	伊梅森公司		
申请(专利权)人(译)	Immersion公司		
当前申请(专利权)人(译)	Immersion公司		
[标]发明人	RAMSTEIN CHRISTOPHE ULLRICH CHRISTOPHER J DEGHEEST ANNE		
发明人	RAMSTEIN, CHRISTOPHE ULLRICH, CHRISTOPHER, J. DEGHEEST, ANNE		
IPC分类号	A61B17/00 A61B17/29 A61B18/14		
CPC分类号	A61B17/29 A61B1/00105 A61B18/14 A61B18/1442 A61B90/90 A61B2017/00022 A61B2017/00464 A61B2017/00482 A61B2018/00178 A61B2562/225		
优先权	12/173177 2008-07-15 US		
其他公开文献	EP2323564A1		
外部链接	Espacenet		

摘要(译)

在本公开中描述了模块化工具的实现和操作模块化工具的方法。根据若干可能实施例之一的模块化工具包括手柄部分和远端部分。把手部分被配置为由用户操纵。远端部分构造成附接到手柄部分，但是进一步构造成可由使用者从手柄部分移除。手柄部分的操纵引起远端部分的一个或多个部件的移动。远端部分还被配置为感测一个或多个参数并将感测的参数传输到手柄部分。

