

(19)



(11)

**EP 2 615 962 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**22.01.2020 Bulletin 2020/04**

(51) Int Cl.:  
**A61B 1/00 (2006.01) A61B 1/012 (2006.01)**  
**A61B 1/04 (2006.01) A61B 1/06 (2006.01)**

(21) Application number: **11826060.3**

(86) International application number:  
**PCT/US2011/052039**

(22) Date of filing: **16.09.2011**

(87) International publication number:  
**WO 2012/037525 (22.03.2012 Gazette 2012/12)**

**(54) DISPOSABLE ENDOSCOPIC ACCESS DEVICE AND PORTABLE DISPLAY**

**EINWEG-ENDOSKOPZUGRIFFSVORRICHTUNG UND TRAGBARES DISPLAY DAFÜR**  
**DISPOSITIF JETABLE D'ACCÈS ENDOSCOPIQUE ET ÉCRAN PORTABLE**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**

- **TOGAMI, Chris**  
**San Jose, CA 95120 (US)**
- **FARR, Laleh**  
**Palo Alto, CA 94306 (US)**

(30) Priority: **17.09.2010 US 884363**

(74) Representative: **Kaminski Harmann**  
**Patentanwälte AG**  
**Landstrasse 124**  
**9490 Vaduz (LI)**

(43) Date of publication of application:  
**24.07.2013 Bulletin 2013/30**

(73) Proprietor: **Vivid Medical Inc.**  
**Palo Alto, CA 94303 (US)**

(56) References cited:  
**WO-A2-2009/134634 US-A- 5 203 320**  
**US-A1- 2005 038 321 US-A1- 2007 015 964**  
**US-A1- 2007 225 561 US-A1- 2008 207 996**  
**US-A1- 2010 198 009 US-A1- 2010 198 009**

(72) Inventors:

- **FARR, Ali**  
**Palo Alto, CA 94301 (US)**
- **FARR, Mina**  
**Palo Alto, CA 94301 (US)**

**EP 2 615 962 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The above-identified patent applications are hereby incorporated herein by reference in their entirety.

## BACKGROUND

### The Field of the Invention

**[0002]** The present invention relates generally to an apparatus for visualization of endoscopic and borescopic fields, in minimally invasive surgical (MIS) procedures, general or diagnostic medical or industrial procedures using endoscopes or borescopes, respectively. More particularly, embodiments of the invention relate to use of portable and completely disposable endoscopic access device as a pluggable and removable vision systems in endoscopic procedures, that are completely disposable, with means of solid state illumination, image capture, equipped with an access channel, and means for suction and delivery of medication or lubricant to the endoscopic field. The device to be externally plugged into a control unit for display of endoscopic video, where the control unit provides power to the medical device, and controls and displays the visual data, through Universal Serial Bus cabling that can be disposed of along with the disposable medical access device.

### The Relevant Technology

**[0003]** Endoscopy is used in both diagnostic and surgical procedures. Currently, MIS procedures, as opposed to open surgical procedures, are routinely done in almost all hospitals. Minimally invasive techniques minimize trauma to the patient by eliminating the need to make large incisions. This both reduces the risk of infection and reduces the patient's hospital stay.

**[0004]** Endoscopic procedures in MIS use different types of endoscopes as imaging means, giving the surgeon an inside-the-body view of the surgical site. Specialized endoscopes are named depending on where they are intended to look. Examples include: cystoscope (bladder), nephroscope (kidney), bronchoscope (bronchi), laryngoscope (larynx + the voice box), otoscope (ear), arthroscope (joint), laparoscope (abdomen), gastrointestinal endoscopes, and specialized stereo endoscopes used as laparoscopes or for endoscopic cardiac surgery.

**[0005]** The endoscope may be inserted through a tiny surgical incision to view joints or organs in the chest or abdominal cavity. More often, the endoscope is inserted into a natural body orifice such as the nose, mouth, anus, bladder or vagina. Laryngoscopes are used in Endo-Tracheal intubation, a common procedure performed on all patients under anesthesia and in emergency situations where a flexible plastic catheter or Endotracheal Tube (ET tube) is placed into the trachea to protect the airway and provide a means of mechanical ventilation. There

are three basic types of endoscopes: rigid, semi-rigid, and flexible. The rigid endoscope comes in a variety of diameters and lengths depending on the requirements of the procedure. Typical endoscopic procedures require a large amount of equipment. The main equipment used in conjunction to the visual part of the endoscopic surgery are the endoscope body, fiber optics illumination bundles, illumination light source, light source controller, imaging camera, camera control module, and video display unit.

**[0006]** Figure 1 depicts a direct laryngoscope 100 with a handle 104 containing batteries for power, and a curved Macintosh type blade 102, equipped with fiber optic or lamp illumination 106 that is used for manual direct visualization of the larynx. The Direct laryngoscope, where the practitioner obtains manual visualization of the vocal cords and tracheal opening to perform intubation, is used by anesthesiologists, on patients under anesthesia for routine airway management procedures. Where difficult airway is suspected or encountered however, more sophisticated and expensive video intubation products are used.

**[0007]** Due to non-portability and expensive nature of the video laryngoscope and intubation devices, most emergency intubations are also performed with direct laryngoscopy with poor success rates due to, the emergency nature of the case, unpredictability of the airway, and lack of practice by the non-anesthesiologist staff performing the procedure.

**[0008]** Patients that are awake during the procedure present emergency staff with more challenges, where involuntary reflexes and muscle spasms could make the tube insertion into the tracheal opening very difficult. The possibility of cuts and tissue damage to soft tissue in the mouth, throat, and vocal cord, increases with multiple attempts and forced attempts especially during emergency situations.

**[0009]** The cost of ownership of the video intubation devices also prohibits most hospitals in having ample equipment ready for use in all operating rooms, emergency rooms and crash carts. In emergency cases the manual visualization is at times impossible with the patient's position, circumstances that could involve other injuries such as C-Spine injury where the patient cannot be moved.

**[0010]** Video intubation devices currently available are also only partially disposable where a disposable cover or sheath is used to protect the reusable part of the visualization system.

**[0011]** Various expensive visualization devices, capture electronics, rechargeable means for power, and small LCD displays mounted on the video intubation device need to be separated after use and cleaned. Improper cleaning process in these devices can lead to cross contamination and risk of infection for the patient.

**[0012]** Portable video intubation devices and as well as direct laryngoscopes are powered by portable batteries, within the device, where battery replacement and

recharging is necessary for proper operation.

**[0013]** Other completely disposable intubation devices have manual visualization or allow for only a small display mounted on the intubation device itself, where shared viewing of the intubation process is not possible. In addition, most video intubation devices use analog video capture devices, where storage, transfer of the video data cannot be done without separate and secondary Analog to Digital conversion of data. Current video intubation devices are closed systems with limited process, transfer, sharing, and storage capability.

**[0014]** US 2010/0198009 shows a disposable endoscope and portable display by the same applicant, which comprises a disposable opto-electronic module for illumination and imaging. It can include one or more solid state or other compact electro-optic illuminating elements, illuminating optics, imaging optics, and/or image capture devices.

**[0015]** The illuminating elements may have different wavelengths and can be time-synchronized with an image sensor to illuminate an object for imaging or detection purpose.

## BRIEF SUMMARY

**[0016]** These and other limitations are overcome by embodiments of the invention which relate to a removable, pluggable, and completely disposable illumination and vision systems that can be coupled to the distal end or housed within the body of a single use removable body (access device), and subsequently attached to various other medical devices, including various functional devices used as single use disposable unit (such as ET tube in intubation procedures, biopsy tools), or autoclavable medical instruments, used in minimally invasive surgical and other diagnostic procedures. Disposable illumination and vision systems according to some embodiments of the invention include one or more solid state light sources, illumination optics (such as wave guides) and optionally include separate imaging optics and image capture devices, collectively referred to as Opto-Electronic (OE) illumination and vision modules. Removable and pluggable OE illumination and vision modules may additionally include accompanying electronics for process and transfer of the image. Moreover the complete OE vision module and electronics could be housed in a rigid, flexible, partially flexible or expandable disposable body, where the complete device including the connecting cable can be disposed of after use. Embodiments of the invention also relate to the layouts and functionality of such removable and pluggable vision systems within the body of a disposable endoscope or other disposable medical devices, or within a disposable container (access device) in which the removable and pluggable OE illumination and vision modules are housed, and plugged onto a separate non-disposable control unit. The vision system housed within a disposable access device body, can also incorporate air tight clear channels and/or flexible

plastic tubing for air and liquid routing means, within the body of the disposable device as well, to enable insertion and guiding of the endo-tracheal intubation tube or other medical instruments through the access channel, as well as means to transfer gas, perform suction, deliver drug, lubricant or tissue diagnostic agents to the distal tip of the device during the procedure.

**[0017]** Embodiments of the invention additionally relate to general layouts of such removable, pluggable, and disposable vision systems incorporating mechanisms enabling stereoscopic, hyper or varying Field of View (FOV) visual systems.

**[0018]** Embodiments of the invention alternately or additionally include mobile and wearable displays that take advantage of the above embodiments. Some embodiments of mobile and wearable displays can enable minimally or non-invasive surgical and other diagnostic procedures, as well as airway management (intubation) to be performed with minimal setup needs and/or in remote locations, with full connectivity and means for recoding of procedure.

**[0019]** This Summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This Summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used as an aid in determining the scope of the claimed subject matter.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0020]** To further clarify the above and features of the present invention, a more particular description of the invention will be rendered by reference to specific embodiments thereof which are illustrated in the appended drawings. It is appreciated that these drawings depict only typical embodiments of the invention and are therefore not to be considered limiting of its scope. The invention will be described and explained with additional specificity and detail through the use of the accompanying drawings in which:

Figure 1 illustrates a direct laryngoscope with attached Macintosh laryngoscope blade, equipped with a miniature lamp or fiber optic illumination for manual visualization of the larynx, with batteries in the handle;

Figure 2a illustrates a disposable LED illumination and OE vision module comprising a miniature camera unit that can be built into the distal end of a flexible or rigid medical device, and connected to a remote portable display and control unit through flexible electrical circuitry;

Figure 2b illustrates the disposable LED illumination and OE vision module of Figure 2a controlled by a multi functional control unit;

Figure 3a illustrates an example embodiment of a completely disposable anatomically shaped laryn-

goscope or oral access device (including blade, handle, and connecting cable) equipped with the OE vision and illumination module of Figure 2, and with means for suction, and delivery;

Figure 3b illustrates the disposable oral access device of Figure 3a, where an endo-tracheal tube is inserted into its access channel.

Figures 3c-d illustrate the access channel routing and release at distal and proximal ends of the disposable endoscopic access device of Figures 3a-b, where the access channel is open in different sides of the device.

Figure 3e illustrates a close up view of the distal tip of the device in Figures 3a-d, showing the OE vision and illumination ports, as well as possible suction and spray nozzles positioning.

Figures 4a-d illustrate a flexible and expandable endoscopic access device not part of the invention, where the device body can be deployed, and manipulated to take different shapes and forms.

Figure 5a illustrates a dual camera version of OE illumination and vision module of Figure 2a, housed in the pluggable and disposable access device of Figures 3a-e, providing stereoscopic vision endoscopic access device.

Figures 5b-5c, illustrate 3D viewing mechanisms for the stereoscopic disposable endoscope of Figure 5a.

Figure 6 illustrates an embodiment of an adjustable, quick mount mechanism for the portable display in Figures 2a to 5c, that can be employed to adjustably mount the portable display on a user's arm or wrist;

## DETAILED DESCRIPTION

**[0021]** Example embodiments of the invention are directed to completely disposable solid state opto-electronic vision modules, that can include monochromatic, polychromatic visible, Ultra Violet (UV), and/or Infra Red (IR) solid state light sources such as high power Light Emitting Devices (LEDs) and Laser Diodes as a means of illumination and one or more opto-electronic imaging systems for image capture in diagnostic, intubation or surgical endoscopic procedures or functional borescopic systems where a separate medical device (such as an ET tube) or a surgical tool can be introduced through its access channel.

**[0022]** In various endoscope geometries, it is also possible to install and remove the entire opto-electronic imaging system along with the LED illuminator, associated processing electronics, and cable connection for power and control of the device, within the disposable housing, from a separate power and control unit allowing implementation of a removable and pluggable opto-electronic or electro-optic (OE or EO) illumination and/or vision module, as an entirely disposable unit, of various sizes and features, as described more fully below. The removability and pluggability of such OE vision modules de-

scribed herein can provide instantly upgradeable, and entirely disposable illumination and image capture systems, without any necessity to replace an entire medical or other functional control system still having a remaining useful life in a safe manner without danger of any cross contamination.

**[0023]** Figures 2a-b represent OE illumination and vision module 200, comprising a camera and housing unit 201, within which is disposed one or more imaging lenses or optical filters 208, and an image sensor 206. A clear optical window 203 (203a in Figure 2b), is also provided to enclose the imaging lenses 208 and image sensor 206 within the camera housing of 201, that is mounted on a rigid, flexible, or combination electronic processing board 207. The pluggable OE vision module 200 can be attached to the distal end of a rigid, flexible, partially flexible, or an expandable medical device, such as an anatomically shaped, access device that is permanently shaped, pre-procedure shaped or actively manipulated during procedure, to be inserted into the body, where minimum or no force is necessary to obtain clear view of various locations inside the body. Illumination module 202 and its drive electronics can be mounted on the same electronics board 207 or have its own flexible circuitry 204, receiving power from connection 209 and electronic board 207. Flex circuitry 205a-205b can be used to provide power and control signals to the OE vision module 200 and to transmit serialized imaging signals to a portable control and display unit 210, where part of the cable (205a) can be enclosed along the flexible or rigid body of the disposable medical access device, and part of the cable (205b) can be outside the medical device, where the entire cable can be disposable along with the medical device.

**[0024]** The portable control and display unit 210 generally includes a display screen, housing, illumination and imaging control electronics, image processing electronics, and/or a power supply, such as a battery. Such compact vision and illumination modules 200, without means of power or control electronics of their own, can be made in a compact and low cost form to make it easily introduced into the body within a disposable housing, by itself or introduced into the body as means of access for standard medical devices, where they can be removed and disposed of after a single use. Standard low cost and proven digital electronics can be used on the flexible or rigid electronic board 207, to convert the parallel digital video signals from a high resolution digital sensor 206, for example to high speed USB (Universal Serial Bus) video class camera signals (UVC, or USB Video Class format), similar to USB Web cameras, convert and send MIPI (Mobile Industry Processor Interface) enabled serialized digital sensor outputs in UVC format directly to the Portable Display and Controller 210.

**[0025]** In some embodiments, flexible circuitry 205a,b communicatively couples the portable control and display unit 210 to the OE vision module(s) 201, as a USB device to communicate power and control signals, as well

as serialized high speed digital video imaging signals in UVC format between the portable control and display unit 210 and the OE vision module(s) 201.

**[0026]** As such, the flex circuitry (USB cable) 205a,b serves as one example of a means for communicatively coupling the portable control and display unit 210 to the OE vision module(s) 201. Additionally, USB cable 205a,b further communicatively couples the portable control and display unit 210 to OE illumination modules 202 to communicate power and control signals between the portable control and display unit 210 and the OE illumination modules 202. As such, the USB cable 205a,b further serves as an example of a means for communicatively coupling the portable control and display unit 210 to the OE illumination module 202 sources.

**[0027]** For any of the high digital speed communication methods used in USB cable 205a,b between the display and control device 210 and OE vision and illumination module 200, appropriate USB connection can be made at the display and control unit, where the entire cable 205a,b can be also disposed of, along with the OE vision and illumination module 200 that is housed in a disposable device housing. Using standard USB communication protocols and connections to the display and control unit, allows the display and control unit be or function as a computing and processing unit such as a UMPC (Ultra Mobile Personal Computer), MID (Mobile Internet Device), a Tablet Computer, or mini PC or a PDA (Personal Digital Assistant), smart cellular phone, accommodating such USB communication port. Use of such established video communication protocols such as UVC, for example in case of a high speed USB connection, makes the display and control unit to be a device readily available with multiple other connectivity solutions already available in a mobile form. As illustrated in Figure 2b, other wired connections 211, 213, 215, could be DVI (Digital Video Interface), HDMI (High Definition Multimedia Interface), Ethernet connection, or external power adaptor connection, and wireless interfaces 217, 219, and 221 could be WiFi (wireless Ethernet), Bluetooth, UWB (Ultra Wide Band), IR, or high bandwidth cellular connection.

**[0028]** Other portable or non portable computing and display units, such as 220, and storage devices, such as 230, can be connected wirelessly, or with a wired connection, to the portable display and control unit 210. Figure 2b also illustrates bulb like protective window 203a and 202a, made of thin molded plastic or glass that could be placed on the camera housing of camera module 201, and illumination module 202, to act as an optical interface and window between the camera and the illumination module where they are incorporated at the distal tip of medical devices. A single (or multiple) bulb type or flat window could act as a common (or separate) window for both the illuminator and camera in an alternate embodiment, where it can be built into the disposable medical device body, in front of the OE illumination and/or vision module 200.

**[0029]** Alternatively where a vision system with focus-

ing capability is necessary, compact autofocus mechanism could be also integrated in camera module 201, where certain or all lens elements 208 are to be moved axially with respect to camera sensor 206, with drive and control signals from the control unit 210. Control unit 210 can be programmed to detect best focus of the remote camera module 201 with the imaging data it's provided from the camera and run it as if it's a local camera lens module within the control unit 201.

**[0030]** A fully disposable, removable and pluggable OE illumination and vision modules 200, implemented in the body of a single use disposable medical device 300 (300a with stereo vision) and 400, with an access channel 301, 401, as depicted in Figures 3a to 5c, can enable numerous advantages. For instance, the disposable medical device 300 (300a), and 400, housing the OE module 200, can also provide means for suction and delivery of liquid agents and medication (306a-c, 406a-b) in a fully sealed (air-tight) sterile cavity that can be disposed of after removal of the pluggable OE module 200 from the separate external power and control device 210 it is used with, whereupon a new protected OE module within a sterile device body (302, 402), can be plugged onto the power and control device 210 (and external sources of air, suction, lubrication or medication, 319 and 321) for subsequent use, thereby eliminating the likelihood of contaminating body cavities in which the disposable medical devices are used.

**[0031]** Some types of removable and pluggable OE vision modules 200 within the body of the a disposable device (300, 300a, and 400), can provide convenient access channel (301 and 401) to various designs of single use (such as various size ET tubes 330), or reusable medical devices 430 (biopsy or surgical tools) allowing for low cost variations in the medical device design and its functionality. The OE vision and illumination modules covered with a single use protective cover that is sterile (disposable device body 302, and 402) can be made in various device lengths (fixed length body 302, and variable length body 402), and provide distal tip (304a, 402a) access for various medical devices (330 and 430), where the protective cover, or the disposable body 302 and 402, with USB cable 205a, and possible gas and liquid tubing 306a-c, and 406a-b, running the length of the inserted disposable medical device (300, 300a, and 400) length, can be disposed of after use along with the entire USB cable 205a-b, and a new OE vision module 200 within the device 300, 300a or 400, and USB link can be plugged onto the medical device control system 210 for subsequent use.

**[0032]** Different or multiple OE vision and illumination modules 200, with various functionalities can also be plugged into the same type power and control system 210 using single or multiple USB links, directly or through USB HUBs, depending on the procedure to be performed, providing means to choose from a variety of application specific medical vision capability.

**[0033]** For instance, white light illumination 202 or mul-

ti-spectral visible OE modules 200 (containing multi chip RGB LEDs in illumination module 202, that are individually controlled that can cover the visible spectrum) can be used for traditional imaging in the visible range.

**[0034]** A pluggable and disposable OE vision and illumination module, with additional deep blue or UV illumination 202 in device 300, 300a and 400 could be used to induce bio-fluorescence inside the body and detect spectral emission from the object by sensor 206, at the same time as the visible imaging, to gain further information regarding the object, such as the tissue type and identifying lesions. An IR illumination 202 can be used in the OE vision and illumination module 200, to image inside tissue or through scattering substances or fluids, to give additional in depth view. Different UV, visible and IR wavelength illumination with varying penetration depths can be used for depth dependent imaging inside the tissue.

**[0035]** Various spectral component captured in 2D images, can be subsequently processed and put together to reconstruct a 3D view of inside the body.

**[0036]** LED sources in illumination module 202 can provide illumination in a wide range of the electromagnetic spectrum, from UV, to visible and IR, where the individual LED chips in 202 illuminator, each with s in a specific spectral wavelength range can be independently controlled in time by software applications running in control unit 210, and the corresponding spectral images can be independently processed based on individual sensor 206 captured frames, at the time where specific wavelength LED chip is on, by the control unit 210. Each LED spectral component can be independently designed in the LED, or obtained with independent processing of each LED spectrum, via secondary photo-luminescence process on blue or UV LEDs, or using edge or band pass spectral color filters such as multilayer dielectric optical filter coatings within illumination module 202. For imaging in the visible region, Red, Green, and Blue LED chips in primary colors can be used in illuminator 202, with or without other non-primary colors such as amber or cyan where the multiple spectral LEDs together form a white illumination, adhering to a specific color gamut set by control unit 210 by adjusting individual LED drive electronics pulsing the individual LEDs (changing the LED light intensity by adjusting the pulse width of the drive modulation).

**[0037]** By using multiple color LED chips in illuminator 202 and synchronizing a black and white image capture device in 206 by control unit 210, to grab the synchronized color component images, the use of color camera chips or high resolution 3 CCD or 3 CMOS imaging devices are eliminated. In this case, a single CCD or CMOS image capture device is used to capture the three or more images in a time synchronized fashion, where each color component image takes advantage of the full image capture device resolution by incorporating all the pixels in each color image component. Simple black and white image capture devices 206 are also cheaper to use, es-

pecially compared to 3 chip image capture devices, where in effect the resolution of a synchronized black and white imaging CCD or CMOS using synchronized color illumination provided by the LEDs is equivalent to a same pixel 3 chip image capture device.

**[0038]** Using color synchronized image capture devices 206 also allows the use of much higher resolution image capture devices in camera 201 at the distal tip 304a, 402a, of the medical access devices 300, 300a, and 400. A variety of illumination 202 configurations are possible using multiple LED chips in the 202 illuminator, where the uniformity, angle and extent of the illumination are freely controlled by the positioning and design of the LED chips or light source optics in illuminator 202. Various illumination fixed and deployable configurations are disclosed more fully in United States Patent Application Serial No. 11/233,684, which has been previously incorporated by reference.

**[0039]** In current endoscopic imaging systems where a white light illuminator is used, the illumination spectrum is determined by the light source and the optical path the light is transmitted through before reaching the object inside the body. Subsequently, a 3-color image capture device (e.g., a single-chip RGB camera or 3-chip RGB camera) captures the reflected light from the object according to its RGB filter set and image capture device spectral sensitivity. An image display unit in turn displays the captured RGB image according to its own color filters.

**[0040]** Infra Red (IR), Ultraviolet (UV) LED chips, or narrow spectral band VCSELs chips can be used in illuminator 202, based on their transmission and optical characteristics in the medium of insertion, such as wavelength dependent penetration depth inside the medium or the effect they have on the object of interest (such as inducing fluorescence). By delivery and spraying of diagnostic chemical agent (using spray nozzles 308a-b, and 408a-b at the distal tip 304a and 402a of disposable medical access device 300, 300a, and 400, through tubing 306a-c and 406a-b from external source 321, or internal reservoirs 327, 427a-b), can be used to decipher cancerous cells from healthy cells in the FOV of the endoscope, when the scene under observation is illuminated by specific wavelength of light from illuminator 202, and where specific fluorescence light wavelength is detected by the OE vision module 201 sensor 206, of the device, with commands and control from unit 210. With an endoscope equipped with a full range of LED wavelengths in illuminator 202, or a specific range of illumination wavelength, it is possible to obtain a full spectral images of the object by turning the various LEDs on and off at specified times by control unit 210, and in a controlled spectral imaging range or color gamut of imaging depending on application, while a time synchronized imaging process in electronic processor in 207 in conjunction with the external control device 210, captures various spectral images based on the state of illumination 202, at the time of image capture.

**[0041]** Figures 3a through 3e illustrate a disposable

video laryngoscope intubation access device 300 consisting of an anatomically shaped disposable molded plastic body 302, ending with the handle cap 309, as well as a disposable USB cable 205a, that is incorporated with OE illumination and vision modules 202 and 201 (depicted in dashed subset in Figure 3a), and includes a power connection 209, drawing external power from the portable control and display 210 via a power line of USB cable 205a,b. The OE vision module 201 mounted on a rigid electrical board 207 (with flexible extension for the OE vision module), is partially connected to a distal tip component holding structure 305, with connection 209 at the opposite end of the electronic board 207, which carries power to the OE vision module 201 and illumination module 202 (see Figures 3a and 3e, with the LED illumination unit 202 mounted next to the vision module 201 pointing to the tip 304a of the laryngoscope intubation access device blade 304), and transfers serialized image data from the image sensor 206 to USB video cable 205a, within the body 302 of the device 300, and laryngoscope metal blade 304. USB Video cable 205a,b additionally provides external power from the portable control and display unit 210, which may be battery operated, to the complete video laryngoscope intubation device 300, unit consisting of the OE illumination 202 and the vision module 201.

**[0042]** The viewing direction of the camera module 201 can be directed and adjusted towards the tip 304a of the laryngoscope blade 304 by a right angle prism, mirrors, or physically locating and directing the camera unit 201, along the tip 304a, mounted on holding structure 305 (as depicted in Figure 3a). The LED illuminator 202 could be mounted on small thermal pads or heat sink 307 directing the heat from the LED to around the edges of the front surface of imaging lens, that acts as the window 203 to the vision module for anti-fogging or alternatively to a separate imaging window 303 on the plastic device body 302, in front of the imaging optics (Figures 3a and 3e). Display and Control unit 210 can electronically process the video data from the vision module 201 by flipping the image or rotating it as necessary, for correct viewing of the FOV by the user with software control interface.

**[0043]** By incorporating the OE vision module 201 and LED illuminator 202 at the side of the distal tip 304a of the blade 304 (Figures 3a and 3e), the blade opening at distal and in proximal end, remains completely free for access to inside the body and the airway, allowing insertion of an endo-tracheal (ET) tube 330 in a straight through manner (Figure 3b-d) provided by an access channel 301. Other surgical devices can also use channel 301 to gain access into the mouth and throat as well.

**[0044]** Figures 3b-d, show an ET tube 330 inserted through access channel 301, where it is guided towards the vocal cords ahead of metal blade 304 distal tip 304a, by guiding features on both the device plastic body 302 such as "L" shaped tube guide 302a, bump 304b and lip 304c, in the metal blade 304. Access channel 301 is predominantly open on the side of the device 300 (opening

301a, Figure 3b), however only partially open to the side at the distal tip 304a (partially blocked on the side by tube guide 302a), and blocked by handle end cap 309 at the proximal end (Figure 3b). The ET tube 330 release from the access channel 301 of device 300 is made possible at the proximal and distal tip in opposite sides of the device 300 (metal blade 304 side in Figure 3c, and plastic body 302 side in Figure 3d). Cut-out 302b in the plastic body 302 at the proximal handle end cap 309 (Figure 3d) allows the tube 330 to be taken out of the access channel 301 from the plastic body 302 side, and cut-out 304d in the metal blade 304 allows quick release of the tube 330 at the distal tip 304a (Figure 3c), from the metal blade 304 side and under the tube guide 302a. Having access channel 301 opening and release from opposing and orthogonal openings on the sides of the device (rotated openings provided by 302b, 301a, and 304d) at the proximal end, along the device 300 body, and distal tip, allows inserted ET tube 330 or other surgical devices to easily guided, to maintain their position and stay within the access channel 301, until exit at the distal tip and during the operation.

**[0045]** Device 300 of Figure 3a-e is also equipped with means to perform suction at the distal tip 302a, and deliver liquid for irrigation, applying medication, spraying lubricants or other biomedical agents to the scene under observation, or on the surgical instruments inserted into the device 300 through access channel 301 (such as the ET tube). Since the OE vision module 200 with its electronic board 207, and electronic connection 209, is mainly located at the distal tip without taking too much room along the device body 401, various air-tight tubular channels 306a-c (Figure 3a) or plastic tubing, can run along the plastic device body 302, next to the cable 205a, along the length of the access channel 301, inside the device 300, to be used for supply of suction, or means to deliver medication and biological agents to the distal tip of the device 300.

**[0046]** Disposable plastic tubing 315 and 317, can extend outside the medical device similar to USB cable 205b (Figures 3a-d), to appropriate suction chamber 319 and delivery source 321, to keep the visual field and endo-tracheal opening clear of liquids and blood, through suction opening 320 (Figure 3e) close to the distal tip 304a and illumination and vision module ports 310a-b. Suction port 325 or, channels 306a-c can optionally contain means for filtering of air, and liquid. Small built in reservoir(s) 327 (Figure 3a) with pre-filled liquid, medication, or lubrication gel supply can be provided at the proximal end (inside handle cap 309), and connected to plastic tubing and channels 306a-c inside the device body 302. A distal tip connection is made from the channels or tubing 306a-c to possible delivery or spraying means (openings or nozzles 308a-b in Figure 3e) for the field in front of the distal tip 304a of device 300. Activation button 311 (for spraying) and valve mechanism 313 at the proximal end cap 309 (Figures 3a-c) could initiate and continue suction, spray lubricant gel on the ET tube

tip as it leaves the device (Figure 3e), spray antiseptics to numb the area and relax the vocal cords for easier access into the airway, cover the field of view with diagnostic agents that promote fluorescence or other chemical or visual means of tissue analysis and identifying cancerous region of the cells and tissue, through nozzles or openings 308a-b.

**[0047]** Figure 3e, shows the vision module 201 and illumination 202 openings (optical ports 310a, 310b) in device 300 plastic body 302, used for vision module 201 and illuminator 202. A separate optical window 303 can be installed against these optical ports 310a and 310b in front of vision module 201 and illuminator 202 on plastic body 302 of device 300, where the heat from the illumination source is coupled to this separate window 303, to warm up the window as means for defogging.

**[0048]** Suction chamber 319 and delivery source 321, could be sources fixed in the medical environment that are connected to the device 300 through plastic tubing 315 and 317, or portable means to deliver these in a remote setting. In a portable setting suction chamber 319 could be a collapsed ball, bubble, bladder or container, which is made devoid of any air, where once valve 313 is released starts to expand to its expanded perform shape, initiating suction in the device 300 suction port 320. Delivery source 321 can also be a small plastic spray bottle connected the device 300 by plastic tubing 317, where when activated (press on its spray release button) initiates delivery of material to the device 300 distal tip openings or nozzles 308a and or 308b. Alternatively a syringe connection (not shown in the pictures, similar to applying medication in an IV line) can be inserted or otherwise made connection to the plastic tubing 315 and 317 junctions for on-the-go initiation of suction or delivery of medication. All means for portable suction and delivery described above are low cost portable means that could be built into the device 300 and tubes 315 and 317, where the whole mechanism and any medical and biological agents they contain can be disposed of along with the device 300 and its electrical USB cable 205a-b.

**[0049]** Removable and pluggable OE vision and illumination modules built into the distal tip of disposable access device (such as device 300), can also enable variety of single use disposable, articulating and non-articulating surgical medical devices (such as depicted in Figures 4a-d), to be used in a fixed position with respect to the medical device original form (Figure 4a), or deployed and articulated out of the medical device body 400 (Figure 4b-d) once the medical device distal end is inside the body. With flexible circuit connection (207 and 204) of the OE vision (201) and illumination (202) modules at the distal tip of the device 300, and flexible cabling 205a, and using flexible tubing 306a-c inside the device 300, the rigid metal blade 304 and plastic device body 302 of device 300, can be replaced with a flexible accordion type device body 402 of device 400 in Figure 4a-d, retaining similar functionalities of device 300 but in a deployable and articulating manner. The rectangular dis-

posable device body 402 depicted in Figures 4a-d, of course can have circular, elliptical or other tubular forms in a lengthwise expandable form or have shape retaining features (such as a wire) inside its tubular body 402. (as depicted in Figures 4a-b where accordion type body 402 is elongated along the axis 450). Through the deployment and articulation process of the OE illumination and vision modules 202 and 201 that are plugged onto the distal tip 402a of the flexible medical device 400, the OE module 200 can position itself outside the original medical device volume, creating space inside the medical device and enabling further an articulating tool's (430) insertion through the access channel 401, inside the device 400 body 402, thus allowing for further medical device functionality, or articulation to a particular position, revealing a new direction of view (460) by the medical device 400 (perhaps behind some body organs (such as the tongue, teeth, under the tongue, top of the mouth, or otherwise inside the cervix or abdominal cavity).

**[0050]** In the case of surgical procedures where delicate and more precise diagnostic operation or surgery is performed using the disposable endoscopic visualization access device 300 or 400, such pluggable OE vision and illumination systems 200 can not only be made in minimal size, but can alternately or additionally house two or more miniature camera systems 201 (directed towards the same FOV) with an extended dual USB device connection for stereoscopic view of the anatomy or surgical sight (as will be shown later in Figure 5a), where and 3D viewing for extra precision and guidance with visual depth clues.

**[0051]** Incorporating disposable miniature solid state OE illumination and vision modules (200) in endoscope and surgical disposable access device bodies 302 (rigid) and 402 (flexible), without means for power of their own, not only eliminates device mounted displays, and large batteries used in portable devices, it also provides a highly desirable cost advantage over conventional lamp and fiber guide systems used in conventional endoscopes, as it replaces the expensive light sources, long fiber optic light guides to transfer illumination light from the light source to the scope, and the illumination light guides inside the scope as well.

**[0052]** Low level power is needed for the LED light sources 202, image sensors 206, and drive electronics 207. The electrical connection 209 of the OE illumination and vision module 200 is also much easier using USB type communication and power protocols, with well established mobile web camera applications in video conferencing.

**[0053]** Only electrical power and LED control signals need to be provided for the endoscopic disposable access device 300, 300a, and 400, eliminating the heavy and bulky batteries and fiber optics illumination cable connection to the scope, increasing the maneuverability, portability and, availability, and durability of the device in a fully sterile fashion anywhere, anytime. OE illumination and vision modules 200 are also more robust to shock



and vibrations, or extreme environmental conditions, and practically unlimited shelf life than fiber optic illumination, external camera systems, conventional battery, and LCD displays.

**[0054]** In addition to the embodiments of Figures 3a-e, articulating and/or deployable embodiments are possible for effective illumination and imaging of a surgical site. In articulating embodiments, such as the embodiment of Figure 4a-c, where the OE illumination (202) and vision (201) modules are articulated from an insertion position, or deployed from a collapsed profile before use and insertion (Figure 4a), in which they are held within a close profile of the insertion body, and along axis 450, to an operational position (Figures 4b-c) where they are conveniently expanded axially, deployed and articulated, pointing to an object of interest (along tip axis 460). In the original collapsed body 402 form in Figure 4a, all flexible electronic lines and circuitry 204 and 207, flexible air and liquid tubing 406a-b (for suction, drug, diagnostic agents, etc.), are also collapsed within accordion body 402. Alternatively certain parts that are normally inside the device 400 during use, such as cable 205a (extension of USB cable 205b), or shape retaining wires inside the collapsing body 402, can be pushed outside the device from the handle 409, in the collapsed configuration of device 400 depicted in Figure 4a. Where upon deployment, the body 402 and all the inside electrical and tubular connections are elongated (Figure 4b), and articulated into position (Figure 4b-c), where spray nozzles 408a-b at the end of the delivery tubes 406a-b, are also manipulated and pointed towards the same object of interest 490 (along the line of site or distal tip axis 460 in Figure 4d). In operational position of distal tip axis along 460, the illumination light (from illuminator 202), as well as the imaging FOV (of the vision module 201), can be directed to the surgical site 490, from beyond the endoscope body 402 in Figure 4a, where articulation of an OE module holding structure 405 at the distal end 402a, positions the vision module, and the distal tip of the access channel 401 off axis (along 460) from the axis of the insertion body (depicted by the dashed line 450 in Figure 4a-d), increasing the functionality of the surgical device.

**[0055]** The portable control and display unit 210 in Figures 4a-c is connected to the pluggable module 200, using USB electrical cable 205b, which extends as electrical cable 205a to the electrical connection 209 of the electronic circuit board 207 of the OE vision (201) and illumination (202) module near distal end 402a of device 400 (through vision port opening 410a, and illumination port opening 410b). The vision module 201 and illuminator 202 in Figures 4a-c sit on a rigid component block 405 and connected to flexible section of electrical board 207, where they receive power from the electrical connection 209 (as depicted in Figures 4a-c), which could be made to run as a USB device. LED illuminator 202 is mounted on or near or behind optical window 403 (in front of the vision module 201), for efficient heat transfer from the LED to the window as anti-fogging means. Alternatively

a passive resistor could be mounted on the window 403 to act as de-fogging unit, when the device is used inside the body with higher temperature than outside.

**[0056]** Multiple color LED chips can be used within the plastic tip housing 402 of the disposable device 400, where the display and control unit 210 synchronizes the on/off timing of each color LED with the frame rates of a black and white camera sensor 206. Such disposable endoscope could be used for spectral imaging with narrow band LED light output in the illuminator module, or with wider wavelength band illumination in the visible range time synchronized with a black and white image sensor 206, to provide full color vision where each color frame takes advantage of the full resolution of the image sensor 206.

**[0057]** In alternate embodiments of all of the pluggable OE illumination and vision modules 200 in the form of disposable, rigid or flexible access device that use LEDs for illumination, Solid State Laser Diodes (LD) or VSCELs can alternately or additionally be employed within the OE illumination and vision module or independently at the distal end of pluggable single use devices. For instance, Infrared (IR) Imaging employs IR solid state light sources to illuminate close tissue diagnostic and surgical procedures. IR detectors and special image sensors with modified optical filters or polarizers in front of their pixels can be employed within OE vision modules 200 for through tissue and blood imaging along with infrared light sources that have appreciable penetration depth in human tissue, blood or other bodily fluids, such as urine.

**[0058]** With use of various wavelength LED chips (UV, visible spectra, or IR) in illuminator 202, spectral imaging can be performed concurrently or at various time windows, and with spraying of the site with specific diagnostic agents using spray nozzles 408a-b (Figures 4c-d), under specific illumination wavelength from illuminator 202, tissue diagnosis relating the bio-fluorescence characteristics of the cells can also be performed on the area under observation (490). As in device 300, the surgical area 490 under observation of device 400, can further be locally anesthetized or numbed with medication sprayed onto the site 490, from nozzles 408a-b, were then surgical tools (430 in Figure 4c-d), biopsy needles, or blood coagulating devices, and other tools can be inserted and used through channel 401. Spray buttons 411a and 411b installed on handle 409 and the proximal end of the disposable device 400, can activate spray of the material contained in reservoir 427a and 427b (also enclosed inside the handle 409), through flexible tubing 406a-b, at the spray nozzles 408a-b.

**[0059]** In some embodiments of the invention, multiple OE vision modules 201 are employed within a single pluggable module to obtain stereoscopic viewing in a disposable stereoscopic access device 300 or 400, as illustrated in Figure 5a (device 300a). In these and other embodiments, the portable control and display unit 210 can be used to house all the control electronics and software necessary to power the OE vision modules 201a and

201b, (used as right and left vision modules, now mounted behind vision ports 310a and 310b of device 300 in Figure 3e), control illumination 202 now mounted behind a new third device vision port 510, imaging functionality of illumination module(s) 200, data transmission control (using standard network device protocol such as a in a USB host driving one or more web cameras with on board illumination), as well as any image processing and/or display functionalities. For instance, the portable control and display unit 210 can include illumination and imaging control electronics that provide illumination and/or imaging control of multiple LED sources (individually, concurrently or in time) in OE illumination module 202 and/or the OE vision modules 201a,b. Alternately or additionally, the portable control and display unit 210 can include image processing electronics that provide image processing of image data received from multiple OE vision modules 201a,b, perform autofocus, or initiate drug and chemical agent delivery to the site from spray nozzles 308a-b.

**[0060]** The portable control and display unit 210 can be a portable display unit used in a fixed position in a medical facility, or as a mobile application with an LCD, a touch screen, or other display unit capable of displaying 2D or 3D (stereoscopic) images. The portable control and display unit 210 can alternately or additionally be worn by a user, with a wired or wireless connection to the input devices (e.g., the OE vision module(s) 200), where the user can observe 2D or 3D stereo images and video conveniently by looking at the display mounted on an arm of the user, hanging from a neck of the user, or otherwise mounted (clipped on) to the user or patient.

**[0061]** The portable control and display unit 210 can be electrically powered using a power cable, or use rechargeable or disposable batteries. In all the embodiments, the electrical power supply of the portable control and display unit 210, whether from a power cable or battery, provides power for the portable control and display unit 210 as well as the OE illumination and vision modules 202, 201 to which the portable control and display unit 210 is attached via USB cable 205a,b. Single or multiple OE illumination 202 and vision modules 201 can be connected to the portable control and display unit 210 (using USB HUB like connections), which portable control and display unit 210 can be configured to provide synchronized control of complete illumination and image capture for all connected OE illumination and vision module units it's connected to. The portable control and display unit 210 could also provide means for local and transferable means of image and video storage, with magnetic and/or electrical storage devices within its housing. A user interface can be provided on the portable control and display unit 210 and may include hard or soft electronic keys, a mouse or joystick, a touch screen, and/or voice activated command electronics. The user interface can be employed to adjust, control, display, process, transfer, store or retrieve the image and video data. The portable control and display unit 210 can alternately or additionally

comprise a multifunctional unit that is used as both a general portable medical display and one or more of: a cell phone, a mini computer with wireless capabilities, mobile internet device (MID), a GPS unit, a personal digital assistant (PDA), a note-taking device, a dictation device, a video conferencing device, or the like.

**[0062]** The user interface devices described above, including hard or soft electronic keys, a mouse or joystick, a touch screen, and voice activated command electronics all serve as examples of input and/or output means that can be included in the portable control and display unit 210.

**[0063]** The portable control and display unit 210 can alternately or additionally include computing means, such as a processor, microprocessor, controller, or the like. Alternately or additionally, the portable control and display unit 210 can include cellular communication capabilities and/or wireless connectivity.

**[0064]** In some embodiments that include stereoscopic or 3D image capture (device 300a, as illustrated in Figure 5a), the portable control and display unit 210 can display time-synchronized alternate left and right frames of the video from the medical device vision modules 201a and 201b in Figure 5a, where a pair of time-synchronized liquid crystal shutters, 504 and 506, in front of the user's left and right eyes (501 and 503), allow each eye to see the corresponding alternating stereoscopic images. In such embodiments, the user can wear 3D-viewing time-synchronized shutter glasses 500, with frame 502 depicted in Figure 5b, while viewing the 3D displayed data on the portable control and display unit 210, and while the 3D-viewing liquid crystal shutter glasses are time-synchronized with the portable control and display unit 210 via a timing signal received via wireless interface 221 (e.g., IR connection, Bluetooth) or hardwired connection 215, to the portable control and display unit 210 as described also in Figure 2b.

**[0065]** An independent 3D viewer illustrated in Figure 5c with its' own left and right LCDs for stereoscopic viewing (or time synchronized left and right image on single LCD, similar to the display unit 210 in Figure 5a, with left and right liquid crystal shutters 554 and 556) could be used alternatively to view the 3D video from the disposable stereo endoscope 300a (here connected using separate USB cables 205b for the left and right video). In which case the control and display unit 210 could be displaying the 2D images from either left or right vision modules 201a or 201b, while relaying the 3D video data to the 3D viewer 550 through wired or wireless connections 221 and 215. The independent 3D viewer could be equipped with headrest 559 and nose relief 557 on its housing 552.

**[0066]** The portable control and display unit 210 may comprise a flat panel LCD screen, touch screen, or other suitable screen such as organic LED display, or 3D LCD that can display 3D stereoscopic images with or without special (polarized) glasses. A separate sterile disposable cover could be draping the portable control and display

unit, preserving all user interface and electrical connection functionalities. Alternately or additionally, the portable control and display unit 210, or its separate sterile cover can have multiple positioning and attachment possibilities, depending on its size, the type of medical device it's used with, the type of medical procedure, the location the procedure is performed, and the type of user interface necessary. In fixed office or surgical environments, the portable control and display unit 210 can be fixed to a wall, mounted on an IV post, clipped onto a patient cover or drape, or can be hung from a frame structure, with tilt, rotation, and locking capabilities and in a removable and portable form. Alternately or additionally, a fixed control and display unit can be employed to control OE illumination and vision modules 202 and 201 and/or to display image data captured by OE vision modules 200.

**[0067]** Figures 6, illustrate "wearable" configurations of the portable control and display unit 210, where the portable control and display unit 210 is attached to the arm or wrist 603 of a user via a wearable attachment device. In more detail, a wide bracelet, wrist band or support structure 602, could be made of the soft Velcro material, where a strip of mating Velcro strip could be fixed behind the portable control and display unit 210 or its disposable cover. The Velcro arm band 602 can be employed for adjustable attachment or wearing of the portable control and display unit 210 on the arm or the wrist 603 of the user, as its' soft Velcro material grabs onto the back surface of the display and control unit 210 or its' secondary disposable sterile protective cover, that is equipped with mating Velcro.

**[0068]** The convenient and flexible Velcro based wearable attachment device of Figure 6, can be adjusted using the adjustable Velcro mounting, to allow convenient direct viewing of the display 210 by the user during use, on the user's arm 603.

**[0069]** The present invention may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

## Claims

1. A device for insertion into a body cavity, the device comprising:

a disposable device body (300, 300a, 400) having a proximal end and a distal end (304a, 404a), the distal end (304a, 404a) being configured to be at least partially inserted into the body cavity; the disposable device body (300, 300a, 400) being an anatomically shaped laryngoscope with

metal blade comprising:

an access channel (301, 401), the access channel (301, 401) having a release at distal and proximal ends of the disposable device body (300, 300a, 400), where the access channel (301, 401) is open in different sides of the disposable device body (300, 300a, 400),

an opto-electronic illumination and imaging module (200) located on the disposable device body (300, 300a, 400);

electrical lines embedded in the disposable device body (300, 300a, 400) such that the electrical lines extend from the proximal end of the disposable device body (300, 300a, 400) to the distal end (304a, 404a) of the disposable device body (300, 300a, 400); an external power source, control electronics, and display device (210) electrically coupled to the opto-electronic illumination and imaging module (200) via a flexible Universal Serial Bus (USB) cable (205a, 205b) configured to electrically connect each of the power source, control electronics, and display device (210) to the electrical lines, and

at least one air-tight tubular channel (306a-c) running along the disposable device body (300, 300a, 400), next to the electrical lines, along the length of the access channel (301, 401), inside the device body (300, 300a, 400)

wherein the access channel (301, 401) is configured to provide an endo-tracheal tube (330) access to a trachea

### characterised in that

the access channel (301, 401) comprises an opening which turns on multiple sides of the device body to maintain the position of the endo-tracheal tube or other instruments within the channel during operation, and provides cut-outs on multiple sides of the device for insertion and release of the endo-tracheal tube and other instruments.

2. The device of claim 1, wherein the opto-electronic illumination and imaging module (200) comprises an illumination source (202) and an image sensors (201, 201a, 201b, 206) including one or more of: a light emitting device (LED), a laser diode (LD), an ultraviolet (UV) light source, an infrared (IR) light source; a CCD sensor, or a CMOS sensor.

3. The device of claim 2, wherein heat from the illumination source (202) is coupled to a window (203, 203a, 303, 403) of the opto-electronic illumination

and imaging module (200) for defogging purposes.

4. The device of claim 2, wherein the opto-electronic illumination and imaging module (200) is attached to one or more small flexible, rigid, or partially rigid electronic boards (204, 207) within the disposable device body (300, 300a, 400). 5
5. The device of claim 4, wherein the one or more electronic boards (204, 207) are configured to distribute power to the illumination source (202) and to one or more image sensors (201, 201a, 201b, 206) at or near the distal end (304a, 404a) of the disposable device body (300, 300a, 400); serialize parallel digital imaging data or use MIPI output from the one or more image sensors (201, 201a, 201b, 206); and deliver the serial data through the electrical. 10
6. The device of claim 5, wherein the electrical lines continue to extend outside the disposable device body (300, 300a, 400) as a USB cable (205a,b) to an end configured to connect directly to at least one of the display device and the control electronics. 15
7. The device of claim 6, wherein a communication interface of the one or more electronic boards (204, 207) within the disposable device body (300, 300a, 400), through the electronic lines, to a controller unit separate from the opto-electronic illumination and imaging module (200), is that of the USB format and connection. 20
8. The device of claim 7, wherein the controller unit acts as a USB host, driving the opto-electronic illumination and imaging module (200) as a USB camera device. 25
9. The device of claim 8, wherein the controller unit is configured to receive USB Video Class (UVC) video signals from the one or more electronic boards (204, 207). 30
10. The device of any of claims 1-9, wherein the disposable device body (300, 300a, 400) comprises one or more of: a rigid portion, a flexible portion, a selectively expandable accordion portion, a solid portion, a hollow portion, a tool access, or a channel portion. 35
11. The device of claim 10, wherein other air tight tubing and channels run the length of the device access channel for delivery of one or more of suction, air, liquid, and gel material to the distal end (304a, 404a) of the disposable device body (300, 300a, 400). 40
12. The device of any of claims 1-10, configured to deliver and spray diagnostic chemical agent using spray nozzles at the distal tip of the medical access 45

device through the tubular channels from internal reservoirs (327, 427a-b).

13. The device of any of claims 1-12, wherein the disposable device body (300, 300a, 400) includes one or more of: lips in the metal blade (304), lips in the plastic body, bumps (304b) in the channel (301, 401), configured to ease guiding of an endotracheal tube (330) through the access channel (301, 401) into the body cavity. 50
14. The device of claim 13, wherein the spray nozzles (308a-b, 408a-b) are configured to spray lubricants on the endotracheal tube (330) or other instruments (430) as they pass or leave the access channel (301, 401), deliver drugs to tissue adjacent the distal end (304a, 404a), or to deliver chemicals to activate the tissue. 55

## Patentansprüche

1. Vorrichtung für das Einführen in einen Körperhohlraum, wobei die Vorrichtung Folgendes umfasst:

einen Einweg-Vorrichtungskörper (300, 300a, 400) mit einem proximalen Ende und einem distalen Ende (304a, 404a), wobei das distale Ende (304a, 404a) dazu konfiguriert ist, zumindest teilweise in den Körperhohlraum eingeführt zu werden; wobei der Einweg-Vorrichtungskörper (300, 300a, 400) ein anatomisch geformtes Laryngoskop mit Metallspatel ist, umfassend:

einen Zugangskanal (301, 401), wobei der Zugangskanal (301, 401) eine Freigabe am distalen und proximalen Ende des Einweg-Vorrichtungskörpers (300, 300a, 400) aufweist, wobei der Zugangskanal (301, 401) an unterschiedlichen Seiten des Einweg-Vorrichtungskörpers (300, 300a, 400) offen ist, ein optoelektronisches Beleuchtungs- und Bildgebungsmodul (200), das sich an dem Einweg-Vorrichtungskörper (300, 300a, 400) befindet; elektrische Leitungen, die in dem Einweg-Vorrichtungskörper (300, 300a, 400) integriert sind, sodass sich die elektrischen Leitungen von dem proximalen Ende des Einweg-Vorrichtungskörpers (300, 300a, 400) zu dem distalen Ende (304a, 404a) des Einweg-Vorrichtungskörpers (300, 300a, 400) erstrecken; eine externe Leistungsquelle, Steuerelektronik und Anzeigevorrichtung (210), die über ein flexibles Universal-Serial-Bus(USB)-Kabel (205a, 205b), das dazu

konfiguriert ist, jede von der Leistungsquelle, der Steuerelektronik und der Anzeigevorrichtung (210) elektrisch mit den elektrischen Leitungen zu verbinden, elektrisch an das optoelektronische Beleuchtungs- und Bildgebungsmodul (200) gekoppelt sind, und  
 mindestens einen luftdichten rohrförmigen Kanal (306a-c), der entlang des Einweg-Vorrichtungskörpers (300, 300a, 400), neben den elektrischen Leitungen, entlang der Länge des Zugangskanals (301, 401), innerhalb des Vorrichtungskörpers (300, 300a, 400) verläuft,

wobei der Zugangskanal (301, 401) dazu konfiguriert ist, einen Zugang über einen Endotrachealtubus (330) zu einer Trachea bereitzustellen,

**dadurch gekennzeichnet, dass**

der Zugangskanal (301, 401) eine Öffnung umfasst, die an mehreren Seiten des Vorrichtungskörpers gebogen ist, um die Position des Endotrachealtubus oder von anderen Instrumenten innerhalb des Kanals während des Einsatzes beizubehalten, und Ausschnitte an mehreren Seiten der Vorrichtung für das Einführen und Freigeben des Endotrachealtubus und von anderen Instrumenten bereitstellt.

2. Vorrichtung nach Anspruch 1, wobei das optoelektronische Beleuchtungs- und Bildgebungsmodul (200) eine Beleuchtungsquelle (202) und Bildsensoren (201, 201a, 201b, 206) umfasst, einschließlich eines oder mehrerer von Folgendem: einer lichtemittierenden Vorrichtung (LED), einer Laserdiode (LD), einer ultravioletten (UV) Lichtquelle, einer Infrarot(IR)-Lichtquelle; eines CCD-Sensors oder eines CMOS-Sensors.
3. Vorrichtung nach Anspruch 2, wobei Wärme von der Beleuchtungsquelle (202) an ein Fenster (203, 203a, 303, 403) des optoelektronischen Beleuchtungs- und Bildgebungsmoduls (200) zum Verhindern von Beschlägen gekoppelt ist.
4. Vorrichtung nach Anspruch 2, wobei das optoelektronische Beleuchtungs- und Bildgebungsmodul (200) an einer oder mehreren kleinen flexiblen, starren oder teilweise starren elektronischen Karten (204, 207) innerhalb des Einweg-Vorrichtungskörpers (300, 300a, 400) angebracht ist.
5. Vorrichtung nach Anspruch 4, wobei die eine oder mehreren elektronischen Karten (204, 207) dazu konfiguriert sind, Leistung zur Beleuchtungsquelle (202) und zu einem oder mehreren Bildsensoren (201, 201 a, 201b, 206)

an oder nahe dem distalen Ende (304a, 404a) des Einweg-Vorrichtungskörpers (300, 300a, 400) zu verteilen;  
 parallele digitale Bildgebungsdaten zu serialisieren oder MIPI-Ausgabe von dem einen oder den mehreren Bildsensoren (201, 201a, 201b, 206) zu verwenden; und  
 die seriellen Daten über die Elektrik zu liefern.

6. Vorrichtung nach Anspruch 5, wobei sich die elektrischen Leitungen weiter außerhalb des Einweg-Vorrichtungskörpers (300, 300a, 400) als USB-Kabel (205a,b) zu einem Ende erstrecken, das dazu konfiguriert ist, direkt mit mindestens einer der Anzeigevorrichtung und der Steuerelektronik verbunden zu werden.
7. Vorrichtung nach Anspruch 6, wobei eine Kommunikationsschnittstelle der einen oder mehreren elektronischen Karten (204, 207) innerhalb des Einweg-Vorrichtungskörpers (300, 300a, 400), durch die elektronischen Leitungen, zu einer Steuereinheit, die von dem optoelektronischen Beleuchtungs- und Bildgebungsmodul (200) getrennt ist, ein USB-Format und eine USB-Verbindung ist.
8. Vorrichtung nach Anspruch 7, wobei die Steuereinheit als USB-Host wirkt, der das optoelektronische Beleuchtungs- und Bildgebungsmodul (200) als USB-Kameravorrichtung ansteuert.
9. Vorrichtung nach Anspruch 8, wobei die Steuereinheit dazu konfiguriert ist, USB-Video-Class(UVC)-Videosignale von der einen oder den mehreren elektronischen Karten (204, 207) zu empfangen
10. Vorrichtung nach einem der Ansprüche 1-9, wobei der Einweg-Vorrichtungskörper (300, 300a, 400) eines oder mehrere von Folgendem umfasst: einem starren Abschnitt, einem flexiblen Abschnitt, einem selektiv dehnbaren Akkordeonabschnitt, einem festen Abschnitt, einem hohlen Abschnitt, einem Werkzeugzugang oder einem Kanalabschnitt.
11. Vorrichtung nach Anspruch 10, wobei andere luftdichte Schläuche und Kanäle entlang der Länge des Vorrichtungszugangskanals für die Bereitstellung von einem oder mehreren von Sog, Luft, Flüssigkeit und Gelmaterial an das distale Ende (304a, 404a) des Einweg-Vorrichtungskörpers (300, 300a, 400) verlaufen.
12. Vorrichtung nach einem der Ansprüche 1-10, die dazu konfiguriert ist, ein diagnostisches chemisches Mittel unter Verwendung von Sprühdüsen an der distalen Spitze der medizinischen Zugangsvorrichtung durch die rohrförmigen Kanäle von den inneren Be-

hältern (327, 427a-b) abzugeben und zu sprühen.

13. Vorrichtung nach einem der Ansprüche 1-12, wobei der Einweg-Vorrichtungskörper (300, 300a, 400) eines oder mehrere von Folgendem beinhaltet: Lippen in dem Metallspatel (304), Lippen im Kunststoffkörper, Erhebungen (304b) im Kanal (301, 401), die dazu konfiguriert sind, das Führen eines Endotrachealtubus (330) durch den Zugangskanal (301, 401) in den Körperhohlraum zu erleichtern.
14. Vorrichtung nach Anspruch 13, wobei die Sprühdüsen (308a-b, 408a-b) dazu konfiguriert sind, Schmiermittel auf den Endotrachealtubus (330) oder andere Instrumente (430) zu sprühen, wenn diese den Zugangskanal (301, 401) durchlaufen oder verlassen, Arzneimittel an Gewebe benachbart zu dem distalen Ende (304a, 404a) abzugeben oder chemische Mittel abzugeben, um das Gewebe zu aktivieren.

## Revendications

1. Dispositif pour une insertion dans une cavité corporelle, le dispositif comprenant :
- un corps de dispositif jetable (300, 300a, 400) ayant une extrémité proximale et une extrémité distale (304a, 404a), l'extrémité distale (304a, 404a) étant configurée pour être insérée au moins partiellement dans la cavité corporelle ; le corps de dispositif jetable (300, 300a, 400) étant un laryngoscope de forme anatomique avec une lame en métal comprenant :
- un canal d'accès (301, 401), le canal d'accès (301, 401) ayant un élément de dégagement au niveau d'extrémités distale et proximale du corps de dispositif jetable (300, 300a, 400), où le canal d'accès (301, 401) est ouvert dans des côtés différents du corps de dispositif jetable (300, 300a, 400), un module d'imagerie et d'illumination optoélectronique (200) situé sur le corps de dispositif jetable (300, 300a, 400) ; des lignes électriques incorporées dans le corps de dispositif jetable (300, 300a, 400) de sorte que les lignes électriques s'étendent depuis l'extrémité proximale du corps de dispositif jetable (300, 300a, 400) jusqu'à l'extrémité distale (304a, 404a) du corps de dispositif jetable (300, 300a, 400) ; une source d'alimentation externe, une électronique de commande, et un dispositif d'affichage (210) couplés électriquement au module d'imagerie et d'illumination optoélectronique (200) via un câble de bus sé-

rie universel (USB) (205a, 205b) configuré pour connecter électriquement chacun de la source d'alimentation, de l'électronique de commande, et du dispositif d'affichage (210) aux lignes électriques, et au moins un canal tubulaire étanche à l'air (306a à c) longeant le corps de dispositif jetable (300, 300a, 400), près des lignes électriques, suivant la longueur du canal d'accès (301, 401), à l'intérieur du corps de dispositif (300, 300a, 400)

dans lequel le canal d'accès (301, 401) est configuré pour fournir à un tube endotrachéal (330) un accès à une trachée

### caractérisé en ce que

le canal d'accès (301, 401) comprend une ouverture qui tourne sur de multiples côtés du corps de dispositif pour maintenir la position du tube endotrachéal ou d'autres instruments au sein du canal pendant un fonctionnement, et fournit des découpes sur de multiples côtés du dispositif pour une insertion et un dégagement du tube endotrachéal et d'autres instruments.

2. Dispositif selon la revendication 1, dans lequel le module d'imagerie et d'illumination optoélectronique (200) comprend une source d'illumination (202) et des capteurs d'image (201, 201a, 201b, 206) comportant un ou plusieurs parmi : un dispositif électroluminescent (LED), une diode laser (LD), une source de lumière ultraviolette (UV), une source de lumière infrarouge (IR) ; un capteur CCD, ou un capteur CMOS.
3. Dispositif selon la revendication 2, dans lequel de la chaleur provenant de la source d'illumination (202) est couplée à une fenêtre (203, 203a, 303, 403) du module d'imagerie et d'illumination optoélectronique (200) à des fins de désembuage.
4. Dispositif selon la revendication 2, dans lequel le module d'imagerie et d'illumination optoélectronique (200) est attaché à une ou plusieurs petites cartes électroniques flexibles, rigides, ou partiellement rigides (204, 207) au sein du corps de dispositif jetable (300, 300a, 400).
5. Dispositif selon la revendication 4, dans lequel les une ou plusieurs cartes électroniques (204, 207) sont configurées pour distribuer une alimentation à la source d'illumination (202) et à un ou plusieurs capteurs d'image (201, 201a, 201b, 206) au niveau ou près de l'extrémité distale (304a, 404a) du corps de dispositif jetable (300, 300a, 400) ; mettre en série des données d'imagerie numériques parallèles ou utiliser une sortie MIPI provenant des

un ou plusieurs capteurs d'image (201, 201a, 201b, 206) ; et  
 délivrer les données en série par le biais des lignes électriques.

6. Dispositif selon la revendication 5, dans lequel les lignes électriques continuent de s'étendre à l'extérieur du corps de dispositif jetable (300, 300a, 400) sous la forme d'un câble USB (205a, b) jusqu'à une extrémité configurée pour se connecter directement à au moins l'un du dispositif d'affichage et de l'électronique de commande. 5
7. Dispositif selon la revendication 6, dans lequel une interface de communication des une ou plusieurs cartes électroniques (204, 207) au sein du corps de dispositif jetable (300, 300a, 400), par le biais des lignes électroniques, avec une unité de dispositif de commande séparée du module d'imagerie et d'illumination optoélectronique (200), est celle de la connexion et du format USB. 10 20
8. Dispositif selon la revendication 7, dans lequel l'unité de dispositif de commande sert d'hôte USB, pilotant le module d'imagerie et d'illumination optoélectronique (200) en tant que dispositif de caméra USB. 25
9. Dispositif selon la revendication 8, dans lequel l'unité de dispositif de commande est configurée pour recevoir des signaux vidéo de catégorie vidéo USB (UVC) en provenance des une ou plusieurs cartes électroniques (204, 207). 30
10. Dispositif selon l'une quelconque des revendications 1 à 9, dans lequel le corps de dispositif jetable (300, 300a, 400) comprend un ou plusieurs parmi : une portion rigide, une portion flexible, une portion en accordéon pouvant s'agrandir de façon sélective, une portion pleine, une portion creuse, un accès d'outil, ou une portion de canal. 35 40
11. Dispositif selon la revendication 10, dans lequel d'autres tubulures et canaux étanches à l'air se présentent sur la longueur du canal d'accès de dispositif pour délivrer un ou plusieurs d'une aspiration, d'un air, d'un liquide, et d'un matériau en gel à l'extrémité distale (304a, 404a) du corps de dispositif jetable (300, 300a, 400). 45
12. Dispositif selon l'une quelconque des revendications 1 à 10, configuré pour délivrer et pulvériser un agent chimique de diagnostic à l'aide de buses de pulvérisation au niveau de l'extrémité distale du dispositif d'accès médical à travers les canaux tubulaires depuis des réservoirs internes (327, 427a et b) . 50 55
13. Dispositif selon l'une quelconque des revendications 1 à 12, dans lequel le corps de dispositif jetable (300,

300a, 400) comporte un ou plusieurs parmi : des lèvres dans la lame en métal (304), des lèvres dans le corps en plastique, des bossages (304b) dans le canal (301, 401) configurés pour faciliter le guidage d'un tube endotrachéal (330) à travers le canal d'accès (301, 401) dans la cavité corporelle.

14. Dispositif selon la revendication 13, dans lequel les buses de pulvérisation (308a et b, 408a et b) sont configurées pour pulvériser des lubrifiants sur le tube endotrachéal (330) ou d'autres instruments (430) lorsqu'ils passent ou quittent le canal d'accès (301, 401), délivrer des médicaments à un tissu adjacent à l'extrémité distale (304a, 404a), ou délivrer des produits chimiques pour activer le tissu,

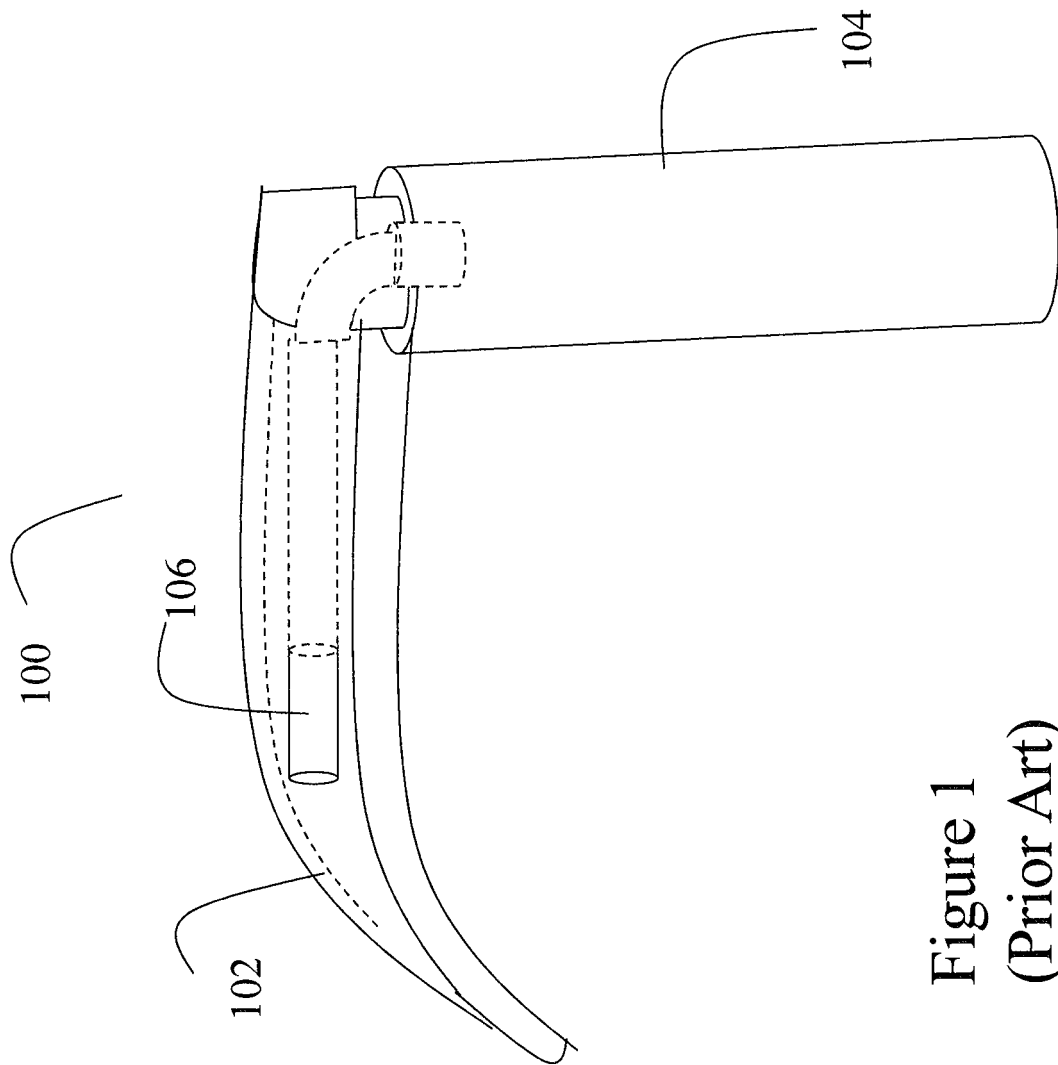


Figure 1  
(Prior Art)



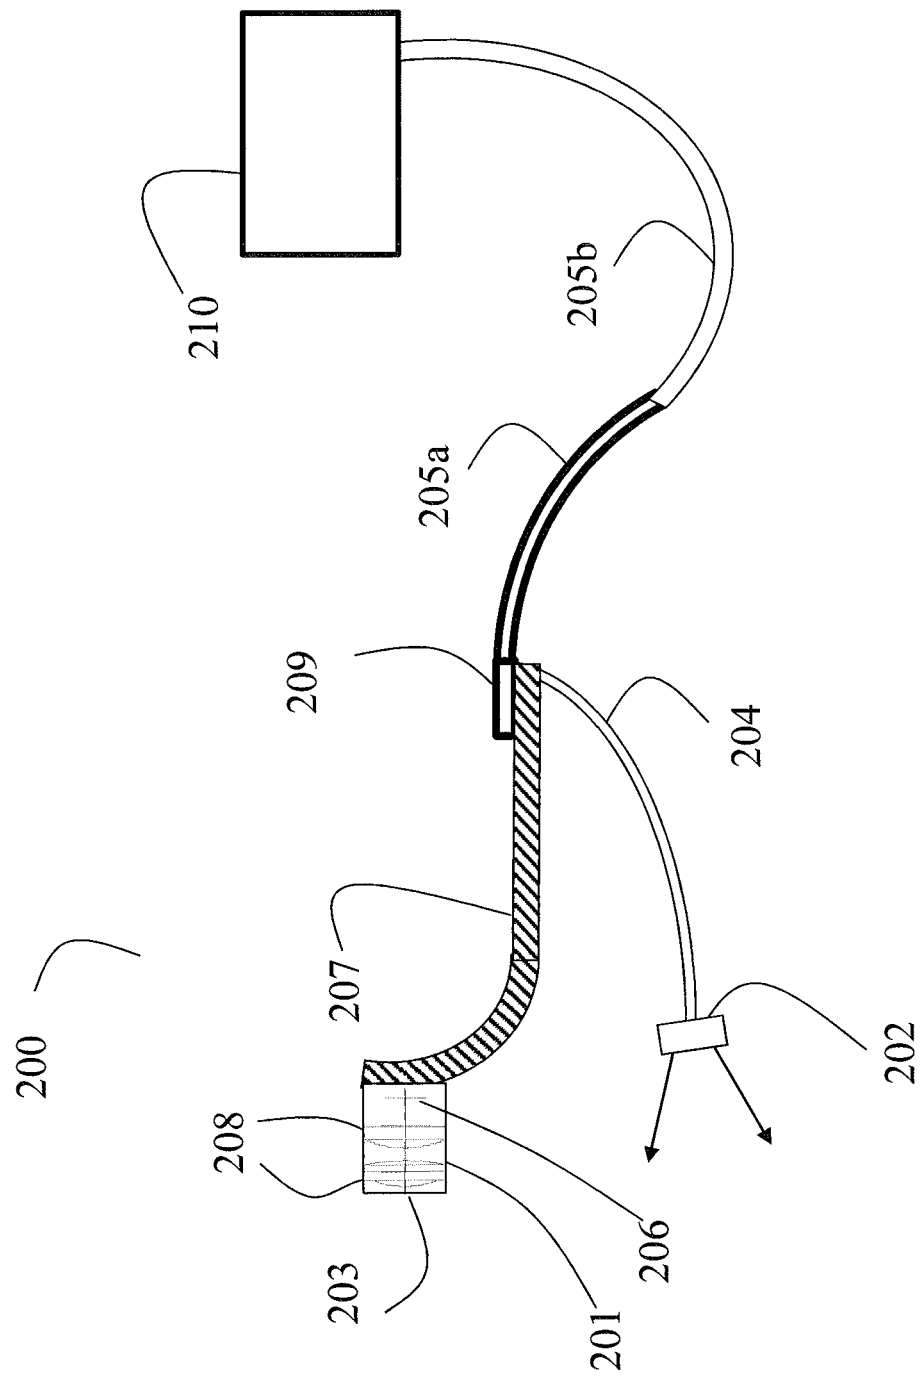
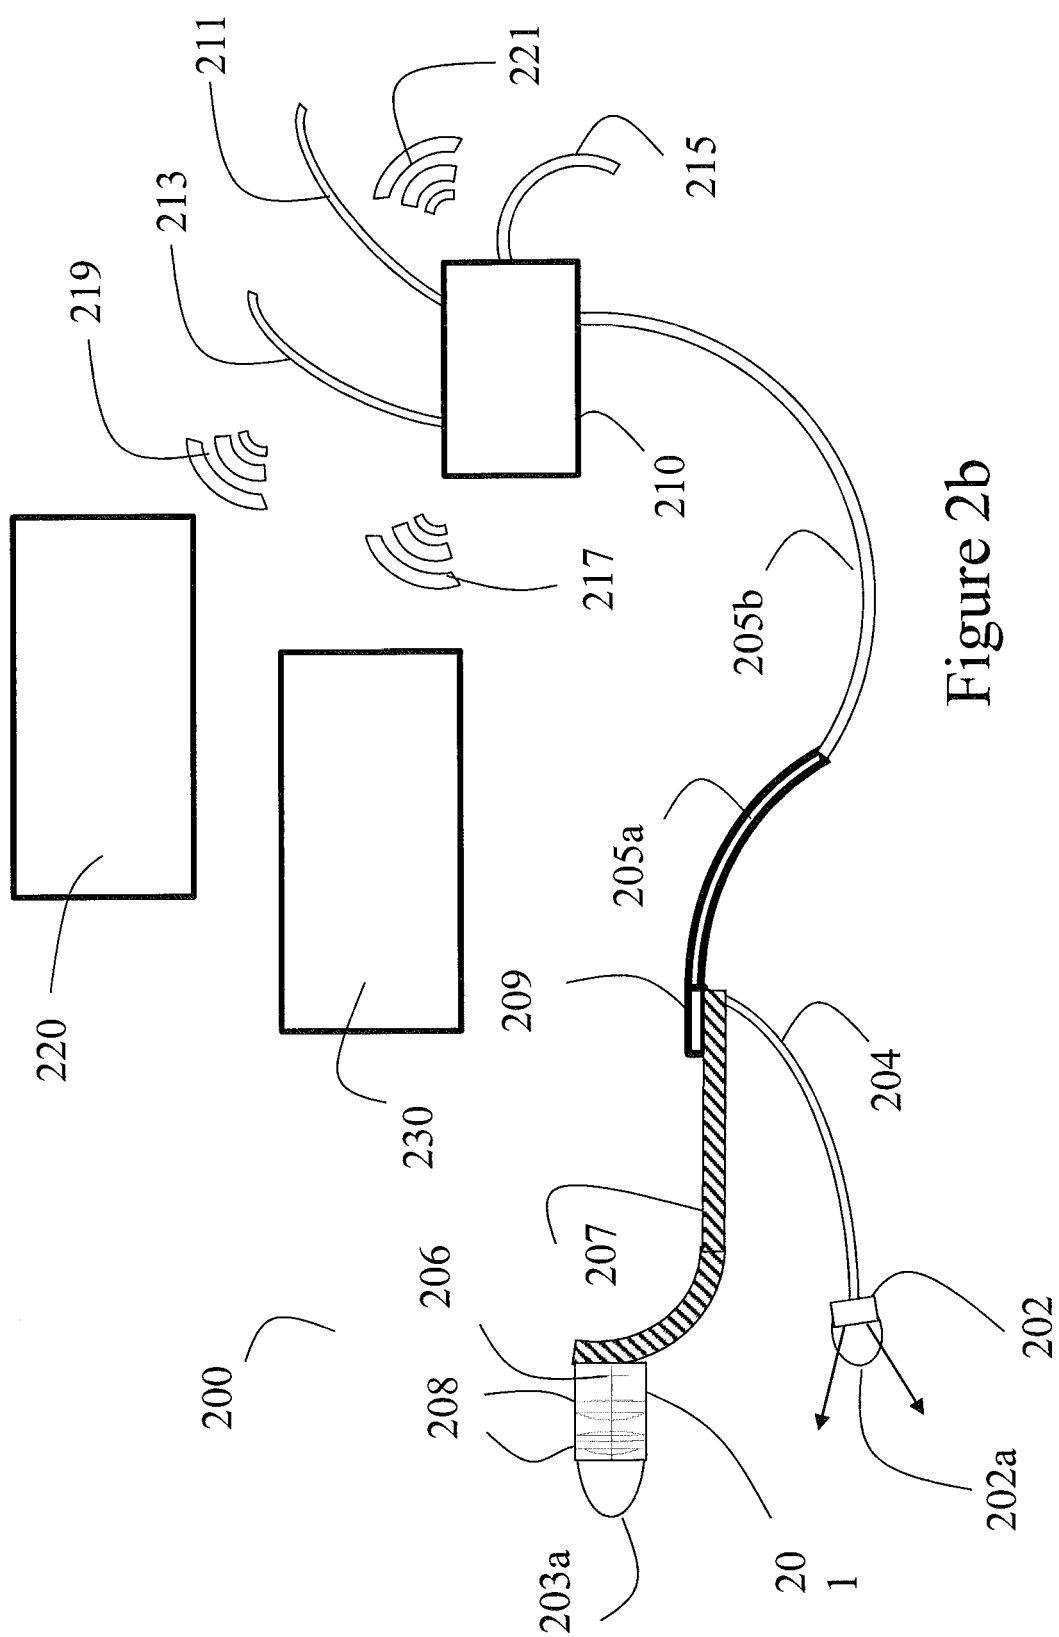


Figure 2a



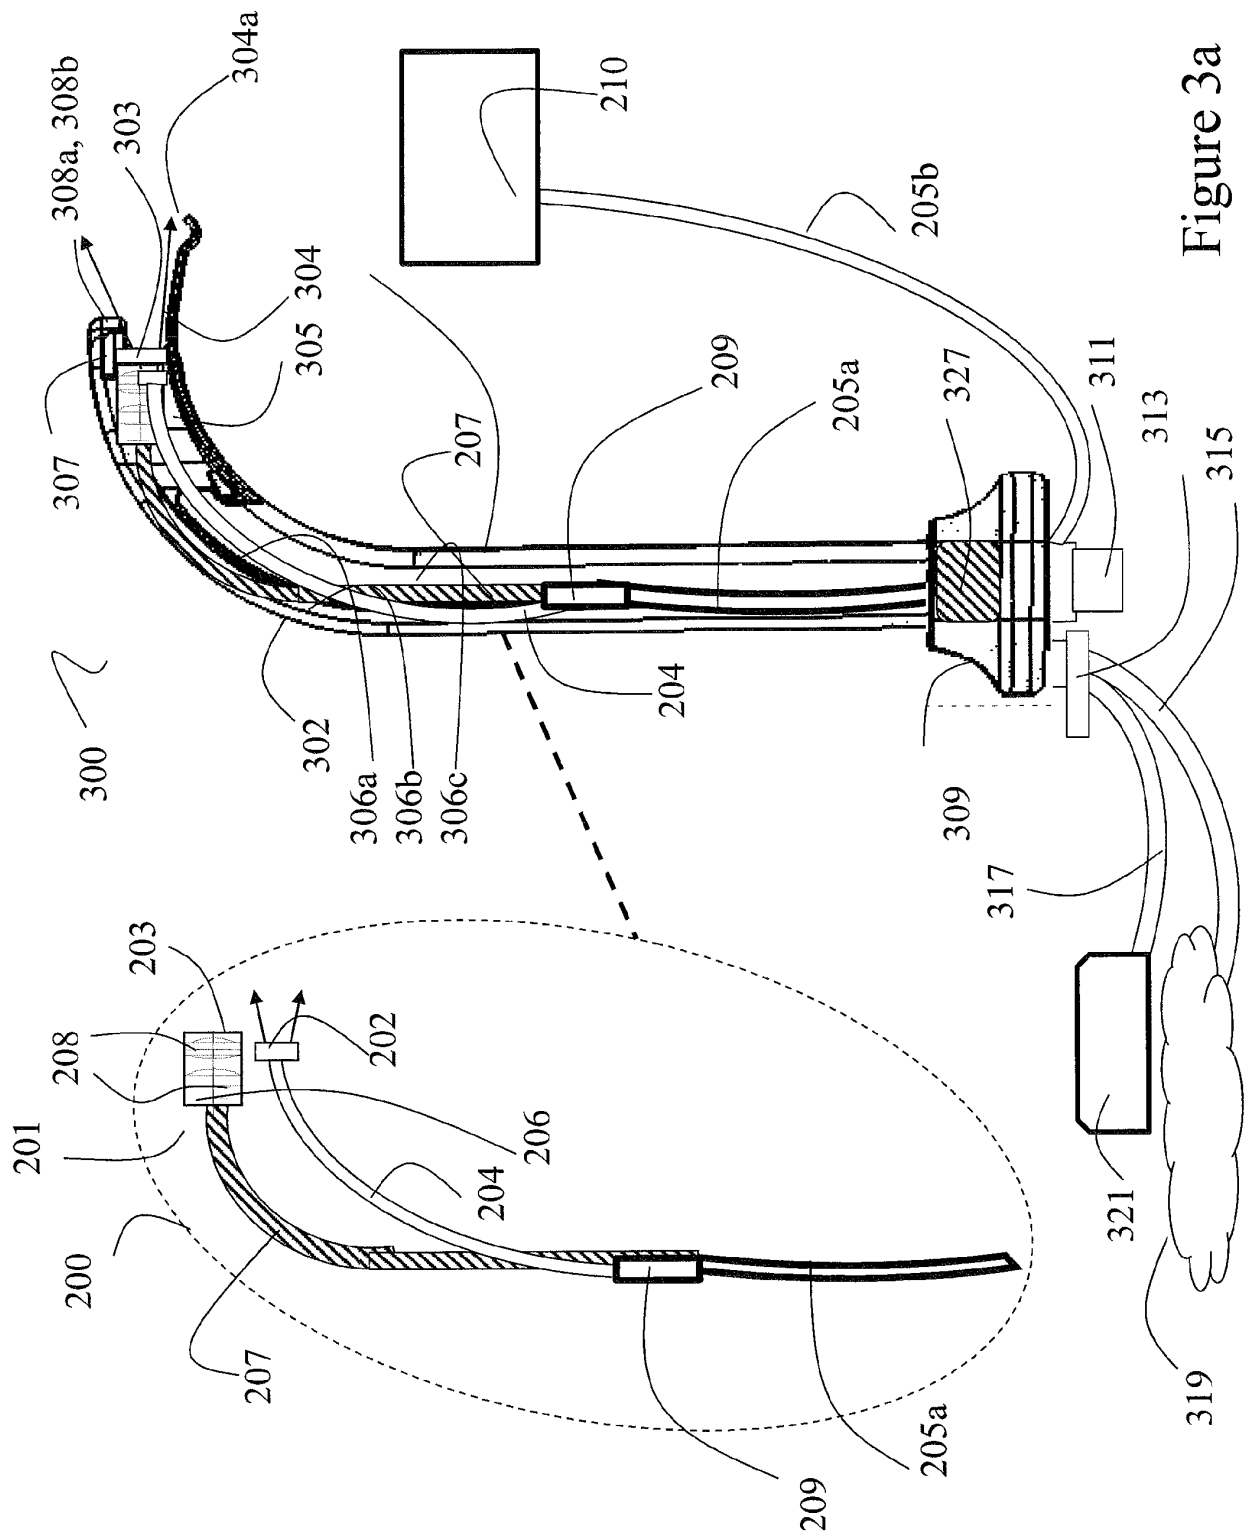


Figure 3a

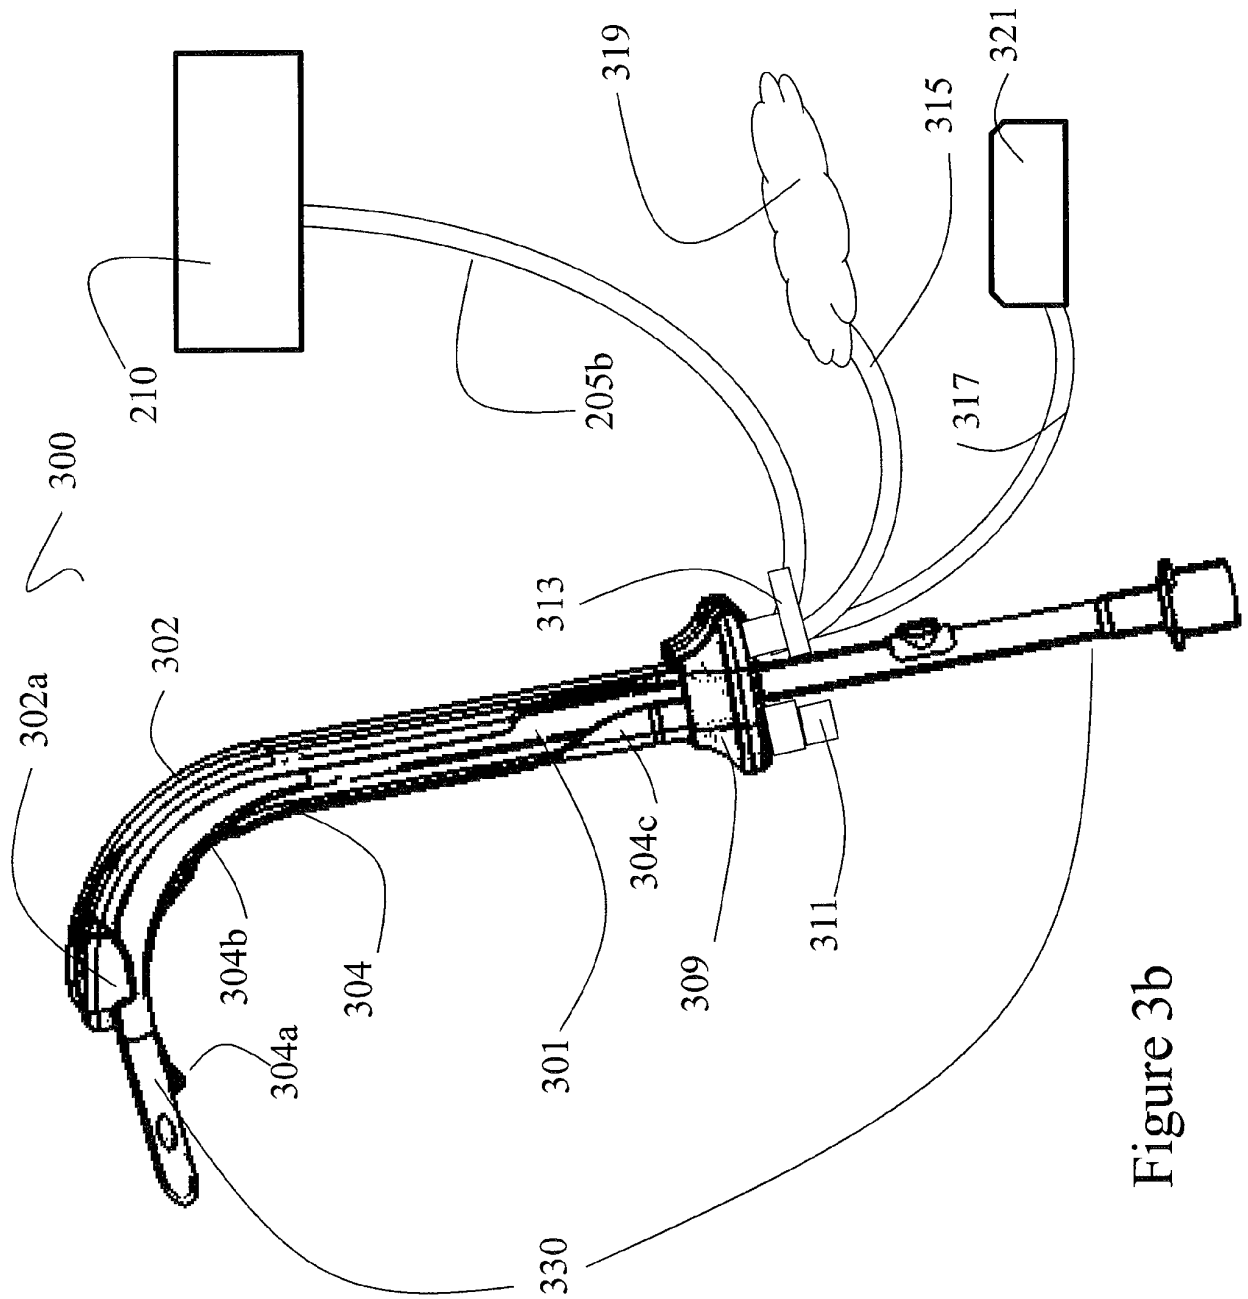


Figure 3b

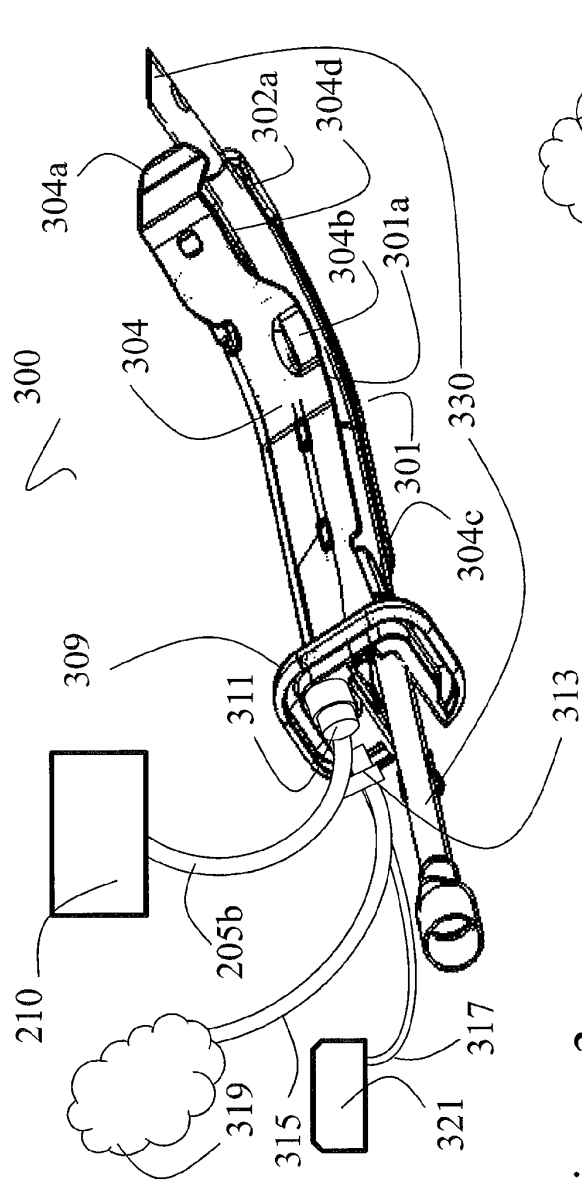


Figure 3c

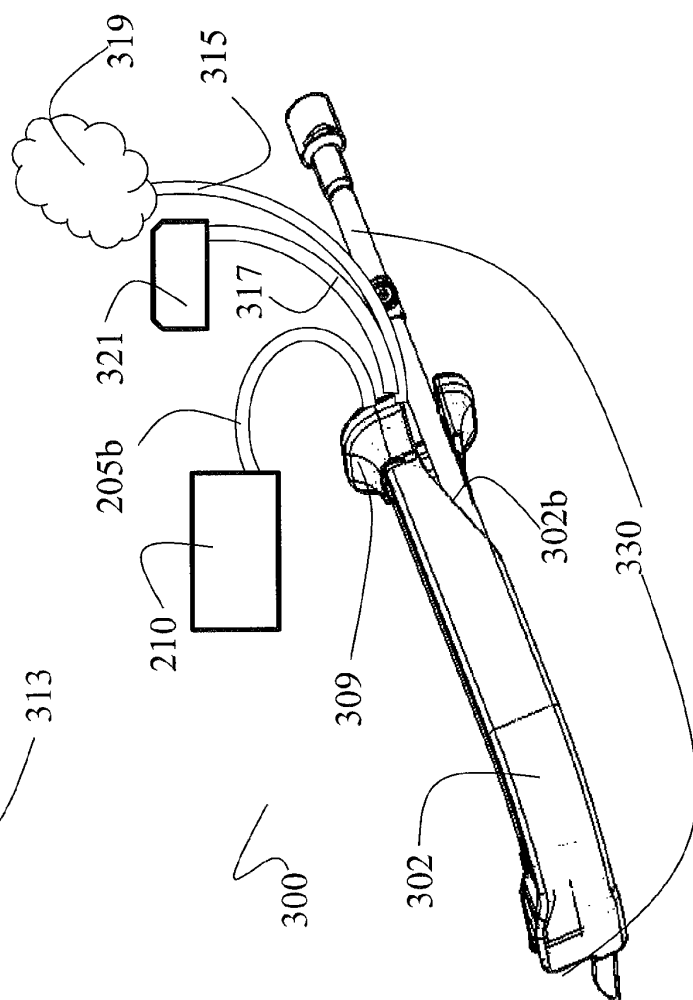


Figure 3d

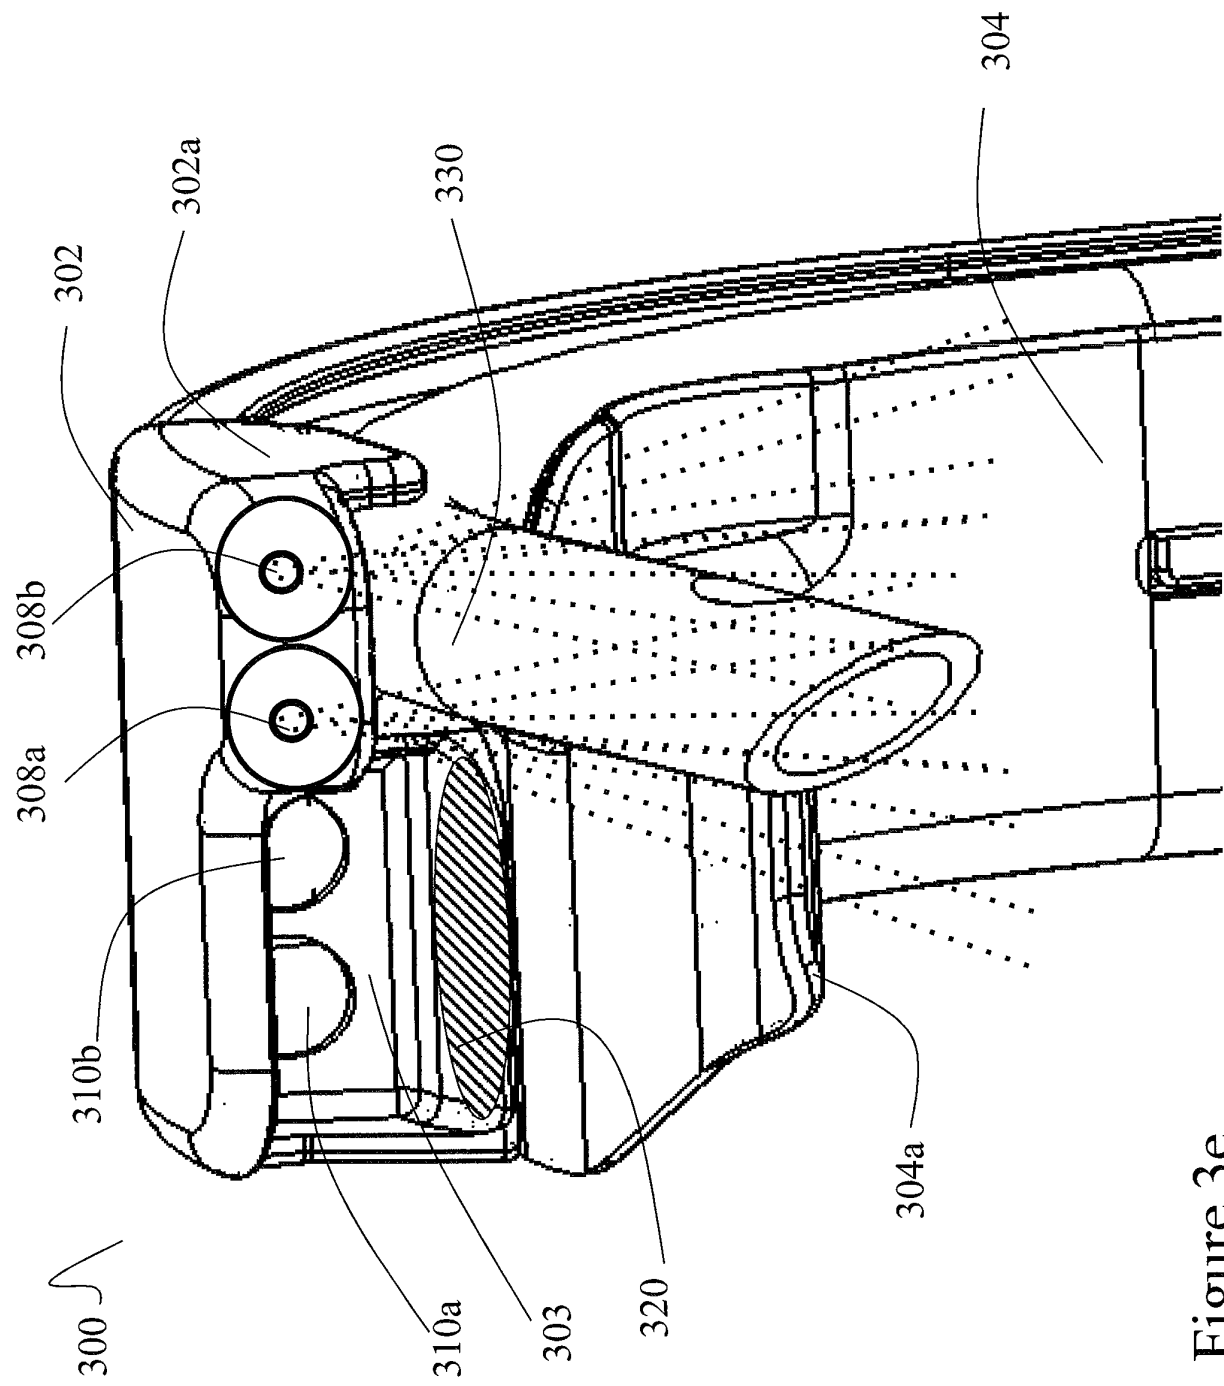


Figure 3e

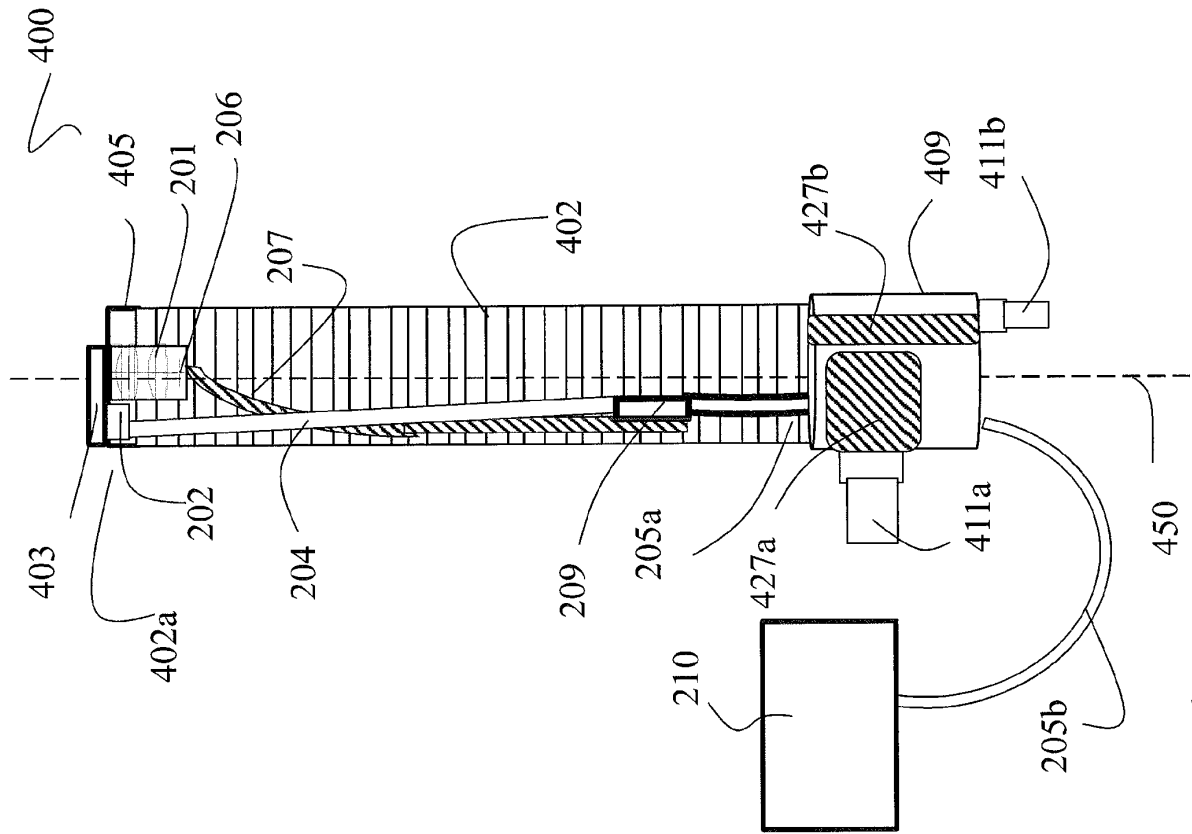


Figure 4b

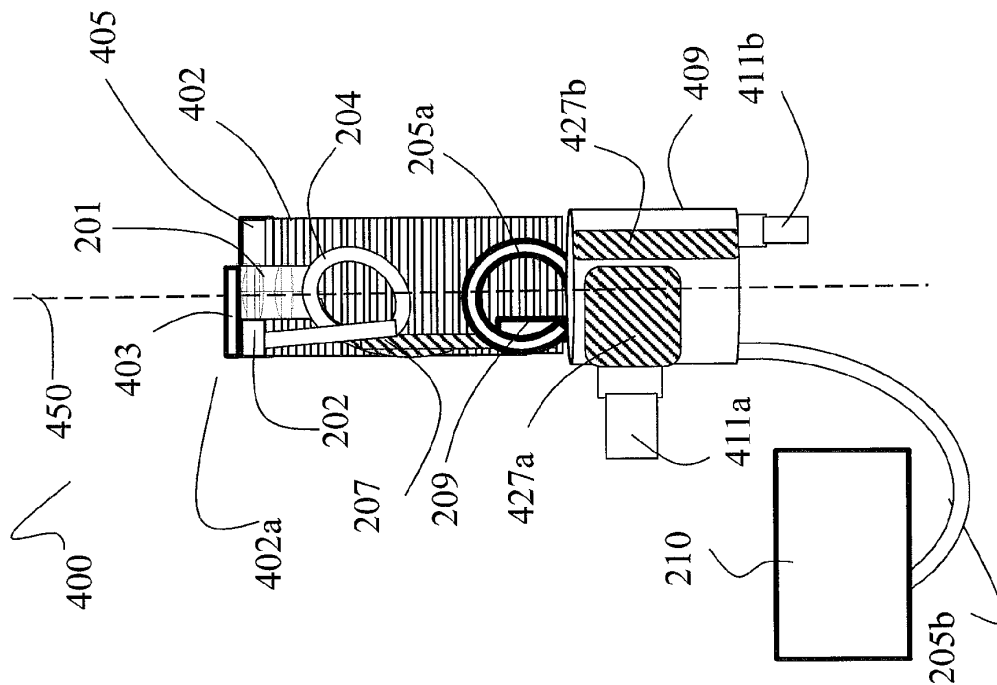


Figure 4a

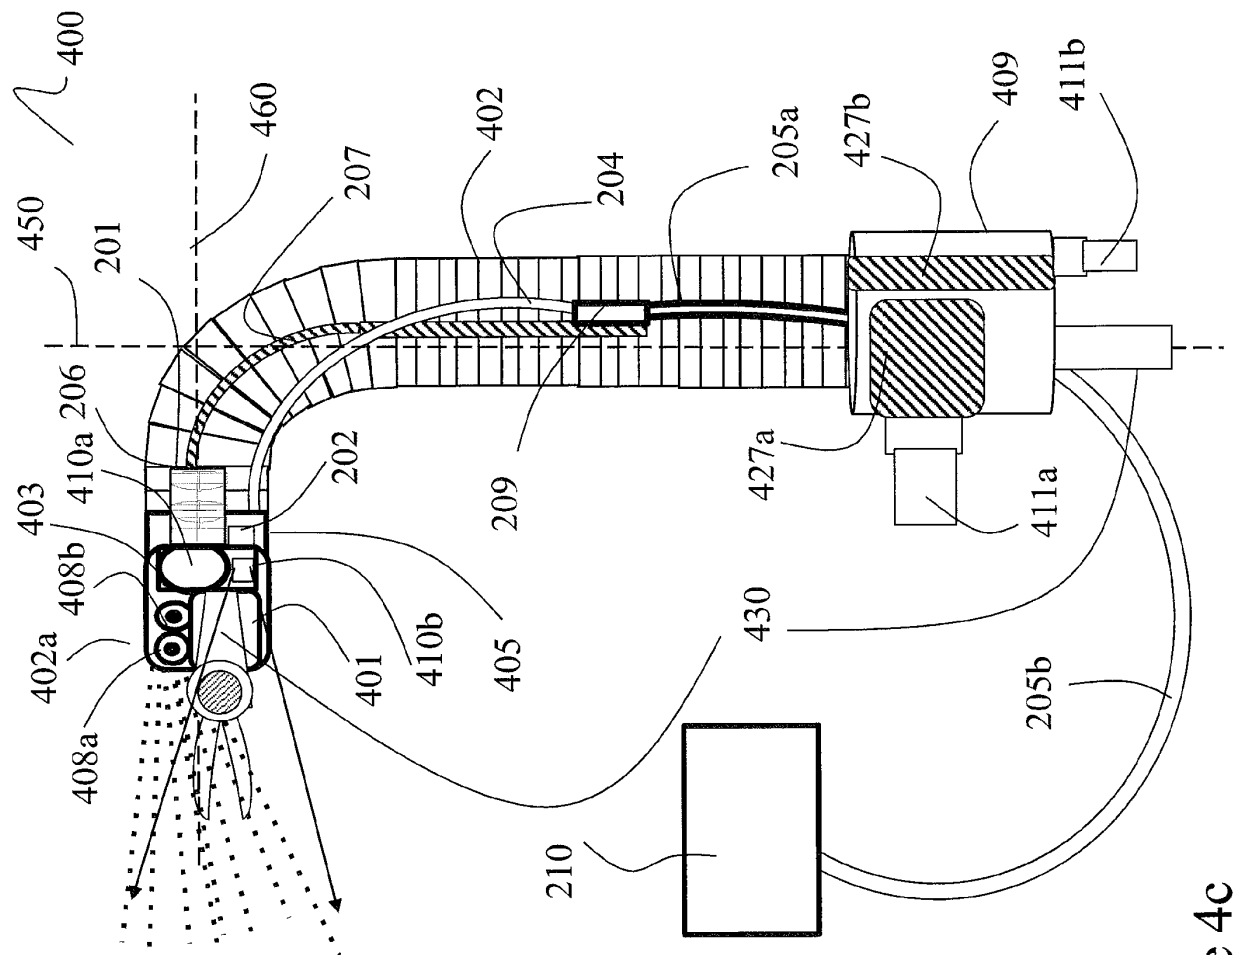


Figure 4c



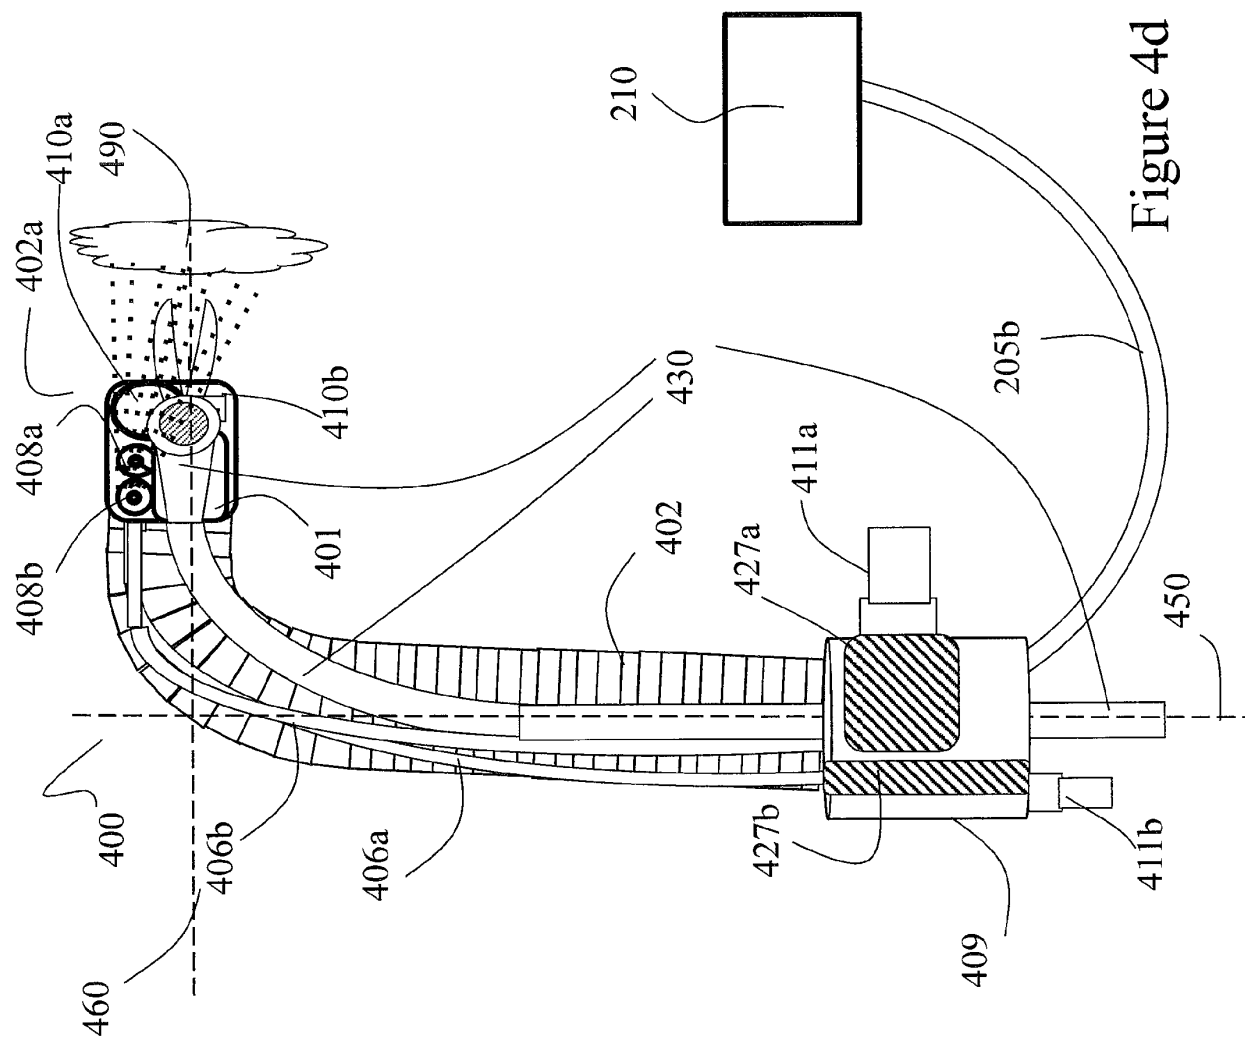


Figure 4d

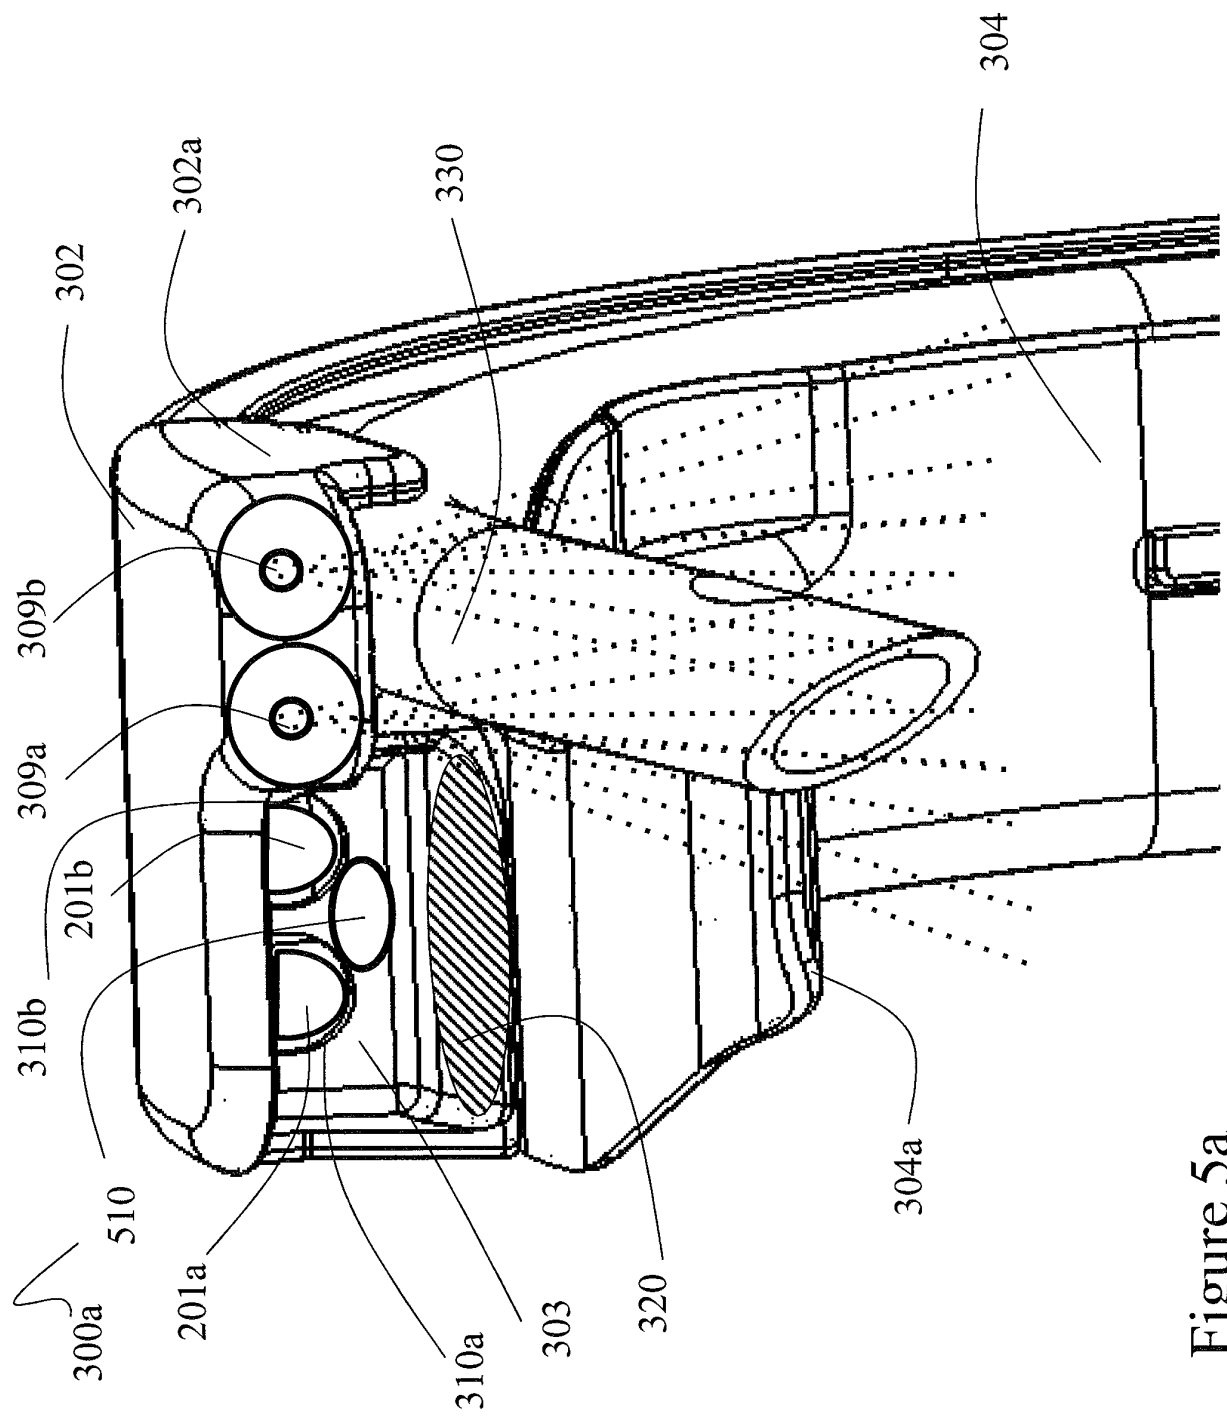


Figure 5a

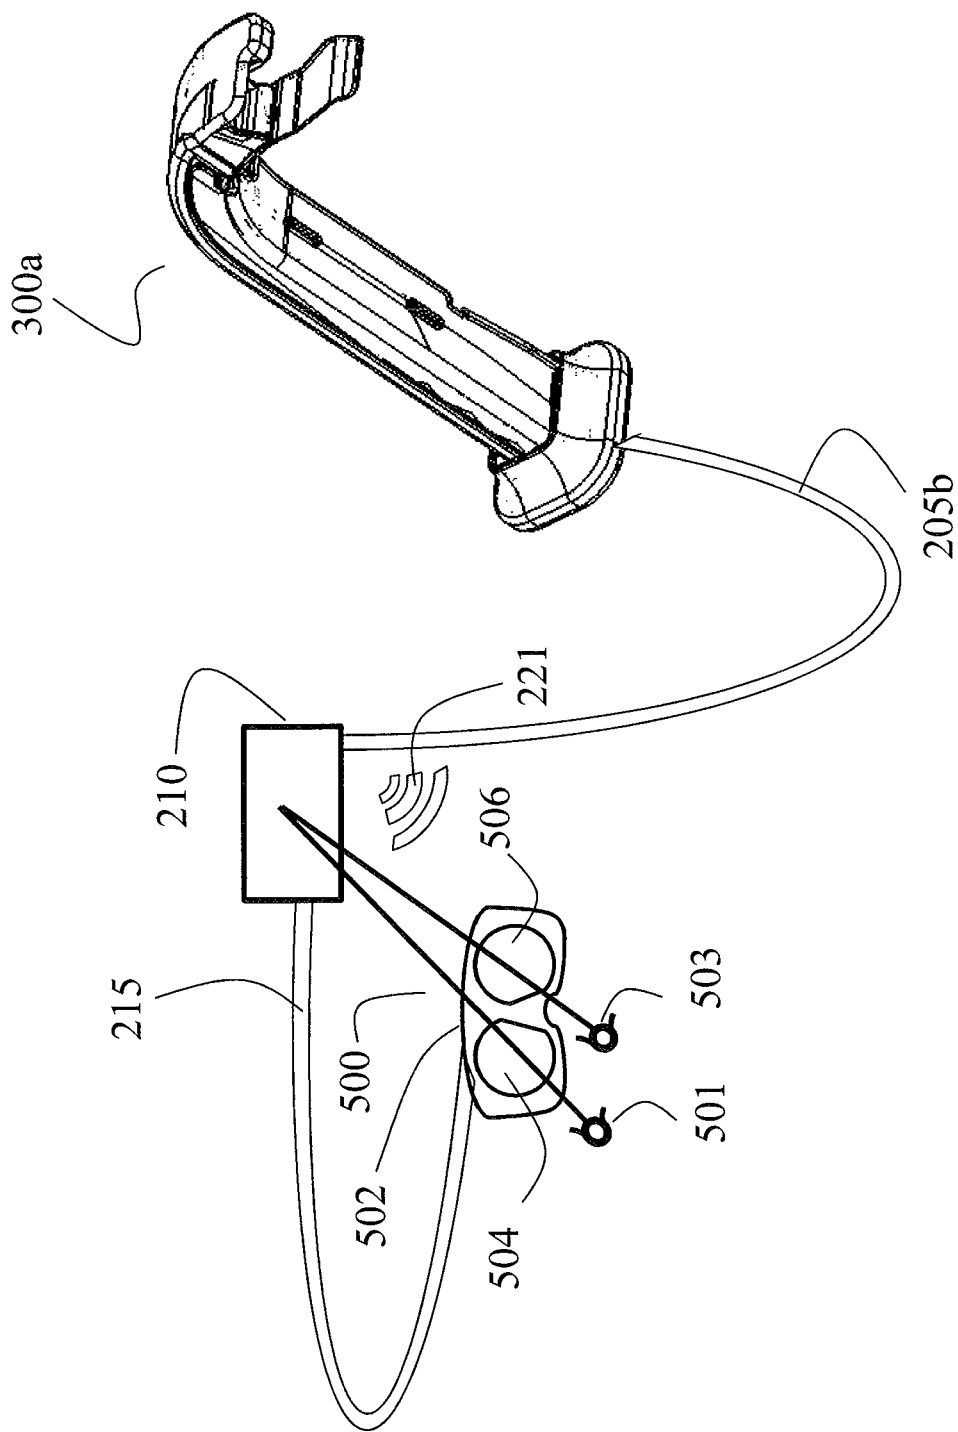


Figure 5b

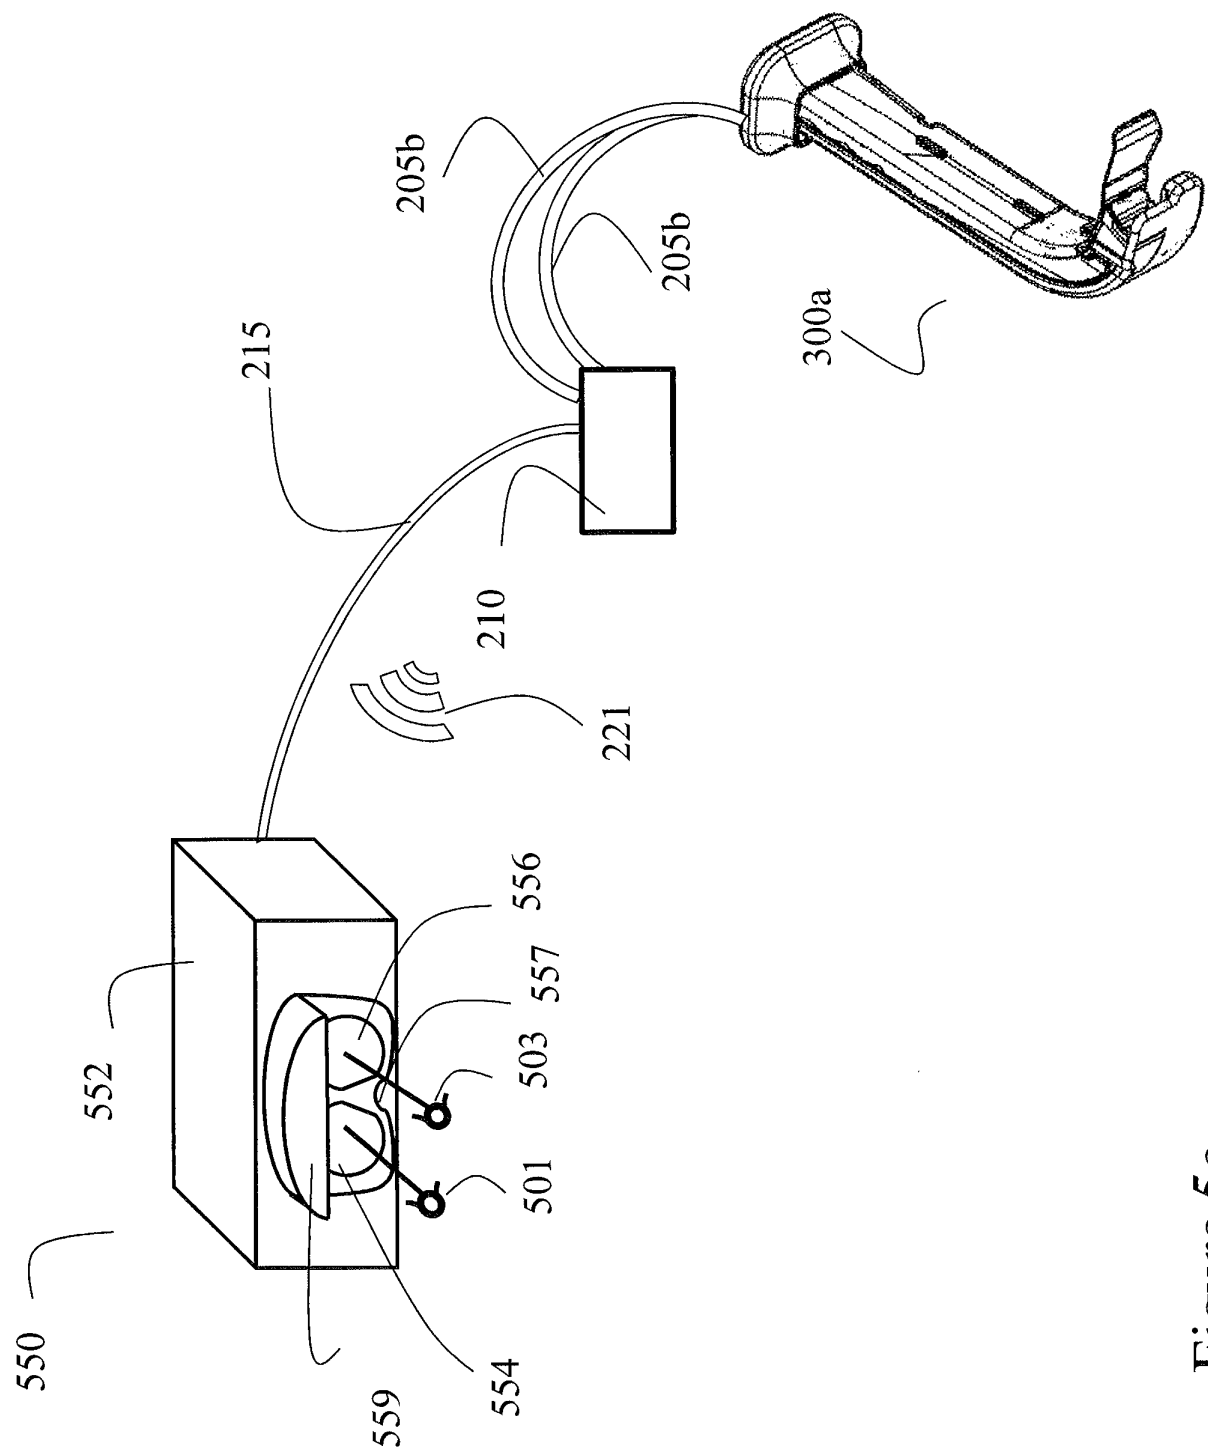


Figure 5c

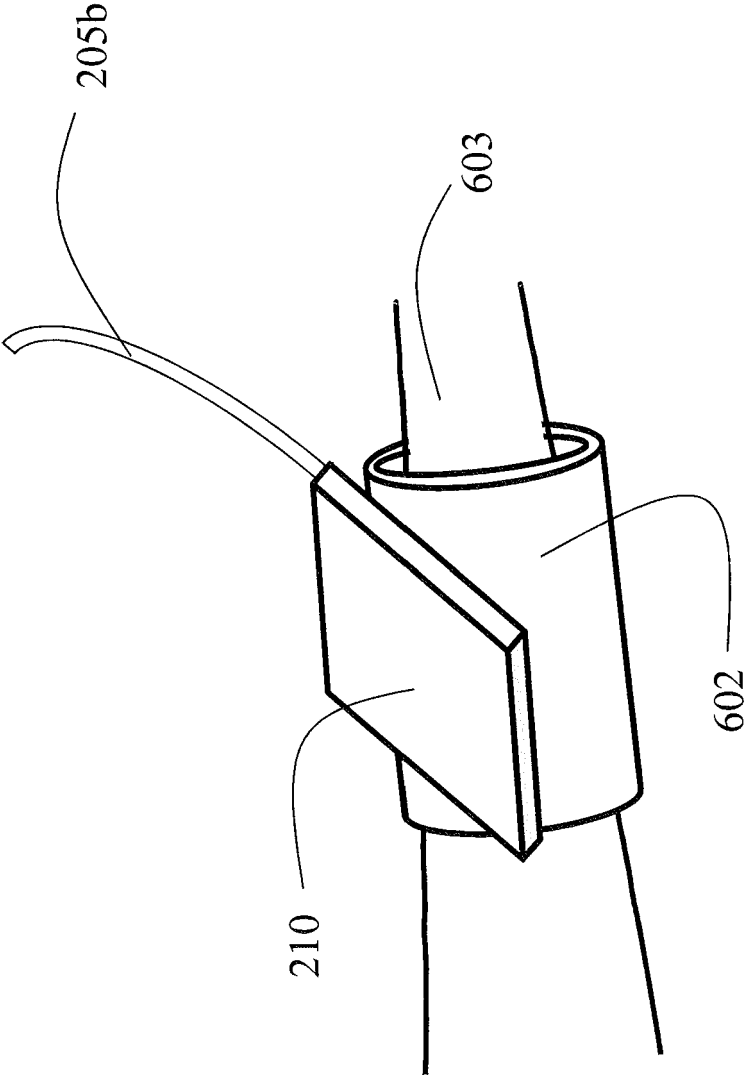


Figure 6

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 20100198009 A [0014]
- US 11233684 B [0038]

专利名称(译)	一次性内窥镜进入装置和便携式显示器		
公开(公告)号	<a href="#">EP2615962A4</a>	公开(公告)日	2017-01-04
申请号	EP2011826060	申请日	2011-09-16
[标]申请(专利权)人(译)	生动医疗公司		
申请(专利权)人(译)	VIVID MEDICAL INC.		
当前申请(专利权)人(译)	VIVID MEDICAL INC.		
[标]发明人	FARR ALI FARR MINA TOGAMI CHRIS FARR LALEH		
发明人	FARR, ALI FARR, MINA TOGAMI, CHRIS FARR, LALEH		
IPC分类号	A61B1/00 A61B1/012 A61B1/04 A61B1/06		
CPC分类号	A61B1/00052 A61B1/00103 A61B1/05 A61B1/0638 A61B1/0676 A61B1/0684 A61B17/00234 A61B17/3439 A61B34/25 A61B90/20 A61B90/37 A61B90/53 A61B2017/0023 A61B2017/00345 A61B2017/00442 A61B2017/3445 A61B2017/3484 A61B2090/0813 A61B2090/309 A61B1/00045 A61B1/00142 A61B1/045 A61B1/06 A61B1/24		
优先权	12/884363 2010-09-17 US		
其他公开文献	EP2615962A2 EP2615962B1		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

用于显示医学视觉图像和视频的装置可以包括便携式显示屏和外壳。该装置还可以包括位于壳体背面上的安装机构。安装机构可以被配置为可移除地接合在用于可移除地将便携式显示屏和壳体安装到结构上的结构上的互补安装机构。该设备还可以包括用于将便携式显示屏通信地耦合到用于控制和处理信息的一个或多个光电视觉和照明模块的装置。