

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/014245 A1

(51) International Patent Classification⁷: **A61B 19/00**

(21) International Application Number: PCT/US2002/025654

(22) International Filing Date: 13 August 2002 (13.08.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **INAMED MEDICAL PRODUCTS CORPORATION [US/US]; 5540 Ekwill Street, Santa Barbara, CA 93111 (US).**

(72) Inventor; and

(75) Inventor/Applicant (for US only): **COE, Frederick, L. [US/US]; 526 Alameda Padre Serra, Santa Barbara, CA 93103 (US).**

(74) Agents: **VAN BUSKIRK, Tedd, W. et al.; Frommer, Lawrence & Haug LLP, 745 Fifth Avenue, New York, NY 10151 (US).**

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REMOTELY ADJUSTABLE GASTRIC BANDING DEVICE AND METHOD

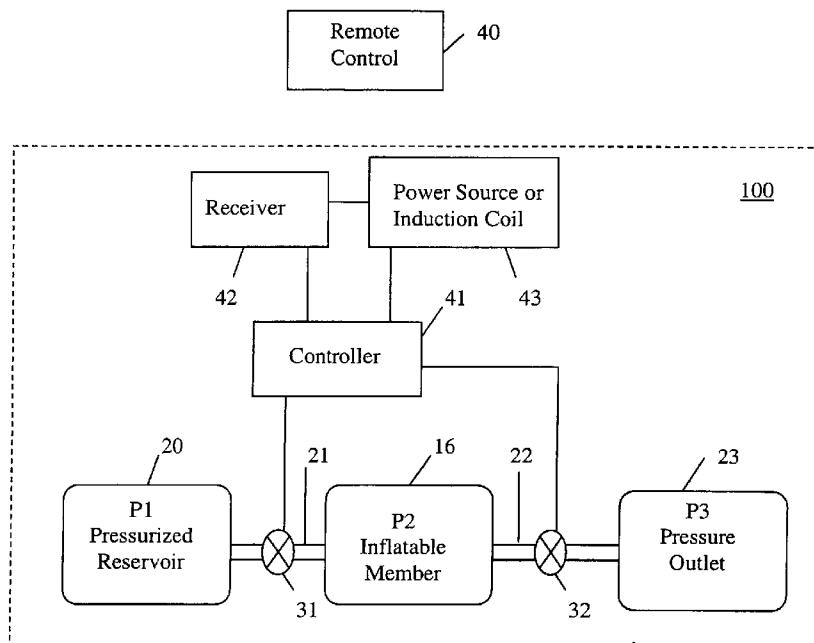

WO 2004/014245 A1

(57) Abstract: A remotely controllable gastric banding device (10) for placement around the stomach of a patient for the treatment of obesity. The device (10) comprises a gastric band (10) having an inflatable chamber (16) for adjusting the inner circumference of the band (10), a pressurized reservoir (20) with a valve (31) for providing fluid to inflate the inflation chamber (16), a valve (32) for releasing fluid from the inflation chamber (16), and a controller (41) for controlling the valves (31, 32). The controller (41) is remotely controllable from outside the patient.

REMOTELY ADJUSTABLE GASTRIC BANDING DEVICE AND METHOD**BACKGROUND OF THE INVENTION****5 Field of the Invention**

The present invention relates generally to an apparatus for remotely adjusting the volume in the inflatable portion of a surgically implanted gastric band encircling the stomach. A method for treating morbid obesity utilizing a remotely adjustable gastric banding device is also disclosed.

10

Description of the Related Art

A belt-like gastric band for encircling the stomach to control morbid obesity is disclosed by Vincent in U.S. Pat. 5,601,604, incorporated herein by reference. The band comprises a belt that can be passed around the stomach and 15 locked into an encircling position in order to create a stoma opening within the stomach. An adjustable portion of the band comprises an inflatable member which permits fine adjustment of the stoma opening after the stoma is created by locking the band in place.

The gastric banding procedure may involve placement of a 20 calibrating apparatus in the stomach to position the stoma and size the pouch created above the stoma. The gastric band is fastened in position about the stomach to prevent slippage, usually by gastro-gastric sutures.

The stoma opening may be adjusted by injecting or withdrawing a fluid into or from an inflatable member, which is preferably coextensive with a 25 portion of the inner stomach-contacting surface of the band. The means for injecting the fluid into the inflatable member usually comprises a fill port located beneath the skin that can be accessed extracorporeally by transdermal injection. Thus, following implantation, the gastric band can be adjusted to enlarge or reduce the stoma as required.

30 A potential disadvantage of prior art gastric bands is the difficulty in finely adjusting the stoma created by the implanted band. For example, the fill port located beneath the skin can be difficult to locate precisely. In addition, the fill procedure requires an invasive transdermal injection to adjust the band. Hence,

repeated adjustments may be painful or worrisome to the patient. Moreover, exposure to x-rays may be required to facilitate location of the port. It would therefore be desirable to provide a band having an inflatable member that can be easily, precisely, and readily adjusted remotely, without the need to undergo an 5 invasive procedure or radiographic exposure.

To address this problem, several prior art remote control gastric banding devices have been proposed. Klaiber et al. (U.S. Pat. 5,938,669) discloses a radio controlled gastric band adjusted by means of an electric pump and a balancing reservoir. Forsell (U.S. Pat. 6,210,347) discloses a remotely controlled and powered 10 gastric band adjusted by a motorized mechanical or hydraulic means. Each of these proposed devices operates by pumping fluid to or from the gastric band. Unfortunately, because of their energy requirements, these devices pose problems for practical use. These devices are also not suitable for use with existing gastric banding systems, such as that disclosed by Vincent.

15 Recent developments in implantable drug delivery devices have shown that small, reliable, and energy-efficient implantable devices are feasible. Drug delivery devices currently exist in which drugs are administered periodically or continuously to a patient having an implanted device by applying pressure from a pressurized reservoir and opening an outlet valve to allow a pressure differential to 20 cause a flow of the drug. For example, Malamud et al. (U.S. Patent 5,928,195) discloses a remotely controlled drug delivery device suitable for implantation in a body cavity. A pressurized gas chamber presses upon a drug storage chamber thereby administering a dose of the drug when a valve is remotely opened.

Similarly, Arzbaecher (U.S. Patent 5,607,418) discloses an 25 implantable drug apparatus having nested deformable chambers with the outer chamber being pressurized. The pressure from the outer pressurized chamber forces the drug from a reservoir chamber into an inner dispensing chamber. A remotely controlled valve is used to administer a dose of the drug from the dispensing chamber. Further, Haller et al. (U.S. Patent 6,203,523) discloses an implantable 30 drug infusion device having a flow regulating mechanism that permits the flow rate to be independent of reservoir pressure. Some of the tradeoffs between "passive" (pressurized reservoir-based) devices and "active" (pump-based) devices are discussed in Haller, the disclosure of which is incorporated herein by reference.

OBJECTS OF THE INVENTION

The foregoing demonstrates a need for a practical, accurate and easy means of remotely adjusting an implanted gastric band.

5 It is therefore an object of the present invention to provide a practical, accurate and efficient means for remotely adjusting an implanted gastric band.

It is another an object of the present invention to remotely adjust an implanted gastric band having an inflatable member.

10 It is yet another object of the invention to provide a remote control means suitable for use with existing gastric banding devices and technology.

Still another an object of the present invention is to minimize device complexity for an implanted remotely adjustable gastric banding device to ensure maximum device longevity/durability, in light of the fact that repair would require additional surgery.

15 Various other objects, advantages and features of the present invention will become readily apparent from the ensuing detailed description and the novel features will be particularly pointed out in the appended claims.

SUMMARY OF THE INVENTION

20 The present invention applies recent developments in implantable drug delivery device technology to the field of gastric banding.

A preferred embodiment of the invention provides a gastric banding device for treatment of morbid obesity. The device has a gastric band suited for laparoscopic placement around the stomach of a patient to form an adjustable stoma opening. The gastric band has an inflatable chamber for adjusting the inner circumference of the band. The inflatable chamber is preferably substantially coextensive with an inner stomach-facing surface of the gastric band. The inflatable member does not wrinkle or fold when adjusted, thereby presenting a substantially smooth contour along the inner circumference. A fluid-filled pressurized reservoir provides a source of fluid to inflate the inflation chamber of the gastric band. First and second valves control the flow between the pressurized reservoir, the inflatable chamber, and an unpressurized or negatively pressurized outlet. A controller is used to control the valves, thereby regulating the volume change in the inflatable chamber

to adjust the inner circumference of the band. The controller is remotely controllable from outside of the patient.

Other aspects of the invention include a remote control for remotely transmitting control signals to the controller, a receiver for receiving control signals from the remote control, and a power source for providing power to the controller and the valves. The power source may be an induction coil. The power source may also be a battery or capacitor charged by a piezoelectric device which converts body motion into electrical energy.

In a method according to the invention, a remotely adjustable gastric banding system may be used for the treatment of obesity. The method comprises the steps of implanting a gastric band, preferably laparoscopically, around the stomach of the patient to create a stoma; remotely transmitting control signals from outside of the patient to a controller of the implanted gastric banding device; and actuating a first valve, between a pressurized reservoir and an inflatable chamber, and/or a second valve, between the inflatable chamber and an outlet, on the basis of the control signals received by the controller to increase or decrease the fluid volume in the inflatable chamber, thereby adjusting the inner circumference of the band to adjust the stoma.

20

BRIEF DESCRIPTION OF THE DRAWINGS

The following detailed description given by way of example, but not intended to limit the invention solely to the specific embodiments described, may best be understood in conjunction with the accompanying drawings in which:

25 Figure 1 is a perspective view of a laparoscopically implantable gastric band, which may be used in the present invention, fastened in an encircling position and partially inflated;

Figure 2 is a side view of the gastric band shown in Figure 1; and

Figure 3 is a schematic diagram showing a remotely controlled fluid distribution system for a gastric band according to the present invention.

30

DETAILED DESCRIPTION OF CERTAIN PREFERRED EMBODIMENTS

The present invention combines the implantable drug delivery device technology discussed above with gastric banding technology. The preferred

embodiments of the apparatus and method according to the present invention will be described with reference to the accompanying drawings.

Referring to Figure 1, a gastric band for use with the present invention is disclosed in Vincent (U.S. Patent 5,601,604). This compatible gastric band, indicated as reference numeral **10**, has a body portion **11** with an inner stomach-facing surface **15**. The body portion **11** has a head end **12** and a tail end or “belt” **13**. A fill tube **14**, which is generally a tube having a single lumen coextensive therewith, is in fluid communication with an inflatable chamber **16** on the inner surface **15** of the band body **11**. Preferably, the inflatable portion **16** is substantially coextensive with the inner surface **15** of the body portion **11**. The central lumen of the fill tube **14** is in fluid communication with inflatable chamber **16**. The head end **12** of the body portion **11** has a “buckle” **19** through which the tail end of “belt” **13** is inserted and locked in place in use. Head end **12** may be provided with a pull tab **18** for use in locking the band in place about the stomach.

In use, the gastric band is placed in an encircling position around the stomach and locked in place as shown in Figure 2. (In Figure 2, the stomach is omitted for clarity.) This is accomplished by introducing the gastric band **10** through a laparoscopic cannula (not shown) in a patient’s abdominal cavity. Laparoscopic placement consists of blunt dissection below the gastro-esophageal junction followed by placement of the band. The end of the fill tube **14** is passed through the dissected path around the upper stomach, and the tail end or belt **13** is passed through buckle **19**, so that the belt and buckle lock in place. A laparoscopic closure tool, such as that disclosed by Coe and Vincent in U.S. Pat. 5,658,298, incorporated herein by reference, may be used. Hence, with the gastric band affixed in an encircling position around the stomach, a new stoma (opening) is created within the stomach. After the band is secured in position, the size of the stoma may be adjusted by adding fluid to or withdrawing fluid from the inflatable member **16** to bring the stoma opening to the desired size. The inflatable member or chamber **16** is preferably coextensive with the inner stomach-facing surface **15** of the band between the head end **12** and the tail end **13**. The interior of the adjustable chamber **16** is in fluid communication with a fluid reservoir (not shown) by means of the central lumen of the fill tube **14**, as with prior art adjustable gastric bands. The inflatable member **16** is gradually inflated or deflated with saline or other biologically

compatible fluid via the fluid reservoir such that the inflatable member **16** presses on and constricts the stomach wall or other tissue underlying the band. This results in the decrease or increase of the size of the stomach opening directly inside the encircling band.

In the present invention, the pressure relationship between reservoir 20, inflatable member 16 and outlet 23 is initially represented by the formula $P1 > P2 > P3$. Hence, valve 31 may be used to increase the pressure $P2$ up to a maximum pressure of $P2=P1$, thereby inflating inflatable member 16. Similarly, valve 32 may be used to decrease the pressure $P2$ down to a minimum of $P2=P3$, thereby deflating inflatable member 16. Thus, by actuating valves 31 and 32, the fluid volume in the inflatable member 16 may be regulated, thereby adjusting the size of the stoma formed by the gastric band.

30 In the present invention, valves **31** and **32** are controlled by a controller **41**. The valves are preferably controlled in accordance with externally transmitted signals (not shown) received by a receiver **42** but may ultimately be controlled by any control system, including internal, mechanical, wired, or the like.

The signals are preferably radio frequency (RF) signals transmitted by a remote control device **40** located external to the implanted gastric banding system. Power may be supplied to the receiver, the controller, and/or the valves either from an implanted power source **43** or from an induction coil **43** that receives power from a concentric coil external to the body, as described for instance for hearing aids in Baumann et al. (U.S. Patent 5,279,292), which is hereby incorporated by reference.

The entirety of the remote gastric banding system **100** shown in Figure 3 may be laparoscopically implanted in the patient. Subsequent adjustment of the band can be simply, quickly, and painlessly performed using a remote control device to remotely inflate/deflate the inflatable portion **16** of the band. The entire system **100** may be removed from the patient if necessary. No permanent anatomical changes should be anticipated.

The remote control device **40** can be in the form of a typical television remote control, a personal computer interfaced device, or any other format. A unique identification code may be assigned to each remotely adjustable gastric band, so that access to and control of the device is restricted. This code may be a PIN code and may also act to prevent accidental adjustment of the band.

The system may be pressurized using a saline solution, or any other biocompatible fluid. If desired, a concentrated saline solution may be used as the inflation medium, thereby allowing water from the patient's body to diffuse into the inflatable member **16** over time and further inflate the band. After repeated adjustments the reservoir **20** may be refilled through an access port (not shown) or replaced altogether. As a backup and safety measure, the system may also allow for inflation/deflation of inflatable member **16** by transdermal injection through a fill port (not shown) as in prior art gastric banding devices.

Because this system uses a pressurized reservoir rather than a mechanical pressurization means (*i.e.* a pump or screw), the present system is more energy-efficient than those disclosed in the existing remote-controlled adjustable gastric band systems of Klaiber or Forsell (U.S. Patents 5,938,669 and 6,210,347). Power is only required when operating the valves **31** and/or **32**, and then only for relatively short time intervals.

Alternative embodiments of the present invention may include means for measuring fluid flow through the valves **31** and/or **32**, such as a mass flowmeter,

to ensure accuracy in adjusting the stoma when inflatable member **16** is inflated or deflated. Also, the controller **41** may be positioned external to the body. An alternate gastric band design might also be used, provided that the inflation medium remains a fluid.

5 A further embodiment of the present invention is a method of treating obesity using the remotely adjustable gastric banding system disclosed herein. The method includes implanting a gastric band, preferably laparoscopically, around the stomach of the patient to create a stoma; remotely transmitting control signals from outside of the patient to controller **41** of the gastric banding device inside of the
10 patient; and opening and closing valve **31**, between pressurized reservoir **20** and inflatable chamber **16**, and/or valve **32**, between the inflatable chamber and outlet **23**, on the basis of the control signals received by controller **23** to increase or decrease the pressure in the inflatable chamber, thereby adjusting the inner circumference of the band to adjust the stoma size.

15 Although the invention has been particularly shown and described with reference to certain preferred embodiments, it will be readily appreciated by those of ordinary skill in the art that various changes and modifications may be made therein, without departing from the spirit and scope of the invention. It is intended that the claims be interpreted as including the foregoing as well as various
20 other such changes and modifications.

WHAT IS CLAIMED IS:

1. A gastric banding apparatus for treatment of obesity in a patient, comprising:
 - 5 a gastric band suitable for laparoscopic placement around the stomach of the patient to create a stoma; said gastric band having an inflatable chamber for adjusting an inner circumference of the band;
 - 10 a pressurized fluid reservoir for providing fluid to inflate said inflation chamber;
 - 15 a first valve between said pressurized fluid reservoir and said inflatable chamber;
 - 20 a second valve between said inflatable chamber and an outlet;
 - 25 a controller for actuating said first and second valves thereby increasing or decreasing the fluid volume in said inflatable chamber to adjust the inner circumference of the band; said controller being remotely controllable from outside of the patient.
2. The gastric banding apparatus according to claim 1, further comprising a remote control for remotely transmitting control signals to the controller.
3. The gastric banding apparatus according to claim 1, further comprising a receiver for receiving control signals wherein said controller actuates said first and second valves in response to the received signals.
4. The gastric banding apparatus according to claim 1, further comprising a power source for providing power to said controller, said first valve, and said second valve.
- 30 5. The gastric banding apparatus according to claim 4, wherein said power source is an induction coil.
6. The gastric banding apparatus according to claim 4, wherein said power source is a battery.

7. The gastric banding apparatus according to claim 4, wherein said power source is a capacitor.

8. The gastric banding apparatus according to claim 7, wherein said 5 capacitor is piezo-electrically charged.

9. The gastric banding apparatus according to claim 1, wherein said outlet is the peritoneal cavity of the patient.

10 10. The gastric banding apparatus according to claim 1, wherein said outlet is a waste reservoir.

11. The gastric banding apparatus according to claim 10, wherein said waste reservoir is negatively pressurized.

15

12. The gastric banding apparatus according to claim 1, wherein said inflatable chamber is substantially coextensive with an inner stomach-facing surface of said gastric band.

20 13. The gastric banding apparatus according to claim 12, wherein said inflatable chamber does not wrinkle or fold when adjusted, thereby presenting a substantially smooth contour along said inner circumference.

25 14. The gastric banding apparatus according to claim 1, wherein said gastric band forms a smoothly surfaced circle.

15. The gastric banding apparatus according to claim 14, wherein said gastric band is lockable in said smoothly surfaced circle.

30 16. The gastric banding apparatus according to claim 1, wherein the fluid in said pressurized fluid reservoir is saline.

17. A method of treating obesity in a patient, comprising the steps of:

implanting a gastric banding device around the stomach of the patient to create a stoma; said gastric banding device having an inflatable chamber;

remotely transmitting control signals from outside of the patient to a controller of the gastric banding device inside of the patient; and

5 actuating a first valve, between a pressurized fluid reservoir and said inflatable chamber, or a second valve, between said inflatable chamber and an outlet, on the basis of the control signals received by the controller to increase or decrease the fluid volume in said inflatable chamber, thereby adjusting an inner circumference of the band.

10

18. The method according to claim 17, wherein the control signals are remotely transmitted using a remote control.

15

19. The method according to claim 17, wherein the controller has a receiver for receiving the control signals.

20. The method according to claim 17, wherein said inflatable chamber is substantially coextensive with an inner stomach-facing surface of said gastric band.

20

21. The method according to claim 17, wherein said gastric band forms a smoothly surfaced circle.

22. A gastric banding apparatus for treatment of obesity in a patient, comprising:

25

a laparoscopically implantable gastric band having an inflatable member for adjusting an inner circumference of the band;

a reservoir for providing pressurized fluid to inflate said inflation member;



a valve between said reservoir and said inflatable member;

30

a controller for opening and closing said valve thereby increasing the volume of said inflatable member to decrease the inner circumference of the band.

23. The gastric banding apparatus according to claim 22, further comprising a valve between said inflatable member and an outlet; said controller opening and closing said valve between said inflatable member and an outlet thereby decreasing the volume of said inflatable member to increase the inner circumference
5 of the band.

24. The gastric banding apparatus according to claim 23, wherein the controller is remotely controllable from outside of the patient.

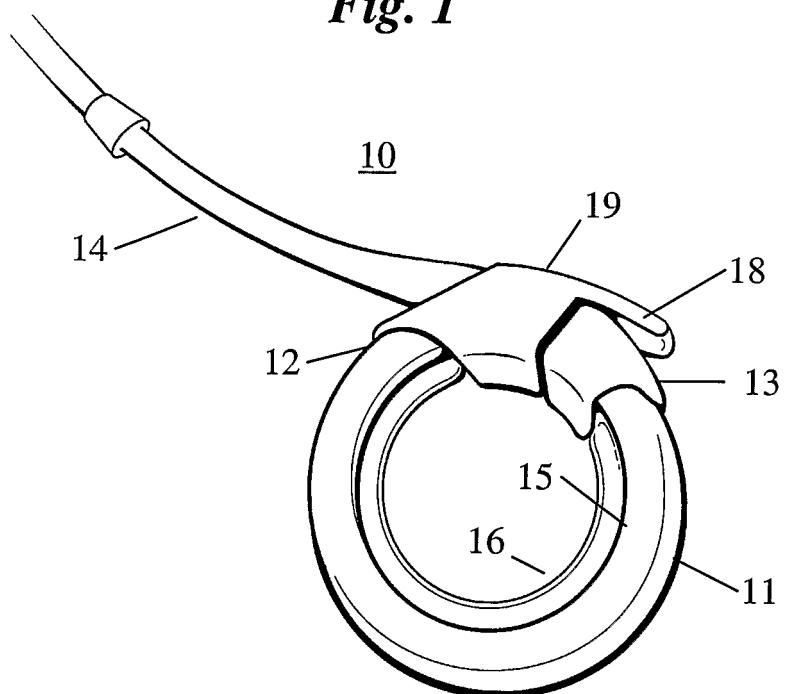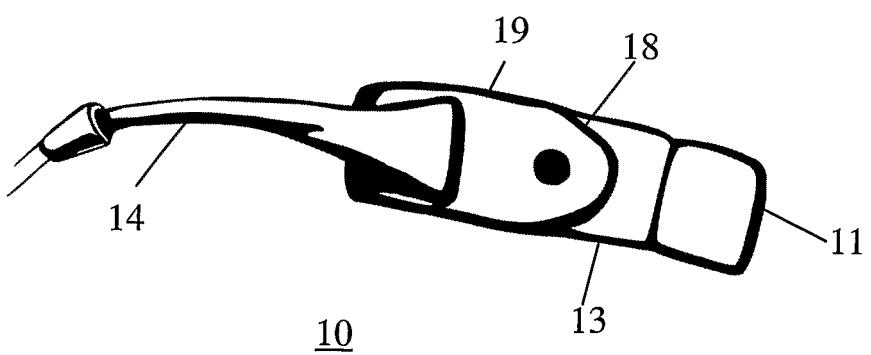Fig. 1*Fig. 2*

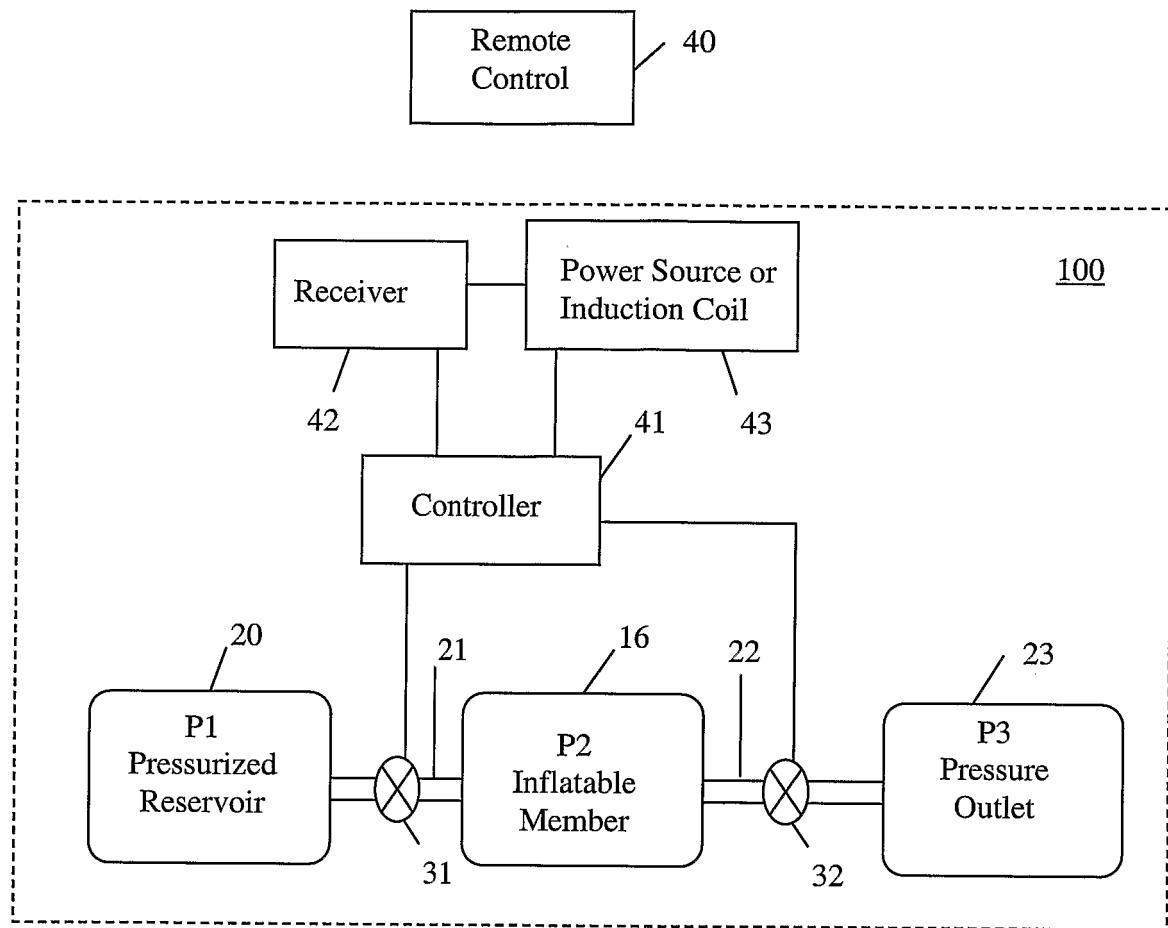


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/25654

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : A61B 19/00
US CL : 128/899

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
U.S. : 128/899, Dig 25; 600/29-31,37; 606/192

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
None

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EAST

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6,067,991 A (FORSELL) 30 May 2000. See entire document.	1-24
Y	US 6,210,347 B1 (FORSELL) 03 April 2001. See entire document.	1-24
Y, E	US 6,450,946 B1 (FORSELL) 17 September 2002. See entire document.	1-24
Y, E	US 6,432,040 B1 (MEAHL) 13 August 2002. See entire document.	1-24
Y	US 6,102,922 A (JAKOBSSON ET AL) 15 August 2000. See entire document.	1-24

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

27 September 2002 (27.09.2002)

Date of mailing of the international search report

07 MAY 2003

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Faxsimile No. (703)305-3230

Authorized officer

Samuel G Gilbert



Telephone No. 703-308-0858

专利名称(译)	可远程调节的胃束带装置和方法		
公开(公告)号	EP1534162A1	公开(公告)日	2005-06-01
申请号	EP2002768514	申请日	2002-08-13
[标]申请(专利权)人(译)	INAMED医疗PROD		
申请(专利权)人(译)	INAMED医疗产品公司		
当前申请(专利权)人(译)	ALLERGAN , INC.		
[标]发明人	COE FREDERICK L		
发明人	COE, FREDERICK, L.		
IPC分类号	A61F5/00 A61B19/00		
CPC分类号	A61F5/0066 A61F5/003 A61F5/0053		
其他公开文献	EP1534162A4 EP1534162B1		
外部链接	Espacenet		

摘要(译)

一种可远程控制的胃束带装置(10)，用于放置在患者的胃周围，用于治疗肥胖症。该装置(10)包括胃带(10)，其具有用于调节带(10)的内周的可充气室(16)，带有阀(31)的加压贮器(20)，用于提供流体以使充气膨胀。腔室(16)，用于从充气室(16)释放流体的阀门(32)，以及用于控制阀门(31,32)的控制器(41)。控制器(41)可从患者外部远程控制。