



(11)

EP 1 806 101 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 158(3) EPC

(43) Date of publication:
11.07.2007 Bulletin 2007/28

(51) Int Cl.:
A61B 17/00 (2006.01) **A61B 17/12 (2006.01)**

(21) Application number: **05785718.7**(86) International application number:
PCT/JP2005/017462(22) Date of filing: **22.09.2005**(87) International publication number:
WO 2006/033385 (30.03.2006 Gazette 2006/13)

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

- **TAKADA, Moriatsu,**
c/o National University Corp.
Kobe-shi, Hyogo 6578501 (JP)
- **KURODA, Yoshikazu,**
c/o National University Corp.
Kobe-Sh i, Hyogo 6578501 (JP)

(30) Priority: 24.09.2004 JP 2004276827

(71) Applicant: **National University Corp.**
Kobe University
Kobe-shi, Hyogo 6578501 (JP)

(74) Representative: **Casalonga, Axel**
Bureau Casalonga & Josse
Bayerstrasse 71/73
80335 München (DE)


(72) Inventors:
• **ICHIHARA, Takao,**
c/o National University Corp.
Kobe-shi, Hyogo 6578501 (JP)

(54) **GUT CLAMPER**

(57) Even in a situation where a sufficient space necessary for using instruments cannot be secured around as in the case of a laparoscopic operation, to easily and reliably clamp the gut during operation, a gutclamper is provided which includes two hard rod-like bodies having flexible belts on one ends, a joint at which the rod-like bodies are joined, and at least one through hole made in one of the belts, and clips the gut by using the two hard rod-like bodies by using the joint as a pivot. By clipping the gut by side surfaces of the rod-like bodies, it can be clipped while the width of the gut is pressed and widened, so that the gut is prevented from being excessively clamped and torn.

In addition, the two rod-like bodies are made different in length from each other, a through hole is made in the belt connected to the shorter rod-like body, and the tip end of the longer rod-like body is fit into the through hole and locked, so that reliable clipping is realized without an excessive burden being placed on an operator.

【Fig.1】

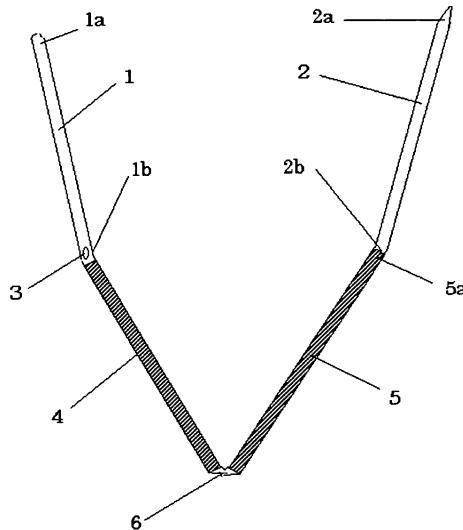

Description

[0001] The present invention relates to a surgical aid instrument to be used for a surgical operation on digestive organs in principal, more specifically, a clamp which is used for gut tract resection and used for completely pressure-closing the gut lumen.

[0002] In laparoscopic operations, according to improvement in the techniques and improvement of instruments, it has become possible to laparoscopically perform surgical operations such as partial resection of the stomach and the large intestine and removal of bile duct calculus and cancerous tissues which could be conventionally performed only by abdominal operations. In abdominal operations, a method is used in which the gut is clipped with intestinal forceps during an operation for intraoperative enema cleaning or an operation for resecting the stomach or the large intestine or removing bile duct calculus or cancerous tissues.

[0003] In a laparoscopic operation, a gas for pneumoperitoneum such as carbon dioxide is supplied into the abdominal cavity via a pneumoperitoneum needle puncturing the abdominal cavity to distend the abdominal cavity, whereby a space is secured in the abdominal cavity to secure the operative field. In the method of clipping with intestinal forceps or the like as described above, for using the instrument, it is necessary to secure a sufficient space around, and it was impossible to use this method in laparoscopic operations.

[0004] On the other hand, instead of clipping the gut with intestinal forceps during an operation, also available is a method in which the gut is tied with a silk thread or tightened with a string in a ringed manner. However, this damages the gut frequently, and is not appropriate.

[0005] A method is considered in which the gut is clipped with an instrument like a clothespin. However, to effectively clamp the gut, a clothespin with a high spring effect must be used, and a force is needed to open the clothespin to the clipping points, and this places an excessive burden on an operator. Furthermore, around the gut, there is fat, so that in many cases using the method for clipping with a clothespin, only a half of the gut is seized, and it is impossible to confirm whether the seizing is sufficient.

[0006] Generally, as an instrument for clamping or clipping, a bundling band like an instrument to be used for bundling cable wires together is available (for example, Patent document 1). This bundling band tightens the gut in a ringed manner, and this is not appropriate. There is also available a bundling band for assisting joining of bone fragments (Patent document 2).

Additionally, there are clip forceps for clipping a blood vessel in a human body which can be inserted in a neuroendoscope and remotely operated (Patent document 3).

However, no matter which instrument is used, the gut is tightened in a ringed manner or the surrounding of the gut is partially clipped, and this is not appropriate.

[0007] Intraoperative dissemination due to operative maneuvers has come into question, and it is demanded that surgical operations are performed without contacting tumors.

5 From a medical perspective of prevention of intraluminal metastases, it is recognized as desirable that the gut is clamped around a tumor early in operative maneuvers. Furthermore, as relates to intraoperative rectal lavage, in particular, in abdomino-perineal resection of the rectum, rectal lavage immediately before resection is necessary from the perspective of prevention of postoperative infection, and by clamping the rectum, it becomes possible to sufficiently clean the rectum from the anus, and as a result, the rectum can be resected at the sufficiently cleaned anus side.

10 From these circumstances, currently, a medical clamp which can easily, safely, and reliably clamp the gut during an operation for intraoperative enema cleaning or the like in the field of digestive surgery is demanded.

15 **[0008]**

Japanese Unexamined Patent Publication No. 2003-237823

20 25 Japanese Unexamined Patent Publication No. 2000-201941

Japanese Unexamined Patent Publication No. 09-192137

30 35 **[0009]** A gutclamper of the present invention was made in view of the above-described circumstances, and an object of the invention is to provide a convenient medical clamper which can easily clamp the gut during an operation even in a situation where a sufficient space necessary for using instruments cannot be secured around as in the case of a laparoscopic operation, has less limitation in a movable range, and is preferable for safely performing an operation in a narrow abdominal cavity.

40 45 **[0010]** Another object of the invention is to provide a medical clamper which, during clamping of the gut, enables an operator to maneuver the clamper without an excessive burden on the operator shown in the aforementioned example using a clothespin, can clip the whole circumference instead of clipping a part of the circumference of the gut, and enables confirmation as to whether the clipping is sufficient.

50 55 **[0011]** Furthermore, in view of the problem in the method in which the gut is tightened by a bundling band in a ringed manner, and the gut is constricted and makes it difficult to identify a resection range in, for example, intestinal resection, still another object of the invention is to provide a medical clamper which can clip the gut by surfaces instead of tightening in a ringed manner, and can clamp the gut while widening the width of the gut.

[0012] The present inventors accumulated knowledge through experience of clipping the gut during actual op-

erations at medical sites and repeated trial and error, and as a result, they completed the present invention. Hereinafter, means for achieving the objects will be described.

[0013] According to a first aspect of the present invention, "a gutclamper including: two hard rod-like bodies having belts with flexibility on their one ends; a joint at which the rod-like bodies are joined, and one through hole made in one of the belts" is provided. Herein, the belts with flexibility are made of, for example, a soft resin and can be wound around the gut like a band, and mean string-like members as well as belt-like members.

The hard rod-like bodies are made of, for example, a hard resin, wood, or metal, and can clip the gut, and mean rod-like bodies with circular, oval, or polygonal sectional shapes.

[0014] The gutclamper according to the first aspect of the present invention clips the gut by using the two hard rod-like bodies by using the joint as a pivot. Different from the case where the gut is tightened in a ringed manner with a string or silk thread, this clipping method has the following advantages.

When clipping the gut by the rod-like bodies, the side surfaces of the rod-like bodies clip the gut, and as a result, the gut can be clipped while the width of the gut is pressed and widened, so that tearing of the gut due to excessive tightening as in the case of tightening in a ringed manner does not occur.

[0015] When tightening the gut in a ringed manner, the tightened portion is constricted like a banded bundle, so that due to the constricted portion, when observing the gut from the interior of the gut through a scope, it becomes difficult to accurately identify the resecting position, and as a result, extra portions may be resected in the gut resection. However, in the case of the gutclamper of the present invention, the gut is clipped by the rod-like bodies and the width of the gut is pressed and widened, and the constricted portion is reduced, so that extra portions are not resected.

[0016] Furthermore, by inserting one of the belts into the through hole of the other belt from tip end side, the two rod-like bodies can clip the gut by using the joint as a pivot, so that different from clipping with a clothespin, an excessive operating burden is not placed on the operator, and the whole circumference of the gut can be clamped while adjusting and confirming the degree of clamping.

[0017] Next, according to a second aspect of the present invention, in the first aspect of the invention, "a gutclamper wherein lengths of the two rod-like bodies are made different from each other, and the position of a through hole made in a belt connected to the shorter rod-like body is set so as to match with the tip end of the longer rod-like body when the two rod-like bodies are put together by using the joint as a pivot" is provided.

By making the lengths of the two rod-like bodies different from each other, making a through hole in a belt connected to the shorter rod-like body, and positioning the

through hole at the tip end of the longer rod-like body when the two rod-like bodies are put together by using the joint as a pivot, it becomes possible to fit and lock the tip end of the longer rod-like body into the through hole by inserting the whole of a belt connected to the other longer rod-like body into the through hole from the tip end side.

[0018] According to a third aspect of the present invention, "a gutclamper which is formed of one hard rod-like body having belts on both ends, and has a through hole made in one belt" is provided.

In the gutclamper according to the first aspect described above, the gut is clipped by using two hard rod-like bodies, however, the gutclamper according to the third aspect uses one hard rod-like body and can clip the gut by the rod-like body and belts. Into the through hole made in one belt, the other belt is inserted from the tip end side, whereby the rod-like bodies and the belts clip the gut. It is also allowed that one end of the hard rod-like body is formed into a belt and the other end is formed into a string.

[0019] In the first through third aspects of the present invention, the surfaces of the rod-like bodies are covered by covers made of a resin with flexibility. The surfaces of the rod-like bodies are covered by covers made of a resin with flexibility at the positions where the side surfaces of the rod-like bodies come into direct contact with the gut and clip it, and the covers are for protecting the surfaces of the gut from damage.

[0020] By integrally molding belts, covers, and joint by using a soft and bendable resin,

(1) connection of the belts to the hard rod-like bodies,

(2) covering on the surfaces of the hard rod-like bodies by a flexible resin, and

(3) joining of the rod-like bodies can be concurrently and conveniently performed.

Herein, as the soft, bendable, and elastic resin, a soft resin such as a urethane resin, low-density polyethylene, etc., can be used. Instead of the resin, natural rubber or synthetic rubber may also be used. As the integral molding, heat fusion, injection molding, thermal compression molding or bonding can be used.

[0021] As the material of the rod-like bodies, a metal such as stainless steel or a hard resin such as plastic is used. To clip the gut by the rod-like bodies, the rod-like bodies need to have a certain degree of hardness and strength.

[0022] The sectional shape of the rod-like bodies is circular, oval, or polygonal. To avoid a sharp contact surface so as not to damage the surface of the gut, the sectional shape is desirably circular or oval, however, to improve engagement for clipping by the two rod-like bodies, the sectional shape may be a polygon with unevenness

or without unevenness.

[0023] The lengths of the rod-like bodies are 30 to 70 millimeters in view of the whole circumferential length of the gut. When the length is more than 70 millimeters, a sufficient space cannot be secured around it in a laparoscopic operation, so that it becomes difficult to use the clamp. To completely clip the whole circumference of the gut, it is considered that at least 30 millimeters is necessary as the length of the rod-like bodies.

[0024] In the second aspect of the present invention, the length difference between the two rod-like bodies is predetermined by considering the widths of the belts, diameters of the rod-like bodies, the diameter and arrangement of the through hole. In the case of an aid instrument for clipping the gut in a laparoscopic operation or the like, the widths of the belts, the diameters of the rod-like bodies, and the diameter of the through hole are several millimeters, respectively, so that the length difference between the two rod-like bodies is appropriately 3 to 7 millimeters. It is preferably 5 millimeters. By arranging the through hole so as to be positioned at the tip end of the longer rod-like body when the two rod-like bodies are put together by using the joint as a pivot, the tip end of the longer rod-like body can be fit into the through hole and locked. The size of the through hole is set so that the belt can be inserted therein. In the embodiment described later, the through hole is arranged at the portion of the length difference between the two rod-like bodies.

[0025] When using the gutclamper of the present invention, in a laparoscopic operation, the belts of the gut-clamper are handled via an instrument, so that in particular, the tip end of the belt to be inserted through the through hole is tapered so as to be easily inserted through the through hole.

[0026] In the gutclamper of the present invention, by providing the belts themselves with elasticity, the belt inserted through the through hole is made more difficult to come out from the through hole, however, by further providing at least one locking portion in a projecting shape on a part of the belt to be inserted through the through hole, the belt is made more difficult to come out from the through hole after it is inserted through the through hole.

[0027] Similarly, a serrated uneven portion is provided on a part of the belt to be inserted through the through hole so as to lock the belt, whereby the belt is made more difficult to come out from the through hole after it is inserted therein.

[0028] In the gutclamper of the present invention, the color of the belts is transparent or a complementary color of red, that is, for example, blue or green, etc. This makes it possible to clearly recognize the belts even under an environment in red of the interior of the aperture such as the gut and easily laparoscopically handle them.

[0029] Furthermore, in the gutclamper of the present invention, when clipping is released, the joint is seized and the one belt having the through hole is pulled, whereby the clipping can be released, and in this case, the two belts are colored differently from each other to prevent

mistakes.

[0030] By using the gutclamper of the present invention, the procedure for completely pressure-closing the lumen of the gut by clipping the gut for gut tract resection under a situation where a sufficient space cannot be secured as in the case of a laparoscopic operation in digestive surgery can be conveniently, reliably, and safely performed. Of course, the gutclamper can also be used for clamping the duodenum in the case of gastric resection in a conventional general digestive surgical operation.

[0031] In addition, in the procedure for clipping the gut, there is no need for a force to open the clamper of the present invention to clipping points, and a force is needed only to insert the belt into the through hole and pull it, so that an excessive burden on the operator can be prevented when maneuvering the instrument.

[0032] In the gutclamper of the present invention, by clipping the gut by the rod-like bodies, the width of the gut can be clipped while being pressed and widened by the side surfaces of the rod-like bodies, so that the constricted portion is reduced, and confirmation as to whether the clipping is sufficient can be made.

[0033] Furthermore, different from tightening in a ringed manner with a bundling band, the constricted portion like bundled papers is not formed on the gut, and the resection range in the case of intestinal resection can be reliably identified.

[0034] Hereinafter, an embodiment of the present invention will be described with reference to the accompanying drawings. The present invention is not limited to the illustrated construction. The widths of the belts and the diameters and lengths of the rod-like bodies are set to optimal values according to the surgery site, and the shape and dimensions, etc., of the gutclamper of the present invention can be variously changed in design.

[0035] Hereinafter, an Example 1 of the embodiment of the present invention will be described with reference to the drawings.

[0036] Fig. 1 is an external view of Example 1 of a gutclamper of the present invention. As shown in Fig. 1, the gutclamper of the present invention has two hard rod-like bodies (4 and 5), and on one ends of the rod-like bodies, belts (1 and 2) with flexibility are provided, and the two rod-like bodies (4 and 5) are joined by a joint (6), and a through hole (3) is made in the belt (1).

The two rod-like bodies (4 and 5) are covered by covers (not shown) made of a resin with flexibility.

Concerning the lengths of the rod-like bodies, the shorter rod-like body has a length of about 55 millimeters, and the longer rod-like body has a length of about 60 millimeters. The diameters of the rod-like bodies are both about 2 millimeters.

The length difference of about 5 millimeters between the rod-like body (4) and the rod-like body (5) is provided for smoothly fitting the tip end (5a) of the longer rod-like body

(5) into the through hole as described later.

According to the clipping position on the gut, the lengths and diameters of the rod-like bodies are adjustable.

[0037] For the belts (1 and 2), a urethane resin that is soft and has bendability and elasticity is used. The belt (1) has the through hole (3), and has as a length of 70 to 90 millimeters.

On the other hand, the belt (2) is to be inserted through the through hole (3), and is made longer than the belt (1) for easy insertion by the operator, and has a length of 80 to 100 millimeters. The tip end (2a) of the belt (2) is tapered so as to be easily inserted through the through hole. Both belts (1 and 2) have a width of about 4 millimeters and a thickness of about 1 millimeter.

The lengths of the belts are adjustable so that handling of the belts becomes easy by considering the procedure for clipping the whole circumference of the gut in a laparoscopic operation.

[0038] Next, the manner of connecting the belt and the rod-like body and the manner of joining the two rod-like bodies will be described below. In this example, the belts, covers, and joint are integrally molded by means of heat fusion by using a urethane resin that is soft and has bendability and elasticity. Instead of the urethane resin, natural rubber or synthetic rubber or a soft resin such as low-density polyethylene may be used. Other than the heat fusion, injection molding, thermal compression molding or bonding may be used for integral molding.

The belts are colored by mixing a coloring pigment into the resin.

[0039] Fig. 2 through Fig. 5 illustrate a use image of Example 1 of the gutclamper of the present invention. Hereinafter, it is described step by step.

First, Fig. 2 shows a state in that the belt (2) is inserted through the through hole (3). Into the through hole (3) made in one belt (1), the other belt (2) is inserted from the tip end side, whereby the two rod-like bodies can clip the gut by using the joint (6) as a pivot. In Fig. 2, a circle is formed by the belt (1), the belt (2), the rod-like body (4), and the rod-like body (5), and in this ring, the gut to be clipped exists. In other words, the belt (2) is inserted through the through hole (3) so as to surround the gut by the belt (1), the belt (2), the rod-like body (4), and the rod-like body (5).

[0040] Next, Fig. 3 shows a state that by seizing the tip end of the belt (1) and pulling the tip end of the belt (2), the whole belt (2) is inserted through the through hole (3), whereby the gut (not shown) is clipped by the rod-like body (4) and the rod-like body (5).

[0041] Fig. 4 shows a state that the tip end of the longer rod-like body is fitted in the through hole and locked. The two rod-like bodies are made different in length from each other, a through hole (3) is made in the belt (1) connected to the shorter rod-like body (4), in such a manner that the through hole is positioned at the tip end of the longer rod-like body (5) when the two rod-like bodies are put together by using the joint (6) as a pivot, so that as shown in Fig. 4, by inserting the whole belt (2) through the through hole

(3) from the tip end side, the tip end (5a) of the longer rod-like body (5) can be fitted in the through hole and locked.

[0042] Next, a method for releasing the clipping state will be described.

To release the clipping state by displacement or the like of the clipping position of the gut, by seizing the joint (6) of the rod-like bodies and pulling the belt (1), the tip end (5a) of the rod-like body (5) comes out from the through hole (3) and the locked state can be released.

Fig. 5 shows a state that the joint (6) of the rod-like bodies is seized, the belt (1) is pulled to make the tip end (5a) of the longer rod-like body come out from the through hole (3), whereby the clipping state is released.

[0043] The belt (1) is flexible and elastic, so that the shape of the through hole (3) made in the belt (1) is also deformed into an oval shape in the pulling direction, and the tip end (5a) of the rod-like body is made easier to come out from the through hole (3). Unless the belt (1) is pulled, the tip end (5a) of the rod-like body does not come out from the through hole (3), and the state that the rod-like bodies clip the gut is reliably maintained.

[0044] Next, another Example 2 will be described.

When the belt is inserted through the through hole, it can be locked due to the respective elastic friction, however, when a further locking force is necessary, as in this Example 2, projections are provided on a part of the belt.

Fig. 6 is an external view of Example 2 of the gutclamper of the present invention, and as shown in Fig. 6, projections (7a through 7d) are provided on a part of the belt (2) to be inserted through the through hole (3) to lock the belt (2) so that the belt (2) becomes more difficult to come out from the through hole (3) after being inserted in the through hole (3). Various shapes such as spherical, semispherical, and rectangular shapes of the projections are possible.

[0045] Still another Example 3 will be described. Fig. 7 through Fig. 9 show an external view, an external perspective view, and a use image (clipping state) of Example 3.

In Example 3, as in the case of Example 2 described above, when a further locking force is necessary, a serrated uneven portion (8) is provided on a part of the belt. In Example 3, it is assumed that the shapes of the hard

rod-like bodies (4 and 5) are rectangular columns, and the belts (1 and 2) are thick. By providing a serrated uneven portion (8) on a part of the belt (2) to be inserted into the through hole (3) so as to make the belt more difficult to come out from the through hole (3) after being inserted therein.

[0046] The gutclamper of the present invention can easily and reliably clip the gut during an operation for intraoperative enema cleaning, resection of the stomach or the large intestine, or removal of bile duct calculus or cancerous tissues in the surgical field, and can be used as a medical aid instrument.

[0047]

[Fig. 1] is an external view of Example 1 of the gut-clamper of the present invention;

[Fig. 2] is a view of a use image of Example 1 of the gutclamper of the present invention (a state that the belt is inserted through the through hole);

[Fig. 3] is a view of a use image of Example 1 of the gutclamper of the present invention (a state that the whole belt is inserted through the through hole);

[Fig. 4] is a view of a use image of Example 1 of the gutclamper of the present invention (a state that the tip end of the longer rod-like body is fitted in the through hole and locked);

[Fig. 5] is a view of a use image of Example 1 of the gutclamper of the present invention (a state that one belt is pulled to make the tip end of the longer rod-like body to come out from the through hole, whereby the clipping is released);

[Fig. 6] is an external view of Example 2 of the gut-clamper of the present invention;

[Fig. 7] is an external view of Example 3 of the gut-clamper of the present invention;

[Fig. 8] is an external perspective view of Example 3 of the gutclamper of the present invention;

[Fig. 9] is a view of a use image of Example 3 of the gutclamper of the present invention (clipping state);

Description of Symbols

[0048]

1	belt (with a through hole)
2	belt (to be inserted through the through hole)
1a, 2a	tip end
1b, 2b	connected portion
3	through hole
3a, 3b, 3c	through hole
4	rod-like body (shorter)
5	rod-like body (longer)
5a	tip end of rod-like body (longer)
6	joint

7a, 7b, 7c, 7d	projection
8	serrated uneven portion

5 Claims

1. The gutclamper according to Claim 1, wherein the two rod-like bodies are made different in length from each other, the position of the through hole (3) made in the belt (1) connected to the shorter rod-like body (4) is set so as to match with the tip end (5a) of the longer rod-like body (5) when the two rod-like bodies are put together by using the joint (6) as a pivot, and by inserting the whole belt (2) connected to the longer rod-like body (5) through the through hole (3), the tip end (5a) of the longer rod-like body (5) can be fitted in the through hole and locked.
20. A gutclamper comprising: two hard rod-like bodies (4 and 5) having flexible belts (1 and 2) on one ends; a joint (6) at which the rod-like bodies are joined, and at least one or more through holes (3) made in one belt (1), wherein by inserting the other belt (2) into the through hole (3) from the tip end side, the two rod-like bodies can clip the gut by using the joint (6) as a pivot.
3. A gutclamper which is one hard rod-like body having belts on both ends, has a through hole made in one belt, and can clip the gut by the rod-like body and the belts by inserting the other belt into the through hole from the tip end side.
35. 4. The gutclamper according to any of Claims 1 through 3, wherein the surfaces of the rod-like bodies are covered by covers made of a resin with flexibility.
40. 5. The gutclamper according to Claim 4, wherein the belts, covers, and joint are integrally molded by using a resin that is soft and has bendability.
45. 6. The gutclamper according to any of Claims 1 through 3, wherein the material of the rod-like bodies is a metal.
7. The gutclamper according to any of Claims 1 through 3, wherein the material of the rod-like bodies is a hard resin.
50. 8. The gutclamper according to any of Claims 1 through 3, wherein the sectional shape of the rod-like bodies is circular, oval, or polygonal.
55. 9. The gutclamper according to any of Claims 1 through 3, wherein the lengths of the rod-like bodies are 30 to 70 millimeters.

10. The gutclamper according to Claim 2, wherein the length difference between the two rod-like bodies is 3 to 7 millimeters.

11. The gutclamper according to any of Claims 1 through 3, wherein the shape of the tip end of the belt to be inserted in the through hole is tapered so that the belt is easily inserted in through hole. 5

12. The gutclamper according to any of Claims 1 through 3, wherein at least one projection is provided on a part of the belt to be inserted in the through hole to lock the belt so as to make the belt more difficult to come out from the through hole after it is inserted in the through hole. 10 15

13. The gutclamper according to any of Claims 1 through 3, wherein a serrated uneven portion is formed on a part of the belt to be inserted in the through hole to lock the belt so as to make the belt more difficult to come out from the through hole after it is inserted in the through hole. 20

14. The gutclamper according to any of Claims 1 through 3, wherein the color of the belts is a complementary color of red. 25

15. The gutclamper according to Claim 14, wherein the colors of the belts are different from each other. 30

16. The gutclamper according to any of Claims 1 through 3, wherein the length of the belt (1) having the through hole is shorter than the other belt (2).

35


40

45


50

55


【Fig.1】

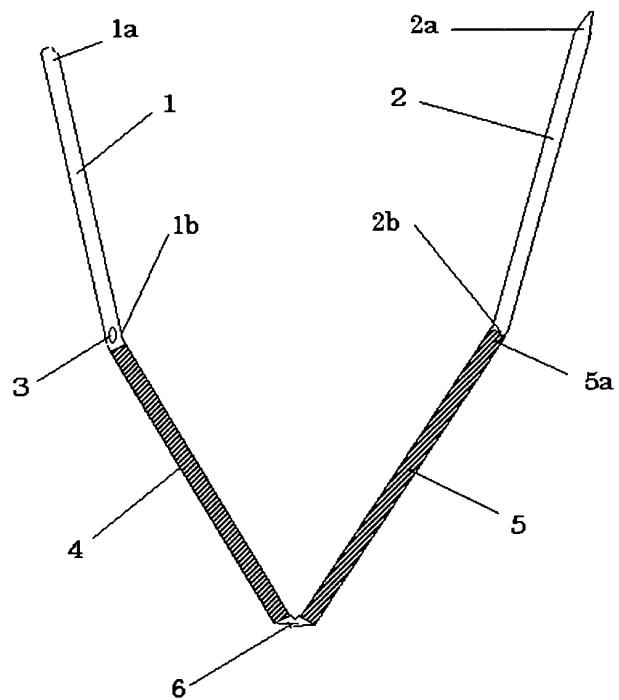


【Fig.2】

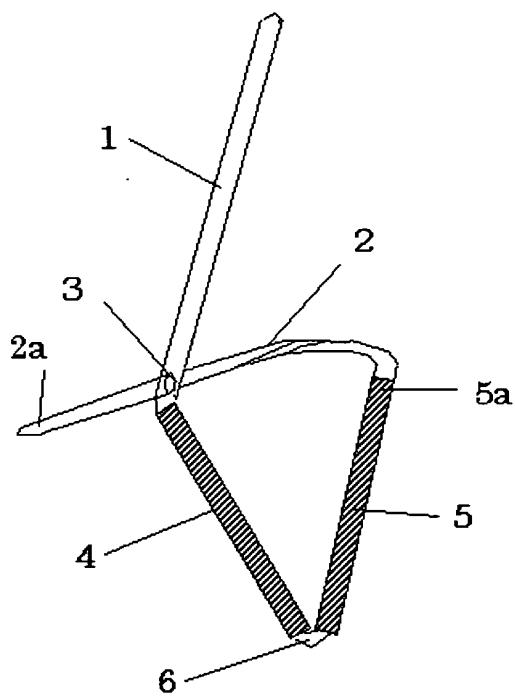


【Fig.3】

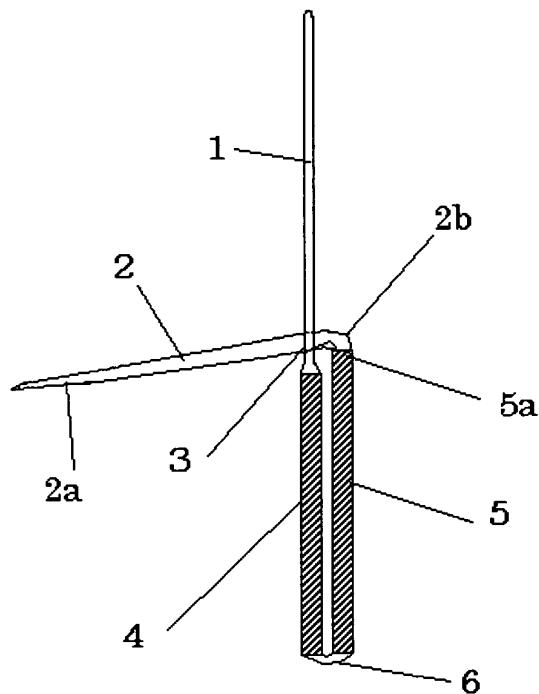


【Fig.4】

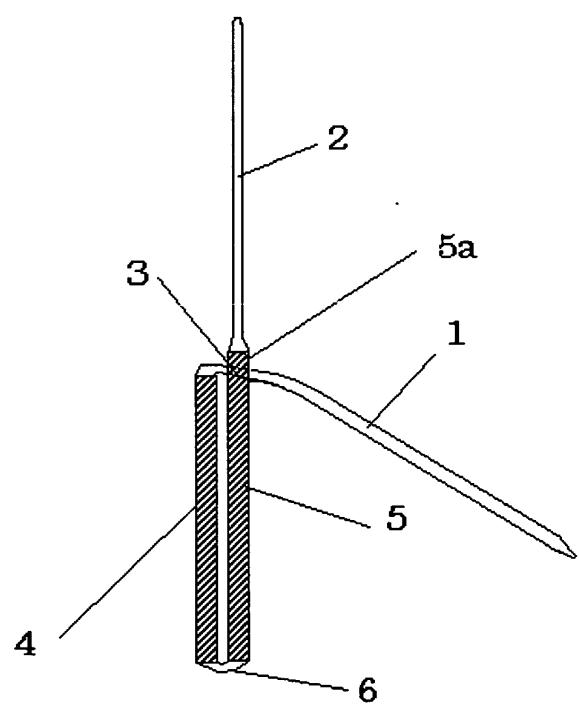


【Fig.5】

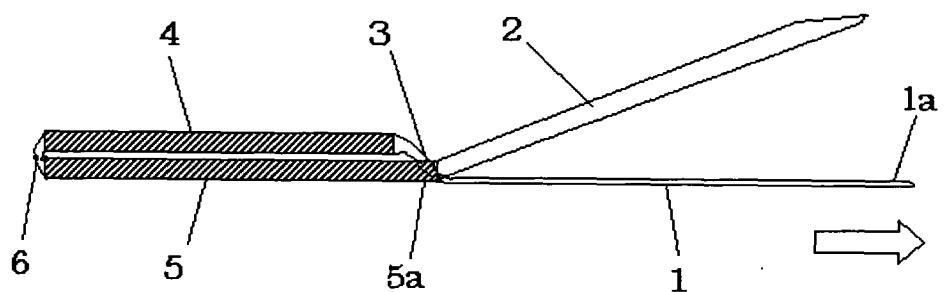


【Fig.6】

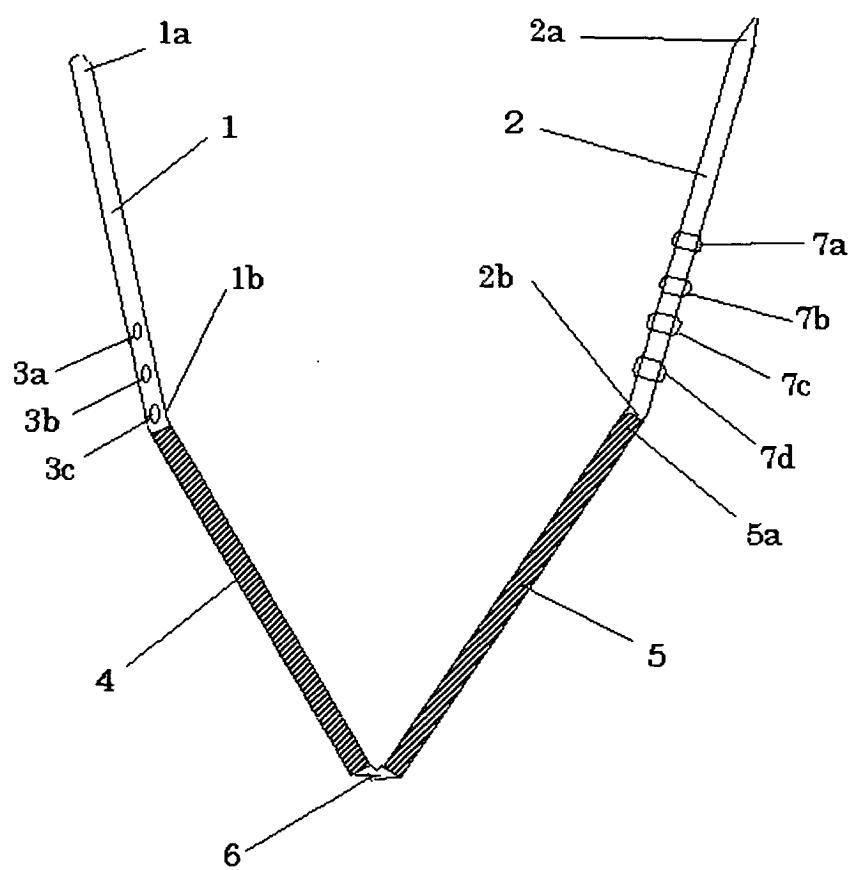


【Fig.7】

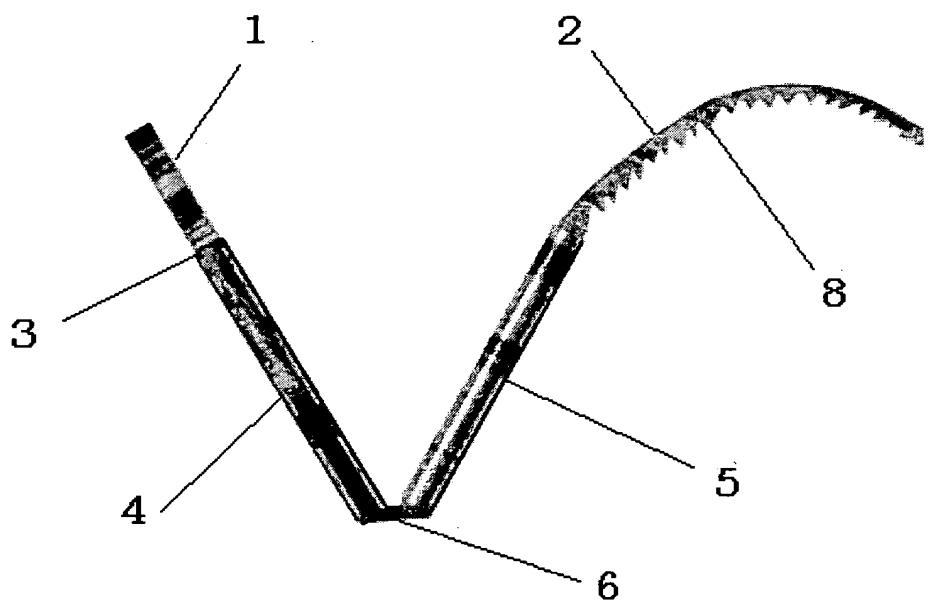

【Fig.8】

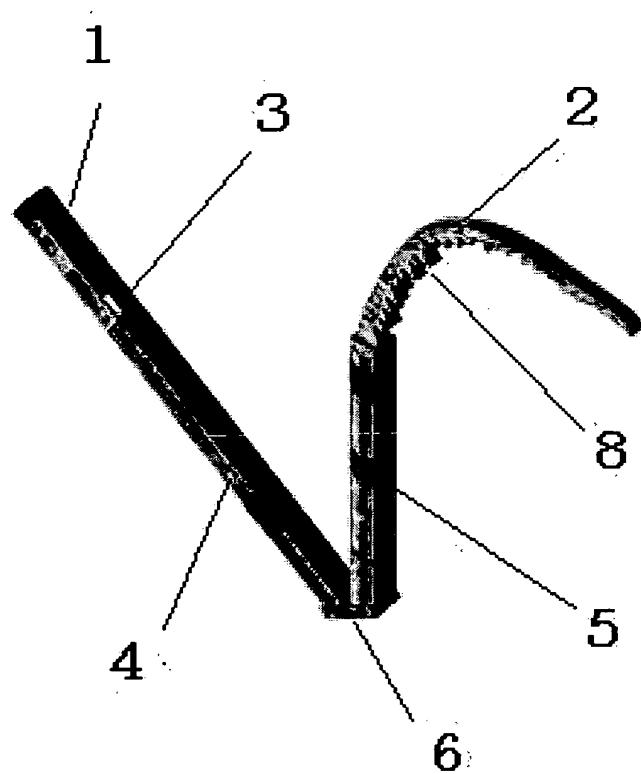

【Fig.9】

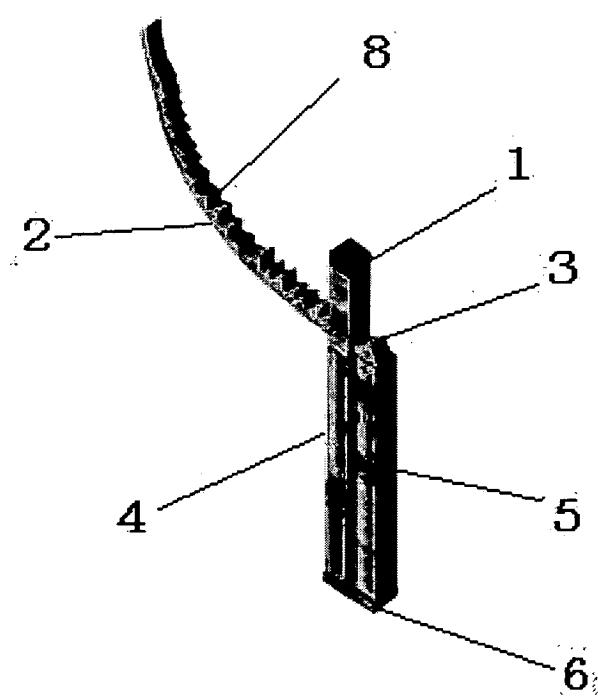

INTERNATIONAL SEARCH REPORT		International application No. PCT/JP2005/017462
A. CLASSIFICATION OF SUBJECT MATTER A61B17/00 (2006.01), A61B17/12 (2006.01)		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) A61B17/00 (2006.01), A61B17/12 (2006.01)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2005 Kokai Jitsuyo Shinan Koho 1971-2005 Toroku Jitsuyo Shinan Koho 1994-2005		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 3705586 A (John B. Sarracino), 12 December, 1972 (12.12.72), Column 3, line 12 to column 4, line 30; Figs. 1 to 4 (Family: none)	1, 3, 6-11, 16 4, 12-15
Y A	WO 1980/001752 A1 (LeVEEN, Harry, H.), 04 September, 1980 (04.09.80), Page 3, lines 9 to 11; page 3, lines 22 to 35; Figs. 1 to 3 & JP 56-500242 A	4, 12-13 1, 3
Y	US 6206897 B1 (Ethicon, Inc.), 27 March, 2001 (27.03.01), Column 3, lines 14 to 26; Fig. 3 & JP 8-215201 A	14-15
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed		
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 07 November, 2005 (07.11.05)		Date of mailing of the international search report 15 November, 2005 (15.11.05)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (April 2005)

INTERNATIONAL SEARCH REPORT		International application No. PCT/JP2005/017462
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2947055 A (Warren B. McHenry), 02 August, 1960 (02.08.60), Column 2, lines 50 to 64; Figs. 1 to 3 (Family: none)	1, 3
A	US 5843101 A (William R. Fry), 01 December, 1998 (01.12.98), Column 2, lines 28 to 50; Fig. 4 (Family: none)	1, 3
A	US 6746461 B2 (William R. Fry), 08 June, 2004 (08.06.04), Column 1, lines 12 to 16; Figs. 2A to 2B (Family: none)	1, 3
A	US 4976721 A (The Research Foundation of State University of New York), 11 December, 1990 (11.12.90), Column 1, lines 5 to 12; Fig. 2 (Family: none)	1, 3
A	US 6463932 B1 (Charles H. Single), 15 October, 2002 (15.10.02), Fig. 20A & WO 1999/043276 A1	1
A	WO 1997/040755 A1 (W.L. GORE & ASSOCIATES, INC.), 06 November, 1997 (06.11.97), Figs. 13 to 14 & JP 2000-510006 A	1

Form PCT/ISA/210 (continuation of second sheet) (April 2005)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2003237823 A [0008]
- JP 2000201941 A [0008]
- JP 9192137 A [0008]

专利名称(译)	好夹具		
公开(公告)号	EP1806101A1	公开(公告)日	2007-07-11
申请号	EP2005785718	申请日	2005-09-22
[标]申请(专利权)人(译)	国立大学法人神戸大学		
申请(专利权)人(译)	国家大学CORP.神戸大学		
当前申请(专利权)人(译)	国家大学CORP.神戸大学		
发明人	ICHIHARA, TAKAO, C/O NATIONAL UNIVERSITY CORP. TAKADA, MORIATSU, C/O NATIONAL UNIVERSITY CORP. KURODA, YOSHIKAZU, C/O NATIONAL UNIVERSITY CORP.		
IPC分类号	A61B17/00 A61B17/12		
CPC分类号	A61B17/12 A61B17/12009 A61B17/122 A61B17/132		
代理机构(译)	CASALONGA , AXEL		
优先权	2004276827 2004-09-24 JP		
其他公开文献	EP1806101A4 EP1806101B1		
外部链接	Espacenet		

摘要(译)

即使在如腹腔镜手术的情况下不能确保使用器械所需的足够空间的情况下，为了在操作期间容易且可靠地夹紧肠道，提供了包括两个具有柔性带的硬杆状体的gutclamper。在一端，连接杆状体的接头和在其中一个带中形成的至少一个通孔，并且通过使用该接头作为枢轴，通过使用两个硬杆状体来夹住肠。通过由杆状体的侧表面夹住肠道，可以在挤压和加宽肠道的宽度的同时夹住肠道，从而防止肠道被过度夹紧和撕裂。另外，两个杆状体的长度彼此不同，在与较短的棒状体连接的带中形成通孔，并且较长的棒状体的尖端适合于通孔和锁定，从而实现可靠的夹持，而不会给操作者带来过多的负担。

【Fig. 1】

