



(11)

EP 2 851 020 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
25.03.2015 Bulletin 2015/13

(51) Int Cl.:  
**A61B 17/34 (2006.01)**

(21) Application number: 14190029.0

(22) Date of filing: 26.01.2009

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL  
PT RO SE SI SK TR**

(30) Priority: 25.01.2008 US 23539 P

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:  
**09703532.3 / 2 231 233**

(71) Applicant: **APPLIED MEDICAL RESOURCES CORPORATION**  
Rancho Santa Margarita, CA 92688 (US)

(72) Inventors:  
• **Albrecht, Jeremy J**  
Rancho Santa Margarita, CA California 92688 (US)

- **Johnson, Gary M**  
Rancho Santa Margarita, CA California 92688 (US)
- **Brustad, John R**  
Rancho Santa Margarita, CA California 92688 (US)


(74) Representative: **Fitchett, Stuart Paul  
Saunders & Doleymore LLP  
9 Rickmansworth Road  
Watford  
Hertfordshire WD18 0JU (GB)**

Remarks:

This application was filed on 23-10-2014 as a divisional application to the application mentioned under INID code 62.

(54) **Insufflating access system**

(57) Systems, devices, and methods permit insulation of a body cavity prior to the insertion of a cannula into the body cavity. Embodiments of an access system comprise an obturator (160), a trocar (110), and a fluid flow channel (180). The access system has a closed configuration, in which a distal end of the access system is fluidly isolated from the fluid flow channel, and an open configuration, in which the distal end of the access system is fluidly connected to the fluid flow channel, thereby permitting fluid flow, for example, an insulation gas into a body cavity.

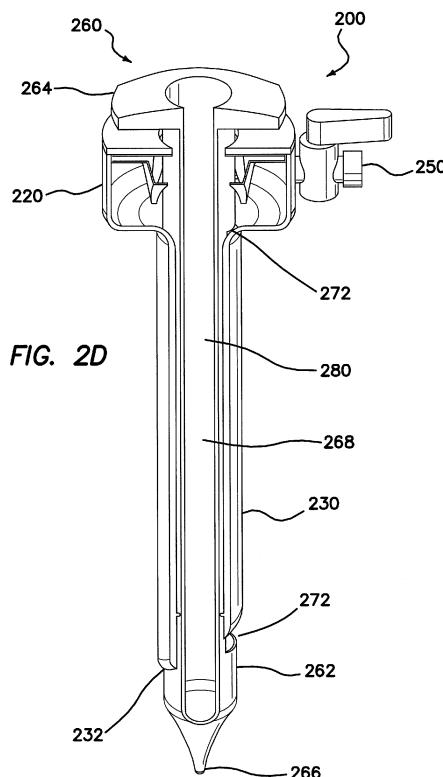

**Description****BACKGROUND****Technical Field**

**[0001]** This application is directed to an insufflating access system.

**Description of the Related Art**

**[0002]** In laparoscopic procedures in which a patient's abdomen is insufflated or inflated with gas, placing a device through which the abdomen is insufflated, also referred to as a first entry device, is often problematic. Because the peritoneum directly contacts the organ bed, a device puncturing the peritoneum can also damage the underlying organ bed. Placing subsequent devices is less dangerous because the insufflating the abdomen lifts the peritoneum above a gas-fill space or cavity above the organ bed, thereby reducing the risk of inadvertent damage thereto.

**[0003]** Several techniques are used to achieve pneumoperitoneum in laparoscopic surgery. A first technique uses a Veress needle, which is a sharp needle placed blindly through the abdominal wall into the abdominal cavity. An insufflation gas, for example, CO<sub>2</sub>, is then pumped through the hollow Veress needle and into the abdominal cavity, thereby insufflating the peritoneal cavity. The Veress needle technique, also known as a controlled stab, is capable of damaging organs such as the intestinal tract. The technique provides little or no feedback to the surgeon that any damage to an anatomic structure has occurred.

**[0004]** A second technique is known as the Hassan technique in which a surgeon performs a mini-laparotomy through the abdominal layers into the abdominal cavity, through which a trocar is inserted and the abdomen insufflated. The Hassan technique is a cut-down technique that results in larger abdominal defects and increased patient scarring. The technique is also difficult to perform on obese patients with very thick abdominal walls.

**[0005]** In a third technique, the surgeon places a trocar optically, visualizing the abdominal layers as the trocar is placed through the abdominal wall through a laparoscope disposed within the obturator of the trocar. The tip of the obturator can penetrate about 2 cm (about 0.75") into the organ bed of the abdominal cavity when placing the cannula and establishing pneumoperitoneum.

**[0006]** In a fourth technique, the abdominal layers are visualized while the trocar is advanced though the abdominal wall. As soon as the tip of the obturator punctures the peritoneum, gas is pumped through the trocar system into the abdominal cavity through vent holes disposed at the tip of the obturator. The fourth technique uses a vacuum release, which causes the organs to fall away from the abdominal wall, thereby creating a space in the abdominal cavity for the obturator tip. Accordingly, the ab-

dominal cavity can be inflated with minimal penetration into the space. As soon as the tip of the obturator punctures the peritoneum, gas enters the abdominal cavity through the vent holes in the tip of the obturator, thereby reducing the negative pressure caused by the surgeon's lifting of the abdominal wall, and in turn, creating a space above the organ bed into which the trocar system is fully inserted into the cavity. A seal is disposed within the obturator that provides a gas tight seal both with and without the laparoscope in place. The vent holes at the tip of the obturator allow moisture and tissue to enter the obturator, however, which obscure the field of view within the obturator tip. Gas flowing directly past the laparoscope within the obturator can cool the laparoscope, thereby fogging of the lens thereof.

**[0007]** European Patent Application EP 1733707 A1 and International Patent Application WO 03/020140 A1 disclose known access systems of the type to which the present invention relates.

**SUMMARY OF THE INVENTION**

**[0008]** The present invention provides an access system in accordance with Claim 1. This may permit insufflation of a body cavity prior to the insertion of a cannula into the body cavity. The access system has a closed configuration, in which a distal end of the access system is fluidly isolated from the fluid flow channel, and an open configuration, in which the distal end of the access system is fluidly connected to the fluid flow channel, thereby permitting fluid flow, for example, an insufflation gas into a body cavity.

**[0009]** In some embodiments, the trocar seal assembly further comprises a zero seal.

**[0010]** In some embodiments, the distal end of the cannula comprises an angled tip.

**[0011]** In some embodiments, the fluid port is disposed on the trocar seal assembly.

**[0012]** In some embodiments, the fluid flow seal is integrated with a cannula tip disposed at the distal end of the cannula. In some embodiments, the fluid flow seal is disposed proximal of the distal end of the cannula. In some embodiments, the fluid flow seal is substantially perpendicular to the longitudinal axis of the axis channel.

**[0013]** In some embodiments, the obturator further comprises an instrument well open at a proximal end of the obturator, extending longitudinally through the body of the obturator, terminating at the tip of the obturator, and dimensioned to receive a laparoscope therein, wherein at least a portion of the tip of the obturator is transparent. Some embodiments further comprise a laparoscope.

**[0014]** In some embodiments, the fluid flow channel comprises a space defined by the lumen of the cannula and the body of the obturator. In some embodiments, the fluid flow channel comprises an instrument well disposed

in the body of the obturator. In some embodiments, the fluid flow channel comprises at least one proximal opening and at least one distal opening disposed in the body of the obturator. In some embodiments, the fluid flow channel comprises a slot disposed in the body of the obturator.

**[0015]** In some embodiments, in the closed position, the obturator is displaced distally in the access channel compared with the open position. In some embodiments, in the closed position, the obturator is displaced proximally in the access channel compared with the open position. In some embodiments, in the closed position, the obturator is rotated in the access channel compared with the open position.

**[0016]** Some embodiments further comprise means for visually monitoring the position of the penetrating tip through a laparoscope.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0017]**

FIG. 1A is a perspective view of an embodiment of an insufflating access system. FIG. 1B is a perspective cutaway view of a trocar of the insufflating access system illustrated in FIG. 1A. FIG. 1C is a side cutaway view of the trocar illustrated in FIG. 1B. FIG. 1D is a side cutaway view of the insufflating access system illustrated in FIG. 1A in the closed configuration. FIG. 1E is a side cross-sectional view of the insufflating access system illustrated in FIG. 1A in a closed configuration. FIG. 1F is a cross-sectional view of the insufflating access system illustrated in FIG. 1A in an open configuration.

FIG. 2A is a perspective view of another embodiment of an insufflating access system. FIG. 2B is a perspective view of an embodiment of an obturator from the insufflating access system illustrated in FIG. 2A. FIG. 2C is a side cutaway view of an embodiment of the insufflating access system illustrated in FIG. 2A in a closed configuration. FIG. 2D is a side cutaway view of the embodiment of the insufflating access system illustrated in FIG. 2C in an open configuration.

FIG. 3A is a perspective view of another embodiment of an insufflating access system in an open configuration. FIG. 3B is a side cross section of the insufflating access system illustrated in FIG. 3A in a closed configuration. FIG. 3C is a side see-through view of another embodiment of an insufflating access system in an open configuration.

FIG. 4A is a side cross section of another embodiment of an insufflating access system in a closed configuration. FIG. 4B is a side cross section of the insufflating access system illustrated in FIG. 4A in an open configuration. FIG. 4C is a perspective view of an embodiment of an obturator of the insufflating access system illustrated in FIGS. 4A and 4B.

FIG. 5A-5C schematically illustrate an embodiment of a method for placing the embodiment of the access device illustrated in FIGS. 1A-1F.

#### 5 DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

**[0018]** FIG. 1A is a perspective view of an embodiment of an insufflating access system 100 comprising a trocar 110 and an obturator 160 slidably insertable into the trocar 110. The insufflating access system 100 also comprises a fluid flow channel, which is discussed in greater detail below. The trocar 110 and obturator 160 comprise suitable biologically compatible materials.

**[0019]** FIG. 1B is a perspective cutaway view and FIG. 1C is a partial side cross section of the trocar 110. The trocar 110 comprises a proximal end 112 and a distal end 114. A trocar seal assembly 120 is disposed at the proximal end 112 of the trocar, and an elongate cannula 130 extends from the trocar seal assembly 120 and is disposed at the distal end 114 of the trocar. An access channel 116 extends through the trocar seal assembly 120 and the cannula 130, from the proximal end 112 to the distal end 114 of the trocar. The access channel 116 defines a longitudinal axis. In some embodiments, the trocar seal assembly 120 and the cannula 130 are integrated, while in other embodiments, the trocar seal assembly 120 and the cannula 130 are separate components, and in some embodiments, releasably coupled.

**[0020]** In the illustrated embodiment, the trocar seal assembly 120 comprises a first seal 122 and a second seal 124 disposed on the access channel 116 within a trocar seal housing 126. The first seal 122 is an instrument seal, which forms a substantially fluid tight seal with an instrument extending therethrough, thereby preventing fluid from escaping from the proximal end 112 of the trocar. In some embodiments, the first seal 122 comprises a septum seal. The second seal 124 is a zero seal, which forms a fluid tight seal with no instrument extending therethrough, preventing fluid from escaping from the proximal end 112 of the trocar. In some embodiments, the second seal 124 comprises a duckbill valve, a double duckbill valve, and/or a flap valve. The second seal 124 is optional in some embodiments. For example, in some embodiments, the first seal 122 provides both an instrument seal and a zero seal, for example, a valve comprising a gel material. Other embodiments do not comprise a zero seal. In some embodiments, the first seal 122 and the second seal 124 comprise an elastomer, for example rubber, synthetic rubber, silicone, ethylene propylene diene monomer (EPDM), ethylene-propylene copolymer (EP rubber), polyisoprene, polybutadiene, polyurethane, styrene-butadiene, ethylene vinyl acetate (EVA), poly-chloroprene (Neoprene®), perfluor elastomer (Kalrez®), and the like.

**[0021]** The cannula 130 comprises a proximal end, at which the trocar seal assembly 120 is disposed, and a distal end terminating in a tip 132. In the illustrated em-

bodiment, the tip 132 of the cannula is angled with a beveled edge. The angled tip 132 facilitates insertion through tissue. In other embodiments, the tip 132 is not angled. The cannula 130 comprises a hollow tube open at the proximal and the distal ends. The hollow tube defines a lumen 134, through which the access channel 116 extends. One or more optional vents 136 perforate the cannula 130 at or near the distal end thereof. In the illustrated embodiment, the cannula 130 has a generally circular cross section, although those skilled in the art will understand that other embodiments have other suitable cross sections, for example, oval, elliptical, diamond, square, polygonal, and the like.

[0022] A fluid flow seal 140 is disposed within the lumen of the cannula 130, on an inner wall of the hollow tube. The fluid flow seal 140 is positioned, dimensioned, and configured for sealing contacting the body 162 of the obturator, as discussed in greater detail below. In the illustrated embodiment, the fluid flow seal 140 is disposed near the tip 132 or distal end of the cannula. The fluid flow seal 140 is substantially normal or perpendicular to the longitudinal axis of the trocar 110, and consequently, is generally circular in the illustrated embodiment. In other embodiments, the fluid flow seal 140 is disposed at another location. For example, in some embodiments, the fluid flow seal 140 is disposed at or integrated with the tip 132 of the cannula, or spaced adjacent to or just slightly inward from the tip 132 at the distal-most end. In some of these embodiments in which the tip 132 is not perpendicular to the longitudinal axis of the trocar 110, the fluid flow seal 140 also subtends a non-normal angle with the longitudinal axis, and consequently, is elliptical or oval rather than circular. In some embodiments, the fluid flow seal 140 and the tip 132 subtend about the same angle with the longitudinal axis, while in other embodiments, the fluid flow seal 140 and the tip 132 subtend different angles with the longitudinal axis. Some embodiments of the fluid flow seal 140 comprise a plurality of sub-seals, which are disposed at about the same location in some embodiments, and disposed in a plurality of locations in other embodiments. The fluid flow seal 140 comprises a suitable elastomer for example, at least one of rubber, synthetic rubber, silicone, ethylene propylene diene monomer (EPDM), ethylene-propylene copolymer (EP rubber), polyisoprene, polybutadiene, polyurethane, styrene-butadiene, ethylene vinyl acetate (EVA), poly-chloroprene (Neoprene®), perfluorelastomer (Kalrez®), and the like.

[0023] A fluid port 150 is disposed on the housing 126 of the trocar seal assembly, fluidly connected with the access channel 116 distal of the first 122 and second 124 seals. The fluid port 150 comprises a stopcock in the illustrated embodiment, and terminates in a fitting that permits coupling to a fluid and/or suction source, for example, a Luer fitting. In other embodiments, the fluid port 150 has another location, for example, on the cannula 130 or the obturator 160. Embodiments of the fluid port 150 are useful for introducing and/or venting an insuffla-

tion gas, for example, carbon dioxide, therethrough. Other fluids are introduced and/or vented in other embodiments.

[0024] The trocar 110 is typically manufactured in a range of sizes to accommodate instruments of different diameters, for example, up to about 5 mm, up to about 8 mm, up to about 11 mm, up to about 12 mm, or up to about 15 mm. Embodiments of the trocar 110 have working cannula lengths of about 55 mm, about 75 mm, about 100 mm, or about 150 mm.

[0025] As best seen in FIG. 1D, which is a side cutaway view of the insufflating access system 100, the obturator 160 comprises an elongate body 162 comprising a proximal end terminating in a handle 164 and a distal end terminating in a tissue penetrating tip 166. A diameter of the tip 166 converges from a proximal end to a distal end thereof. The body 162 and tip 166 of obturator is slidably insertable into and removable from the access channel 116 through the proximal end of the trocar 110. In a fully inserted configuration, the tip 166 of the obturator extends out of the distal end or tip 132 of the cannula 130. The first seal 122 of the trocar seal assembly forms an instrument seal with the body 162 of the cannula, thereby substantially preventing fluid leaking from the proximal end of the access channel 116. In the illustrated embodiment, the body 162 comprises a hollow, instrument well 168, which is open at the handle 162 at the proximal end of the obturator, and which extends to the tip 166 of the obturator. The instrument well 168 is dimensioned to receive a laparoscope through the proximal opening thereof. When fully inserted, an end of the laparoscope extends through the body 162 of the obturator into or proximal to the tip 166. In the illustrated embodiment, the tip 166 comprises at least a transparent or windowed portion through which the laparoscope images tissue proximal to the tip 166, for example, for monitoring the position of the tip 166 during the insertion of the access system 100 into a body cavity. Some embodiments of the tip 166 comprise markers or another type of visually enhancing or facilitating features, which assist in viewing the tissue and body cavity, and thus, traversal of the tip 166 through the body. In some embodiments, the laparoscope is fully inserted in the instrument well 168, thereby preventing or reducing fogging thereof. Accordingly, some embodiments comprise at least one of a distal laparoscope seal, membrane, or lock in that provides at least one of holding the laparoscope in a fully or nearly fully inserted position, preventing or reducing fogging, and preventing or reducing other types of interference of the viewing area of the laparoscope.

[0026] FIG. 1E is a side cross section of the insufflating access system 100 in a closed configuration and FIG. 1F is a side cross section of the insufflating access system 100 in an open configuration. The lumen 134 of the cannula and the body 162 of the obturator together define a fluid flow channel 180 therebetween, which extends longitudinally in the access channel 116. A proximal end 182 of the fluid flow channel is fluidly connected to the

fluid port 150. A distal end 184 of the fluid flow channel extends to the distal end of the access system 100, which in the illustrated embodiment, comprises the tip 132 of the cannula. In the illustrated embodiment, the lumen 134 of the cannula and the body 162 of the obturator are both generally circular and define a fluid flow channel 180 with a generally annular cross section. In other embodiments, cross-sectional shapes of the lumen 134 of the cannula and the body 162 of the obturator are different from each other, and the cross section of the fluid flow channel 180 has another shape.

[0027] A size of a space or gap between the tip 166 of the obturator and the tip 132 of the cannula is selected to prevent or reduce coring of tissue as the access system is advanced. In some embodiments, the gap between the tip 166 of the obturator and the tip 132 of the cannula provides sufficient gas flow for insufflation, which is discussed in greater detail below. In some embodiments, a gap between the body 162 of the obturator and the lumen 134 of the cannula is not uniform longitudinally, for example, wider at the proximal end 112 and narrower at the distal end 116.

[0028] In the closed configuration illustrated in FIG. 1E, the tip 166 of the obturator extends from the tip 132 of the cannula in a configuration suitable for inserting the access system 100 through a body wall and into a body cavity. The position of the obturator 160 in this configuration is referred to as a closed position. In the closed configuration, the fluid flow seal 140 sealing contacts the body 162 of the obturator, thereby cooperating therewith to prevent fluid flow through the fluid flow channel 180, from the fluid port 150, and out through the tip 132 of the cannula. Accordingly, the fluid port 150 is not fluidly connected with the distal end of the fluid flow channel 184.

[0029] In the open configuration illustrated in FIG. 1F, the obturator 160 is partially withdrawn from access channel 116, that is translated proximally along the longitudinal axis compared with the configuration illustrated in FIG. 1E. The position of the obturator 160 in this configuration is referred to as an open position. In the illustrated embodiment, the body 162 of the obturator is proximal of the fluid flow seal 140, and consequently, does not make contact and form a seal therewith. Accordingly, in the open configuration, the distal end 184 of the fluid flow channel is fluidly connected with the fluid port 150. In some embodiments, the fluid flow seal 140 contacts a portion of the body 162 of the obturator in the open configuration, but does not sealing contact therewith. For example, in some embodiments, at least one of the fluid flow seal 140, and a transition between the body 162 and tip 166 of obturator are not normal or perpendicular to the longitudinal axis. In some of these embodiments, in some positions of the obturator 160 in the access channel, the body 162 of the obturator contacts only a portion of the fluid flow seal 140 rather than the entire sealing surface thereof, and consequently, does not form a seal therewith.

[0030] Some embodiments of the access system 100

comprise an indicator of the configuration thereof. For example, some embodiments comprise indicia on the obturator 160 and/or the trocar 110 that indicate the position of the obturator 160 in the open and/or closed position.

5 Some embodiments comprise an audio and/or visual indicator of fluid flow through the fluid flow channel 180 and/or fluid port 150, for example, a spinning disk, a spinning ball, a lamp, a whistle, and/or an alarm.

[0031] Some embodiments comprise one or more mechanical features that indicate the state of and/or lock the access system 100 into at least one of the open configuration and the closed configuration, for example, detents, latches, stops, and the like.

[0032] FIG. 2A is a perspective view of another embodiment of an insufflating access system 200 generally similar to the embodiment illustrated in FIGS. 1A-1F, comprising a trocar 210, an obturator 260 inserted in the trocar 210, and a laparoscope 290 inserted into the obturator 260. FIG. 2B is a perspective view of an embodiment of the obturator 260, which is similar to the embodiment of the obturator 160 described above, and comprises an elongate body 262, a handle 264 disposed at the proximal end, a tip 266 disposed at the distal end, and an instrument well 268 extending longitudinally from an opening in the handle 264 at the proximal end of the obturator to the tip 266 at the distal end thereof.

[0033] The obturator 260 further comprises a slot 272 that extends longitudinally on the body 262 thereof. As will be apparent from the description below, the slot 272 incorporates the instrument well 268 into the fluid flow channel 280 in the illustrated embodiment. Because the fluid flow channel 280 comprising the instrument well 268 has a larger cross-sectional area compared with the fluid flow channel 180 of embodiment illustrated in FIGS. 1A-1F, embodiments of the access system 200 exhibit increased fluid flow. A proximal end of the slot 272 is positioned such that the slot 272 does not interfere with the instrument seal between the body 262 and the trocar seal assembly 220 when the obturator 260 is in the open position or the closed position. A distal end of the slot 272 is positioned such that fluid does not flow from the slot 272 in the closed configuration, that is, the distal end of the slot 272 is fluidly isolated from the distal end of the access system 200. The open configuration permits fluid flow from the distal end of the slot 272, that is, the distal end of the slot 272 is fluidly connected to the distal end of the access system 200. In the illustrated embodiment, the slot 272 perforates the body 262 of the obturator into the instrument well 268. Accordingly, the illustrated embodiment comprises a seal between the proximal end of the obturator 260 and the laparoscope 290, thereby preventing or reducing fluid flow therefrom. The seal is disposed on at least one of the laparoscope 290 and the obturator 260. In some embodiments, the slot 272 does not perforate the body 262 of the obturator, for example, comprising one or more longitudinal grooves disposed on an outer surface of the body 262. The seal between the proximal end of the obturator 260 and the laparo-

scope 190 is optional in these embodiments. Some embodiments of the fluid flow channel 280 comprise one or more longitudinal grooves disposed on an inner wall of the cannula 230.

[0034] FIG. 2C is a side cutaway view of an embodiment of the insufflating access system illustrated in FIG. 2A in a closed configuration. In the closed position, the obturator 260 is inserted into the access channel of the trocar 210 with the tip 266 extending from the tip 232 of the cannula in a tissue penetrating position. The proximal end of the slot 272 is disposed below the instrument seal of the seal assembly 220, in fluid communication with the fluid port 250. The distal end of the slot 272 is disposed proximal to the fluid channel seal 240, which seals with the body 262 of the obturator, thereby fluidly isolating the slot 272 from the tip 232 of the cannula and the distal end of the access system 200.

[0035] FIG. 2D is a side cutaway view of the embodiment of the insufflating access system illustrated in FIG. 2C in an open configuration in which the obturator 260 is advanced distally in the access channel, for example, using the handle 264, thereby advancing the distal end of the slot 272 past the fluid channel seal 240, and thereby releasing the seal between the body 262 of the obturator and the fluid channel seal 240. In the illustrated embodiment, the slot 272 has about the same length as the cannula 230, extending from about the position of the fluid inlet to past a proximal portion of the angled tip 232 of the cannula, with which the slot 272 is aligned. Accordingly, alignment of the distal end of the slot 272 with the proximal portion of the angled tip 232 exposes the distal end of the slot 272, thereby providing a fluid flow channel 280 that permits insufflation gas to exit directly out the slot 272 and into the body cavity. In some embodiments, the obturator 260 and trocar 210 are keyed or otherwise configured to prevent rotation therebetween, thereby locking the slot 272 in the exposed condition when the access system 200 is in the open configuration. Those skilled in the art will understand that some embodiments in which the slot 272 is rotated relative to the configuration illustrated in FIG. 2D such that the distal end of the slot 272 and the proximal portion of the angled tip 232 are not aligned, also permit fluid flow therethrough, but at reduced flow rates.

[0036] In other embodiments, the access system 200 has an open configuration, as illustrated in FIG. 2A, with a fluid flow seal 240 disposed in the cannula 230 at or near the angled tip 232 thereof. As discussed above, in some of these embodiments, the fluid flow seal 240 subtends the same or a similar angle as the tip 232. Rotating the obturator 260 positions the entirety of the slot 272 within the cannula 230, proximal of the fluid flow seal 240, thereby converts the open configuration to the closed configuration in which the distal end of the slot 272 is fluidly isolated from the distal end of the access system 200, and preventing fluid flow therefrom. In some of these embodiments, rotation of the handle 264 of the obturator is restricted such that the device 200 is in the

open configuration at a first limit of the rotation and in a closed configuration at a second limit thereof.

[0037] FIG. 3A is a perspective view of another embodiment of an insufflating access system 300 in an open configuration. FIG. 3B is a side cross section of the insufflating access system 300 illustrated in FIG. 3A in a closed configuration. The embodiment of the access system 300 illustrated in FIGS. 3A and 3B is similar to the embodiments described above. Like the embodiment illustrated in FIGS. 2A-2D, a gas flow channel in the illustrated embodiment incorporates an instrument well, thereby increasing the cross sectional area thereof. The access system 300 comprises a trocar 310 and an obturator 360.

[0038] As best seen in FIG. 3B, the obturator 360 comprises at least one proximal opening 372 and at least one distal opening 374, both of which perforate the body 362 of the obturator into the instrument well 368. In the illustrated embodiment, the at least one proximal opening 372 and the at least one distal opening 374 are both generally circular or oval, but in other embodiments, independently have other suitable shapes.

[0039] A fluid flow seal 340 is disposed at or integrated with the cannula tip 332 in the illustrated embodiment, as described above. Some embodiments of the trocar 310 further comprise a second fluid flow seal, either in addition to or instead of the fluid flow seal 340. Some embodiments of the second fluid flow seal comprise a tubular member, disposed in the seal assembly 120, through which the obturator 160 extends, wherein the tubular member comprises at least one opening that is aligned with the at least one proximal opening 372 when the obturator is in an open position, thereby permitting fluid flow therethrough. The at least one opening in the tubular member is not aligned with the at least one proximal opening 372 when the obturator is in a closed position, thereby preventing fluid flow therethrough.

[0040] In the illustrated embodiment, the access system 300 is converted from the open configuration illustrated in FIG. 3A to the closed configuration illustrated in FIG. 3B by rotating the obturator 360, for example, using the handle 362. In the illustrated embodiment, the obturator 360 is rotated about 180° between the views illustrated in FIGS. 3A and 3B, although those skilled in the art will understand that other rotational angles are used in other embodiments. The particular rotational angle depends on factors including the size and shape of the distal opening 374, the location of the distal opening 374, the location of the fluid flow seal 340, the angle of the fluid flow seal 340. In the illustrated embodiment, fluid flows from the fluid port 350, into the proximal opening 372, into the instrument well 368, and out of the distal opening 374. In the illustrated embodiment, the distal opening 374 is exposed in the open configuration. In the closed configuration, the distal opening 374 is positioned proximal of the fluid flow seal 340, which forms a seal with a portion of the body 362 of the obturator distal of the distal opening 374, thereby preventing fluid flow therefrom.

**[0041]** FIG. 3C is a see-through view of another embodiment of an insufflating access system 300 in an open configuration. In the illustrated embodiment, the trocar 310 is similar to the embodiment illustrated in FIGS. 1A-1F in which the fluid flow seal 340 is disposed in the lumen 334 of the cannula proximal to the tip 332. In the illustrated embodiment, the access system 300 is converted from the illustrated open configuration to a closed configuration by withdrawing the obturator longitudinally toward the proximal end, thereby positioning the distal opening 374 proximal of the fluid flow seal 340. The fluid flow seal 340 seals with a portion of the body 362 of the obturator distal of the distal opening 374, thereby preventing fluid flow therefrom.

**[0042]** FIG. 4A is a side cross section of another embodiment of an insufflating access system 400 in a closed configuration. FIG. 4B is a side cross section of the insufflating access system 400 illustrated in FIG. 4A in an open configuration. The insufflating access system 400 is generally similar to the insufflating access systems described above, and comprises a trocar 410 and an obturator 460. In the illustrated embodiment, the trocar 410 is generally similar to the embodiment illustrated in FIGS. 1A-1F and described above. The trocar 410 comprises a fluid flow seal 440 disposed in the lumen 434 of a cannula 430 thereof, proximal of the tip 432 of the cannula. In the illustrated embodiment, the fluid flow seal 440 is generally perpendicular to a longitudinal axis of the trocar 310.

**[0043]** As best seen in FIG. 4C, which is a perspective view of an embodiment of an obturator 460, the obturator 460 comprises a plurality of openings 472 disposed longitudinally and circumferentially on the body 462 of the obturator, which extend into the instrument well 468. The illustrated embodiment comprises a plurality of proximal openings 472a, a plurality of distal openings 472b, and a plurality of optional intermediate openings 472c.

**[0044]** In converting the access system 400 from the closed configuration illustrated in FIG. 4 to the open configuration illustrated in FIG. 4B, the obturator 460 is translated proximally along the longitudinal axis. In the closed configuration illustrated in FIG. 4A, the fluid flow seal 440 seals with a portion of the body 462 of the obturator distal of the distal openings 472b, thereby preventing fluid flow out of the tip 432 of the cannula at the distal end of access system 400. In the open configuration illustrated in FIG. 4B, because the body 462 of the obturator is proximal of the fluid flow seal 440, the body 462 and fluid flow seal 440 do not cooperate in forming a seal in the fluid flow channel 480. Accordingly, fluid flow is possible from the fluid port 450 into and through the fluid flow channel 480. In the illustrated embodiment, the fluid flow channel 480 comprises both the instrument well 468 and a space between the lumen 434 of the cannula and the body 462 of the obturator. As best seen in FIG. 4B, in the illustrated embodiment, the proximal openings 472a are disposed proximal to the cannula 430 within the trocar seal assembly 420, thereby increasing a cross sectional area around

the proximal openings 472a and increasing fluid flow therethrough. Fluid continues flowing longitudinally towards the distal end of the access system 400 through both the instrument well 468 and the space between the lumen 434 of the cannula and the body 462 of the obturator. At the distal end of the obturator 460, fluid exits the instrument well 468 through the distal openings 472c and continues distally in the space between the lumen 434 of the cannula and the body 462 of the obturator. The fluid exits the access system 400 through the tip 432.

**[0045]** Although embodiments of the insufflating access system are applicable to any endoscopic application using insufflation, a prototypical application is in laparoscopic procedures. Consequently, for purposes of illustration only, the following describes an embodiment of a method for inserting an endoscopic port or trocar of an insufflating access system, and establishing pneumoperitoneum in laparoscopic surgery with reference to the embodiment illustrated in FIGS. 1A-1F. Those skilled in the art will understand that the method is also applicable to other embodiments of the access system disclosed herein.

**[0046]** The obturator 160 is inserted into the trocar 110 and positioned in the closed configuration illustrated in FIG. 1E. A laparoscope is inserted into the instrument well 168 of the obturator and the laparoscope coupled with an imaging system, for example, a camera and a video monitor. The fluid port 150 is fluidly coupled to a source of pressurized insufflation gas.

**[0047]** The user positions the tissue penetrating tip 166 in an incision made at a desired location on the patient's abdomen 500 and advances the insufflating access system 100 through the abdominal wall 502 as illustrated schematically in FIG. 5A. The user monitors the position of the tip 166 through the laparoscope and imaging system. When the user observes the tip 166 penetrating the peritoneum 504, as illustrated in FIG. 5B, the user converts the access system 100 to the open configuration. In the illustrated embodiment, the user urges the obturator 160 proximally, for example, pulling on the handle 162 to convert the access system 100 to the open configuration illustrated in FIG. 1F. As discussed above, in some embodiments, the obturator 160 and/or trocar 110 comprise one or more marks or indicia that indicate the position of the obturator 160 in the open position. With the access system 100 in the open configuration, insufflation gas flows from the source of insufflation gas, into the fluid port 150, into the proximal end 182 of the fluid flow channel, longitudinally through the fluid flow channel 180, past the fluid flow seal 140, past the partially withdrawn tip 166 of the obturator, and out the tip 132 of the cannula. Some gas may also flow out of the vents 136, particularly if the tip 132 of the cannula is fully or partially blocked. The gas flows through the opening in the peritoneum into the abdominal cavity, thereby insufflating the abdominal cavity 506 and establishing pneumoperitoneum as illustrated in FIG. 5C.

**[0048]** Accordingly, embodiments of the access sys-

tem 100 and method provide an accurate and simple method for gaining access to the abdominal cavity for laparoscopic surgery. In other embodiments, the insufflating access system 100 provides access to the abdominal cavity through another surface adjacent to the peritoneal lining of the abdominal cavity, for example, the cul-de-sac of the vagina, any point along the gastro-intestinal tract from the diaphragm to the anus, or one of the great vessels such as the abdominal aorta or vena cava. Embodiments of the access system 100 and method provide access to other internal structures, for example, the kidney, the stomach, and/or the third ventricle of the brain, or any hollow organ for which accurate and shallow entry and the subsequent flow of gas or liquid is desired.

**[0049]** Disposing a fluid flow seal 140 between the obturator 160 and the distal end 114 of the cannula permits the device 100 to be fluidly coupled with a source of CO<sub>2</sub> while the device 100 is advanced through the abdominal wall 502. As soon as the peritoneum 504 is punctured by the tip 166 of the obturator, the surgeon stops forward movement of the device 100 and dislocates the fluid flow seal 140 between the obturator 160 and the cannula 130, thereby allowing the gas to flow through the gas flow channel 180 and out of the device 100. The gas, following a path of least resistance, flows between the tip 166 and the abdominal wall 502, through the opening made in the peritoneum 504, and finally into the abdominal cavity 504. Consequently, pneumoperitoneum is established with reduced penetration into the organ bed because the tip 166 of the obturator does not extend as far beyond the peritoneum as in embodiments in which the tip comprises vent holes through which gas insufflates the abdominal cavity. Embodiments of the device 100 also do not comprise at least one of: seals within the obturator and gas channels around the laparoscope. Some embodiments eliminate or reduce the possibility of fluid and/or tissue entering the visual field within the obturator tip 166. In some embodiments, the peritoneum 504 is punctured and the abdominal cavity 504 insufflated without further penetration of the tip 166 beyond the peritoneum 504 and into the abdominal cavity 506 or organ bed.

**[0050]** While certain embodiments have been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the scope of the present invention as defined by the following claims.

Other aspects of the invention are defined by the following clauses.

**[0051]**

Clause 1. An insufflating surgical access system comprising: a trocar comprising: a proximal end and a distal end; a trocar seal assembly disposed at the

5 proximal end of the trocar, the trocar seal assembly comprising an instrument seal; an elongate cannula disposed at the distal end of the trocar, the cannula comprising a tubular wall defining a lumen, an open proximal end, and an open distal end; an access channel defining a longitudinal axis, extending through the trocar seal assembly and the lumen of the cannula, from the proximal end of the trocar to the distal end of the trocar; a fluid port disposed at the proximal end of the trocar; and a fluid flow seal disposed in the access channel; an obturator comprising: an elongate body comprising a proximal end and a distal end; a tissue penetrating tip disposed at the distal end; and a handle disposed at the proximal end, wherein the obturator is slidably insertable into the proximal end of the access channel, and the tip of the obturator extends out of the distal, open end of the cannula when fully inserted therethrough; and a fluid flow channel fluidly connected to the fluid port of the trocar, and extending to a distal end of the insufflating access system, wherein the obturator in the access channel has a closed position, in which the body of the obturator sealing contacts the fluid flow seal, thereby preventing gas flow through the fluid flow channel, and an open position, in which the body of the obturator does not sealing contact the fluid flow seal, thereby allowing fluid flow through the fluid flow channel.

30 Clause 2. The access system of clause 1, wherein trocar seal assembly further comprises a zero seal.

35 Clause 3. The access system of clause 1, wherein the distal end of the cannula comprises an angled tip.

40 Clause 4. The access system of clause 1, wherein the fluid port is disposed on the trocar seal assembly.

45 Clause 5. The access system of clause 1, wherein the fluid flow seal is integrated with a cannula tip disposed at the distal end of the cannula.

50 Clause 6. The access system of clause 1, wherein the fluid flow seal is disposed proximal of the distal end of the cannula.

55 Clause 7. The access system of clause 1, wherein the fluid flow seal is substantially perpendicular to the longitudinal axis of the axis channel.

Clause 8. The access system of clause 1, wherein the fluid flow seal is not perpendicular to the longitudinal axis of the axis channel.

Clause 9. The access system of clause 1, wherein the obturator further comprises an instrument well open at a proximal end of the obturator, extending longitudinally through the body of the obturator, ter-

minating at the tip of the obturator, and dimensioned to receive a laparoscope therein, wherein at least a portion of the tip of the obturator is transparent.

Clause 10. The access system of clause 9, further comprising a laparoscope. 5

Clause 11. The access system of clause 1, wherein the fluid flow channel comprises a space defined by the lumen of the cannula and the body of the obturator. 10

Clause 12. The access system of clause 1, wherein the fluid flow channel comprises an instrument well disposed in the body of the obturator. 15

Clause 13. The access system of clause 1, wherein the fluid flow channel comprises at least one proximal opening and at least one distal opening disposed in the body of the obturator. 20

Clause 14. The access system of clause 1, wherein the fluid flow channel comprises a slot disposed in the body of the obturator. 25

Clause 15. The access system of clause 1, wherein in the closed position, the obturator is displaced distally in the access channel compared with the open position. 30

Clause 16. The access system of clause 1, wherein in the closed position, the obturator is displaced proximally in the access channel compared with the open position. 35

Clause 17. The access system of clause 1, wherein in the closed position, the obturator is rotated in the access channel compared with the open position. 40

Clause 18. A method for insufflating a body cavity using the insufflating surgical access system of clause 1, the method comprising: positioning the obturator in the closed position; fluidly connecting the fluid port with a source of insufflation gas; positioning the tissue penetrating tip at a desired position; advancing the tissue penetrating tip through a body wall until the tip enters a body cavity; and positioning the obturator in the open position, fluidly connecting the fluid port with the body cavity through the fluid flow channel, thereby insufflating the body cavity. 45 50

Clause 19. The method of clause 18, further comprising visually monitoring the position of the penetrating tip through a laparoscope. 55

Clause 20. An insufflating surgical access system comprising: a trocar comprising: a proximal end and a distal end; a trocar seal assembly disposed at the

proximal end of the trocar, the trocar seal assembly comprising an instrument seal; an elongate cannula disposed at the distal end of the trocar, the cannula comprising a tubular wall defining a lumen, an open proximal end, and an open distal end; an access channel defining a longitudinal axis, extending through the trocar seal assembly and the lumen of the cannula, from the proximal end of the trocar to the distal end of the trocar; a fluid port disposed at the proximal end of the trocar; an obturator comprising: an elongate body comprising a proximal end and a distal end; a tissue penetrating tip disposed at the distal end; and a handle disposed at the proximal end, wherein the obturator is slidably insertable into the proximal end of the access channel, and the tip of the obturator extends out of the distal, open end of the cannula when fully inserted therethrough; and a gas flow channel fluidly connected to the fluid port of the trocar, and extending to a distal end of the insufflating access system; and means for modulating gas flow through the gas flow channel.

## Claims

25

1. An insufflating surgical access system (100) comprising:

a trocar (110) comprising:

a proximal end (112) and a distal end (114); a trocar seal assembly (120) disposed at the proximal end of the trocar (110), the trocar seal assembly (120) comprising an instrument seal (122); an elongate cannula (130) disposed at the distal end (114) of the trocar, the cannula (130) comprising a tubular wall defining a lumen (134), an open proximal end, and an open distal end; an access channel (116) defining a longitudinal axis, extending through the trocar seal assembly (120) and the lumen (134) of the cannula (130), from the proximal end (112) of the trocar to the distal end (114) of the trocar; a fluid port (150) disposed at the proximal end (112) of the trocar; and a fluid flow seal (140) disposed in the access channel (116); an obturator (160) comprising:

an elongate body (162) comprising a proximal end and a distal end; a tissue penetrating tip (166) disposed at the distal end; and a handle (164) disposed at the proximal end, wherein the obturator (160) is slidably insertable

into a proximal end of the access channel (116), and the tip (166) of the obturator (160) extends out of the distal, open end of the cannula (130) when fully inserted therethrough; and a fluid flow channel (180) fluidly connected to the fluid port (150) of the trocar, and extending to a distal end of the insufflating access system (100),

wherein the obturator (160) in the access channel (116) has a closed position, in which the body (162) of the obturator (160) sealingly contacts the fluid flow seal (140), thereby preventing fluid flow through the fluid flow channel (180), and an open position, in which the body (162) of the obturator (160) does not sealingly contact the fluid flow seal (140), thereby allowing fluid flow through the fluid flow channel (180),

**characterized in that** the fluid flow channel (180) comprises a slot (272) disposed in the body (162) of the obturator (160).

2. The access system (100) of claim 1 wherein the slot (272) extends longitudinally on the body (162).

3. The access system (100) of claim 1 wherein the distal end of the slot (272) is fluidly isolated from the distal end of the access system in the closed position.

4. The access system (100) of claim 1 further including an instrument well (268) and the slot (272) perforates the body (262) of the obturator into the instrument well (268).

5. The access system (100) of claim 1 wherein the slot (262) comprises one or more longitudinal grooves disposed on an outer surface of the body (262) and does not perforate the body (262) of the obturator (260).

6. The access system (100) of claim 1 wherein the slot (272) includes a proximal end and a distal end and in the closed position, the proximal end of the slot (272) is disposed below the instrument seal (122) and the distal end of the slot (272) is disposed proximal to the fluid flow seal (140) which seals the body (162, 262) of the obturator (160).

7. The access system (100) of claim 1 wherein in the open position the obturator (260) is advanced distally in the access channel (116) advancing the distal end of the slot (172, 272) past the fluid flow seal (140, 240).

8. The access system (100) of claim 1 wherein the elongate cannula (130) has an angled tip (232) with a proximal portion and wherein in the open position, the distal end of the slot (272) is aligned with the proximal portion of the angled tip (232) exposing the

5. The access system (100) of claim 1 wherein the obturator (160) is rotated between the open position and the closed position.

10. The access system (100) of claim 9 wherein rotating the obturator (260) positions the slot (272) within the cannula (230) proximal of the fluid flow seal (240) to convert from an open position to a closed position.

15. The access system (100) of claim 1 wherein the fluid flow seal (140) is integrated with a cannula tip (132) disposed at the distal end of the cannula (130).

20. The access system (100) of claim 1 wherein the fluid flow seal (140) is disposed proximal of the distal end of the cannula (130).

25. The access system (100) of claim 1 wherein the obturator (160) further comprises an instrument well (168) open at a proximal end of the obturator (160), extending longitudinally through the body (162) of the obturator (160), terminating at the tip (166) of the obturator (160), and dimensioned to receive a laparoscope therein, wherein at least a portion of the tip (166) of the obturator (160) is transparent.

30. The access system (100) of claim 1 wherein the fluid flow channel (180) comprises an instrument well (168) disposed in the body (162) of the obturator (160).


35. The access system (100) of claim 1 wherein in the closed position, the obturator (160) is displaced distally in the access channel (116) compared with the open position.

40. The access system (100) of claim 1 wherein in the closed position, the obturator (160) is displaced proximally in the access channel (116) compared with the open position.


45. The access system (100) of claim 1 wherein in the closed position, the obturator (160) is displaced distally in the access channel (116) compared with the open position.


50. The access system (100) of claim 1 wherein in the closed position, the obturator (160) is displaced proximally in the access channel (116) compared with the open position.


55. The access system (100) of claim 1 wherein in the closed position, the obturator (160) is displaced distally in the access channel (116) compared with the open position.

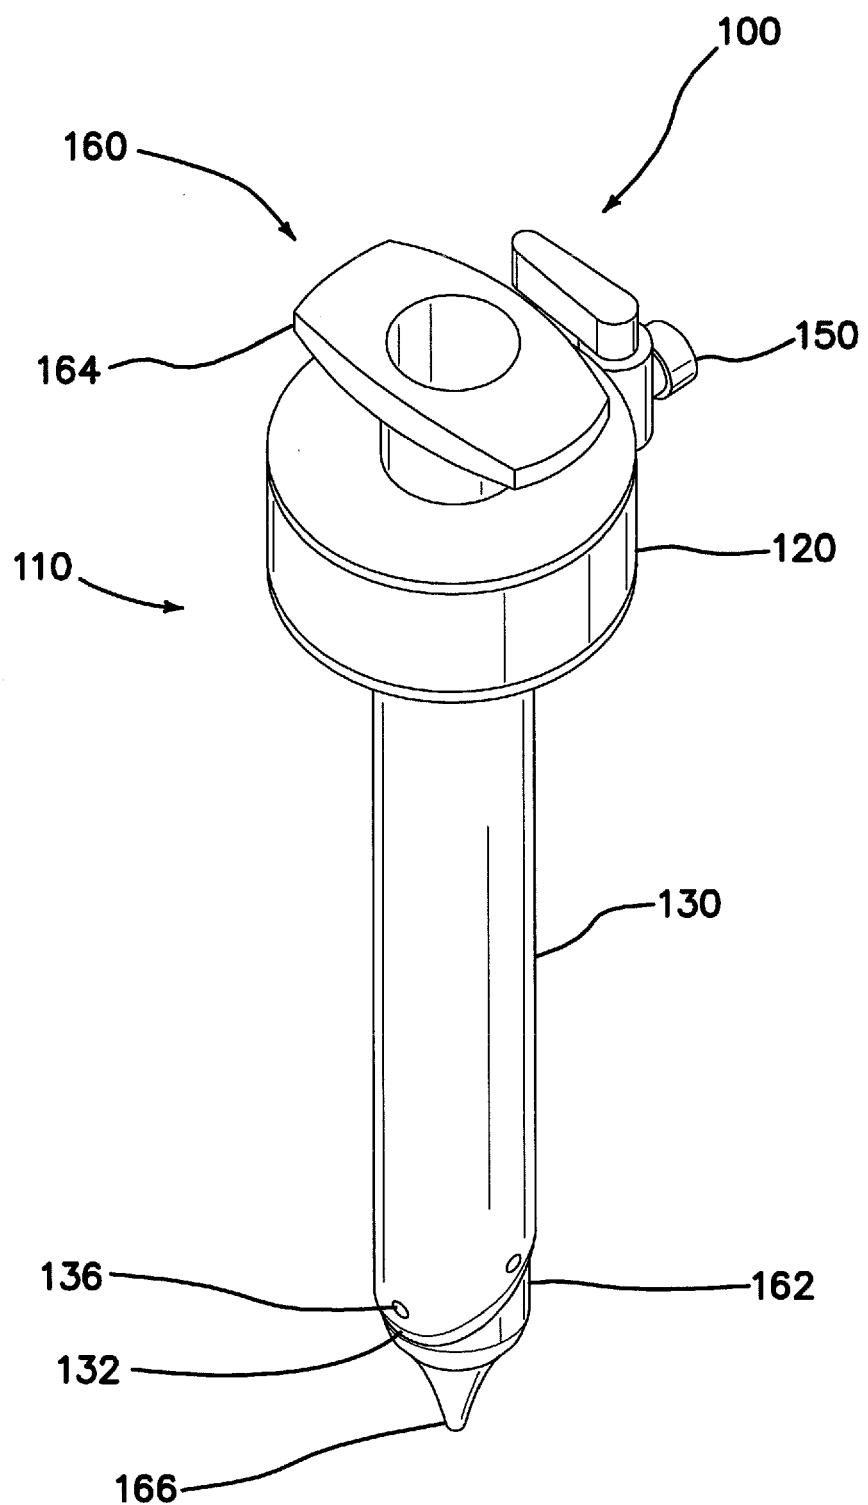


*FIG. 1A*

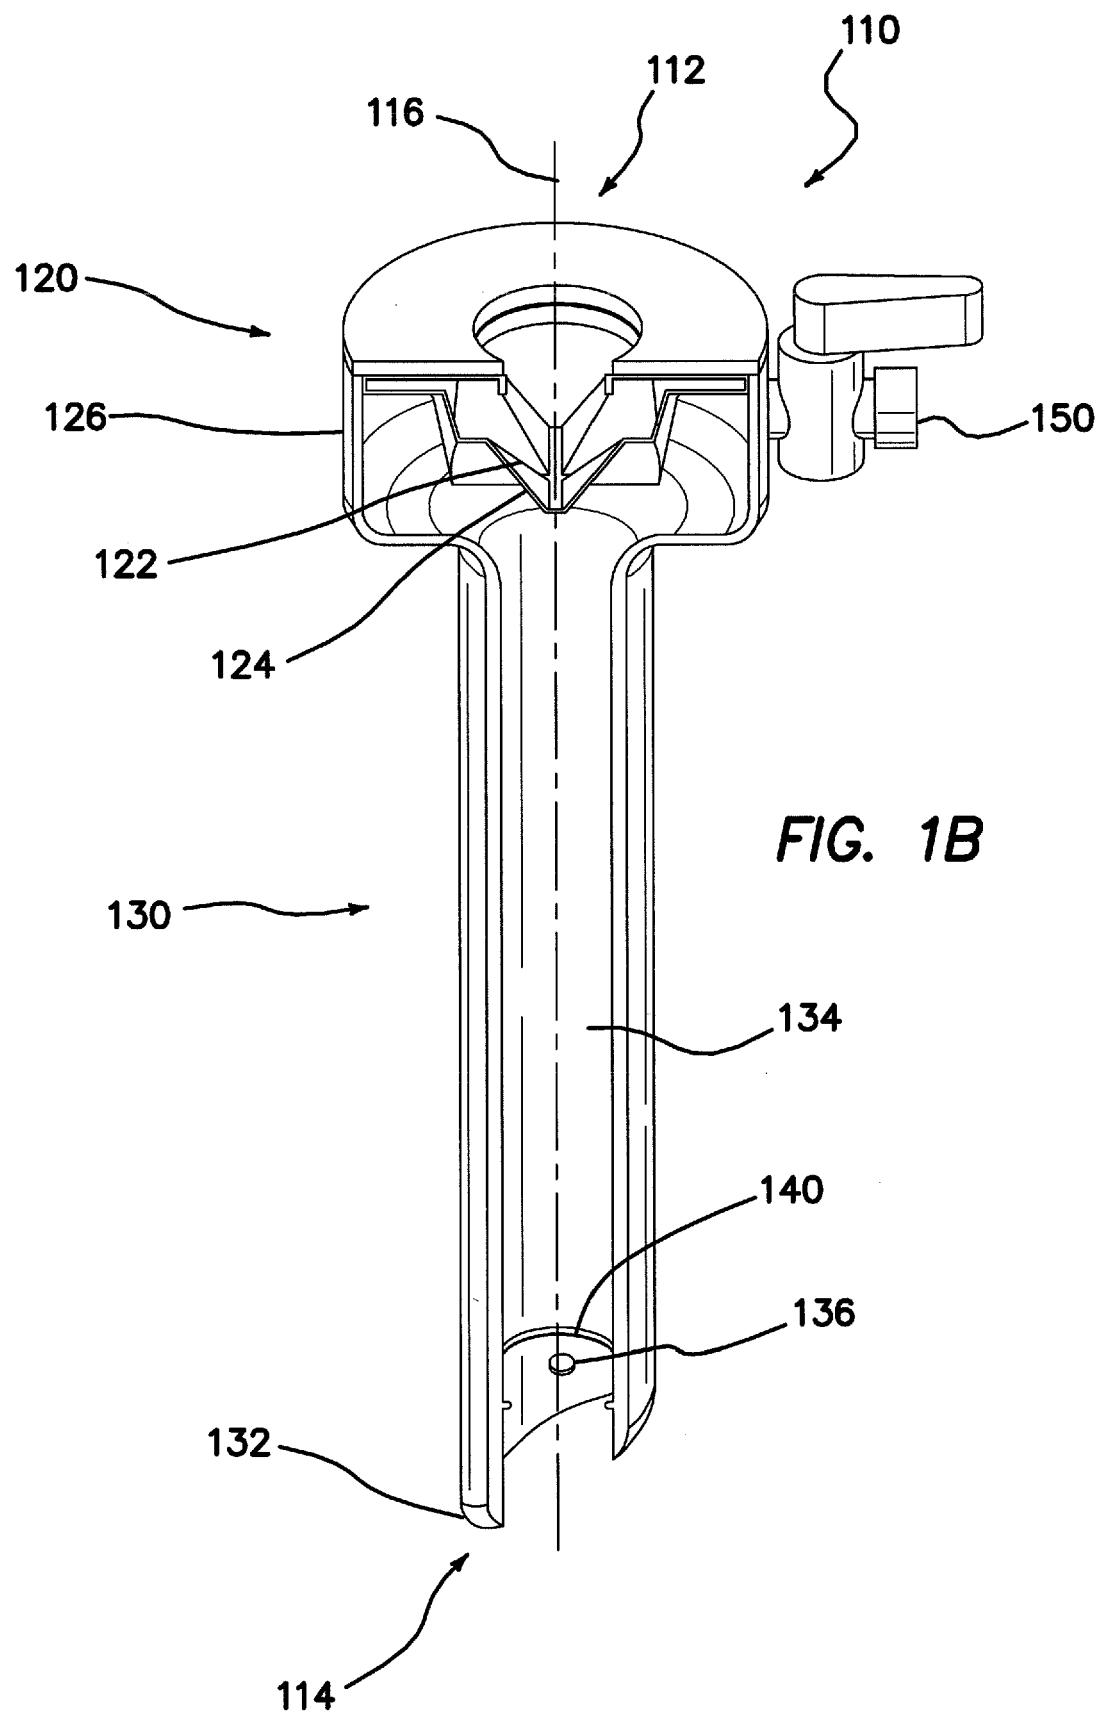


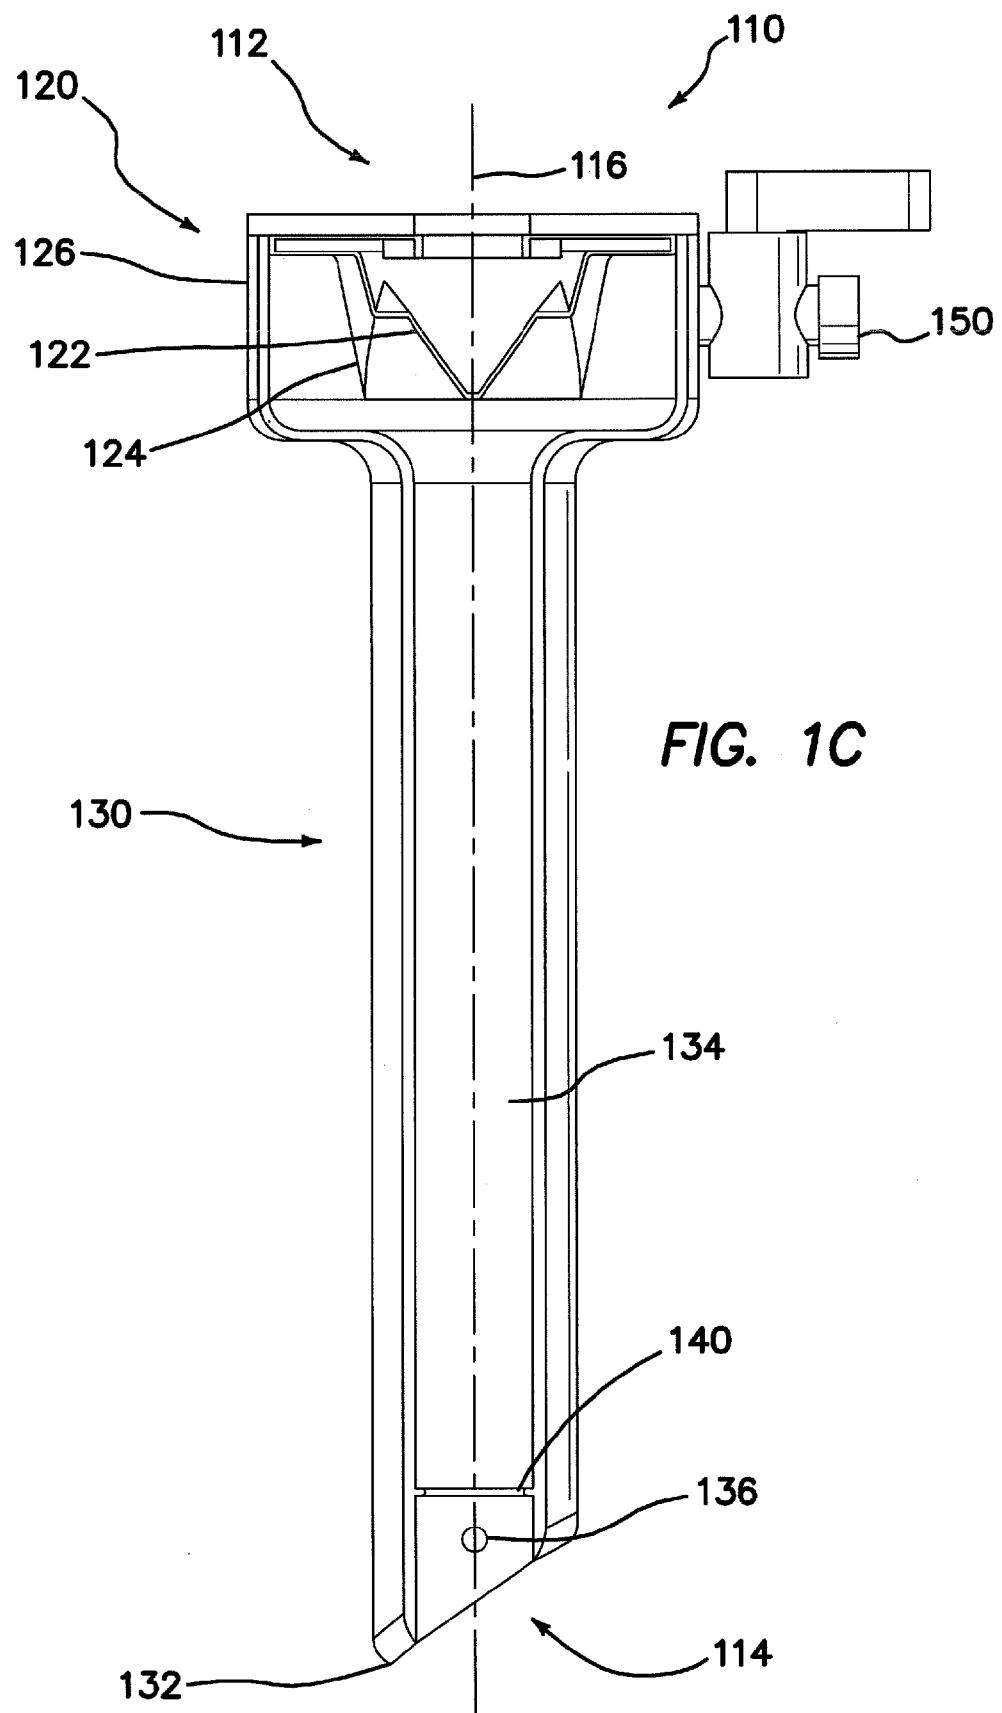

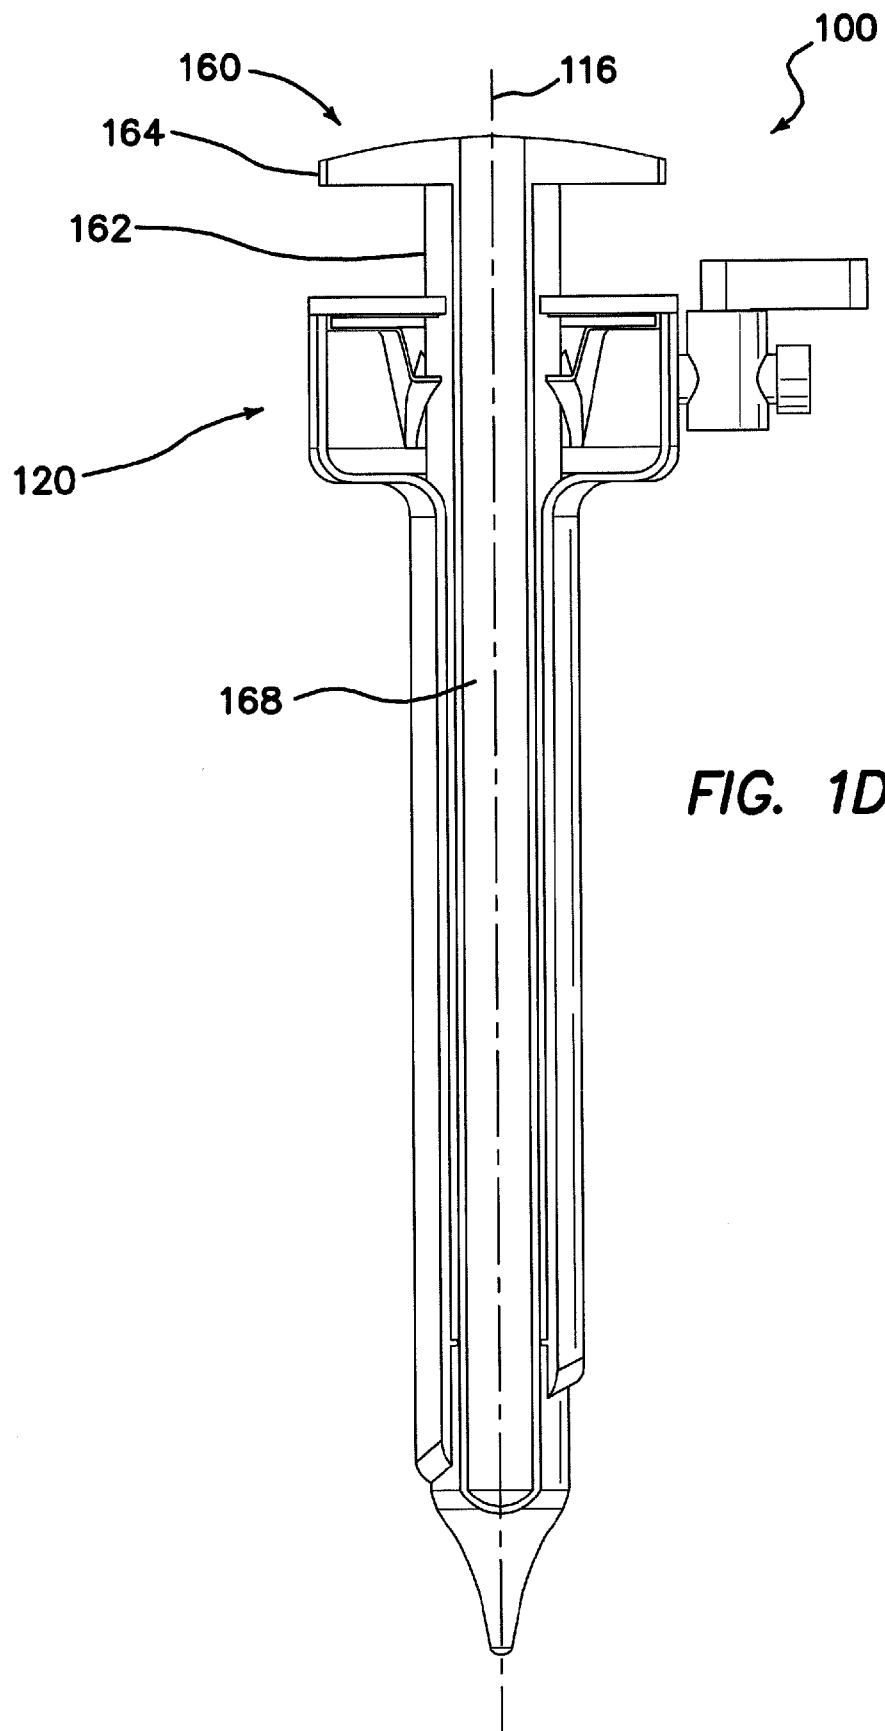



*FIG. 1D*

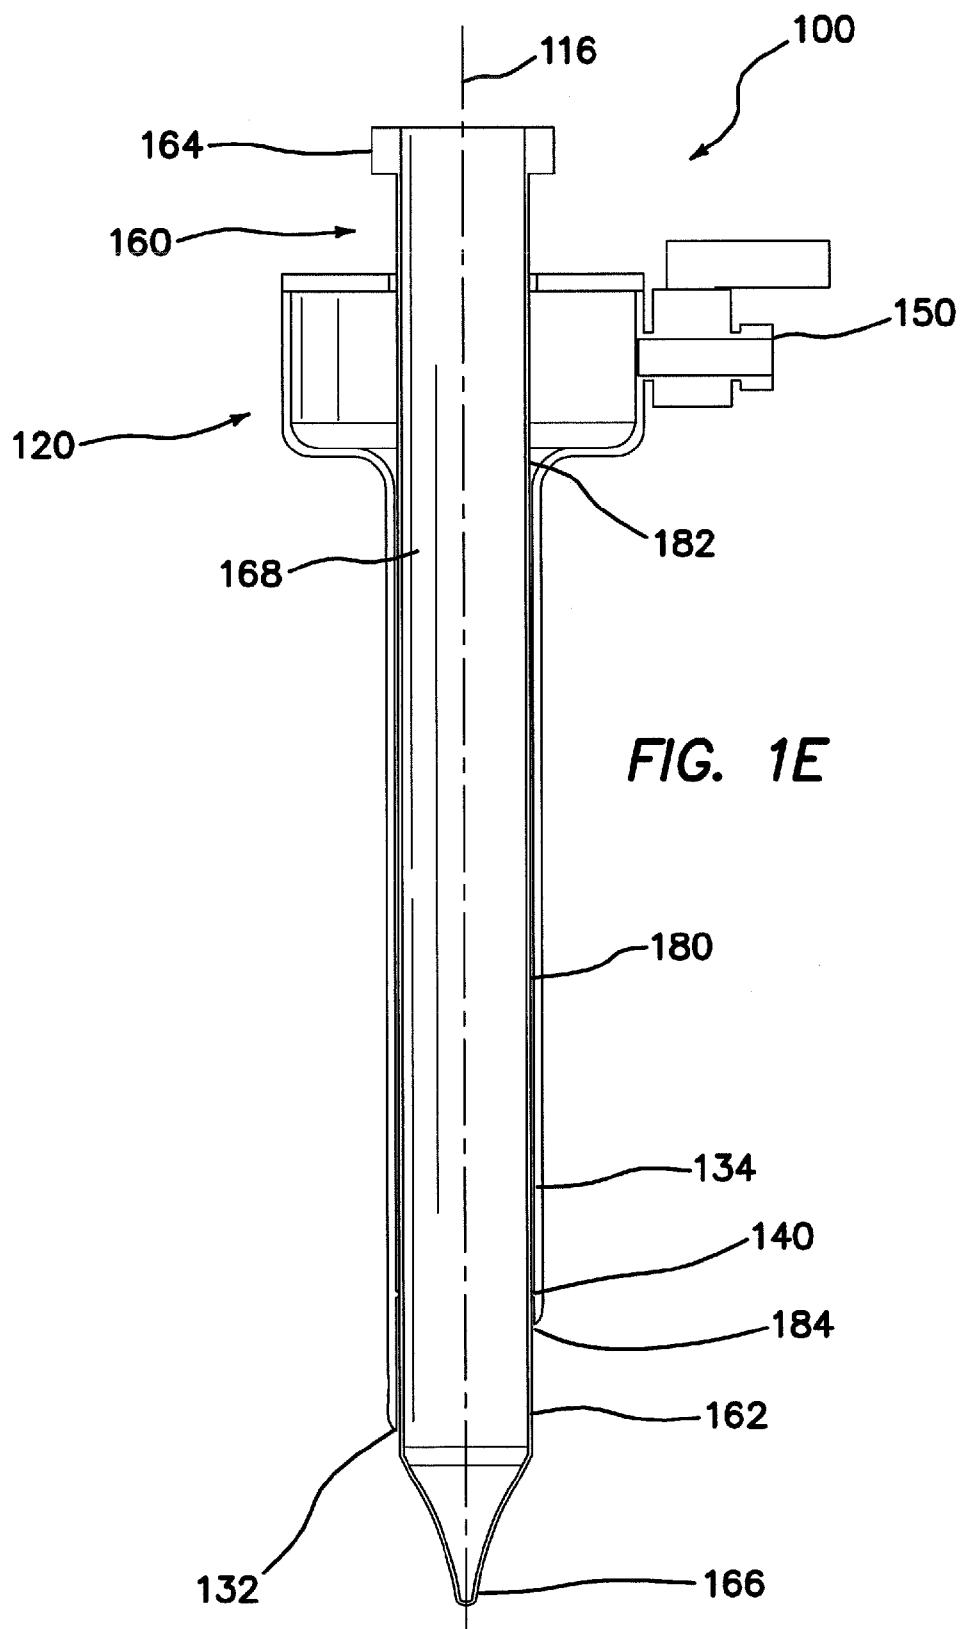

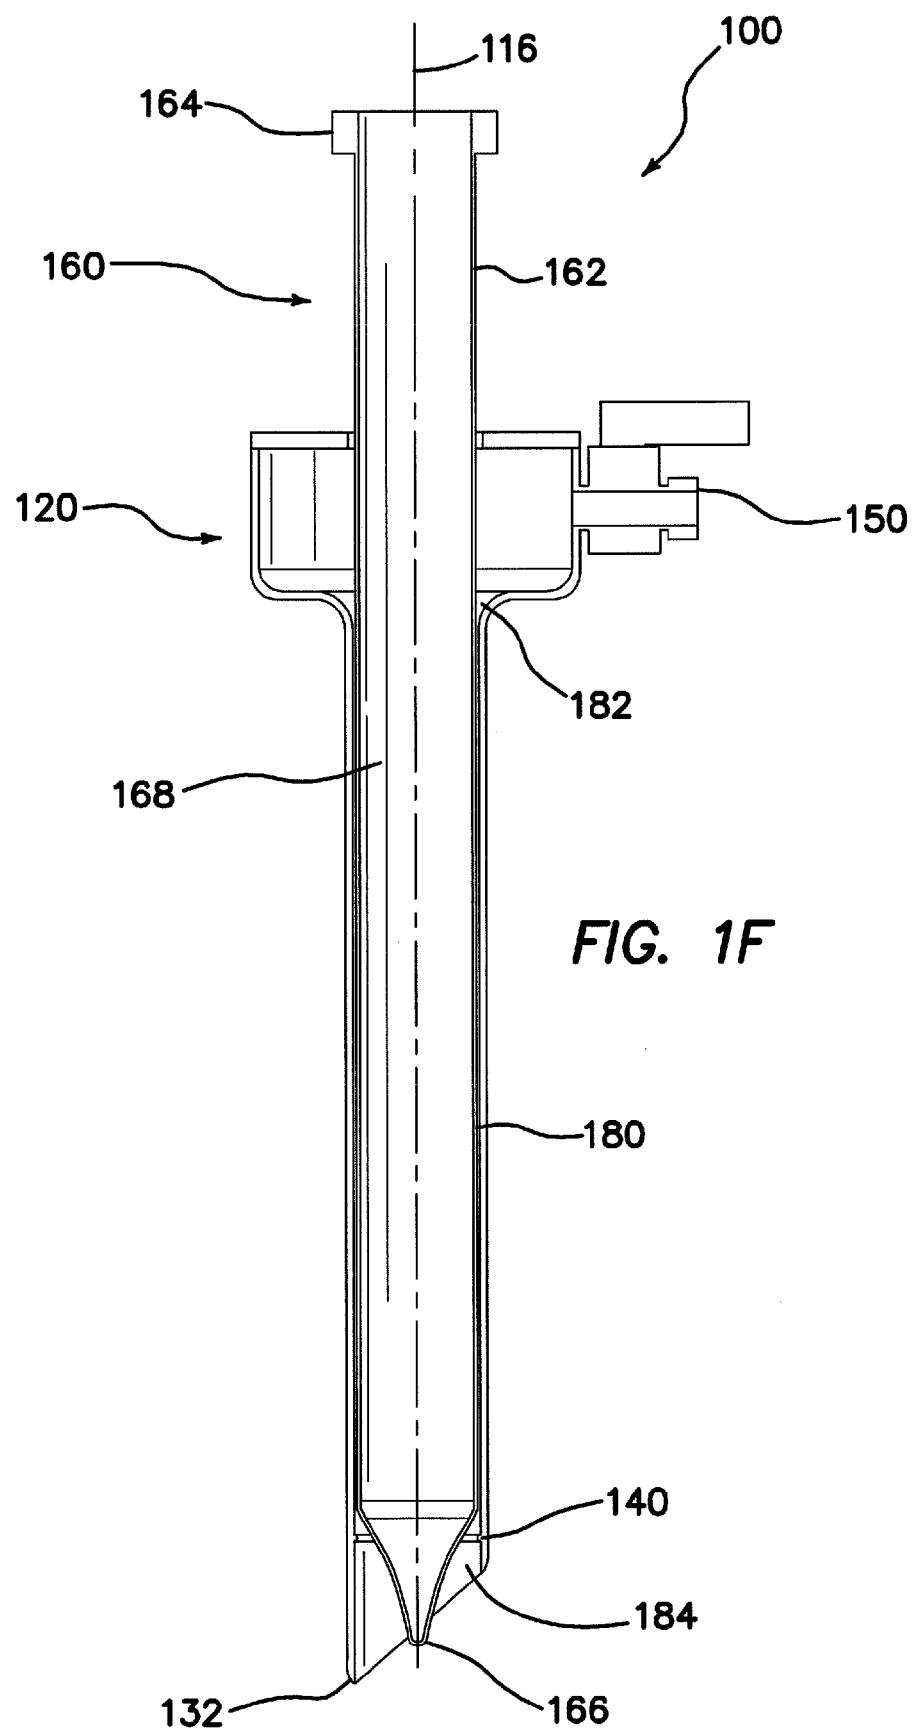

*FIG. 1F*

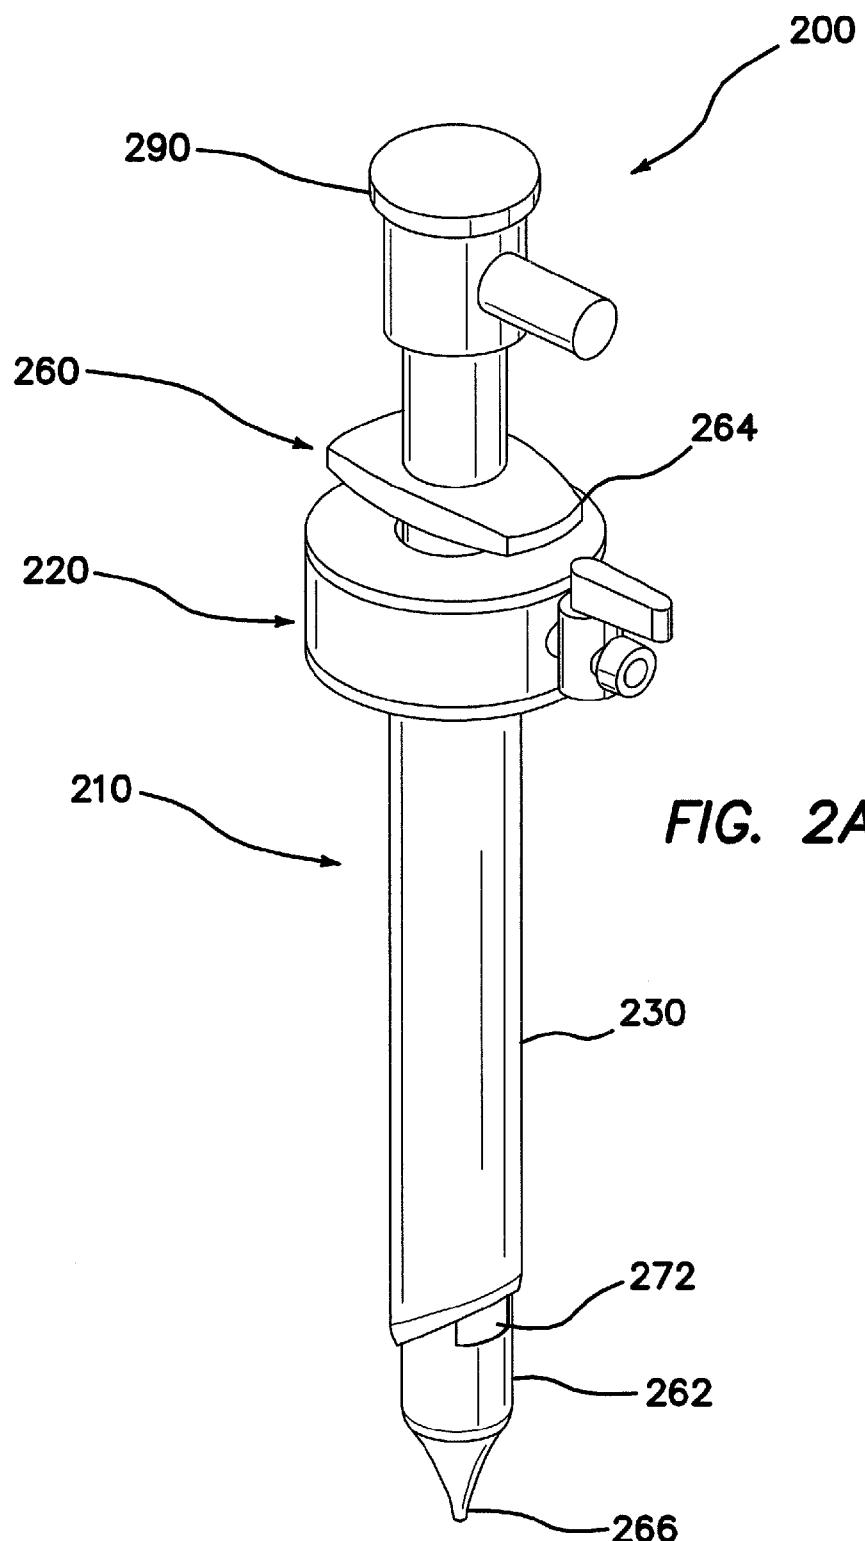

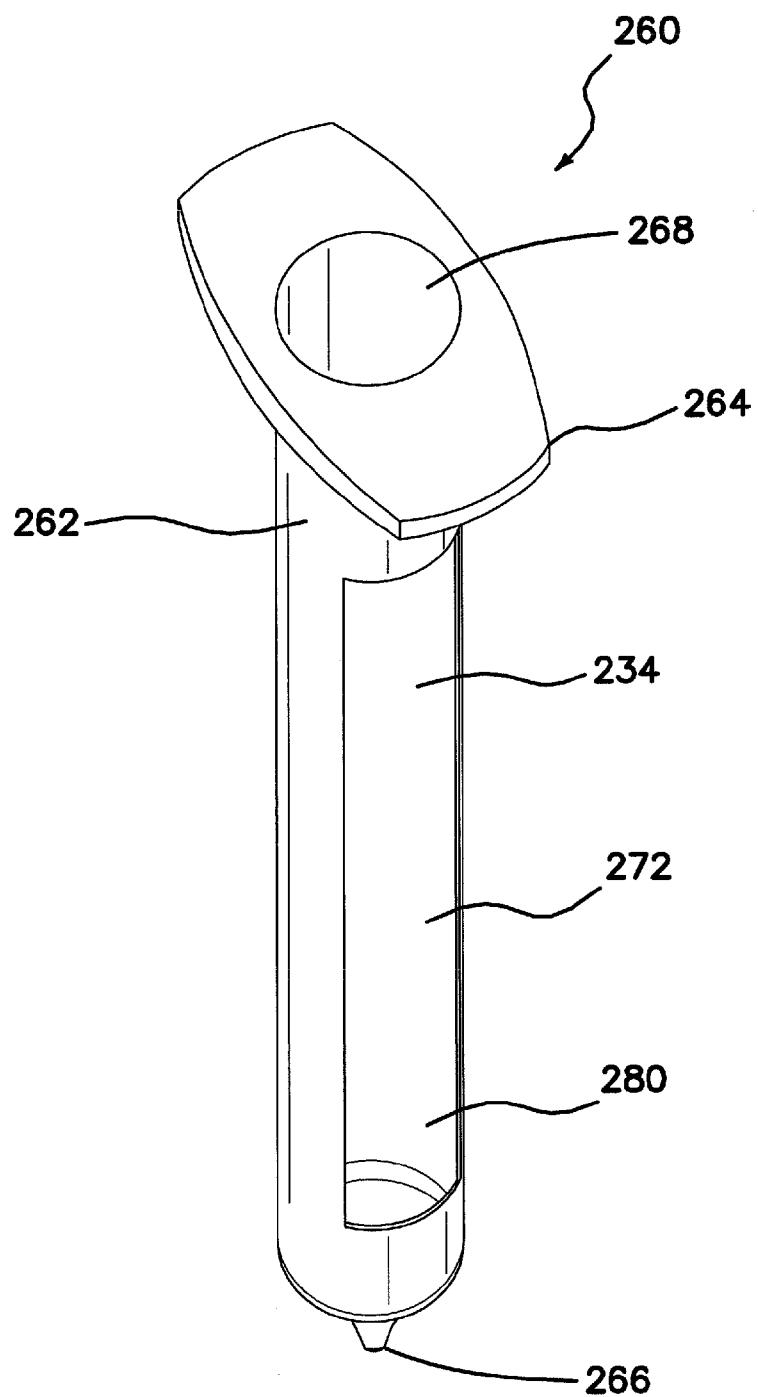

**FIG. 2B**





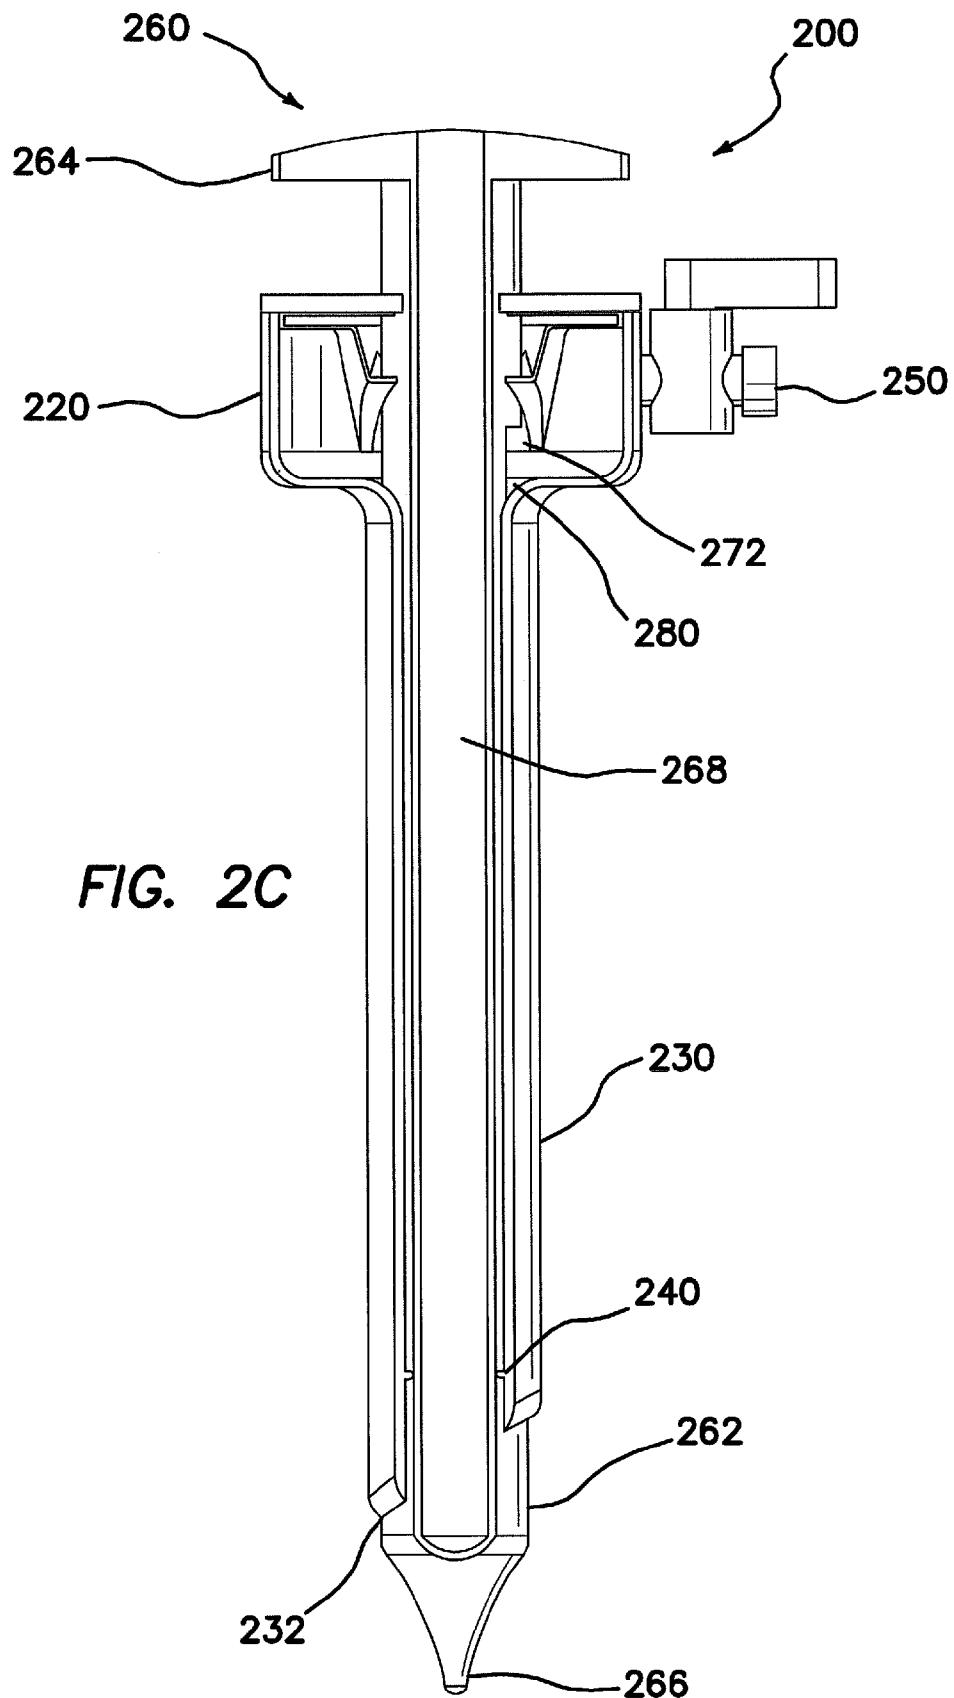


FIG. 2C

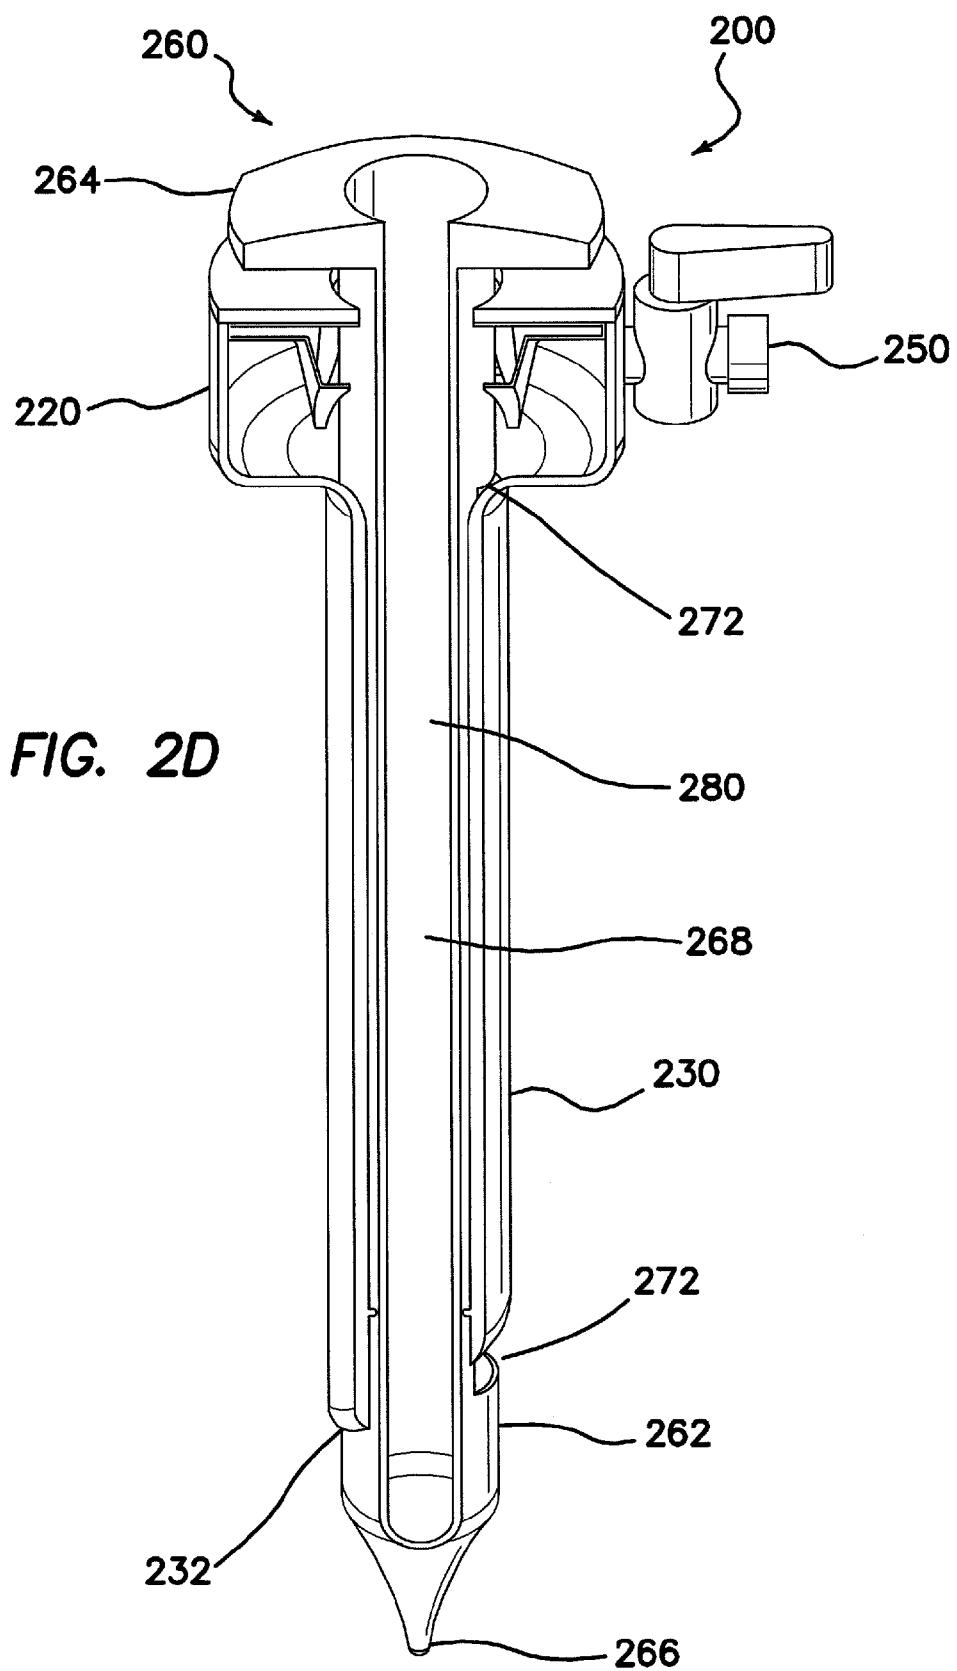

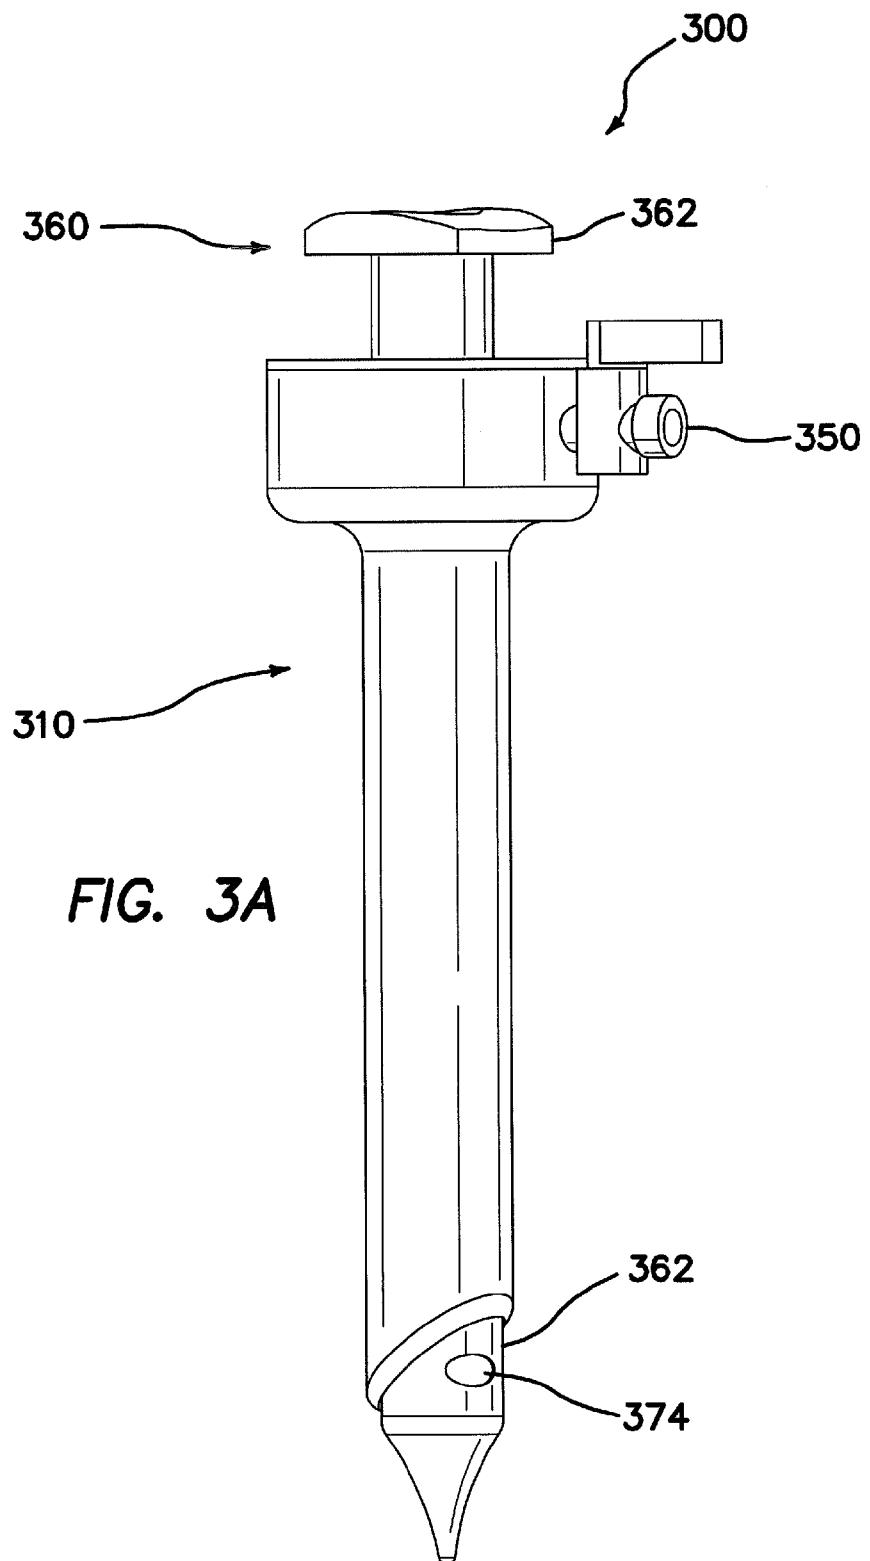

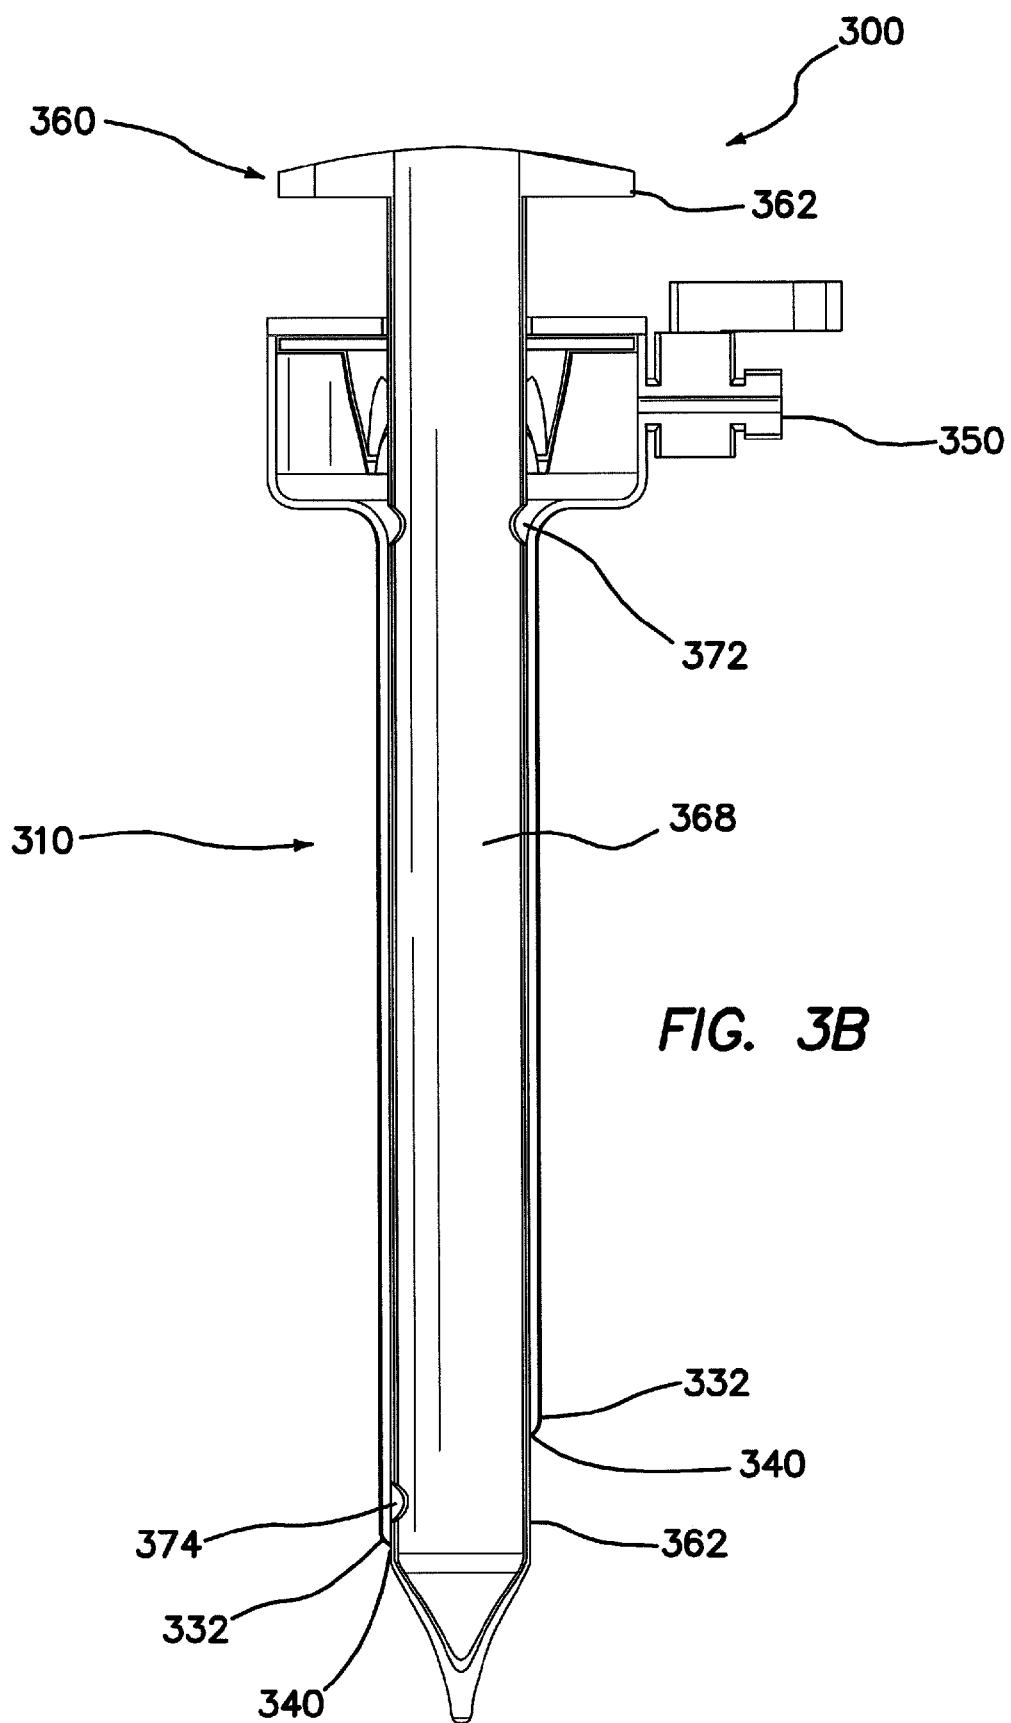

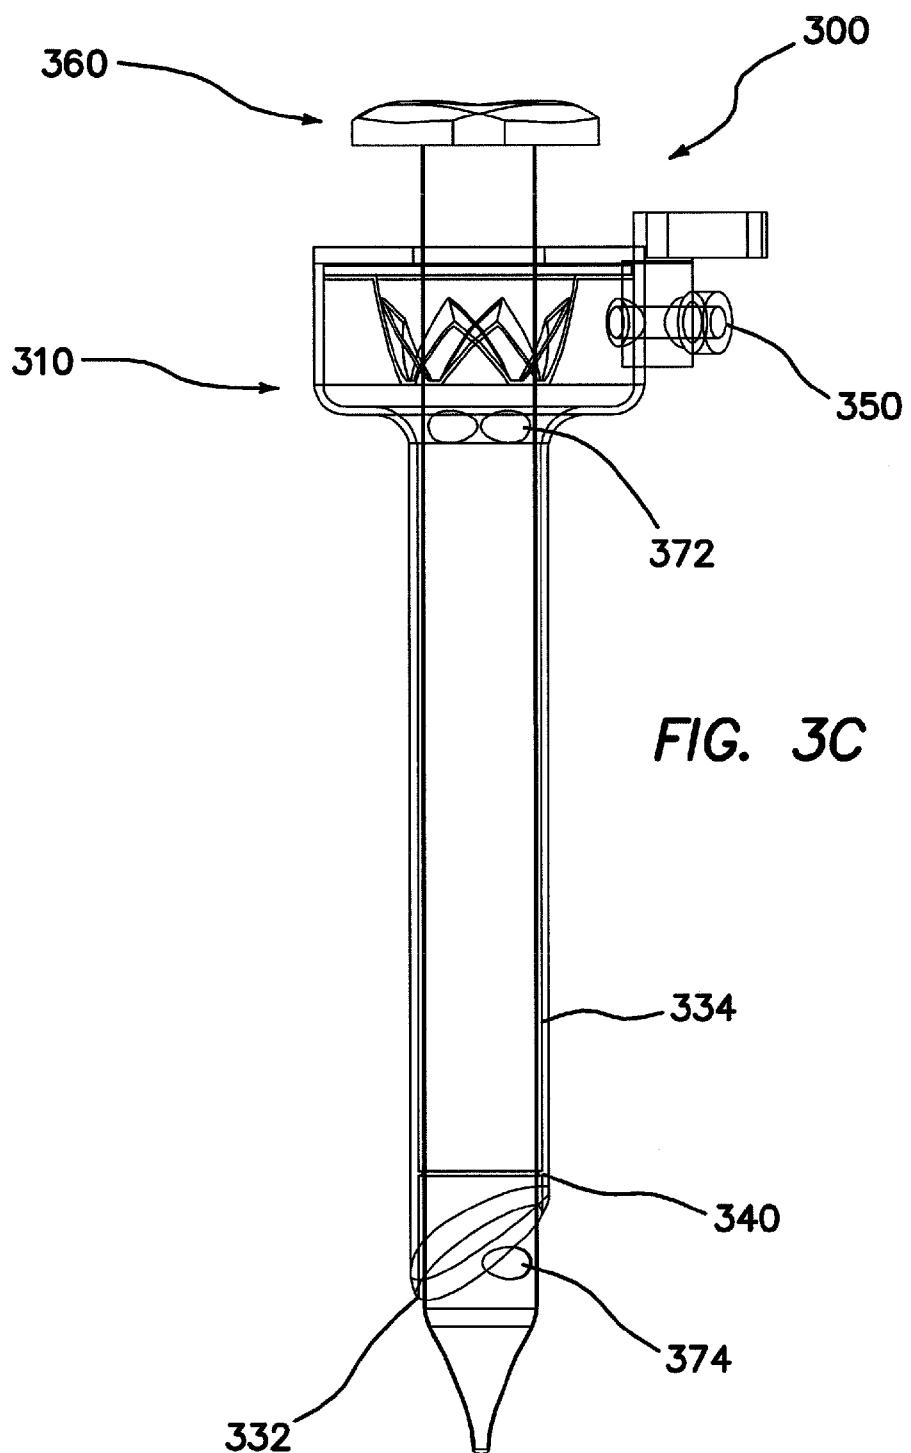

*FIG. 3C*

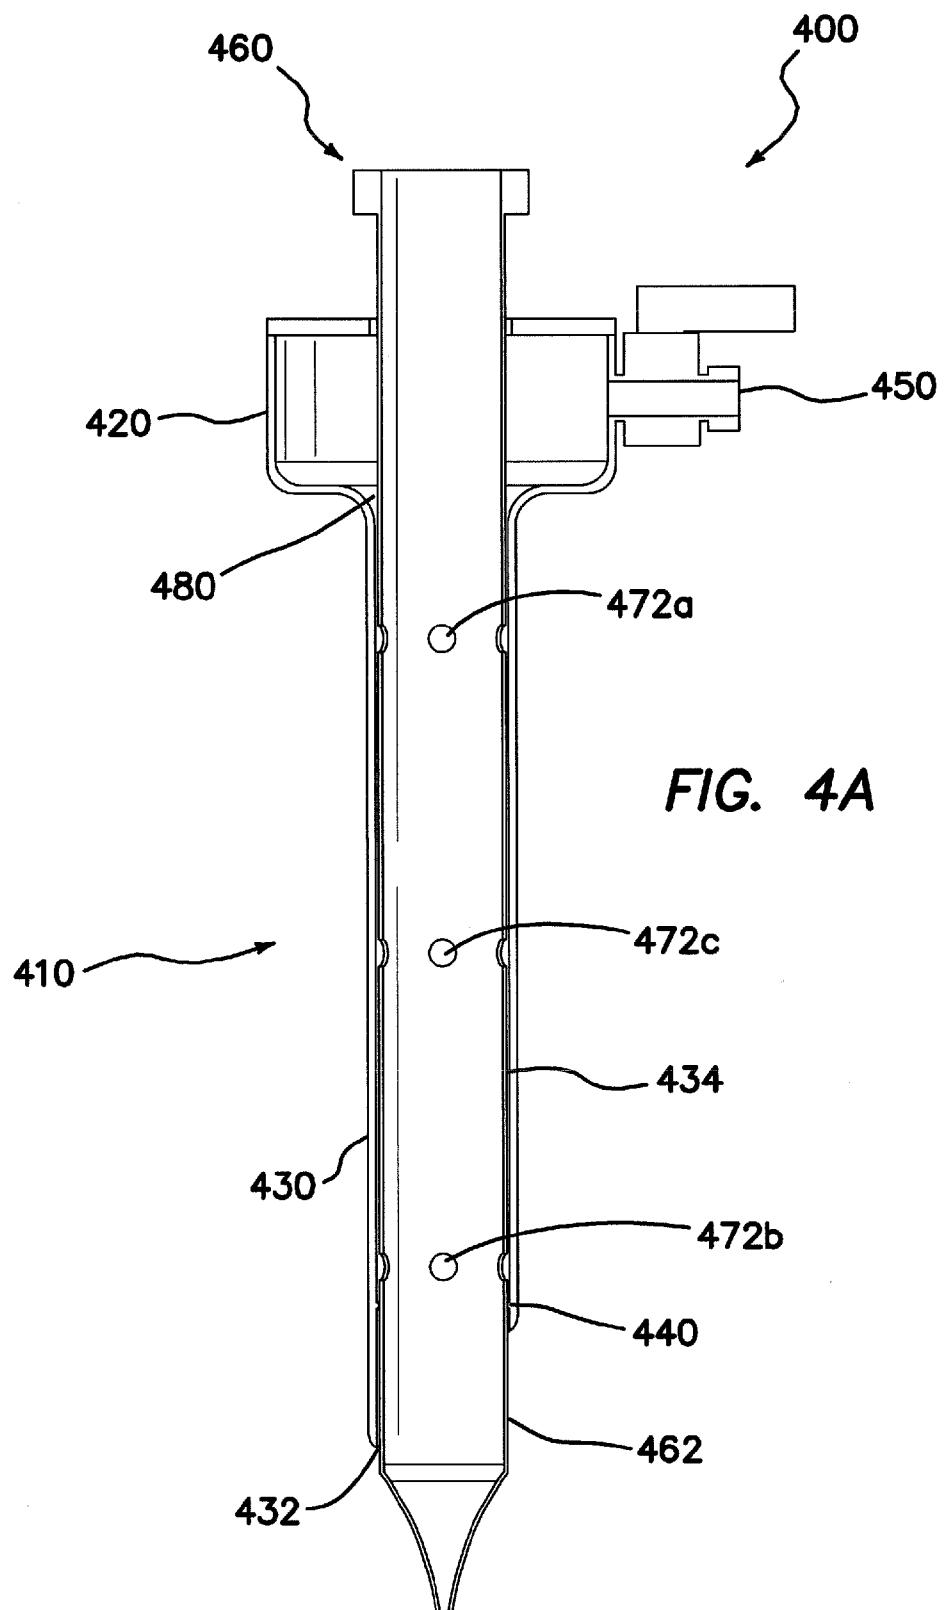


FIG. 4A

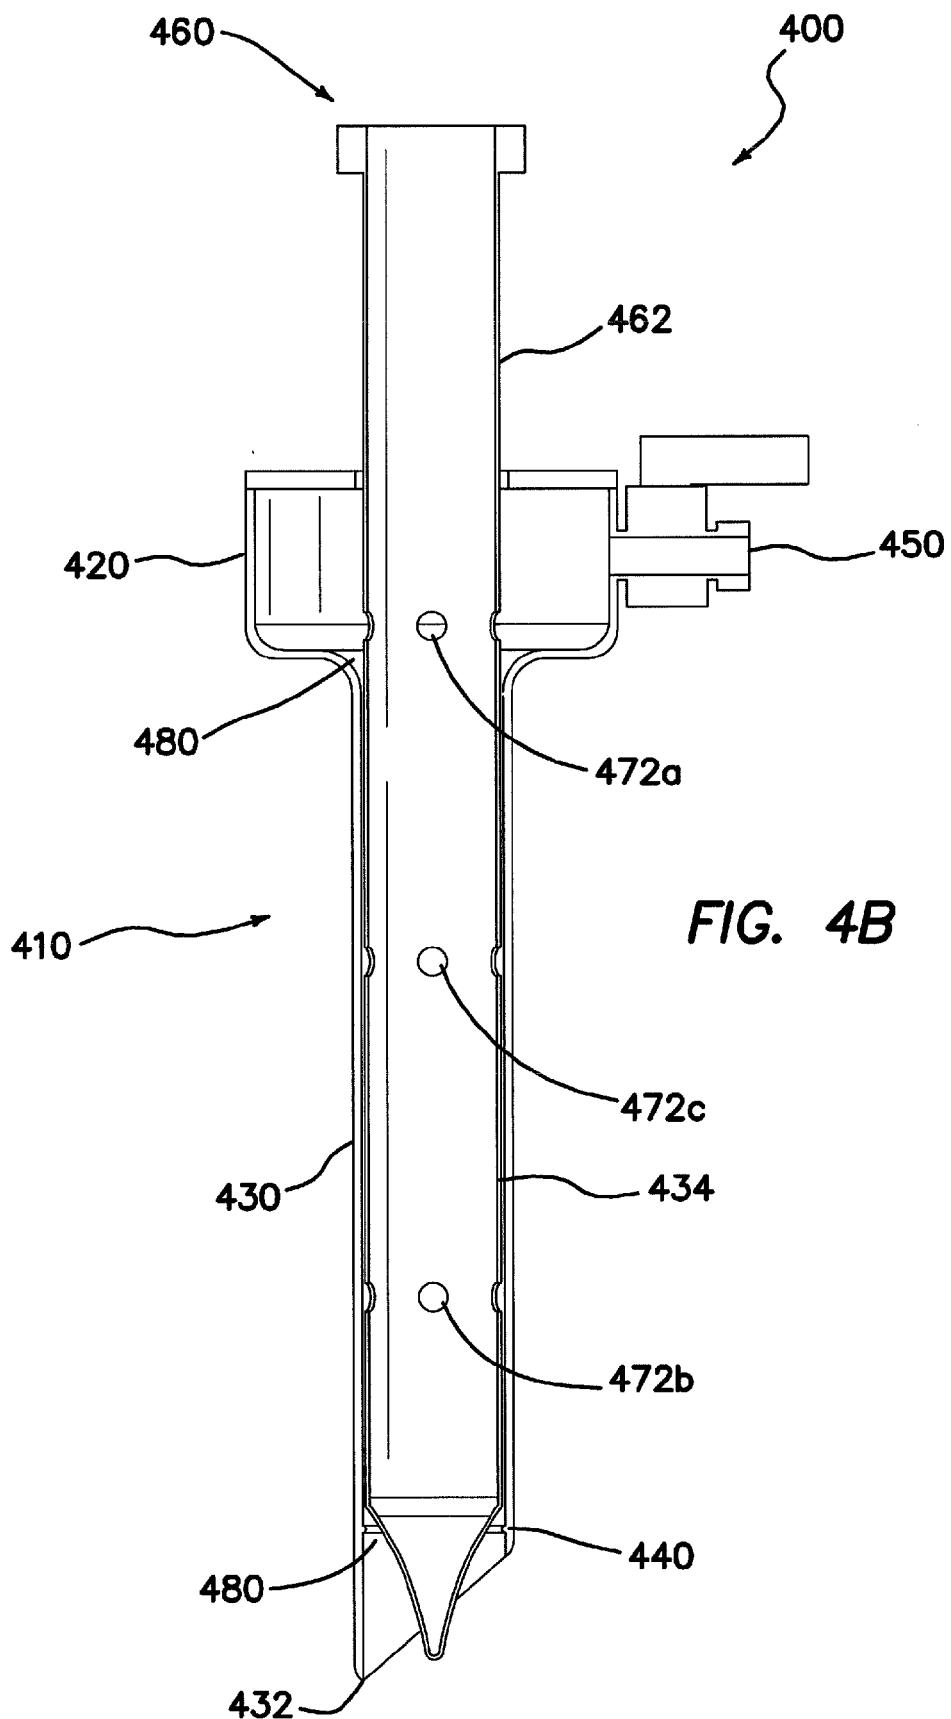
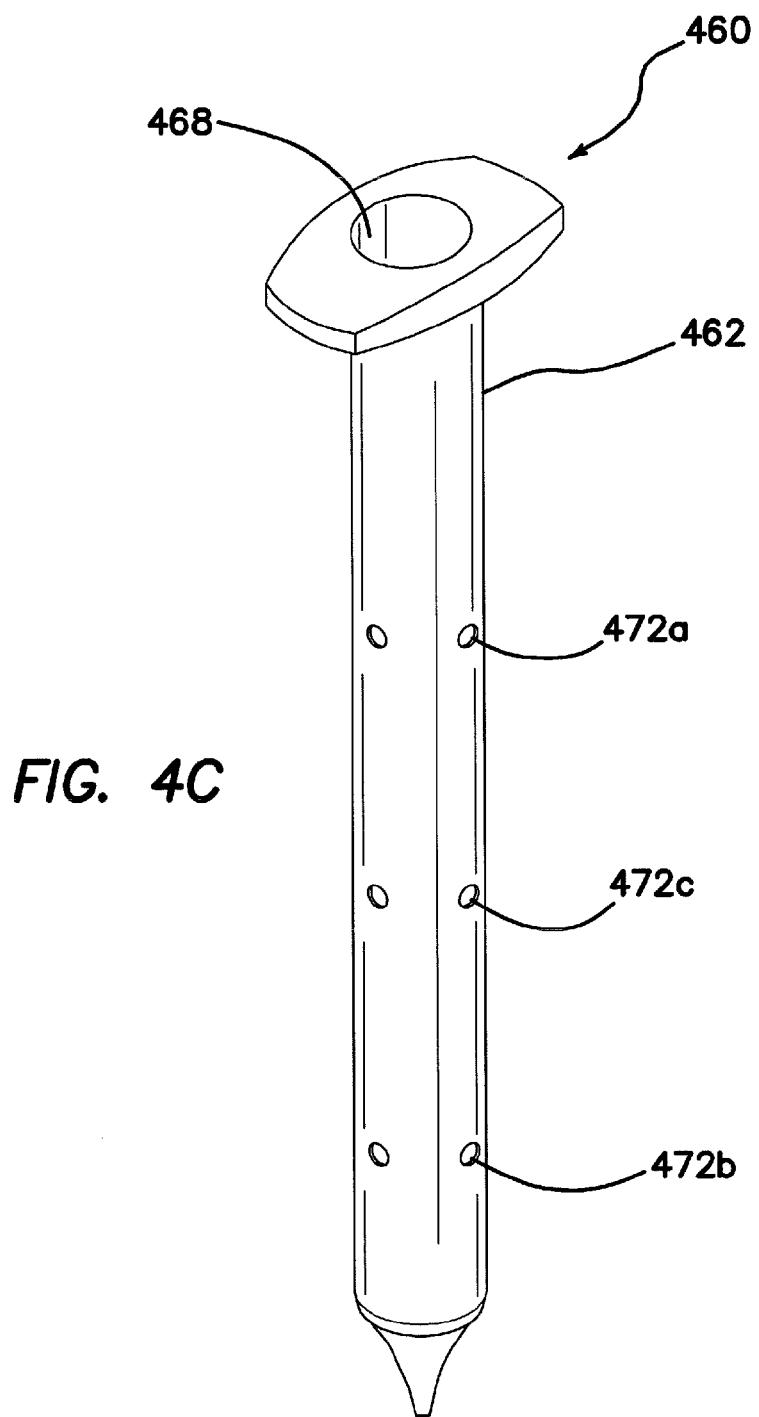


FIG. 4B





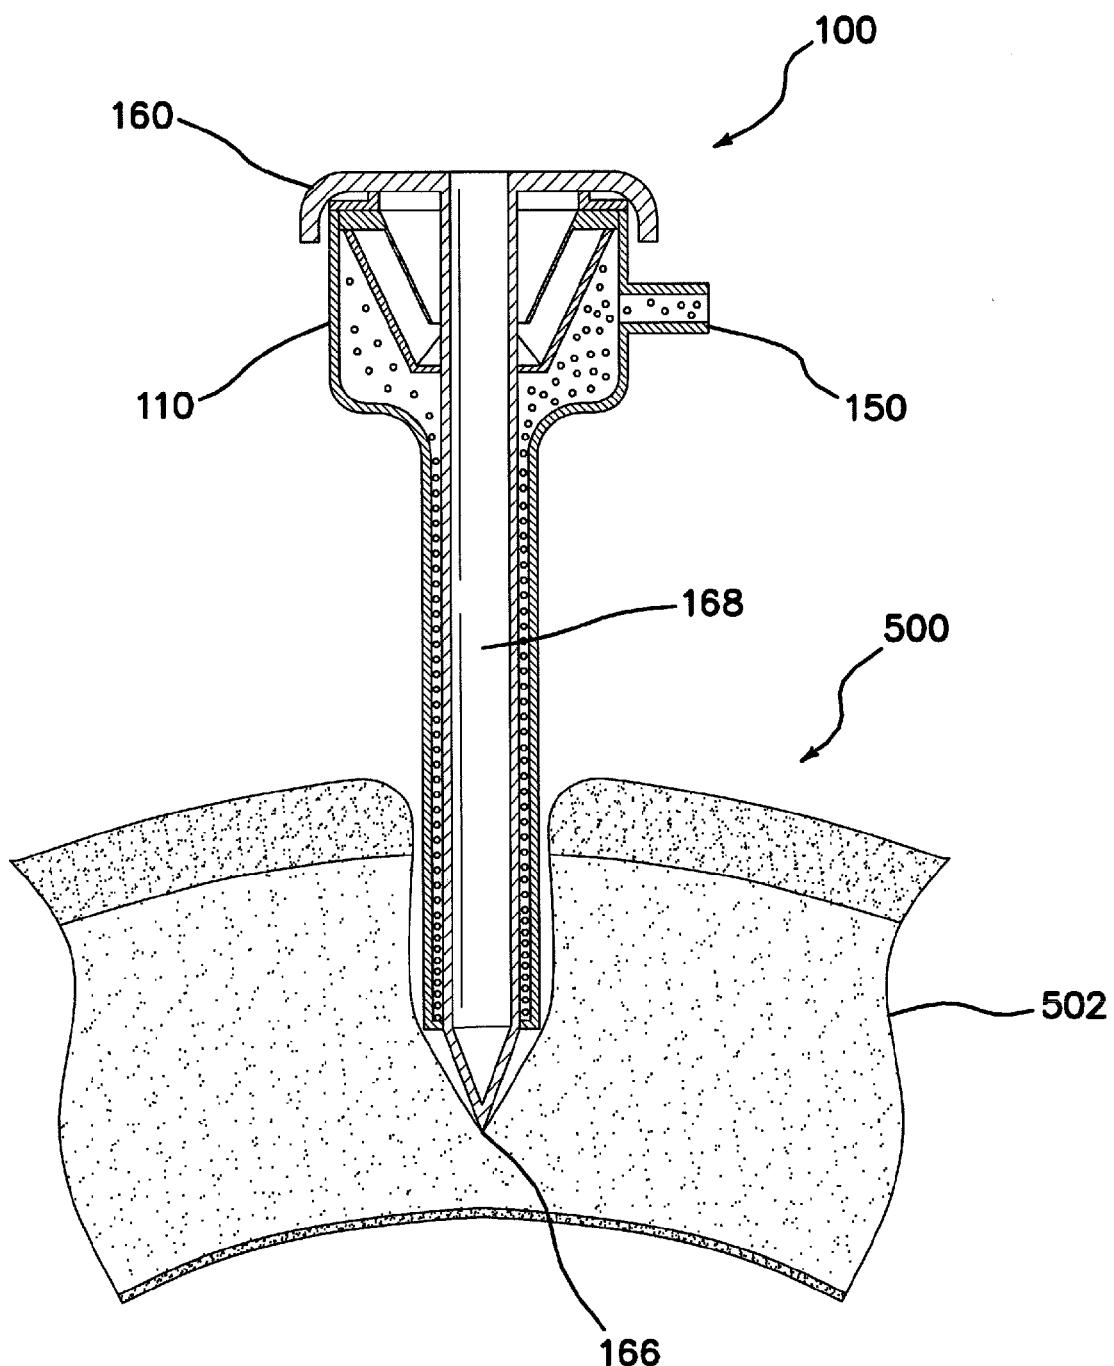


FIG. 5A

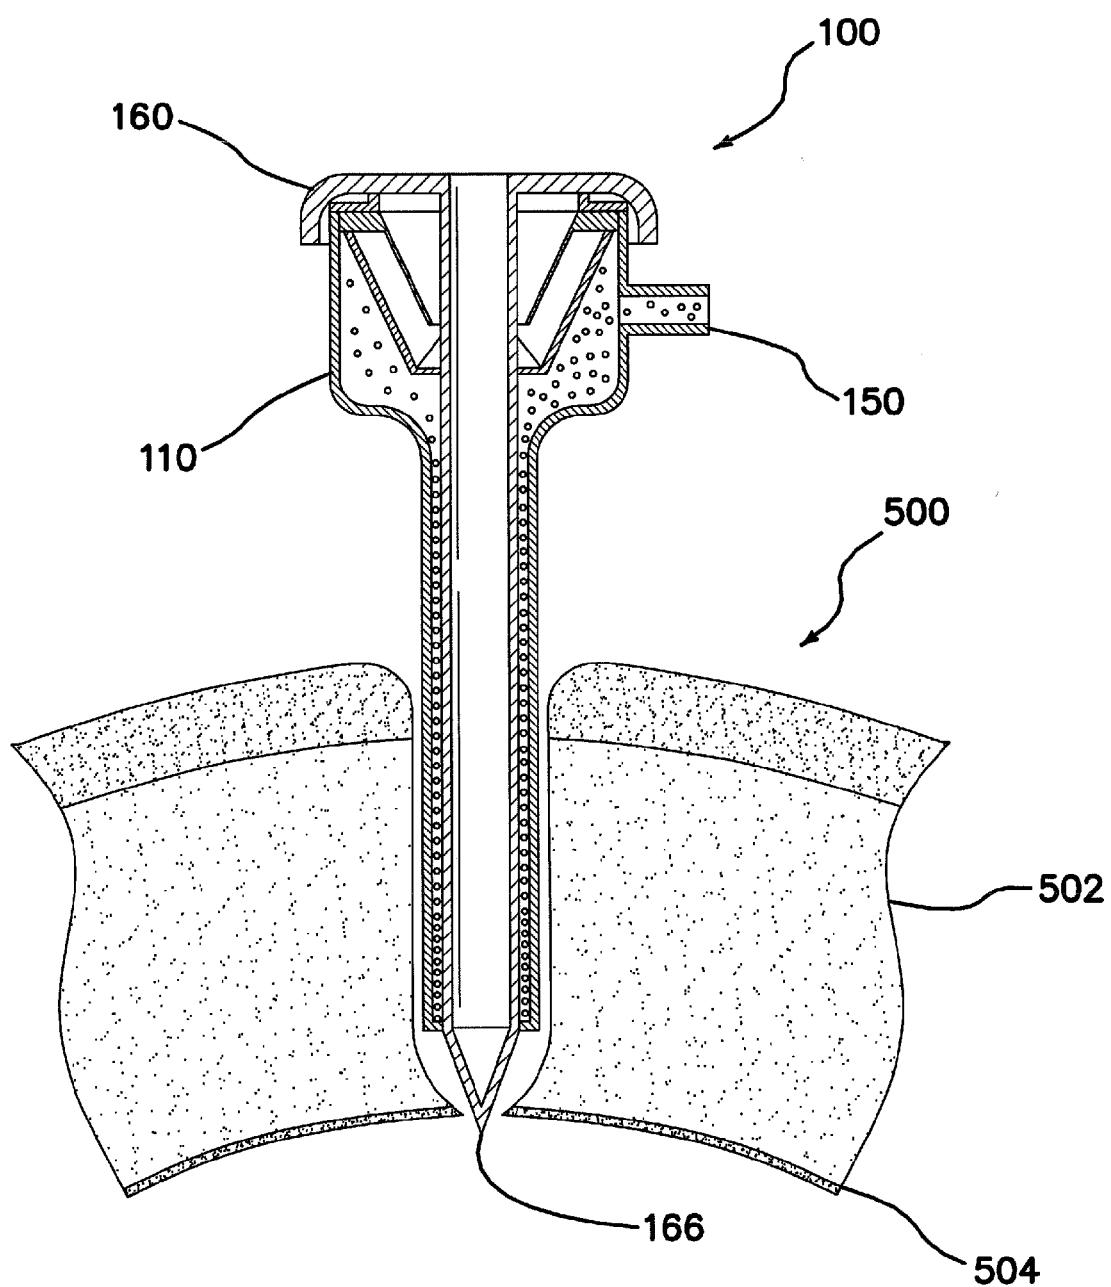

*FIG. 5B*

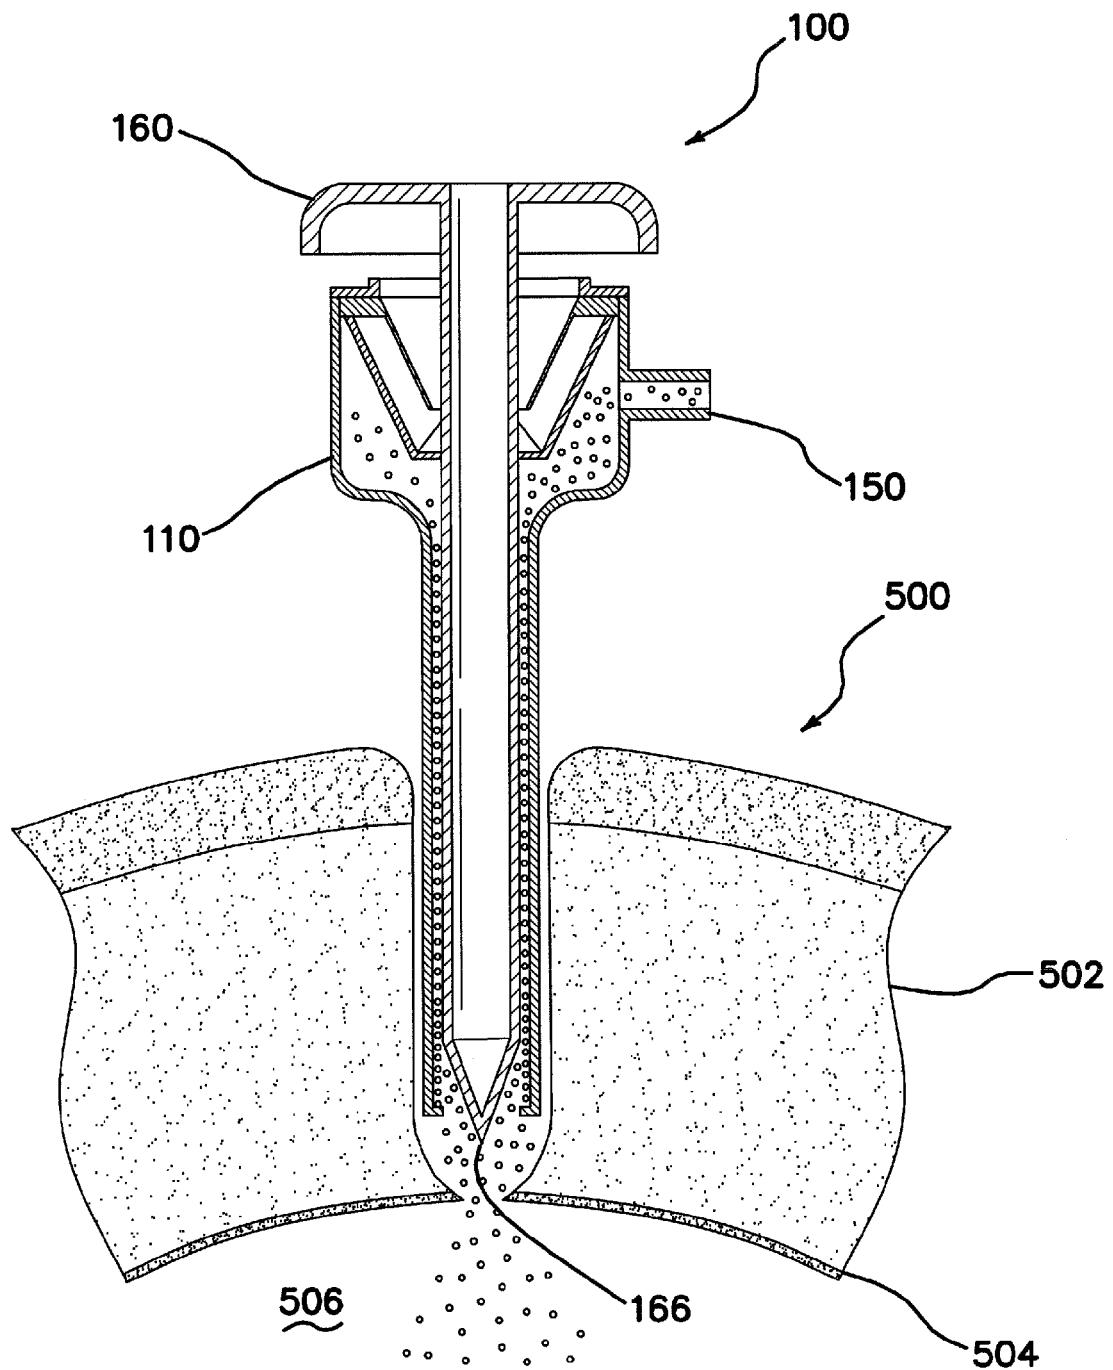

*FIG. 5C*



## EUROPEAN SEARCH REPORT

Application Number  
EP 14 19 0029

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	EP 1 733 707 A1 (ALCON INC [CH]) 20 December 2006 (2006-12-20) * figures 3-5 * * paragraphs [0012] - [0013] * -----	1-16	INV. A61B17/34
A	US 2005/070851 A1 (THOMPSON BRIAN J [US] ET AL) 31 March 2005 (2005-03-31) * paragraph [0119]; figure 3 *	1-16	
A	WO 03/020140 A1 (CONMED CORP [US]) 13 March 2003 (2003-03-13) * figures 1-3,6,8,10,15-16 * * page 1 * * page 5, line 6 - page 6, line 8 * * page 7, lines 18-20 * * page 11, lines 6-11 * * page 17, lines 8-10 * * page 18, line 17 - page 20, line 8 * -----	1-16	
A	US 2005/288622 A1 (ALBRECHT JEREMY J [US] ET AL) 29 December 2005 (2005-12-29) * abstract * * paragraph [0043]; figure 7b *	1-16	TECHNICAL FIELDS SEARCHED (IPC)
A	WO 2006/119197 A1 (ETHICON ENDO SURGERY INC [US]; FRANER PAUL T [US]; ZEINER MARK S [US];) 9 November 2006 (2006-11-09) * figure 3 *	1-16	A61B
The present search report has been drawn up for all claims			
1	Place of search Munich	Date of completion of the search 11 February 2015	Examiner Erbel, Stephan
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document			

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 14 19 0029

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-02-2015

10

	Patent document cited in search report		Publication date	Patent family member(s)	Publication date			
15	EP 1733707	A1	20-12-2006	AR 056385 A1	10-10-2007			
				AT 406859 T	15-09-2008			
				CY 1108774 T1	09-04-2014			
				DK 1733707 T3	10-11-2008			
				EP 1733707 A1	20-12-2006			
				ES 2313219 T3	01-03-2009			
				PT 1733707 E	27-11-2008			
				SI 1733707 T1	28-02-2009			
				US 2007016137 A1	18-01-2007			
				WO 2006134100 A1	21-12-2006			
25	US 2005070851	A1	31-03-2005	BR PI0406033 A	14-06-2005			
				CA 2482675 A1	30-03-2005			
				EP 1520540 A1	06-04-2005			
				MX PA04009629 A	25-07-2005			
				US 2005070851 A1	31-03-2005			
30	WO 03020140	A1	13-03-2003	BR 0212165 A	13-07-2004			
				CA 2458675 A1	13-03-2003			
				EP 1420705 A1	26-05-2004			
				JP 4276536 B2	10-06-2009			
				JP 2005501595 A	20-01-2005			
				MX PA04001791 A	07-03-2005			
				US 2003045834 A1	06-03-2003			
				WO 03020140 A1	13-03-2003			
35	US 2005288622	A1	29-12-2005	AU 2005260071 A1	12-01-2006			
				CA 2572192 A1	12-01-2006			
				EP 1765197 A1	28-03-2007			
				EP 2545870 A1	16-01-2013			
				EP 2545871 A1	16-01-2013			
				JP 5004793 B2	22-08-2012			
				JP 5579772 B2	27-08-2014			
				JP 2008504886 A	21-02-2008			
				JP 2012135650 A	19-07-2012			
				US 2005288622 A1	29-12-2005			
				US 2010210998 A1	19-08-2010			
				US 2012123202 A1	17-05-2012			
40				WO 2006004652 A1	12-01-2006			
WO 2006119197	A1	09-11-2006	EP 1879512 A1	23-01-2008				
			JP 4959684 B2	27-06-2012				
			JP 2009502211 A	29-01-2009				
			US 2006264992 A1	23-11-2006				
			45				WO 2006119197 A1	09-11-2006
			50					
			55					

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- EP 1733707 A1 [0007]
- WO 03020140 A1 [0007]

专利名称(译)	填充访问系统		
公开(公告)号	<a href="#">EP2851020A1</a>	公开(公告)日	2015-03-25
申请号	EP2014190029	申请日	2009-01-26
[标]申请(专利权)人(译)	应用医疗资源		
申请(专利权)人(译)	应用医疗资源CORPORATION		
当前申请(专利权)人(译)	应用医疗资源CORPORATION		
[标]发明人	ALBRECHT JEREMY J JOHNSON GARY M BRUSTAD JOHN R		
发明人	ALBRECHT, JEREMY J JOHNSON, GARY M BRUSTAD, JOHN R		
IPC分类号	A61B17/34		
CPC分类号	A61M13/003 A61B17/3439 A61B17/3474 A61B2017/00907 A61B2017/3441 A61B2017/3456 A61B2017/347		
审查员(译)	ERBEL , STEPHAN		
优先权	61/023539 2008-01-25 US		
其他公开文献	<a href="#">EP2851020B1</a>		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

系统，装置和方法允许在将套管插入体腔之前绝缘体腔。进入系统的实施例包括填塞器 ( 160 )，套管针 ( 110 ) 和流体流动通道 ( 180 )。进入系统具有闭合配置，其中进入系统的远端与流体流动通道流体隔离，以及打开配置，其中进入系统的远端流体连接到流体流动通道，从而允许流体流动，例如，绝缘气体进入体腔。

