

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
28 July 2005 (28.07.2005)

PCT

(10) International Publication Number
WO 2005/067785 A1

(51) International Patent Classification⁷: A61B 1/005,
17/28, A61M 25/01

(NL). SCHELTES, Jules, Serge [NL/NL]; Pybo Steenstraat 6, NL-1086 ZE Amsterdam (NL).

(21) International Application Number:
PCT/NL2005/000001

(74) Agent: BREDA, Jacques van; Octrooibureau Los En Stigter B.V, Weteringschans 96, NL-1017 XS Amsterdam (NL).

(22) International Filing Date: 5 January 2005 (05.01.2005)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1025274 16 January 2004 (16.01.2004) NL

(71) Applicant (for all designated States except US): TECHNISCHE UNIVERSITEIT DELFT [NL/NL]; Julianalaan 134, NL-2628 BL Delft (NL).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,


(72) Inventors; and

(75) Inventors/Applicants (for US only): BREEDVELD, Paul [NL/NL]; L.van Noodgodsstraat 26, NL-2801 RS Gouda

[Continued on next page]

(54) Title: INSTRUMENT FOR FINE-MECHANICAL OR SURGICAL APPLICATIONS

(57) Abstract: The invention relates to an instrument for high-precision or surgical applications of a minimally invasive nature, comprising a distally positioned directable head, a shaft upon which the head is positioned, and a proximally positioned handgrip for operating the head, wherein a ring of cables comprising longitudinally extending cables connects to the head, wherein each cable of the ring of cables is disposed such that at least a part of both sides is in direct contact with another cable of the ring of cables, and wherein the cables are fixedly secured in the radial direction.

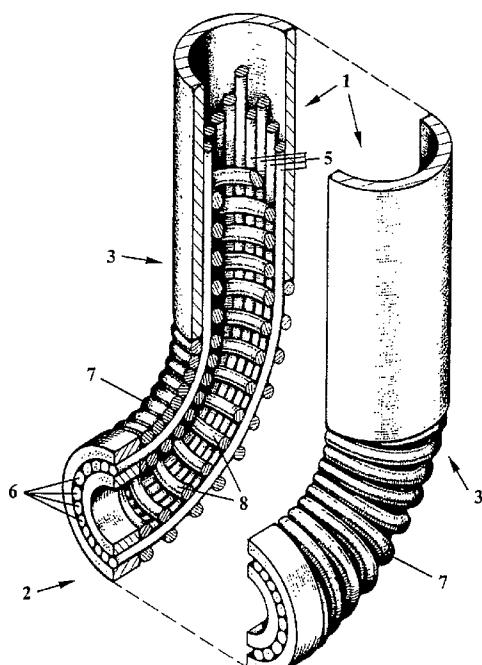

WO 2005/067785 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Instrument for fine-mechanical or surgical applications

The invention relates to an instrument for high-precision or surgical applications of a minimally invasive nature, comprising a distally positioned directable head, a rigid, flexible, or semi-flexible shaft upon which the head 5 is positioned, and a proximal end equipped for operating the head. This proximal end may be provided with, for example, a handgrip or a control (possibly motor-powered). In the latter case, this may also entail a computerised control. The high-precision applications include, for example, the inspection 10 and repair of motors, machines, radiators or tubular systems.

Such an instrument is known for medical applications from, among others, the international patent application PCT/NL01/00552, published under no. WO 02/13682.

From this publication an endoscope is known, embodied 15 with a distally positioned camera, fitted on an endoscope shaft, wherein proximally positioned means are provided for operating the camera. To realise the coupling of the operating means and the camera, use is made of a spring, which is comprised of a chain of in themselves closed, flexible elements 20 wherein the elements of each pair of two adjacent elements as comprised in this chain are only partially connected with each other. Through these mutually connected elements traction wires are threaded through feed-through openings that are provided in the elements.

25 The known construction has several drawbacks. These drawbacks concern the fact that there is a limit to how small the elements forming the spring can be while still keeping the spring at a desirably low cost price. Another drawback is that when the camera is set at an angle to the shaft, the 30 four traction wires used in the known construction establish preferred positions.

An object of the invention is to eliminate these problems and to allow the medical instrument to be constructed at low costs.

35 Corresponding to the preamble of claim 1, an instru-

ment of the kind explained above is known from US-A-2002/0177750, wherein a ring of cables comprising longitudinally extending cables connects to the head, which cables are fixedly secured in the radial direction. A disadvantage of 5 this instrument is, however, that the cables are fed through guide-sleeves provided in the longitudinal direction of the cables and attached to an externally extending leaf spring. This construction is complex and expensive.

10 The instrument according to the invention is characterized in that each cable of the ring of cables is disposed such that at least a part of both sides is in direct contact with another cable of the ring of cables.

15 This instrument lends itself especially for surgical applications, as will become apparent from the following explanation. Of course, high-precision applications are equally well possible, and may be derived without inventive effort from the explanation given hereinbelow. It should be noted that other longitudinally extending elements, with which a closed ring can be formed, also fall within the scope of the 20 term "cable" used in the invention. This relates, for example, to a ring of (hollow) tubes, or glass fibres to be mentioned hereinbelow. Similarly, it is not necessary for all of the cables to have the same dimensions. For example, cables having a completely round cross-section may be disposed next 25 to cables having a banana-shaped cross-section.

20 The instrument according to the invention can be manufactured at exceptionally low costs since the cables may be thin steel cables of the kind normally available on the market. Such steel cables are available with a diameter of, for example, 0.2 mm. This means that if a central channel delimiting the ring of cables has a diameter of 0.2 mm, it is possible to manufacture a ring of cables having a minimum diameter of 0.6 mm. It is thus possible to realise a shaft diameter having a diameter of approximately 1 mm.

35 An essential aspect of the invention is that in the radial and tangential direction, the cables of the ring of cables are fixedly secured. Preferably, the cables comprising the ring of cables are over their whole length in direct con-

tact with neighbouring cables. This enables the cables of the ring of cables to absorb a pulling force as well as a pushing force, allowing the ring of cables to be used for the mechanical coupling of the head to a handgrip.

5 An important advantage of the instrument according to the invention is further that the same is without preferred positions with respect to the movement of the head in relation to the shaft.

For the mechanical coupling of the head to the hand-grip any cable from the ring of cables may be employed. In a preferred embodiment, however, the instrument according to the invention is characterized in that the ends of at least some of the cables of the ring of cables possess a fastening to the head and to the proximal end. In this way the fastening can be constructed in a simple and consequently cheap manner, for example, by means of soldered connections or by using bolts provided in an endplate wherein the ends of the cables having a pulling function can be received.

An embodiment that is preferred when all of the cables provide the mechanical coupling of the head to the hand-grip, is characterized in that the fastening is embodied as an interior ring and an exterior ring, which together delimit a slot for clampingly receiving the cables. This construction can also be used if only some of the cables of the ring of cables are received in the slot.

A simple and inexpensive embodiment of the instrument according to the invention for the fixedly securing the ring of cables is characterized in that the ring of cables is enclosed by an exterior spring lying against the cables of the ring of cables.

It is also possible for the ring of cables to be provided at its exterior side with a construction element selected from the group comprising glass fibres, cables, power cables, power cables surrounded by glass fibres, an optionally torsion-stiff tube or tubes, optionally with lateral scoring and optionally stranded, a bellows, a stent and a spring as specified in WO 02/13682.

For the internal retention of the ring of cables nu-

merous technical possibilities can be used. For example, a simple and effective possibility is to be found in the embodiment wherein the ring of cables is provided at its interior side with an interior spring lying against the cables of the ring of cables.

It is also possible for the ring of cables to be provided at its interior side with a construction element that is selected from the group comprising a bundle of glass fibres, a cable, power cables, a power cable surrounded by a ring of glass fibres, an optionally torsion-stiff tube or tubes, optionally with lateral scoring and optionally stranded, bellows, a stent and a spring as specified in WO 02/13682.

It is also conceivable that the construction element selected from this group is used in combination with an internal spring lying against the cables of the ring of cables. If such an internal spring is not used, the selected construction element itself must lie against the cables of the ring of cables.

If the construction element is a cable, it is advantageous that on the head of the instrument a grab jaw, scissors or clipping tongs be mounted and the cable be embodied as control cable therefor. This is especially useful for medical applications.

However, if the construction element comprises a power cable, it is advantageous for the instrument to be embodied with a camera mounted on the head, wherein the power cable serves for the power supply of said camera and/or for transporting image data obtained with the camera. Of course, it is also possible to use several power cables having separate functions. In addition, the power cable or power cables may serve for feeding a light source, such as an LED or the like. Glass fibres are also useful as light conductors, while they are at the same time able to serve as traction rope.

The instrument proposed in accordance with the invention, is preferably selected from the group comprising laparoscope, thoracoscope, colonoscope, gastroscope, bronchoscope, endoscope, catheter, surgical drill, uretheroscope,

laryngoscope, cystoscope, guidable endoscope, guidable drill, gripping tongs, clipping tongs, scissors, coagulation hook, and generally instruments for ear, nose and throat surgery, eye surgery, neurosurgery and brain surgery.

5 Hereinbelow the invention will be further elucidated by way of the drawing.

 In the drawing:

 - Fig. 1a shows a cut-away drawing of substantially the head of the instrument according to the invention;

10 - Fig. 1b shows a detail of a preferred embodiment of the fastening of the ring of cables;

 - Figs. 2a and 2b show a longitudinal cross-section of an instrument according to the invention in the straight and bent condition, respectively;

15 - Fig. 3 shows a longitudinal cross-section of an alternative embodiment of the construction of the instrument according to the invention shown in Figs. 2a and 2b;

 - Fig. 4 shows several alternative constructions for internally securing the ring of cables forming part of the 20 instrument according to the invention.

 - Figs. 5a and 5b show several alternative fastenings of the cables of the ring of cables, to be used at the head and/or the proximal end of the instrument according to the invention.

25 Similar components in the figures carry identical reference numerals.

 With reference first to Figs. 2a and 2b, showing the main portion of a medical instrument selected from the group comprising laparoscope, thoracoscope, colonoscope, gastro-scope, bronchoscope, endoscope, catheter, surgical drill, uretheroscope, laryngoscope, cystoscope, guidable endoscope, guidable drill, gripping tongs, clipping tongs, scissors, co-agulation hook, instruments for ear, nose and throat surgery, eye surgery, neurosurgery and brain surgery.

35 Comparison between the Figs. 2a and 2b shows clearly that the instrument 1 possesses a distally positioned direct-able head 2, a shaft 3 on which a head 2 is positioned and a proximal end on which in this case a handgrip 4 is positioned

that serves for controlling the head 2.

Depending on the desired application, the head 2 may be provided, for example, with a grab jaw or a camera, as will be explained hereinbelow.

5 A detail of the instrument 1 near the head 2 is shown in the Figs. 1a and 1b.

Fig. 1a shows the shaft 3 and the head 2 positioned on the shaft 3 in two separate longitudinally extending halves. This illustrates that in this example shown, the 10 shaft 3 possesses a shaft wall wherein a ring of cables 5 is contained that comprises cables 6 extending longitudinally in the shaft 3, as indicated with regard to a number of these cables in Fig. 1a. From Fig. 1a it is further clearly apparent that in the radial direction each cable 6 of the ring of 15 cables 5 is fixedly secured. To this effect, the construction shown in Fig. 1a is provided with an external spring 7 disposed up against the cables 6 of the ring of cables 5 and an internal spring 8 lying against the interior side of the ring of cables 5 up against the cables 6 of the ring of cables 5.

20 The ring of cables 5 serves for the mechanical coupling of the head 2 with the handgrip 4 (see Figs. 2a and 2b).

Fig. 1b shows an exploded view of a means for realising a fastening 9 of cables 6 of the ring of cables 5 to the head 2 and the handgrip 4, respectively. The fastening 9 shown in Fig. 1b comprises an interior ring 10 and an exterior ring 11, which together delimit a slot 12 serving to clampingly receive the cables 6 of the ring of cables 5. As already mentioned in the introduction of this exemplary embodiment, this may, for example, be realised such that only every other cable 6 is received in the slot 12. In such a case other fastenings 9 are also feasible. Some non-limiting examples are shown in Figs. 5a and 5b.

Fig. 5a shows the fastening 9 wherein the ends of 35 every other cable 6' may be received in an endplate 13 in order to be fixed therein with soldering points 14. Between these fixed cables 6' run so-called floating cables 6''.

Fig. 5b shows the construction in which ends of the

cables 6' are received in an endplate 13 in order to be fixed therein with bolts 15.

With respect to the interior spring 8 serving to secure the cables 6 of the ring of cables 5 at the inside, alternative embodiments are also conceivable. Fig. 4 on the right, shows an embodiment in which the cables 6 of the ring of cables are internally delimited by a cable 16. This may be, for example, a traction rope, which serves to operate a grab jaw to be mounted on the head 2 of the instrument 1. In that embodiment, the traction rope 16 is able to undergo a longitudinal movement in relation to the adjacent cables 6 of the ring of cables 5. In a manner known to the person skilled in the art, the grab jaw may be equipped with a spring element to produce a counter-force to the force to be exerted by means of the traction rope 16, such that the grab jaw can be both opened and closed, depending on the position of the traction rope 16. It should be noted, that in the construction illustrated the traction rope 16 may also be used as pushing rope, so that the said spring element may be omitted. Since a person skilled in the art is acquainted with the character of such a grab jaw, a further constructive explanation is superfluous and is therefore omitted.

Fig. 4 on the left, shows an embodiment of the instrument 1 according to the invention wherein the traction rope 16 extends in the interior of an interior spring 8, which together with the exterior spring 7 ensures that the cables 6 of the ring of cables 5 are fixedly secured.

Apart from the just explained embodiment in which a traction rope 16 extends at the inside of the ring of cables 5, it is also possible to provide a power cable or power cables, or a power cable surrounded by a ring of glass fibres, or a tube or even a spring as specified in WO 02/13682. Another possibility is the application of a stent. Each of the above-mentioned possibilities has its advantages, which may be selected in accordance with the intended application. For example, the embodiment using the stent or using the spring known from WO 02/13682, possesses greater torsion rigidity in comparison with the embodiment using an internal spring.

The embodiment in which the construction element is a power cable, may advantageously be embodied with a camera mounted on the head 2, wherein the power cable, in a manner known to the person skilled in the art, serves to feed the camera and wherein said same cable or more additional power cables can be used for the transport of image data. It is also possible to use glass fibres, which are preferably applied in a ring around the power cable for conducting light for the image data to be recorded with the camera. The person skilled in the art is quite familiar with the manner in which this is to be accomplished, so that there is no need for further explanation.

With regard to the directability of the head 2, the working principle of the instrument 1 according to the invention may be explained quite simply by referring to the Figs. 2a and 2b.

It is, for example, possible to fasten a miniature camera to the head 2, with a feed cable for the camera and glass fibres for the conduction of light through the interior of the interior spring 8. The cables 6 of the ring of cables 5 are fixed with a fastening 9, which at the head side surrounds the interior ring 10 discussed with reference to Fig. 1b and the exterior ring 11. A similar construction is provided at the side of the handgrip 4. The fastening 9 is at the side of the handgrip 4 slidably accommodated therein.

The illustrated instrument 1 comprises four helical springs, i.e. a compression spring 17 directly behind the head 2, a draw spring 18 between shaft 3 and handgrip 4, a compensation spring 19 accommodated in the handgrip 4 and an interior spring 8 extending over the total length of the instrument 1. It should be noted that in the (straight) shaft 3, the interior spring 8 may be substituted by a tube.

The springs have the following functions:

- The draw spring 18 is embodied as closed draw spring so that the same is relatively rigid with respect to movements other than the desired bending movement. Along a portion of the circumference, the draw spring 18 is preferably glued to the shaft 3 or the handgrip 4, respectively, in

order to increase the torsion rigidity of the construction.

- The interior spring 8 is a weak spring whose function is to keep the cables 6 of the ring of cables 5 in position.

5 - The function of the compensation spring 19 is to in the straight condition compress the spring 17 positioned behind the head 2 until the same is closed. To this end the compensation spring 19 is slightly heavier than the compression spring 17.

10 The instrument 1 works as follows: bending the handgrip 4 causes the portion of the lower cables 6 of the ring of cables 5 indicated with arrow A to elongate. Because the portion of said cables 6 indicated with arrow B is unable to shorten due to the spring 17 being in the straight condition 15 completely closed, the cables 6 in the portion of cables 6 indicated with C are caused to shorten. This makes the fastening rings 9 in the handgrip 4 move in the direction of the distal end while the upper cables 6 are paid out to give the compression spring 17 room to bend over a same angle as draw 20 spring 18 does as a result of the handgrip 4 being moved.

Fig. 3 finally shows a schematic illustration of an embodiment of the medical instrument 1 according to the invention, wherein the compensation spring 19 shown in Figs. 2a and 2b in the handgrip 4 is omitted. When the handgrip 4 is 25 being moved, the necessary length of the cables 6 must then be made available through compression of the spring 17 located behind the head 2, to which end the spring 17 must not be closed in the straight condition.

The study that resulted in the present invention was made possible by a grant from the Royal Dutch Academy of Sciences.

CLAIMS

1. An instrument (1) for high-precision or surgical applications of a minimally invasive nature, comprising a distally positioned directable head (2), a shaft (3) upon which the head (2) is positioned, and a proximal end (4) equipped for operating the head (2), wherein a ring of cables (5) comprising longitudinally extending cables (6) connects to the head (2), which cables are fixedly secured in the radial direction, **characterised** in that each cable (6) of the ring of cables (5) is disposed such that at least a part of both sides is in direct contact with another cable (6) of the ring of cables (5).

2. An instrument according to claim 1, **characterised** in that the ring of cables (5) is designed for mechanically coupling the head (2) to the handgrip (4).

3. An instrument according to claim 2, **characterised** in that the ends of at least some of the cables (6) of the ring of cables (5) possess a fastening to the head (2) and to the proximal end (4).

4. An instrument according to claim 3, **characterised** in that the fastening (9) is embodied as an interior ring (10) and an exterior ring (11), which together delimit a slot (12) for clampingly receiving the cables.

5. An instrument according to one of the claims 1-4, **characterised** in that the ring of cables (5) is enclosed by an exterior spring (7) lying against the cables (6) of the ring of cables (5).

6. An instrument according to one of the claims 1-5, **characterised** in that the ring of cables (5) is provided at its exterior side with a construction element selected from the group comprising glass fibres, cables, power cables, power cables surrounded by glass fibres, an optionally torsion-stiff tube or tubes, optionally with lateral scoring and optionally stranded, a bellows, a stent and a spring as specified in WO 02/13682.

7. An instrument according to one of the claims 1-

6, **characterised** in that the ring of cables (5) is provided at its interior side with an interior spring (8) lying against the cables (6) of the ring of cables (5).

8. An instrument according to one of the claims 1-
5 7, **characterised** in that the ring of cables (5) is provided at its interior side with a construction element that is selected from the group comprising a bundle of glass fibres, a cable, power cables, a power cable surrounded by a ring of glass fibres, an optionally torsion-stiff tube or tubes, optionally with lateral scoring and optionally stranded, bellows, a stent and a spring as specified in WO 02/13682.

9. An instrument according to one of the claims 1-6 and 8, **characterised** in that the construction element lies against the cables (6) of the ring of cables (5).

10 15 10. An instrument according to claim 8 or 9 wherein the construction element is a cable, **characterised** in that on the head a grab jaw, scissors or clipping tongs are mounted and the cable is embodied as control cable therefor.

11. An instrument according to claim 8 or 9 wherein 20 the construction element comprises at least one power cable, **characterised** in that a camera is mounted on the head and that the power cable serves for the power supply of the camera and/or for transporting image data obtained with the camera.

25 12. An instrument according to one of the preceding claims, **characterised** in that the same is selected from the group comprising laparoscope, thoracoscope, colonoscope, gastroscope, bronchoscope, endoscope, catheter, surgical drill, uretheroscope, laryngoscope, cystoscope, guidable endoscope, 30 guidable drill, gripping tongs, clipping tongs, scissors, coagulation hook, and generally instruments for ear, nose and throat surgery, eye surgery, neurosurgery and brain surgery.

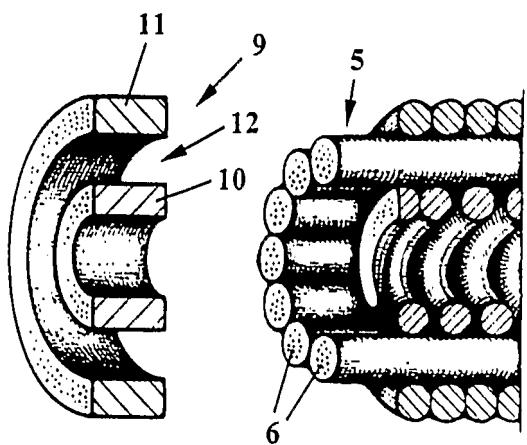


FIG. 1B

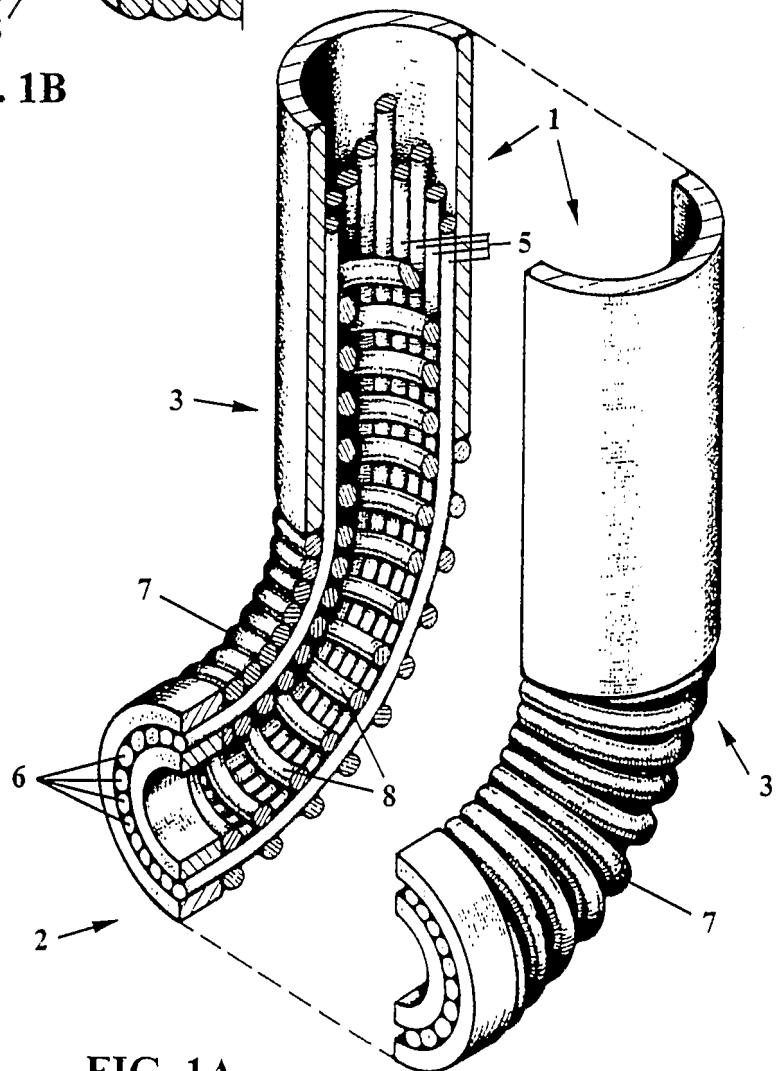


FIG. 1A

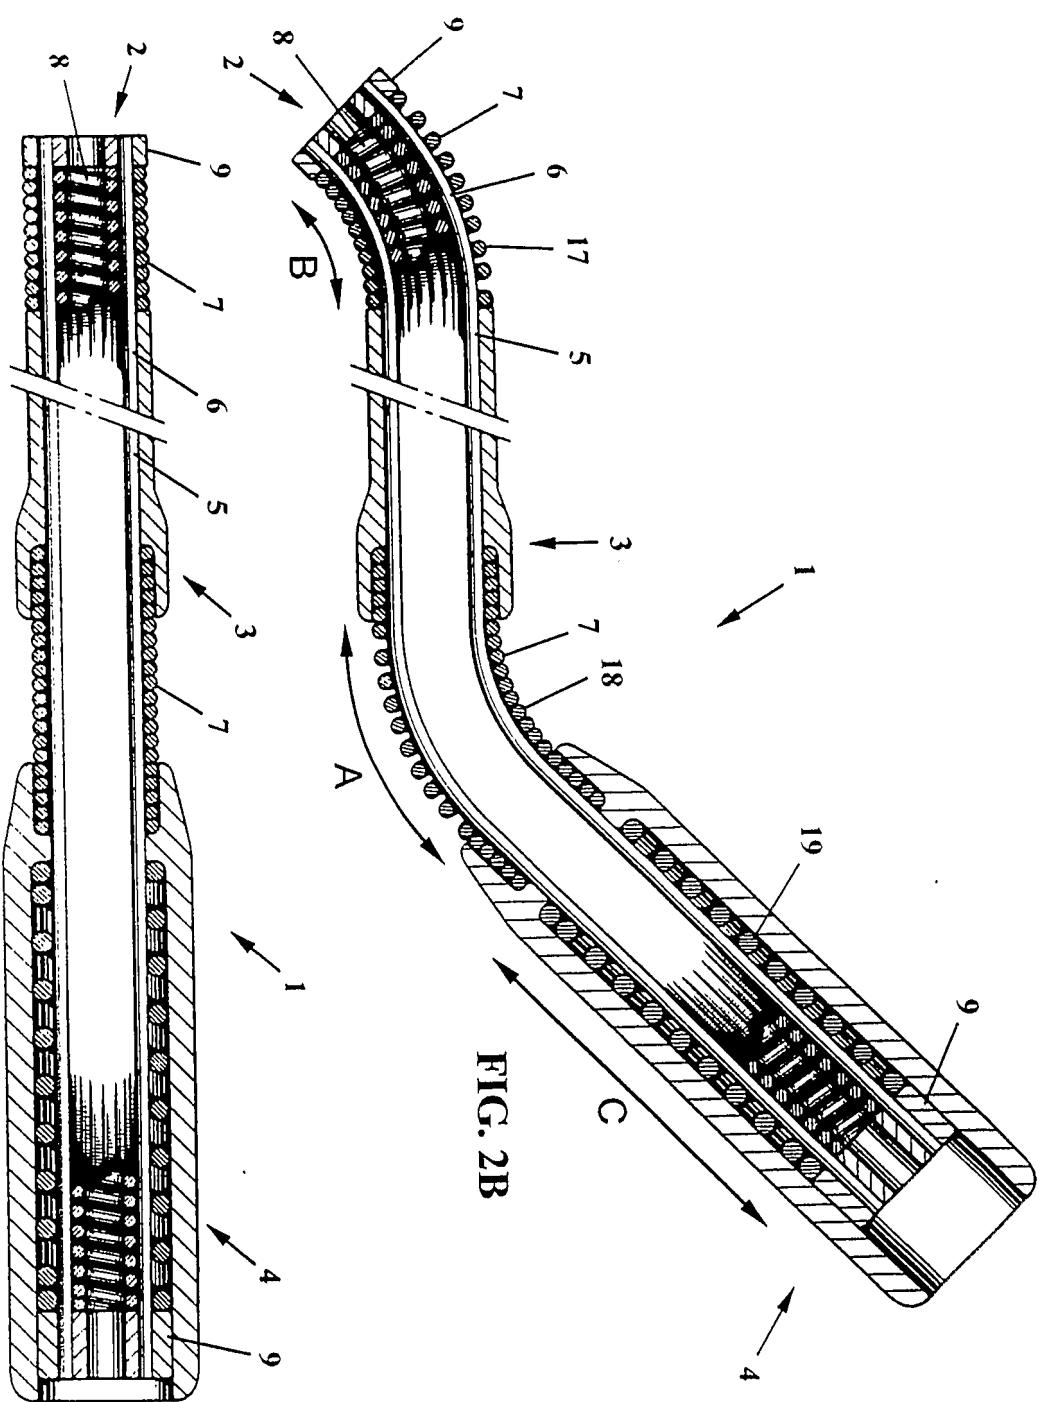


FIG. 2A

FIG. 2B

C

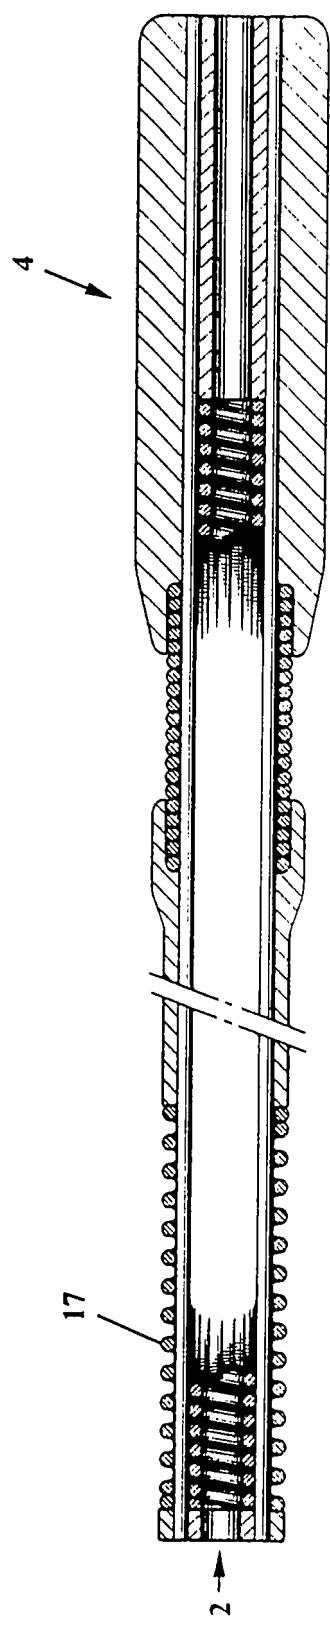


FIG. 3

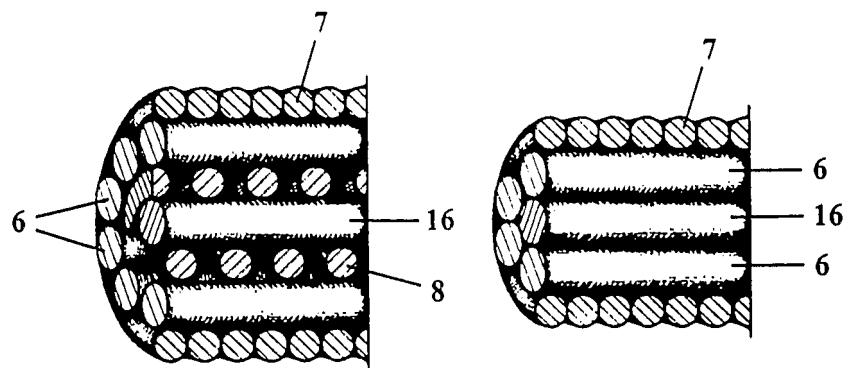


FIG. 4

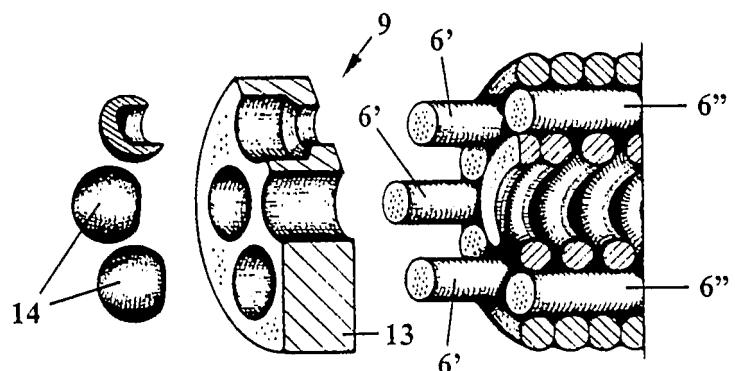


FIG. 5A

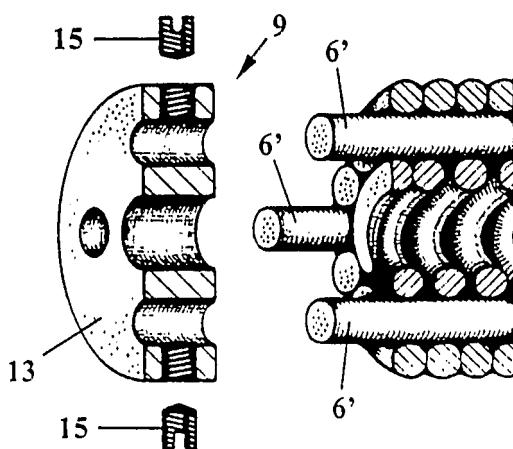


FIG. 5B

INTERNATIONAL SEARCH REPORT

Inte	Application No
PCT/NL2005/000001	

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 A61B1/005 A61B17/28 A61M25/01

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 A61B A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/177750 A1 (PILVISTO TONIS) 28 November 2002 (2002-11-28) paragraph '0031! - paragraph '0036! paragraph '0042!; figures 1-3 -----	1
A	WO 02/13682 A (HIROSE SHIGEO ; BREEDVELD PAUL (NL); UNIV DELFT TECH (NL)) 21 February 2002 (2002-02-21) cited in the application abstract; figures 1-5 -----	1
A	US 4 149 391 A (DRIVER W B) 17 April 1979 (1979-04-17) abstract; figure 1 -----	1
A	DE 28 20 239 A (OLYMPUS OPTICAL CO) 16 November 1978 (1978-11-16) page 12, paragraph 3; figure 11 -----	1
	-/-	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

- *T* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

14 April 2005

Date of mailing of the international search report

22/04/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl
Fax: (+31-70) 340-3016

Authorized officer

Moers, R

INTERNATIONAL SEARCH REPORT

Inter Application No
PCT/NL2005/000001

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 93/23111 A (APPLIED MED RESOURCES) 25 November 1993 (1993-11-25) abstract; figure 4 -----	1
A	US 5 372 587 A (HAMMERSLAG GARY R ET AL) 13 December 1994 (1994-12-13) abstract; figures 9,24 -----	1
A	US 3 498 286 A (KOESTER CHARLES J ET AL) 3 March 1970 (1970-03-03) abstract; figures 3-7 -----	1

INTERNATIONAL SEARCH REPORT

 Inter. Application No.
 PCT/NL2005/000001

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 2002177750	A1	28-11-2002	DE EP	10100533 A1 1224904 A2		18-07-2002 24-07-2002
WO 0213682	A	21-02-2002	NL NL AU WO	1015783 C2 1018282 C1 8267701 A 0213682 A1		25-01-2002 25-01-2002 25-02-2002 21-02-2002
US 4149391	A	17-04-1979	US	4031713 A		28-06-1977
DE 2820239	A	16-11-1978	JP DE	53139390 A 2820239 A1		05-12-1978 16-11-1978
WO 9323111	A	25-11-1993	WO	9323111 A1		25-11-1993
US 5372587	A	13-12-1994	US US US US US WO US AU EP JP US WO AU WO AT AU AU CA DE DE EP ES JP WO US	5203772 A 5108368 A 4998916 A 4921482 A 5378234 A 9421318 A1 5480382 A 3942393 A 0636039 A1 7505554 T 5308324 A 9320883 A1 8723191 A 9204933 A1 123659 T 642400 B2 4941290 A 2045523 A1 69020140 D1 69020140 T2 0452402 A1 2075194 T3 4504368 T 9007355 A1 5037391 A		20-04-1993 28-04-1992 12-03-1991 01-05-1990 03-01-1995 29-09-1994 02-01-1996 18-11-1993 01-02-1995 22-06-1995 03-05-1994 28-10-1993 15-04-1992 02-04-1992 15-06-1995 21-10-1993 01-08-1990 10-07-1990 20-07-1995 08-02-1996 23-10-1991 01-10-1995 06-08-1992 12-07-1990 06-08-1991
US 3498286	A	03-03-1970	DE	1566045 A1		30-04-1970

专利名称(译)	用于精细机械或手术应用的仪器		
公开(公告)号	EP1708609A1	公开(公告)日	2006-10-11
申请号	EP2005704532	申请日	2005-01-05
[标]申请(专利权)人(译)	代尔夫特理工大学		
申请(专利权)人(译)	TECHNISCHE UNIVERSITEIT DELFT		
当前申请(专利权)人(译)	TECHNISCHE UNIVERSITEIT DELFT		
[标]发明人	BREEDVELD PAUL SCHELTES JULES SERGE		
发明人	BREEDVELD, PAUL SCHELTES, JULES, SERGE		
IPC分类号	A61B1/005 A61B17/28 A61M25/01 A61B1/05 A61B17/00 A61M25/00		
CPC分类号	A61B1/0055 A61B1/05 A61B17/29 A61B2017/003 A61B2017/00305 A61B2017/2905 A61B2017/291 A61M25/0054		
优先权	1025274 2004-01-16 NL		
其他公开文献	EP1708609B1		
外部链接	Espacenet		

摘要(译)

本发明涉及一种用于微创性质的高精度或外科应用的器械，包括远侧定位的可定向头部，头部定位在其上的轴，以及用于操作头部的近侧定位手柄，其中一个电缆环包括纵向延伸的电缆连接到头部，其中电缆环的每根电缆设置成使得两侧的至少一部分与电缆环的另一电缆直接接触，
并且其中电缆固定地固定在电缆环中。径向。