

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
30 July 2009 (30.07.2009)

PCT

(10) International Publication Number
WO 2009/094644 A1

(51) International Patent Classification:

A61M 5/178 (2006.01)

John, R. [US/US]; 34056 Formosa Drive, Dona Point, CA 92629 (US).

(21) International Application Number:

PCT/US2009/032026

(74) Agent: HO, Pui, Tong; 22872 Avenida Empresa, Rancho Santa Margarita, CA 92688 (US).

(22) International Filing Date: 26 January 2009 (26.01.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/023,539 25 January 2008 (25.01.2008) US

(71) Applicant (for all designated States except US): APPLIED MEDICAL RESOURCES CORPORATION [US/US]; 22872 Avenida Empresa, Rancho Santa Margarita, CA 92688 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): ALBRECHT, Jeremy, J. [US/US]; 20 Half Moon Trail, Ladera Ranch, CA 92694 (US). JOHNSON, Gary, M. [US/US]; 24662 Canela, Mission Viejo, CA 92692 (US). BRUSTAD,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: INSUFFFLATING ACCESS SYSTEM

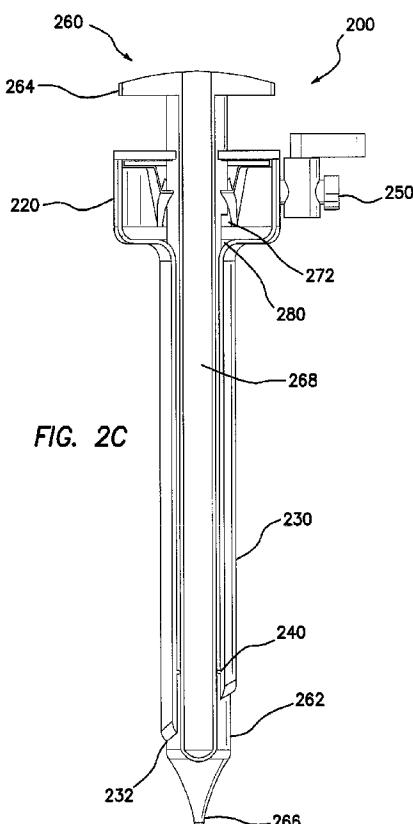

(57) Abstract: Systems, devices, and methods permit insufflation of a body cavity prior to the insertion of a cannula into the body cavity. Some embodiments of an access system comprise an obturator, a trocar, and a fluid flow channel. The access system has a closed configuration, in which a distal end of the access system is fluidly isolated from the fluid flow channel, and an open configuration, in which the distal end of the access system is fluidly connected to the fluid flow channel, thereby permitting fluid flow, for example, an insufflation gas into a body cavity.



FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, **Published:**
MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ,
CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN,
TD, TG). — *with international search report*

INSUFFLATING ACCESS SYSTEM

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of U.S. Application No. 61/023,539, filed January 25, 2008, the disclosure of which is incorporated by reference.

BACKGROUND

Technical Field

[0002] This application is generally directed to surgical instruments, and more particularly, to a first entry, insufflating access system.

Description of the Related Art

[0003] In laparoscopic procedures in which a patient's abdomen is insufflated or inflated with gas, placing a device through which the abdomen is insufflated, also referred to as a first entry device, is often problematic. Because the peritoneum directly contacts the organ bed, a device puncturing the peritoneum can also damage the underlying organ bed. Placing subsequent devices is less dangerous because the insufflating the abdomen lifts the peritoneum above a gas-fill space or cavity above the organ bed, thereby reducing the risk of inadvertent damage thereto.

[0004] Several techniques are used to achieve pneumoperitoneum in laparoscopic surgery. A first technique uses a Veress needle, which is a sharp needle placed blindly through the abdominal wall into the abdominal cavity. An insufflation gas, for example, CO₂, is then pumped through the hollow Veress needle and into the abdominal cavity, thereby insufflating the peritoneal cavity. The Veress needle technique, also known as a controlled stab, is capable of damaging organs such as the intestinal tract. The technique provides little or no feedback to the surgeon that any damage to an anatomic structure has occurred.

[0005] A second technique is known as the Hassan technique in which a surgeon performs a mini-laparotomy through the abdominal layers into the abdominal cavity, through which a trocar is inserted and the abdomen insufflated. The Hassan technique is a cut-down technique that results in larger abdominal defects and increased patient scarring. The technique is also difficult to perform on obese patients with very thick abdominal walls.

[0006] In a third technique, the surgeon places a trocar optically, visualizing the abdominal layers as the trocar is placed through the abdominal wall through a laparoscope disposed within the obturator of the trocar. The tip of the obturator can penetrate about 2 cm (about 0.75") into the organ bed of the abdominal cavity when placing the cannula and establishing pneumoperitoneum.

[0007] In a fourth technique, the abdominal layers are visualized while the trocar is advanced though the abdominal wall. As soon as the tip of the obturator punctures the peritoneum, gas is pumped through the trocar system into the abdominal cavity through vent holes disposed at the tip of the obturator. The fourth technique uses a vacuum release, which causes the organs to fall away from the abdominal wall, thereby creating a space in the abdominal cavity for the obturator tip. Accordingly, the abdominal cavity can be inflated with minimal penetration into the space. As soon as the tip of the obturator punctures the peritoneum, gas enters the abdominal cavity through the vent holes in the tip of the obturator, thereby reducing the negative pressure caused by the surgeon's lifting of the abdominal wall, and in turn, creating a space above the organ bed into which the trocar system is fully inserted into the cavity. A seal is disposed within the obturator that provides a gas tight seal both with and without the laparoscope in place. The vent holes at the tip of the obturator allow moisture and tissue to enter the obturator, however, which obscure the field of view within the obturator tip. Gas flowing directly past the laparoscope within the obturator can cool the laparoscope, thereby fogging of the lens thereof.

SUMMARY OF THE INVENTION

[0008] Systems, devices, and methods permit insufflation of a body cavity prior to the insertion of a cannula into the body cavity. Some embodiments of an access system comprise an obturator, a trocar, and a fluid flow channel. The access system has a closed configuration, in which a distal end of the access system is fluidly isolated from the fluid flow channel, and an open configuration, in which the distal end of the access system is fluidly connected to the fluid flow channel, thereby permitting fluid flow, for example, an insufflation gas into a body cavity.

[0009] Accordingly, some embodiments provide an insufflating surgical access system and a method for insufflating a body cavity using the insufflating surgical access

system. Some embodiments of the insufflating surgical access system comprise: a trocar comprising: a proximal end and a distal end; a trocar seal assembly disposed at the proximal end of the trocar, the trocar seal assembly comprising an instrument seal; an elongate cannula disposed at the distal end of the trocar, the cannula comprising a tubular wall defining a lumen, an open proximal end, and an open distal end; an access channel defining a longitudinal axis, extending through the trocar seal assembly and the lumen of the cannula, from the proximal end of the trocar to the distal end of the trocar; a fluid port disposed at the proximal end of the trocar; and a fluid flow seal disposed in the access channel; an obturator comprising: an elongate body comprising a proximal end and a distal end; a tissue penetrating tip disposed at the distal end; and a handle disposed at the proximal end, wherein the obturator is slidably insertable into the proximal end of the access channel, and the tip of the obturator extends out of the distal, open end of the cannula when fully inserted therethrough; and a fluid flow channel fluidly connected to the fluid port of the trocar, and extending to a distal end of the insufflating access system. The obturator in the access channel has a closed position, in which the body of the obturator sealing contacts the fluid flow seal, thereby preventing gas flow through the fluid flow channel, and an open position, in which the body of the obturator does not sealing contact the fluid flow seal, thereby allowing fluid flow through the fluid flow channel.

[0010] In some embodiments, the trocar seal assembly further comprises a zero seal.

[0011] In some embodiments, the distal end of the cannula comprises an angled tip.

[0012] In some embodiments, the fluid port is disposed on the trocar seal assembly.

[0013] In some embodiments, the fluid flow seal is integrated with a cannula tip disposed at the distal end of the cannula. In some embodiments, the fluid flow seal is disposed proximal of the distal end of the cannula. In some embodiments, the fluid flow seal is substantially perpendicular to the longitudinal axis of the axis channel. In some embodiments, the fluid flow seal is not perpendicular to the longitudinal axis of the axis channel.

[0014] In some embodiments, the obturator further comprises an instrument well open at a proximal end of the obturator, extending longitudinally through the body of the obturator, terminating at the tip of the obturator, and dimensioned to receive a laparoscope therein, wherein at least a portion of the tip of the obturator is transparent. Some embodiments further comprise a laparoscope.

[0015] In some embodiments, the fluid flow channel comprises a space defined by the lumen of the cannula and the body of the obturator. In some embodiments, the fluid flow channel comprises an instrument well disposed in the body of the obturator. In some embodiments, the fluid flow channel comprises at least one proximal opening and at least one distal opening disposed in the body of the obturator. In some embodiments, the fluid flow channel comprises a slot disposed in the body of the obturator.

[0016] In some embodiments, in the closed position, the obturator is displaced distally in the access channel compared with the open position. In some embodiments, in the closed position, the obturator is displaced proximally in the access channel compared with the open position. In some embodiments, in the closed position, the obturator is rotated in the access channel compared with the open position.

[0017] Some embodiments of the method for insufflating a body cavity comprise: positioning the obturator in the closed position; fluidly connecting the fluid port with a source of insufflation gas; positioning the tissue penetrating tip at a desired position; advancing the tissue penetrating tip through a body wall until the tip enters a body cavity; and positioning the obturator in the open position, fluidly connecting the fluid port with the body cavity through the fluid flow channel, thereby insufflating the body cavity.

[0018] Some embodiments further comprise visually monitoring the position of the penetrating tip through a laparoscope.

[0019] Some embodiments provide an insufflating surgical access system comprising: a trocar comprising: a proximal end and a distal end; a trocar seal assembly disposed at the proximal end of the trocar, the trocar seal assembly comprising an instrument seal; an elongate cannula disposed at the distal end of the trocar, the cannula comprising a tubular wall defining a lumen, an open proximal end, and an open distal end; an access channel defining a longitudinal axis, extending through the trocar seal assembly and the

lumen of the cannula, from the proximal end of the trocar to the distal end of the trocar; a fluid port disposed at the proximal end of the trocar; an obturator comprising: an elongate body comprising a proximal end and a distal end; a tissue penetrating tip disposed at the distal end; and a handle disposed at the proximal end, wherein the obturator is slidably insertable into the proximal end of the access channel, and the tip of the obturator extends out of the distal, open end of the cannula when fully inserted therethrough; and a gas flow channel fluidly connected to the fluid port of the trocar, and extending to a distal end of the insufflating access system; and means for modulating gas flow through the gas flow channel.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] FIG. 1A is a perspective view of an embodiment of an insufflating access system. FIG. 1B is a perspective cutaway view of a trocar of the insufflating access system illustrated in FIG. 1A. FIG. 1C is a side cutaway view of the trocar illustrated in FIG. 1B. FIG. 1D is a side cutaway view of the insufflating access system illustrated in FIG. 1A in the closed configuration. FIG. 1E is a side cross-sectional view of the insufflating access system illustrated in FIG. 1A in a closed configuration. FIG. 1F is a cross-sectional view of the insufflating access system illustrated in FIG. 1A in an open configuration.

[0021] FIG. 2A is a perspective view of another embodiment of an insufflating access system. FIG. 2B is a perspective view of an embodiment of an obturator from the insufflating access system illustrated in FIG. 2A. FIG. 2C is a side cutaway view of an embodiment of the insufflating access system illustrated in FIG. 2A in a closed configuration. FIG. 2D is a side cutaway view of the embodiment of the insufflating access system illustrated in FIG. 2C in an open configuration.

[0022] FIG. 3A is a perspective view of another embodiment of an insufflating access system in an open configuration. FIG. 3B is a side cross section of the insufflating access system illustrated in FIG. 3A in a closed configuration. FIG. 3C is a side see-through view of another embodiment of an insufflating access system in an open configuration.

[0023] FIG. 4A is a side cross section of another embodiment of an insufflating access system in a closed configuration. FIG. 4B is a side cross section of the insufflating access system illustrated in FIG. 4A in an open configuration. FIG. 4C is a perspective view

of an embodiment of an obturator of the insufflating access system illustrated in FIGS. 4A and 4B.

[0024] FIG. 5A–5C schematically illustrate an embodiment of a method for placing the embodiment of the access device illustrated in FIGS. 1A–1F.

DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

[0025] FIG. 1A is a perspective view of an embodiment of an insufflating access system 100 comprising a trocar 110 and an obturator 160 slidably insertable into the trocar 110. The insufflating access system 100 also comprises a fluid flow channel, which is discussed in greater detail below. The trocar 110 and obturator 160 comprise suitable biologically compatible materials.

[0026] FIG. 1B is a perspective cutaway view and FIG. 1C is a partial side cross section of the trocar 110. The trocar 110 comprises a proximal end 112 and a distal end 114. A trocar seal assembly 120 is disposed at the proximal end 112 of the trocar, and an elongate cannula 130 extends from the trocar seal assembly 120 and is disposed at the distal end 114 of the trocar. An access channel 116 extends through the trocar seal assembly 120 and the cannula 130, from the proximal end 112 to the distal end 114 of the trocar. The access channel 116 defines a longitudinal axis. In some embodiments, the trocar seal assembly 120 and the cannula 130 are integrated, while in other embodiments, the trocar seal assembly 120 and the cannula 130 are separate components, and in some embodiments, releasably coupled.

[0027] In the illustrated embodiment, the trocar seal assembly 120 comprises a first seal 122 and a second seal 124 disposed on the access channel 116 within a trocar seal housing 126. The first seal 122 is an instrument seal, which forms a substantially fluid tight seal with an instrument extending therethrough, thereby preventing fluid from escaping from the proximal end 112 of the trocar. In some embodiments, the first seal 122 comprises a septum seal. The second seal 124 is a zero seal, which forms a fluid tight seal with no instrument extending therethrough, preventing fluid from escaping from the proximal end 112 of the trocar. In some embodiments, the second seal 124 comprises a duckbill valve, a double duckbill valve, and/or a flap valve. The second seal 124 is optional in some embodiments. For example, in some embodiments, the first seal 122 provides both an

instrument seal and a zero seal, for example, a valve comprising a gel material. Other embodiments do not comprise a zero seal. In some embodiments, the first seal 122 and the second seal 124 comprise an elastomer, for example rubber, synthetic rubber, silicone, ethylene propylene diene monomer (EPDM), ethylene-propylene copolymer (EP rubber), polyisoprene, polybutadiene, polyurethane, styrene-butadiene, ethylene vinyl acetate (EVA), polychloroprene (Neoprene®), perfluorelastomer (Kalrez®), and the like.

[0028] The cannula 130 comprises a proximal end, at which the trocar seal assembly 120 is disposed, and a distal end terminating in a tip 132. In the illustrated embodiment, the tip 132 of the cannula is angled with a beveled edge. The angled tip 132 facilitates insertion through tissue. In other embodiments, the tip 132 is not angled. The cannula 130 comprises a hollow tube open at the proximal and the distal ends. The hollow tube defines a lumen 134, through which the access channel 116 extends. One or more optional vents 136 perforate the cannula 130 at or near the distal end thereof. In the illustrated embodiment, the cannula 130 has a generally circular cross section, although those skilled in the art will understand that other embodiments have other suitable cross sections, for example, oval, elliptical, diamond, square, polygonal, and the like.

[0029] A fluid flow seal 140 is disposed within the lumen of the cannula 130, on an inner wall of the hollow tube. The fluid flow seal 140 is positioned, dimensioned, and configured for sealing contacting the body 162 of the obturator, as discussed in greater detail below. In the illustrated embodiment, the fluid flow seal 140 is disposed near the tip 132 or distal end of the cannula. The fluid flow seal 140 is substantially normal or perpendicular to the longitudinal axis of the trocar 110, and consequently, is generally circular in the illustrated embodiment. In other embodiments, the fluid flow seal 140 is disposed at another location. For example, in some embodiments, the fluid flow seal 140 is disposed at or integrated with the tip 132 of the cannula, or spaced adjacent to or just slightly inward from the tip 132 at the distal-most end. In some of these embodiments in which the tip 132 is not perpendicular to the longitudinal axis of the trocar 110, the fluid flow seal 140 also subtends a non-normal angle with the longitudinal axis, and consequently, is elliptical or oval rather than circular. In some embodiments, the fluid flow seal 140 and the tip 132 subtend about the same angle with the longitudinal axis, while in other embodiments, the fluid flow seal 140

and the tip **132** subtend different angles with the longitudinal axis. Some embodiments of the fluid flow seal **140** comprise a plurality of sub-seals, which are disposed at about the same location in some embodiments, and disposed in a plurality of locations in other embodiments. The fluid flow seal **140** comprises a suitable elastomer for example, at least one of rubber, synthetic rubber, silicone, ethylene propylene diene monomer (EPDM), ethylene-propylene copolymer (EP rubber), polyisoprene, polybutadiene, polyurethane, styrene-butadiene, ethylene vinyl acetate (EVA), polychloroprene (Neoprene®), perfluorelastomer (Kalrez®), and the like.

[0030] A fluid port **150** is disposed on the housing **126** of the trocar seal assembly, fluidly connected with the access channel **116** distal of the first **122** and second **124** seals. The fluid port **150** comprises a stopcock in the illustrated embodiment, and terminates in a fitting that permits coupling to a fluid and/or suction source, for example, a Luer fitting. In other embodiments, the fluid port **150** has another location, for example, on the cannula **130** or the obturator **160**. Embodiments of the fluid port **150** are useful for introducing and/or venting an insufflation gas, for example, carbon dioxide, therethrough. Other fluids are introduced and/or vented in other embodiments.

[0031] The trocar **110** is typically manufactured in a range of sizes to accommodate instruments of different diameters, for example, up to about 5 mm, up to about 8 mm, up to about 11 mm, up to about 12 mm, or up to about 15 mm. Embodiments of the trocar **110** have working cannula lengths of about 55 mm, about 75 mm, about 100 mm, or about 150 mm.

[0032] As best seen in FIG. 1D, which is a side cutaway view of the insufflating access system **100**, the obturator **160** comprises an elongate body **162** comprising a proximal end terminating in a handle **164** and a distal end terminating in a tissue penetrating tip **166**. A diameter of the tip **166** converges from a proximal end to a distal end thereof. The body **162** and tip **166** of obturator is slidably insertable into and removable from the access channel **116** through the proximal end of the trocar **110**. In a fully inserted configuration, the tip **166** of the obturator extends out of the distal end or tip **132** of the cannula **130**. The first seal **122** of the trocar seal assembly forms an instrument seal with the body **162** of the cannula, thereby substantially preventing fluid leaking from the proximal end of the access channel **116**. In the

illustrated embodiment, the body 162 comprises a hollow, instrument well 168, which is open at the handle 162 at the proximal end of the obturator, and which extends to the tip 166 of the obturator. The instrument well 168 is dimensioned to receive a laparoscope through the proximal opening thereof. When fully inserted, an end of the laparoscope extends through the body 162 of the obturator into or proximal to the tip 166. In the illustrated embodiment, the tip 166 comprises at least a transparent or windowed portion through which the laparoscope images tissue proximal to the tip 166, for example, for monitoring the position of the tip 166 during the insertion of the access system 100 into a body cavity. Some embodiments of the tip 166 comprise markers or another type of visually enhancing or facilitating features, which assist in viewing the tissue and body cavity, and thus, traversal of the tip 166 through the body. In some embodiments, the laparoscope is fully inserted in the instrument well 168, thereby preventing or reducing fogging thereof. Accordingly, some embodiments comprise at least one of a distal laparoscope seal, membrane, or lock in that provides at least one of holding the laparoscope in a fully or nearly fully inserted position, preventing or reducing fogging, and preventing or reducing other types of interference of the viewing area of the laparoscope.

[0033] FIG. 1E is a side cross section of the insufflating access system 100 in a closed configuration and FIG. 1F is a side cross section of the insufflating access system 100 in an open configuration. The lumen 134 of the cannula and the body 162 of the obturator together define a fluid flow channel 180 therebetween, which extends longitudinally in the access channel 116. A proximal end 182 of the fluid flow channel is fluidly connected to the fluid port 150. A distal end 184 of the fluid flow channel extends to the distal end of the access system 100, which in the illustrated embodiment, comprises the tip 132 of the cannula. In the illustrated embodiment, the lumen 134 of the cannula and the body 162 of the obturator are both generally circular and define a fluid flow channel 180 with a generally annular cross section. In other embodiments, cross-sectional shapes of the lumen 134 of the cannula and the body 162 of the obturator are different from each other, and the cross section of the fluid flow channel 180 has another shape.

[0034] A size of a space or gap between the tip 166 of the obturator and the tip 132 of the cannula is selected to prevent or reduce coring of tissue as the access system is

advanced. In some embodiments, the gap between the tip **166** of the obturator and the tip **132** of the cannula provides sufficient gas flow for insufflation, which is discussed in greater detail below. In some embodiments, a gap between the body **162** of the obturator and the lumen **134** of the cannula is not uniform longitudinally, for example, wider at the proximal end **112** and narrower at the distal end **116**.

[0035] In the closed configuration illustrated in FIG. 1E, the tip **166** of the obturator extends from the tip **132** of the cannula in a configuration suitable for inserting the access system **100** through a body wall and into a body cavity. The position of the obturator **160** in this configuration is referred to as a closed position. In the closed configuration, the fluid flow seal **140** sealing contacts the body **162** of the obturator, thereby cooperating therewith to prevent fluid flow through the fluid flow channel **180**, from the fluid port **150**, and out through the tip **132** of the cannula. Accordingly, the fluid port **150** is not fluidly connected with the distal end of the fluid flow channel **184**.

[0036] In the open configuration illustrated in FIG. 1F, the obturator **160** is partially withdrawn from access channel **116**, that is translated proximally along the longitudinal axis compared with the configuration illustrated in FIG. 1E. The position of the obturator **160** in this configuration is referred to as an open position. In the illustrated embodiment, the body **162** of the obturator is proximal of the fluid flow seal **140**, and consequently, does not make contact and form a seal therewith. Accordingly, in the open configuration, the distal end **184** of the fluid flow channel is fluidly connected with the fluid port **150**. In some embodiments, the fluid flow seal **140** contacts a portion of the body **162** of the obturator in the open configuration, but does not sealing contact therewith. For example, in some embodiments, at least one of the fluid flow seal **140**, and a transition between the body **162** and tip **166** of obturator are not normal or perpendicular to the longitudinal axis. In some of these embodiments, in some positions of the obturator **160** in the access channel, the body **162** of the obturator contacts only a portion of the fluid flow seal **140** rather than the entire sealing surface thereof, and consequently, does not form a seal therewith.

[0037] Some embodiments of the access system **100** comprise an indicator of the configuration thereof. For example, some embodiments comprise indicia on the obturator **160** and/or the trocar **110** that indicate the position of the obturator **160** in the open and/or closed

position. Some embodiments comprise an audio and/or visual indicator of fluid flow through the fluid flow channel **180** and/or fluid port **150**, for example, a spinning disk, a spinning ball, a lamp, a whistle, and/or an alarm.

[0038] Some embodiments comprise one or more mechanical features that indicate the state of and/or lock the access system **100** into at least one of the open configuration and the closed configuration, for example, detents, latches, stops, and the like.

[0039] FIG. **2A** is a perspective view of another embodiment of an insufflating access system **200** generally similar to the embodiment illustrated in FIGS. **1A–1F**, comprising a trocar **210**, an obturator **260** inserted in the trocar **210**, and a laparoscope **290** inserted into the obturator **260**. FIG. **2B** is a perspective view of an embodiment of the obturator **260**, which is similar to the embodiment of the obturator **160** described above, and comprises an elongate body **262**, a handle **264** disposed at the proximal end, a tip **266** disposed at the distal end, and an instrument well **268** extending longitudinally from an opening in the handle **264** at the proximal end of the obturator to the tip **266** at the distal end thereof.

[0040] The obturator **260** further comprises a slot **272** that extends longitudinally on the body **262** thereof. As will be apparent from the description below, the slot **272** incorporates the instrument well **268** into the fluid flow channel **280** in the illustrated embodiment. Because the fluid flow channel **280** comprising the instrument well **268** has a larger cross-sectional area compared with the fluid flow channel **180** of embodiment illustrated in FIGS. **1A–1F**, embodiments of the access system **200** exhibit increased fluid flow. A proximal end of the slot **272** is positioned such that the slot **272** does not interfere with the instrument seal between the body **262** and the trocar seal assembly **220** when the obturator **260** is in the open position or the closed position. A distal end of the slot **272** is positioned such that fluid does not flow from the slot **272** in the closed configuration, that is, the distal end of the slot **272** is fluidly isolated from the distal end of the access system **200**. The open configuration permits fluid flow from the distal end of the slot **272**, that is, the distal end of the slot **272** is fluidly connected to the distal end of the access system **200**. In the illustrated embodiment, the slot **272** perforates the body **262** of the obturator into the instrument well **268**. Accordingly, the illustrated embodiment comprises a seal between the

proximal end of the obturator **260** and the laparoscope **290**, thereby preventing or reducing fluid flow therefrom. The seal is disposed on at least one of the laparoscope **290** and the obturator **260**. In some embodiments, the slot **272** does not perforate the body **262** of the obturator, for example, comprising one or more longitudinal grooves disposed on an outer surface of the body **262**. The seal between the proximal end of the obturator **260** and the laparoscope **190** is optional in these embodiments. Some embodiments of the fluid flow channel **280** comprise one or more longitudinal grooves disposed on an inner wall of the cannula **230**.

[0041] FIG. **2C** is a side cutaway view of an embodiment of the insufflating access system illustrated in FIG. **2A** in a closed configuration. In the closed position, the obturator **260** is inserted into the access channel of the trocar **210** with the tip **266** extending from the tip **232** of the cannula in a tissue penetrating position. The proximal end of the slot **272** is disposed below the instrument seal of the seal assembly **220**, in fluid communication with the fluid port **250**. The distal end of the slot **272** is disposed proximal to the fluid channel seal **240**, which seals with the body **262** of the obturator, thereby fluidly isolating the slot **272** from the tip **232** of the cannula and the distal end of the access system **200**.

[0042] FIG. **2D** is a side cutaway view of the embodiment of the insufflating access system illustrated in FIG. **2C** in an open configuration in which the obturator **260** is advanced distally in the access channel, for example, using the handle **264**, thereby advancing the distal end of the slot **272** past the fluid channel seal **240**, and thereby releasing the seal between the body **262** of the obturator and the fluid channel seal **240**. In the illustrated embodiment, the slot **272** has about the same length as the cannula **230**, extending from about the position of the fluid inlet to past a proximal portion of the angled tip **232** of the cannula, with which the slot **272** is aligned. Accordingly, alignment of the distal end of the slot **272** with the proximal portion of the angled tip **232** exposes the distal end of the slot **272**, thereby providing a fluid flow channel **280** that permits insufflation gas to exit directly out the slot **272** and into the body cavity. In some embodiments, the obturator **260** and trocar **210** are keyed or otherwise configured to prevent rotation therebetween, thereby locking the slot **272** in the exposed condition when the access system **200** is in the open configuration. Those skilled in the art will understand that some embodiments in which the slot **272** is rotated

relative to the configuration illustrated in FIG. 2D such that the distal end of the slot 272 and the proximal portion of the angled tip 232 are not aligned, also permit fluid flow therethrough, but at reduced flow rates.

[0043] In other embodiments, the access system 200 has an open configuration, as illustrated in FIG. 2A, with a fluid flow seal 240 disposed in the cannula 230 at or near the angled tip 232 thereof. As discussed above, in some of these embodiments, the fluid flow seal 240 subtends the same or a similar angle as the tip 232. Rotating the obturator 260 positions the entirety of the slot 272 within the cannula 230, proximal of the fluid flow seal 240, thereby converts the open configuration to the closed configuration in which the distal end of the slot 272 is fluidly isolated from the distal end of the access system 200, and preventing fluid flow therefrom. In some of these embodiments, rotation of the handle 264 of the obturator is restricted such that the device 200 is in the open configuration at a first limit of the rotation and in a closed configuration at a second limit thereof.

[0044] FIG. 3A is a perspective view of another embodiment of an insufflating access system 300 in an open configuration. FIG. 3B is a side cross section of the insufflating access system 300 illustrated in FIG. 3A in a closed configuration. The embodiment of the access system 300 illustrated in FIGS. 3A and 3B is similar to the embodiments described above. Like the embodiment illustrated in FIGS. 2A–2D, a gas flow channel in the illustrated embodiment incorporates an instrument well, thereby increasing the cross sectional area thereof. The access system 300 comprises a trocar 310 and an obturator 360.

[0045] As best seen in FIG. 3B, the obturator 360 comprises at least one proximal opening 372 and at least one distal opening 374, both of which perforate the body 362 of the obturator into the instrument well 368. In the illustrated embodiment, the at least one proximal opening 372 and the at least one distal opening 374 are both generally circular or oval, but in other embodiments, independently have other suitable shapes.

[0046] A fluid flow seal 340 is disposed at or integrated with the cannula tip 332 in the illustrated embodiment, as described above. Some embodiments of the trocar 310 further comprise a second fluid flow seal, either in addition to or instead of the fluid flow seal 340. Some embodiments of the second fluid flow seal comprise a tubular member, disposed in the seal assembly 320, through which the obturator extends, wherein the tubular member

comprises at least one opening that is aligned with the at least one proximal opening 372 when the obturator is in an open position, thereby permitting fluid flow therethrough. The at least one opening in the tubular member is not aligned with the at least one proximal opening 372 when the obturator is in a closed position, thereby preventing fluid flow therethrough.

[0047] In the illustrated embodiment, the access system 300 is converted from the open configuration illustrated in FIG. 3A to the closed configuration illustrated in FIG. 3B by rotating the obturator 360, for example, using the handle 362. In the illustrated embodiment, the obturator 360 is rotated about 180° between the views illustrated in FIGS. 3A and 3B, although those skilled in the art will understand that other rotational angles are used in other embodiments. The particular rotational angle depends on factors including the size and shape of the distal opening 374, the location of the distal opening 374, the location of the fluid flow seal 340, the angle of the fluid flow seal 340. In the illustrated embodiment, fluid flows from the fluid port 350, into the proximal opening 372, into the instrument well 368, and out of the distal opening 374. In the illustrated embodiment, the distal opening 374 is exposed in the open configuration. In the closed configuration, the distal opening 374 is positioned proximal of the fluid flow seal 340, which forms a seal with a portion of the body 362 of the obturator distal of the distal opening 374, thereby preventing fluid flow therefrom.

[0048] FIG. 3C is a see-through view of another embodiment of an insufflating access system 300 in an open configuration. In the illustrated embodiment, the trocar 310 is similar to the embodiment illustrated in FIGS. 1A–1F in which the fluid flow seal 340 is disposed in the lumen 334 of the cannula proximal to the tip 332. In the illustrated embodiment, the access system 300 is converted from the illustrated open configuration to a closed configuration by withdrawing the obturator longitudinally toward the proximal end, thereby positioning the distal opening 374 proximal of the fluid flow seal 340. The fluid flow seal 340 seals with a portion of the body 362 of the obturator distal of the distal opening 374, thereby preventing fluid flow therefrom.

[0049] FIG. 4A is a side cross section of another embodiment of an insufflating access system 400 in a closed configuration. FIG. 4B is a side cross section of the insufflating access system 400 illustrated in FIG. 4A in an open configuration. The insufflating access system 400 is generally similar to the insufflating access systems described above, and

comprises a trocar 410 and an obturator 460. In the illustrated embodiment, the trocar 410 is generally similar to the embodiment illustrated in FIGS. 1A–1F and described above. The trocar 410 comprises a fluid flow seal 440 disposed in the lumen 434 of a cannula 430 thereof, proximal of the tip 432 of the cannula. In the illustrated embodiment, the fluid flow seal 440 is generally perpendicular to a longitudinal axis of the trocar 310.

[0050] As best seen in FIG. 4C, which is a perspective view of an embodiment of an obturator 460, the obturator 460 comprises a plurality of openings 472 disposed longitudinally and circumferentially on the body 462 of the obturator, which extend into the instrument well 468. The illustrated embodiment comprises a plurality of proximal openings 472a, a plurality of distal openings 472b, and a plurality of optional intermediate openings 472c.

[0051] In converting the access system 400 from the closed configuration illustrated in FIG. 1A to the open configuration illustrated in FIG. 4B, the obturator 460 is translated proximally along the longitudinal axis. In the closed configuration illustrated in FIG. 4A, the fluid flow seal 440 seals with a portion of the body 462 of the obturator distal of the distal openings 472b, thereby preventing fluid flow out of the tip 432 of the cannula at the distal end of access system 400. In the open configuration illustrated in FIG. 4B, because the body 462 of the obturator is proximal of the fluid flow seal 440, the body 462 and fluid flow seal 440 do not cooperate in forming a seal in the fluid flow channel 480. Accordingly, fluid flow is possible from the fluid port 450 into and through the fluid flow channel 480. In the illustrated embodiment, the fluid flow channel 480 comprises both the instrument well 468 and a space between the lumen 434 of the cannula and the body 462 of the obturator. As best seen in FIG. 4B, in the illustrated embodiment, the proximal openings 472a are disposed proximal to the cannula 430 within the trocar seal assembly 420, thereby increasing a cross sectional area around the proximal openings 472a and increasing fluid flow therethrough. Fluid continues flowing longitudinally towards the distal end of the access system 400 through both the instrument well 468 and the space between the lumen 434 of the cannula and the body 462 of the obturator. At the distal end of the obturator 460, fluid exits the instrument well 468 through the distal openings 472c and continues distally in the space

between the lumen 434 of the cannula and the body 462 of the obturator. The fluid exits the access system 400 through the tip 432.

[0052] Although embodiments of the insufflating access system are applicable to any endoscopic application using insufflation, a prototypical application is in laparoscopic procedures. Consequently, for purposes of illustration only, the following describes an embodiment of a method for inserting an endoscopic port or trocar of an insufflating access system, and establishing pneumoperitoneum in laparoscopic surgery with reference to the embodiment illustrated in FIGS. 1A–1F. Those skilled in the art will understand that the method is also applicable to other embodiments of the access system disclosed herein.

[0053] The obturator 160 is inserted into the trocar 110 and positioned in the closed configuration illustrated in FIG. 1E. A laparoscope is inserted into the instrument well 168 of the obturator and the laparoscope coupled with an imaging system, for example, a camera and a video monitor. The fluid port 150 is fluidly coupled to a source of pressurized insufflation gas.

[0054] The user positions the tissue penetrating tip 166 in an incision made at a desired location on the patient's abdomen 500 and advances the insufflating access system 100 through the abdominal wall 502 as illustrated schematically in FIG. 5A. The user monitors the position of the tip 166 through the laparoscope and imaging system. When the user observes the tip 166 penetrating the peritoneum 504, as illustrated in FIG. 5B, the user converts the access system 100 to the open configuration. In the illustrated embodiment, the user urges the obturator 160 proximally, for example, pulling on the handle 162 to convert the access system 100 to the open configuration illustrated in FIG. 1F. As discussed above, in some embodiments, the obturator 160 and/or trocar 110 comprise one or more marks or indicia that indicate the position of the obturator 160 in the open position. With the access system 100 in the open configuration, insufflation gas flows from the source of insufflation gas, into the fluid port 150, into the proximal end 182 of the fluid flow channel, longitudinally through the fluid flow channel 180, past the fluid flow seal 140, past the partially withdrawn tip 166 of the obturator, and out the tip 132 of the cannula. Some gas may also flow out of the vents 136, particularly if the tip 132 of the cannula is fully or partially blocked. The gas flows through the opening in the peritoneum into the abdominal

cavity, thereby insufflating the abdominal cavity **506** and establishing pneumoperitoneum as illustrated in FIG. 5C.

[0055] Accordingly, embodiments of the access system **100** and method provide an accurate and simple method for gaining access to the abdominal cavity for laparoscopic surgery. In other embodiments, the insufflating access system **100** provides access to the abdominal cavity through another surface adjacent to the peritoneal lining of the abdominal cavity, for example, the cul-de-sac of the vagina, any point along the gastro-intestinal tract from the diaphragm to the anus, or one of the great vessels such as the abdominal aorta or vena cava. Embodiments of the access system **100** and method provide access to other internal structures, for example, the kidney, the stomach, and/or the third ventricle of the brain, or any hollow organ for which accurate and shallow entry and the subsequent flow of gas or liquid is desired.

[0056] Disposing a fluid flow seal **140** between the obturator **160** and the distal end **114** of the cannula permits the device **100** to be fluidly coupled with a source of CO₂ while the device **100** is advanced through the abdominal wall **502**. As soon as the peritoneum **504** is punctured by the tip **166** of the obturator, the surgeon stops forward movement of the device **100** and dislocates the fluid flow seal **140** between the obturator **160** and the cannula **130**, thereby allowing the gas to flow through the gas flow channel **180** and out of the device **100**. The gas, following a path of least resistance, flows between the tip **166** and the abdominal wall **502**, through the opening made in the peritoneum **504**, and finally into the abdominal cavity **506**. Consequently, pneumoperitoneum is established with reduced penetration into the organ bed because the tip **166** of the obturator does not extend as far beyond the peritoneum as in embodiments in which the tip comprises vent holes through which gas insufflates the abdominal cavity. Embodiments of the device **100** also do not comprise at least one of: seals within the obturator and gas channels around the laparoscope. Some embodiments eliminate or reduce the possibility of fluid and/or tissue entering the visual field within the obturator tip **166**. In some embodiments, the peritoneum **504** is punctured and the abdominal cavity **506** insufflated without further penetration of the tip **166** beyond the peritoneum **504** and into the abdominal cavity **506** or organ bed.

[0057] While certain embodiments have been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope thereof as defined by the following claims.

WHAT IS CLAIMED IS:

1. An insufflating surgical access system comprising:
 - a trocar comprising:
 - a proximal end and a distal end;
 - a trocar seal assembly disposed at the proximal end of the trocar, the trocar seal assembly comprising an instrument seal;
 - an elongate cannula disposed at the distal end of the trocar, the cannula comprising a tubular wall defining a lumen, an open proximal end, and an open distal end;
 - an access channel defining a longitudinal axis, extending through the trocar seal assembly and the lumen of the cannula, from the proximal end of the trocar to the distal end of the trocar;
 - a fluid port disposed at the proximal end of the trocar; and
 - a fluid flow seal disposed in the access channel;
 - an obturator comprising:
 - an elongate body comprising a proximal end and a distal end;
 - a tissue penetrating tip disposed at the distal end; and
 - a handle disposed at the proximal end,

wherein the obturator is slidably insertable into the proximal end of the access channel, and the tip of the obturator extends out of the distal, open end of the cannula when fully inserted therethrough; and

a fluid flow channel fluidly connected to the fluid port of the trocar, and extending to a distal end of the insufflating access system,

wherein the obturator in the access channel has

 - a closed position, in which the body of the obturator sealing contacts the fluid flow seal, thereby preventing gas flow through the fluid flow channel, and
 - an open position, in which the body of the obturator does not sealing contact the fluid flow seal, thereby allowing fluid flow through the fluid flow channel.

2. The access system of claim 1, wherein trocar seal assembly further comprises a zero seal.

3. The access system of claim 1, wherein the distal end of the cannula comprises an angled tip.

4. The access system of claim 1, wherein the fluid port is disposed on the trocar seal assembly.

5. The access system of claim 1, wherein the fluid flow seal is integrated with a cannula tip disposed at the distal end of the cannula.

6. The access system of claim 1, wherein the fluid flow seal is disposed proximal of the distal end of the cannula.

7. The access system of claim 1, wherein the fluid flow seal is substantially perpendicular to the longitudinal axis of the axis channel.

8. The access system of claim 1, wherein the fluid flow seal is not perpendicular to the longitudinal axis of the axis channel.

9. The access system of claim 1, wherein the obturator further comprises an instrument well open at a proximal end of the obturator, extending longitudinally through the body of the obturator, terminating at the tip of the obturator, and dimensioned to receive a laparoscope therein, wherein at least a portion of the tip of the obturator is transparent.

10. The access system of claim 9, further comprising a laparoscope.

11. The access system of claim 1, wherein the fluid flow channel comprises a space defined by the lumen of the cannula and the body of the obturator.

12. The access system of claim 1, wherein the fluid flow channel comprises an instrument well disposed in the body of the obturator.

13. The access system of claim 1, wherein the fluid flow channel comprises at least one proximal opening and at least one distal opening disposed in the body of the obturator.

14. The access system of claim 1, wherein the fluid flow channel comprises a slot disposed in the body of the obturator.

15. The access system of claim 1, wherein in the closed position, the obturator is displaced distally in the access channel compared with the open position.

16. The access system of claim 1, wherein in the closed position, the obturator is displaced proximally in the access channel compared with the open position.

17. The access system of claim 1, wherein in the closed position, the obturator is rotated in the access channel compared with the open position.

18. A method for insufflating a body cavity using the insufflating surgical access system of claim 1, the method comprising:

positioning the obturator in the closed position;

fluidly connecting the fluid port with a source of insufflation gas;

positioning the tissue penetrating tip at a desired position;

advancing the tissue penetrating tip through a body wall until the tip enters a body cavity; and

positioning the obturator in the open position, fluidly connecting the fluid port with the body cavity through the fluid flow channel, thereby insufflating the body cavity.

19. The method of claim 18, further comprising visually monitoring the position of the penetrating tip through a laparoscope.

20. An insufflating surgical access system comprising:

a trocar comprising:

a proximal end and a distal end;

a trocar seal assembly disposed at the proximal end of the trocar, the trocar seal assembly comprising an instrument seal;

an elongate cannula disposed at the distal end of the trocar, the cannula comprising a tubular wall defining a lumen, an open proximal end, and an open distal end;

an access channel defining a longitudinal axis, extending through the trocar seal assembly and the lumen of the cannula, from the proximal end of the trocar to the distal end of the trocar;

a fluid port disposed at the proximal end of the trocar;

an obturator comprising:

an elongate body comprising a proximal end and a distal end;

a tissue penetrating tip disposed at the distal end; and
a handle disposed at the proximal end,
wherein the obturator is slidably insertable into the proximal end of the access channel, and the tip of the obturator extends out of the distal, open end of the cannula when fully inserted therethrough; and
a gas flow channel fluidly connected to the fluid port of the trocar, and extending to a distal end of the insufflating access system; and
means for modulating gas flow through the gas flow channel.

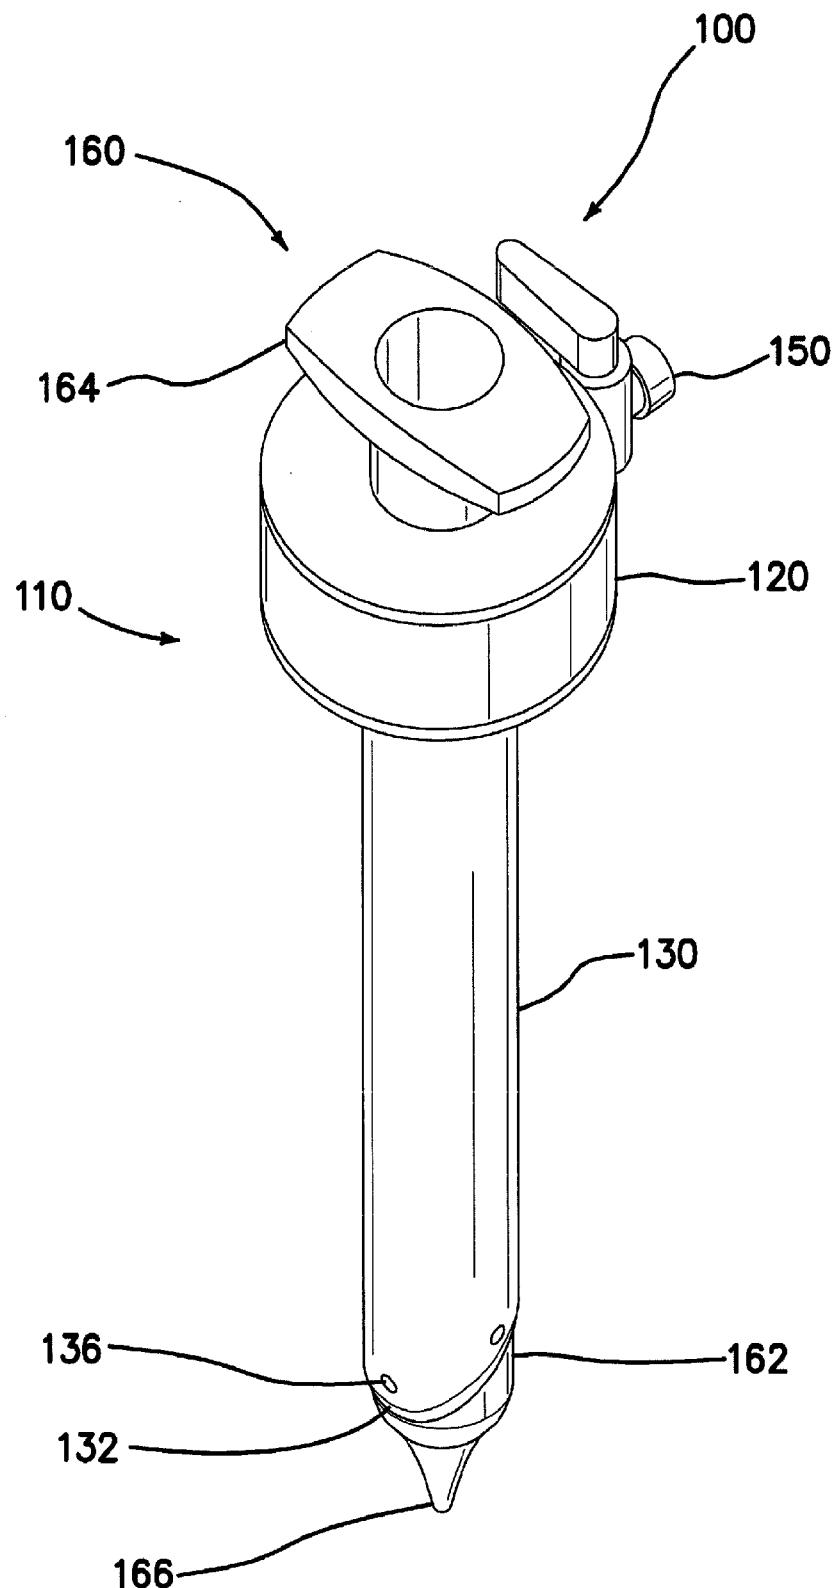
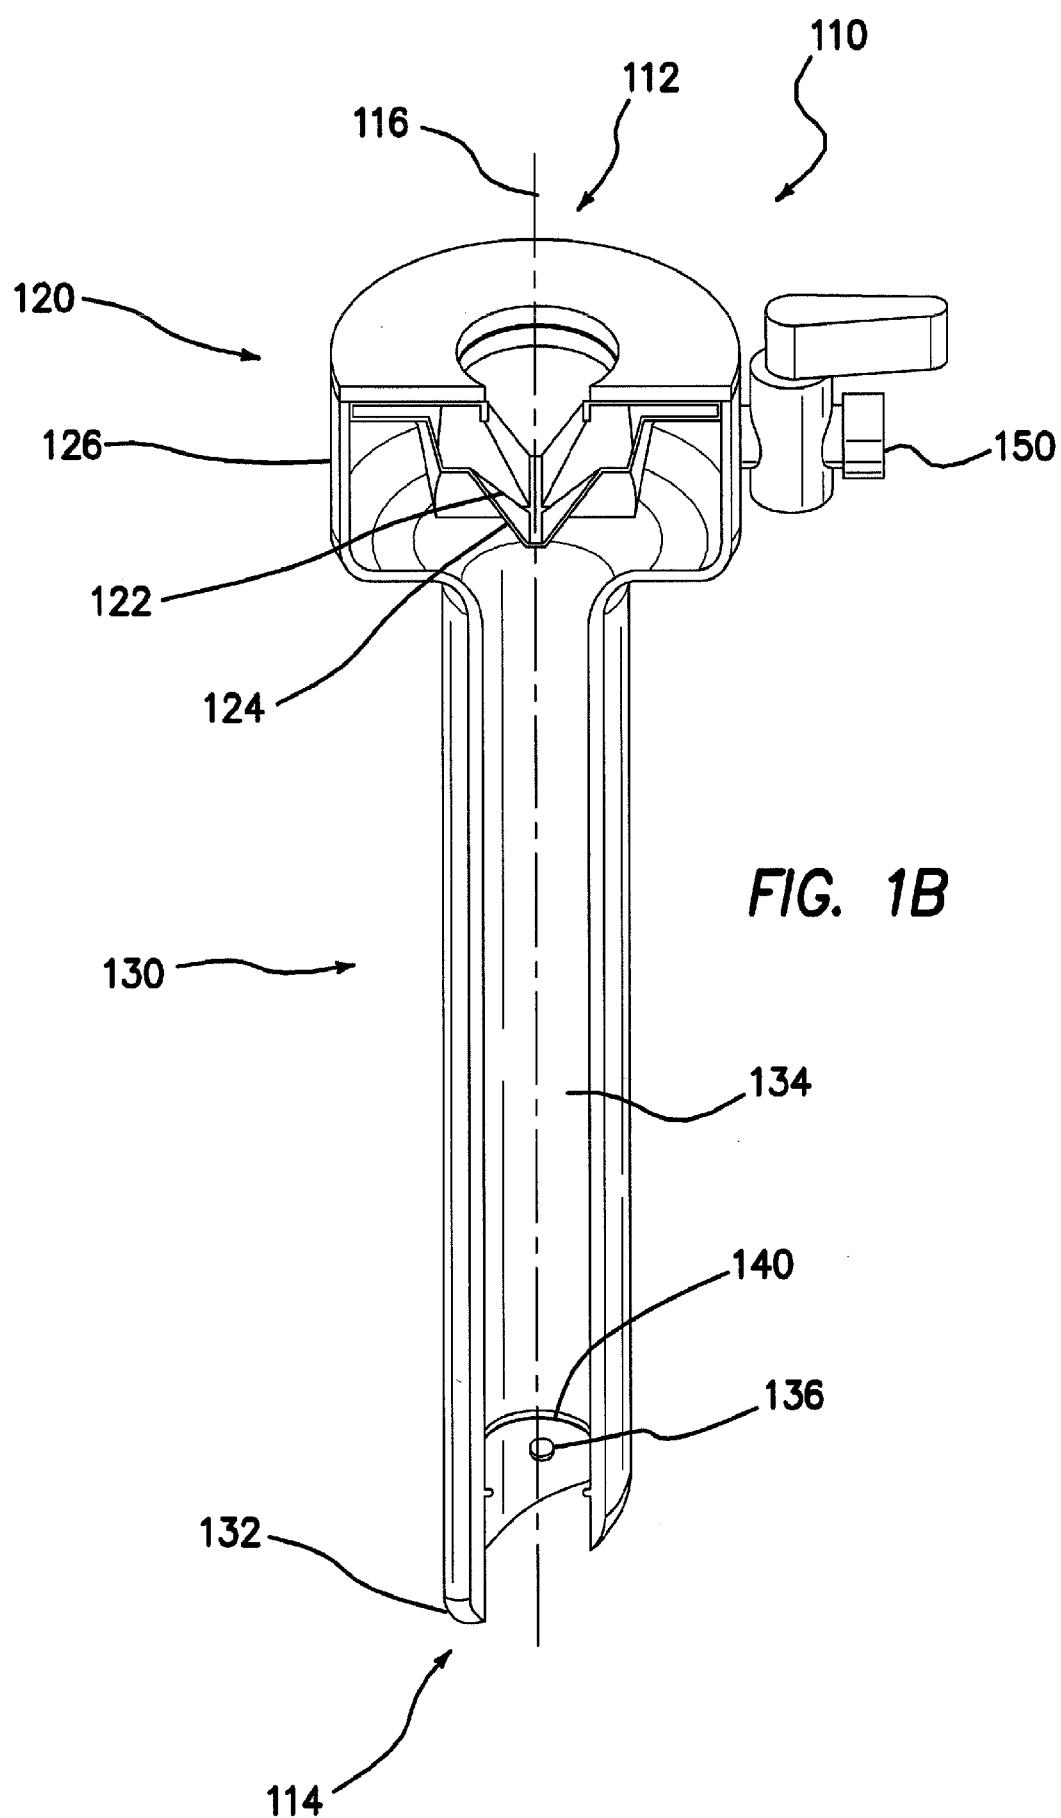
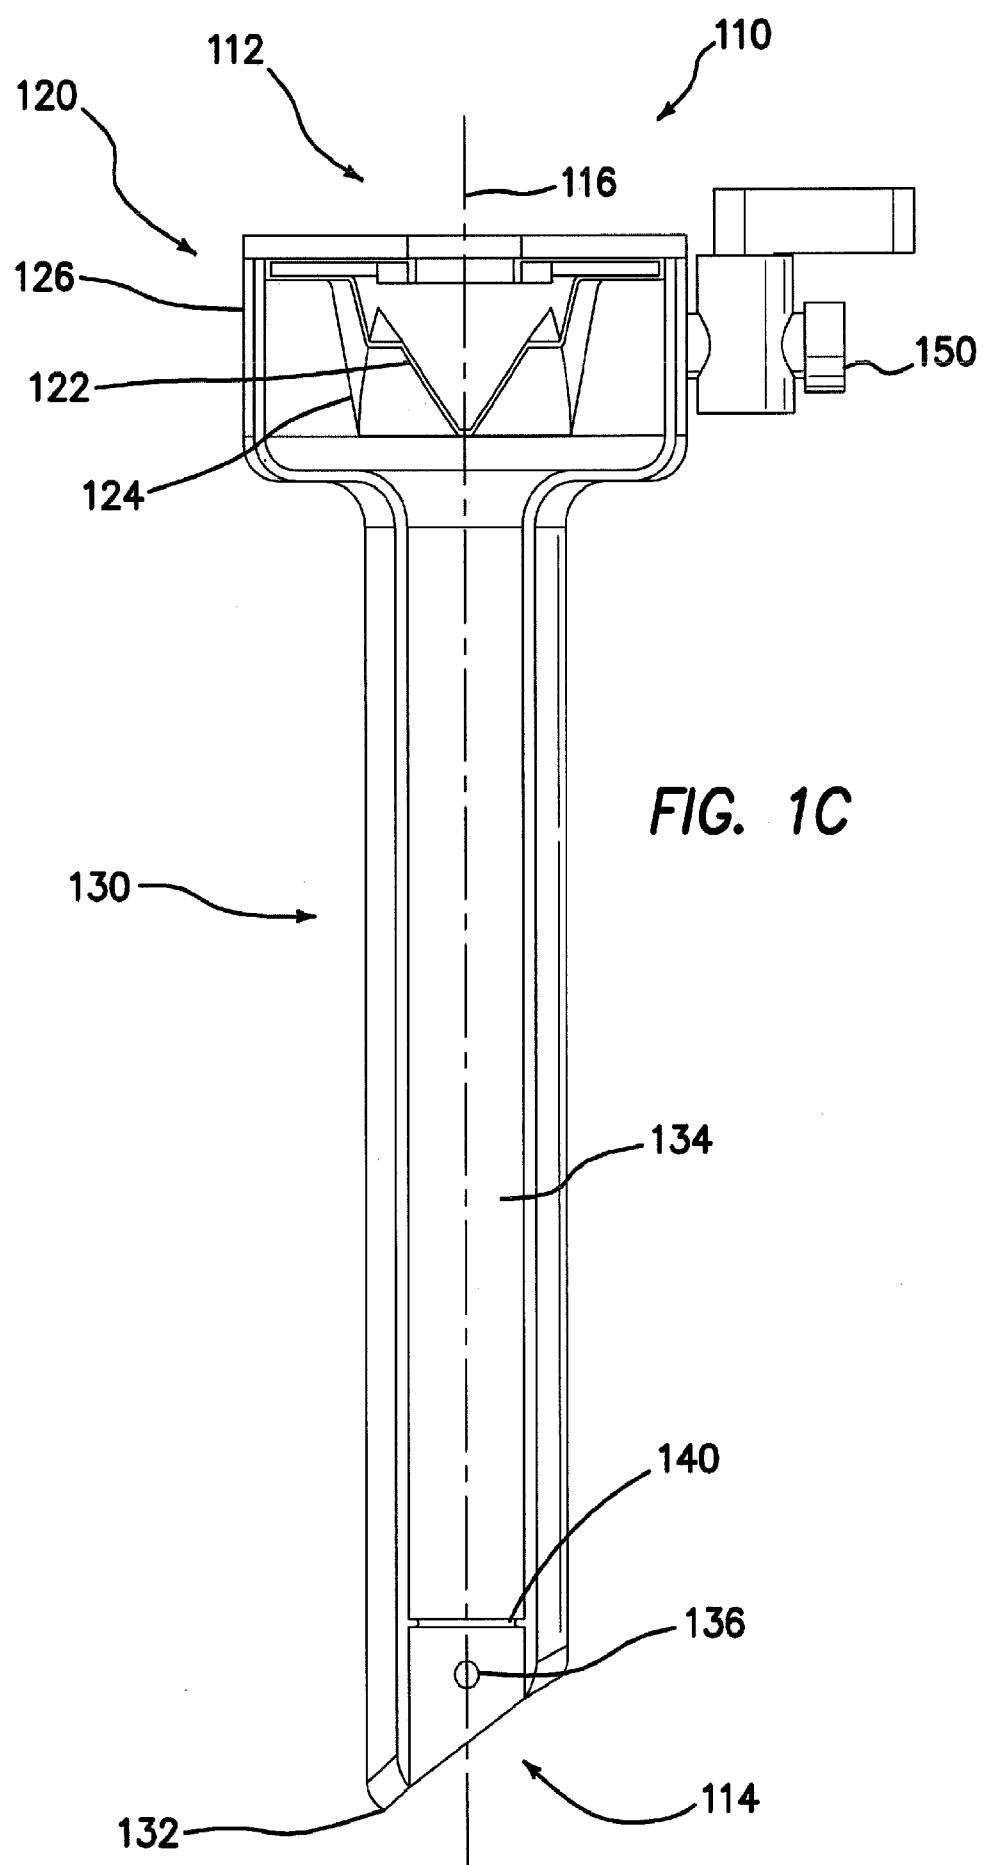


FIG. 1A





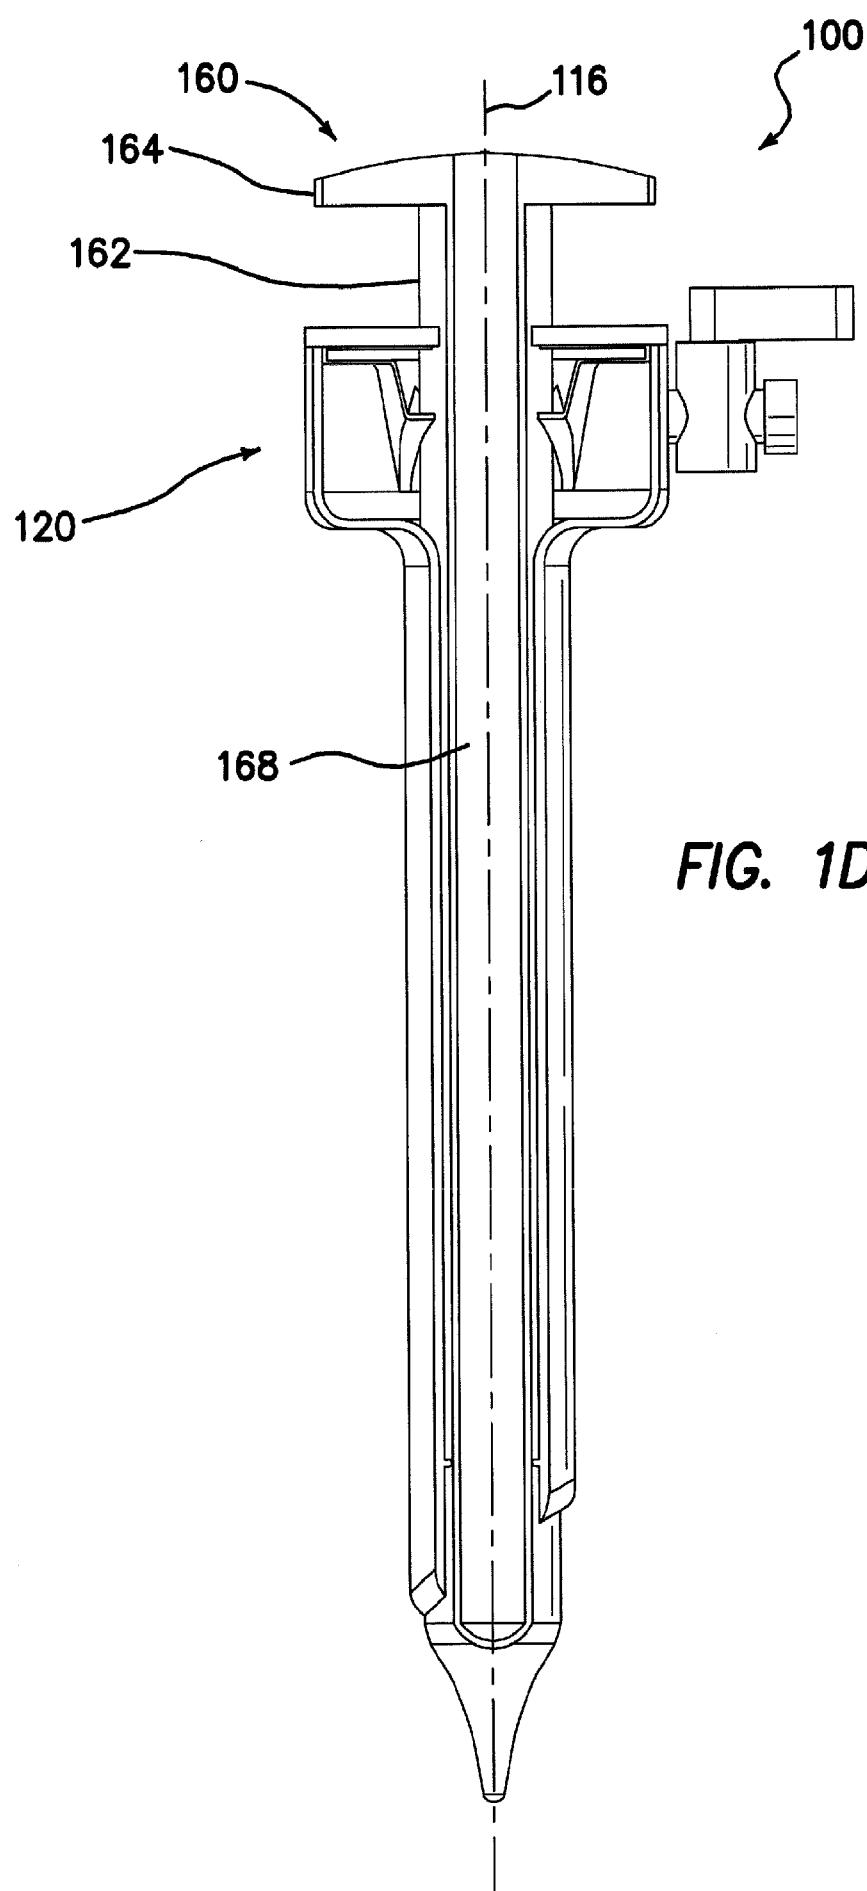


FIG. 1D

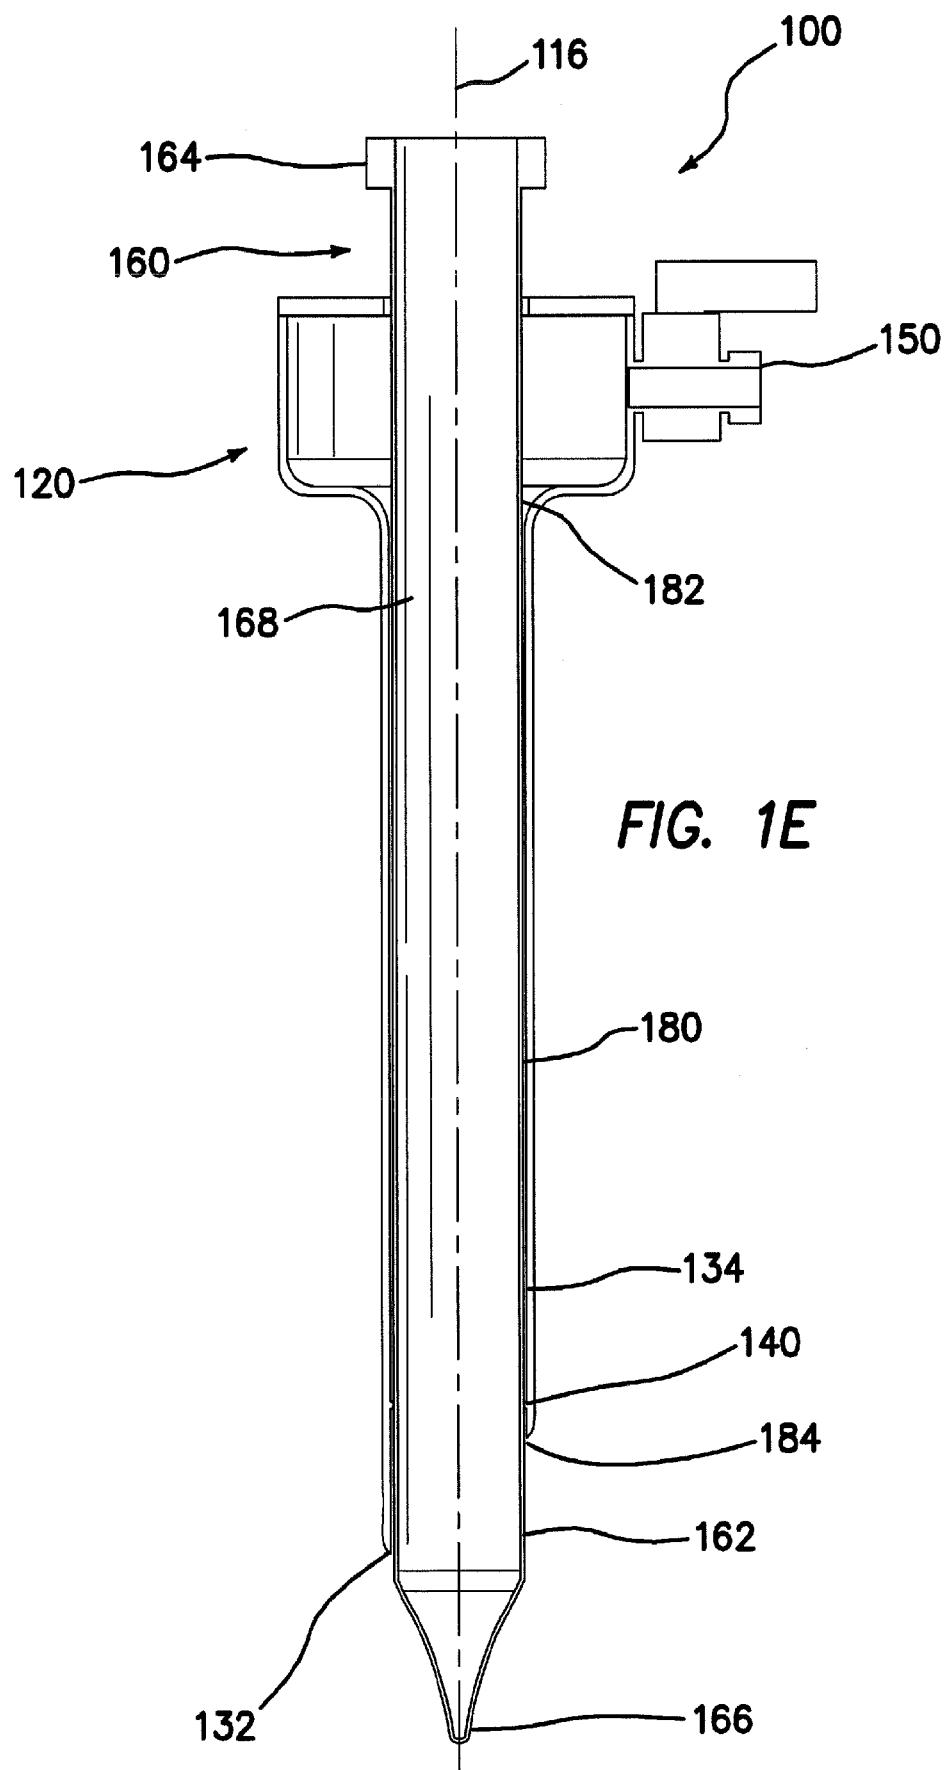


FIG. 1E

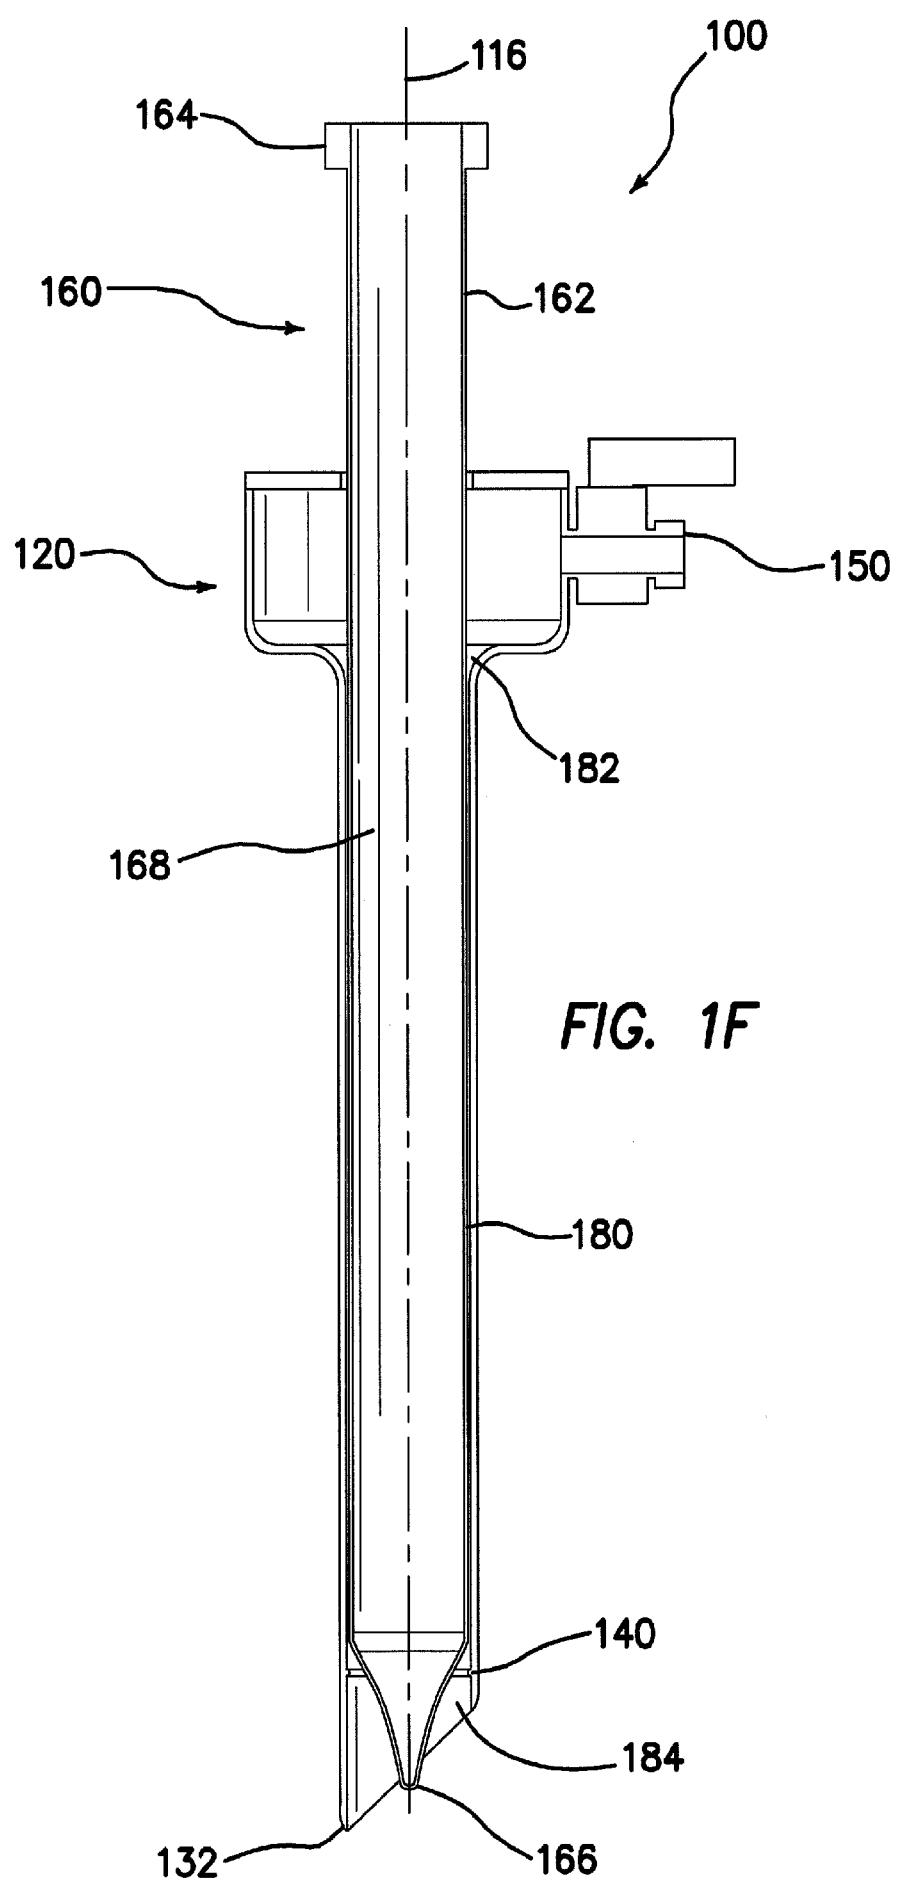
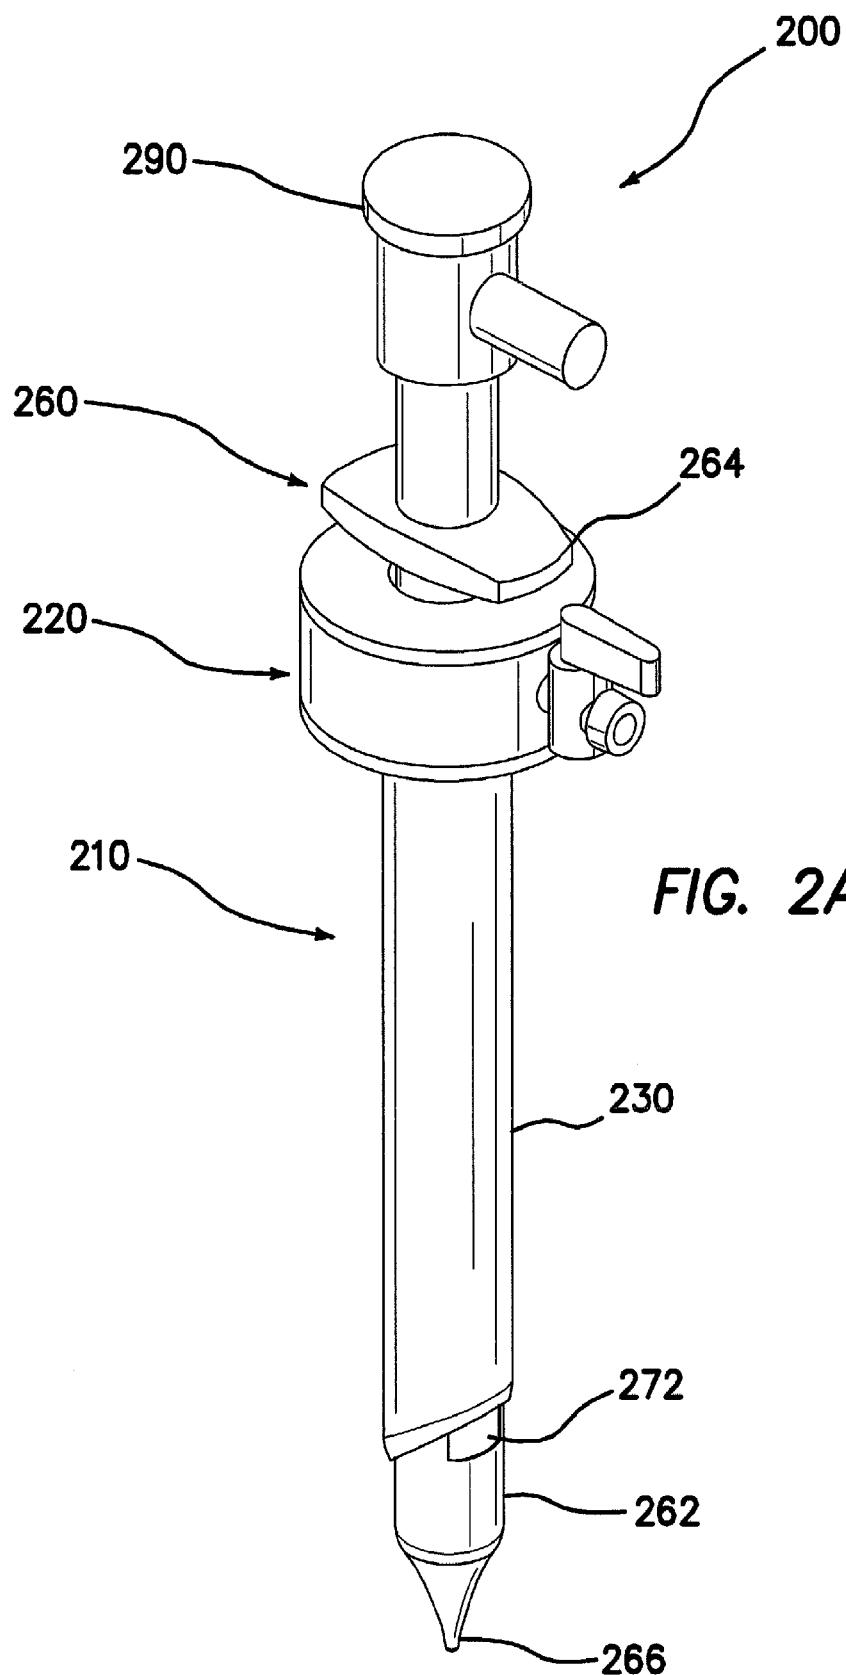


FIG. 1F



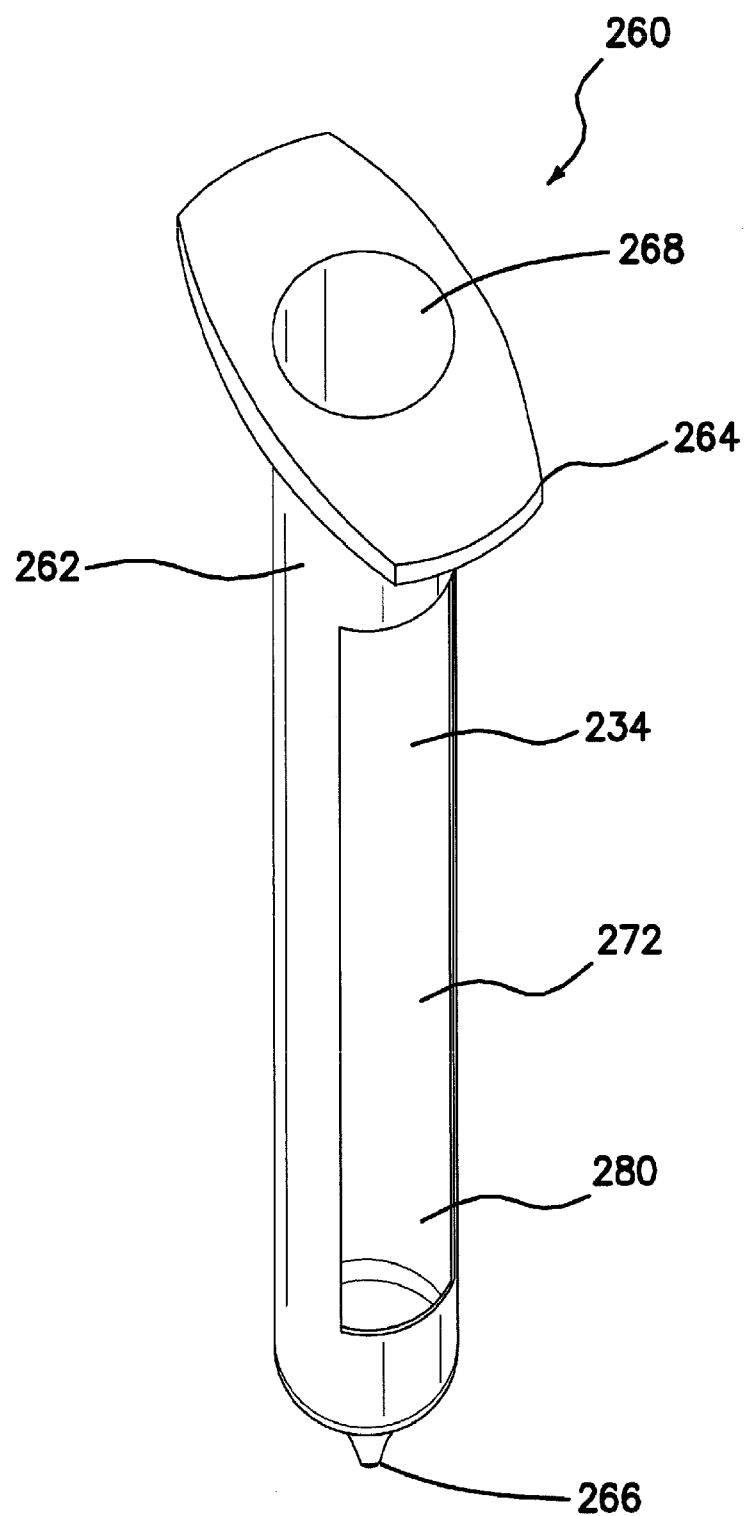


FIG. 2B

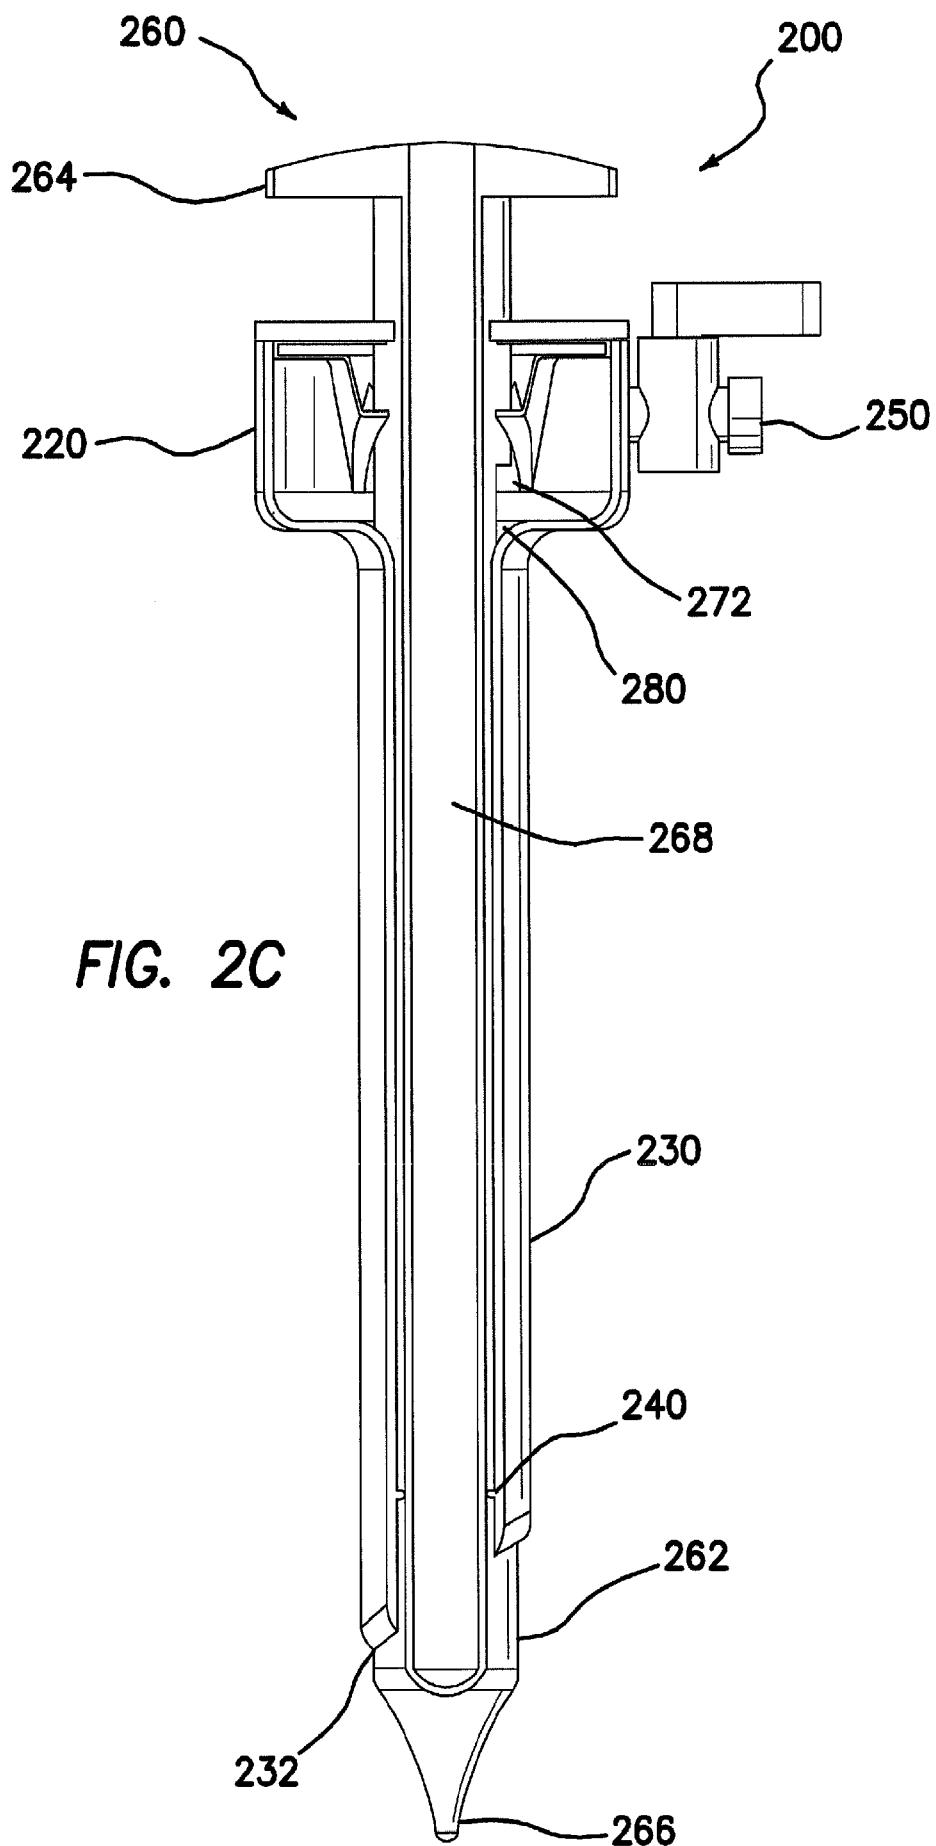
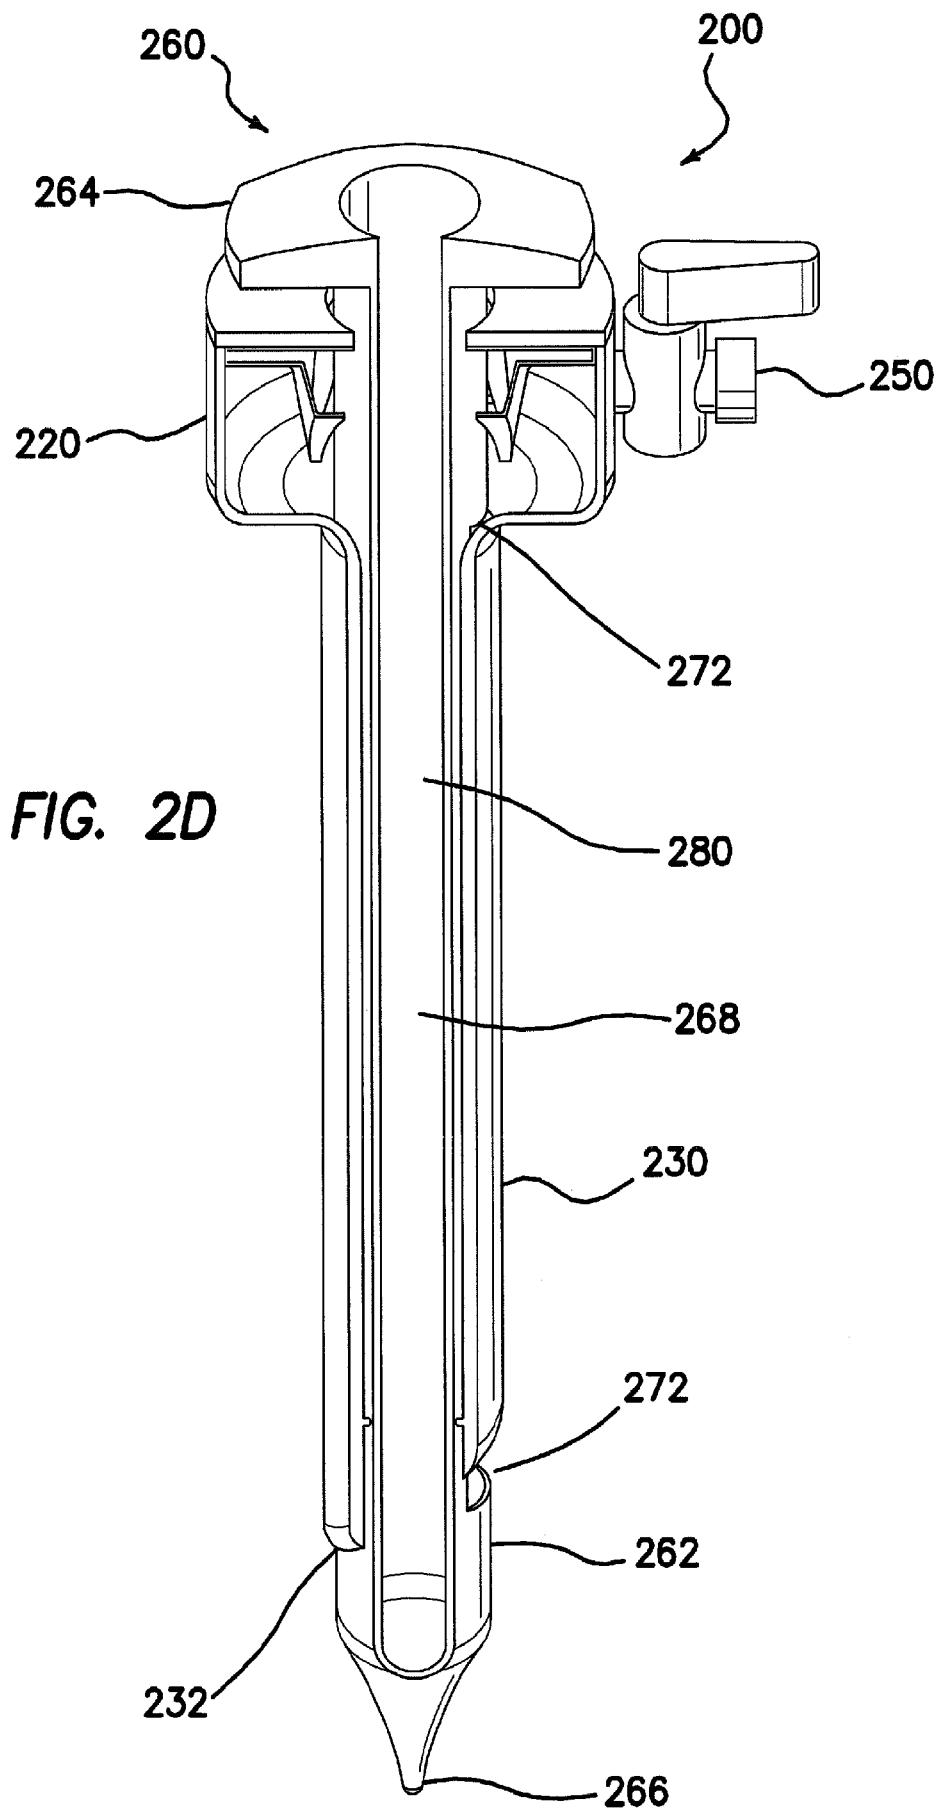
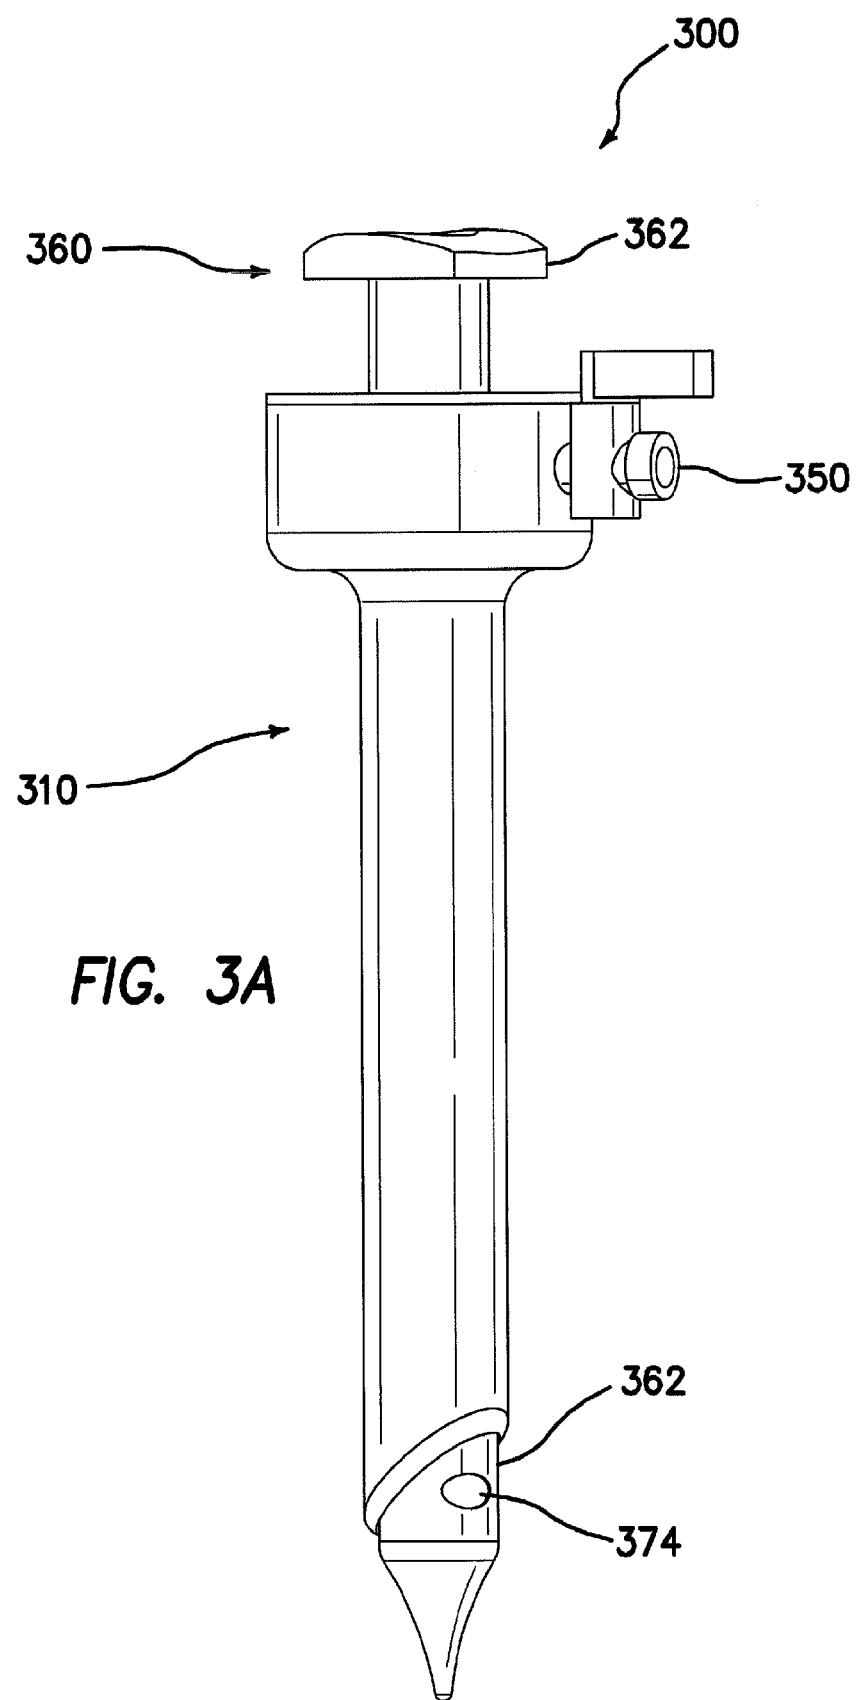
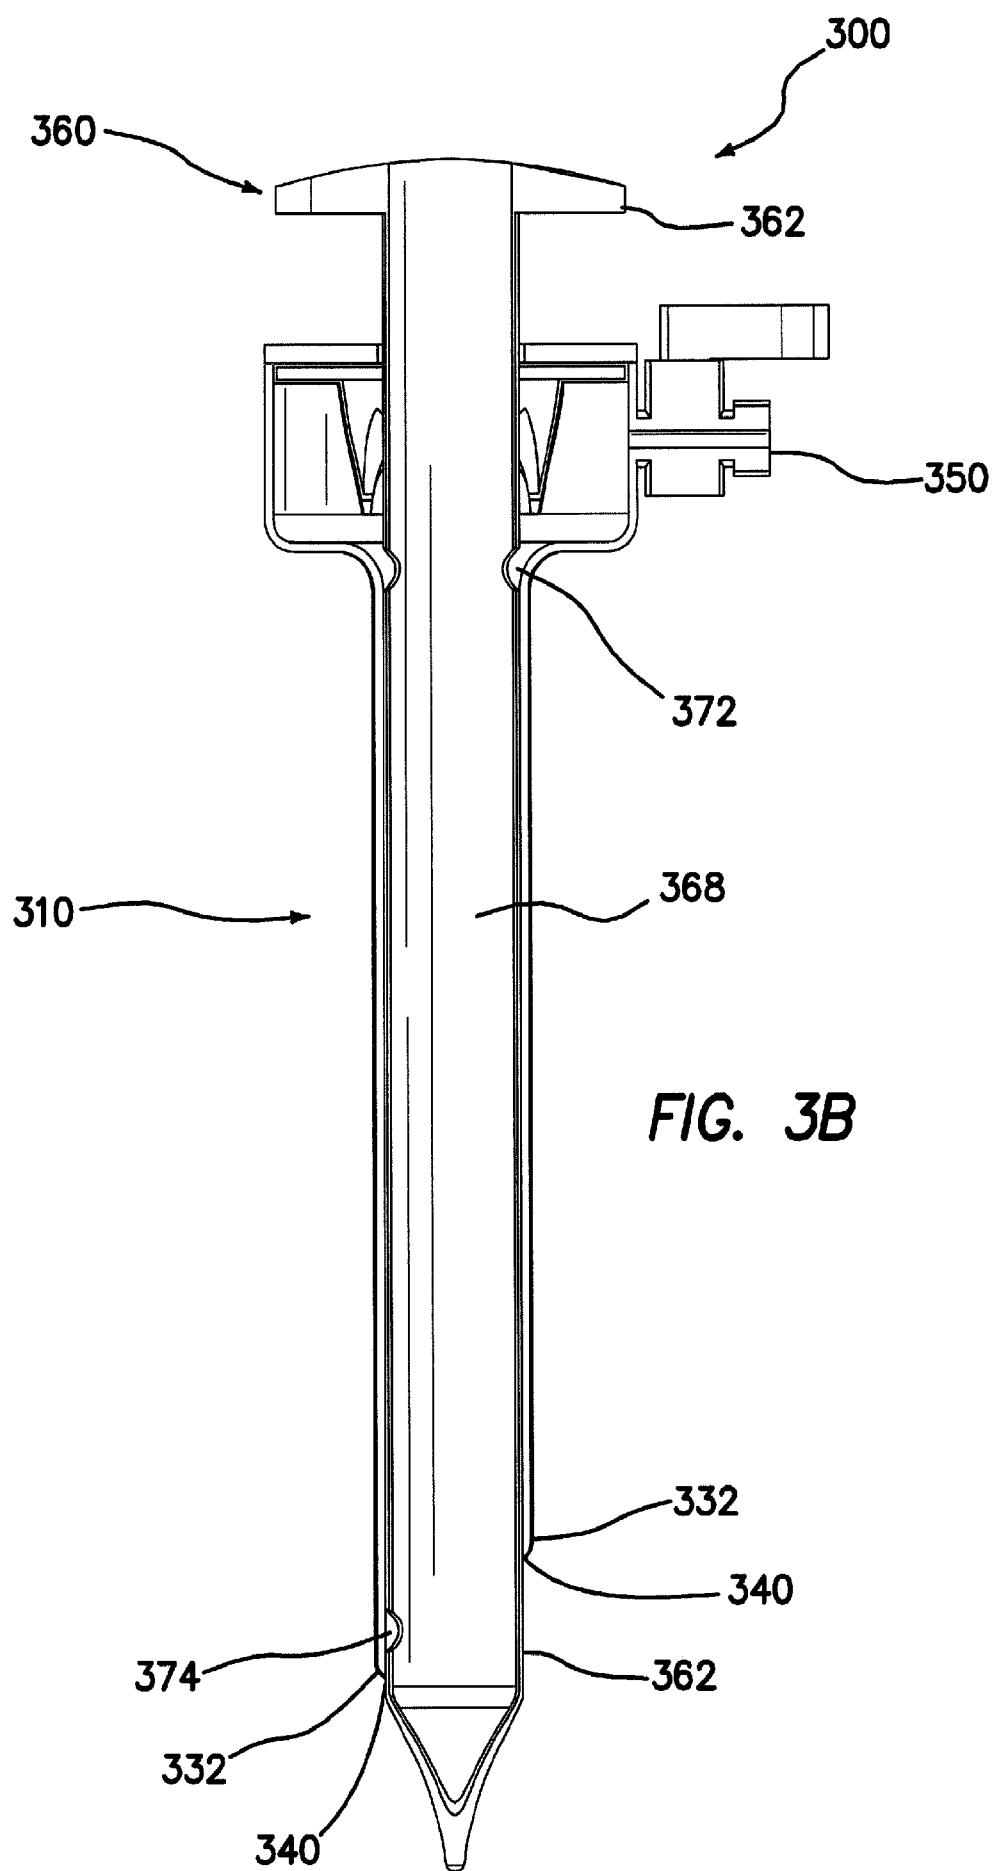
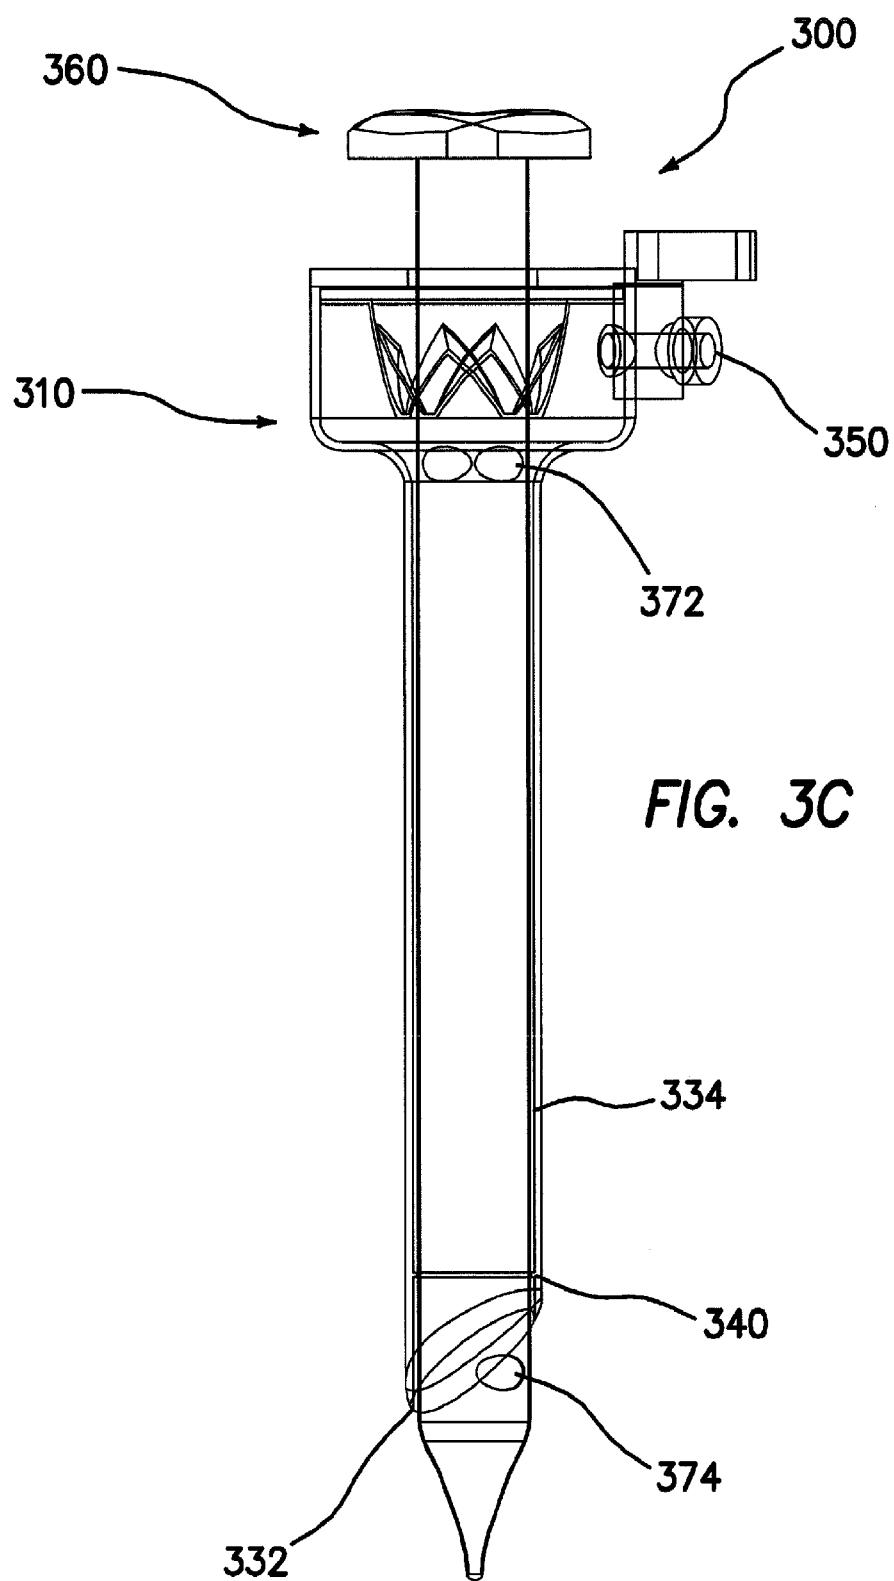


FIG. 2C









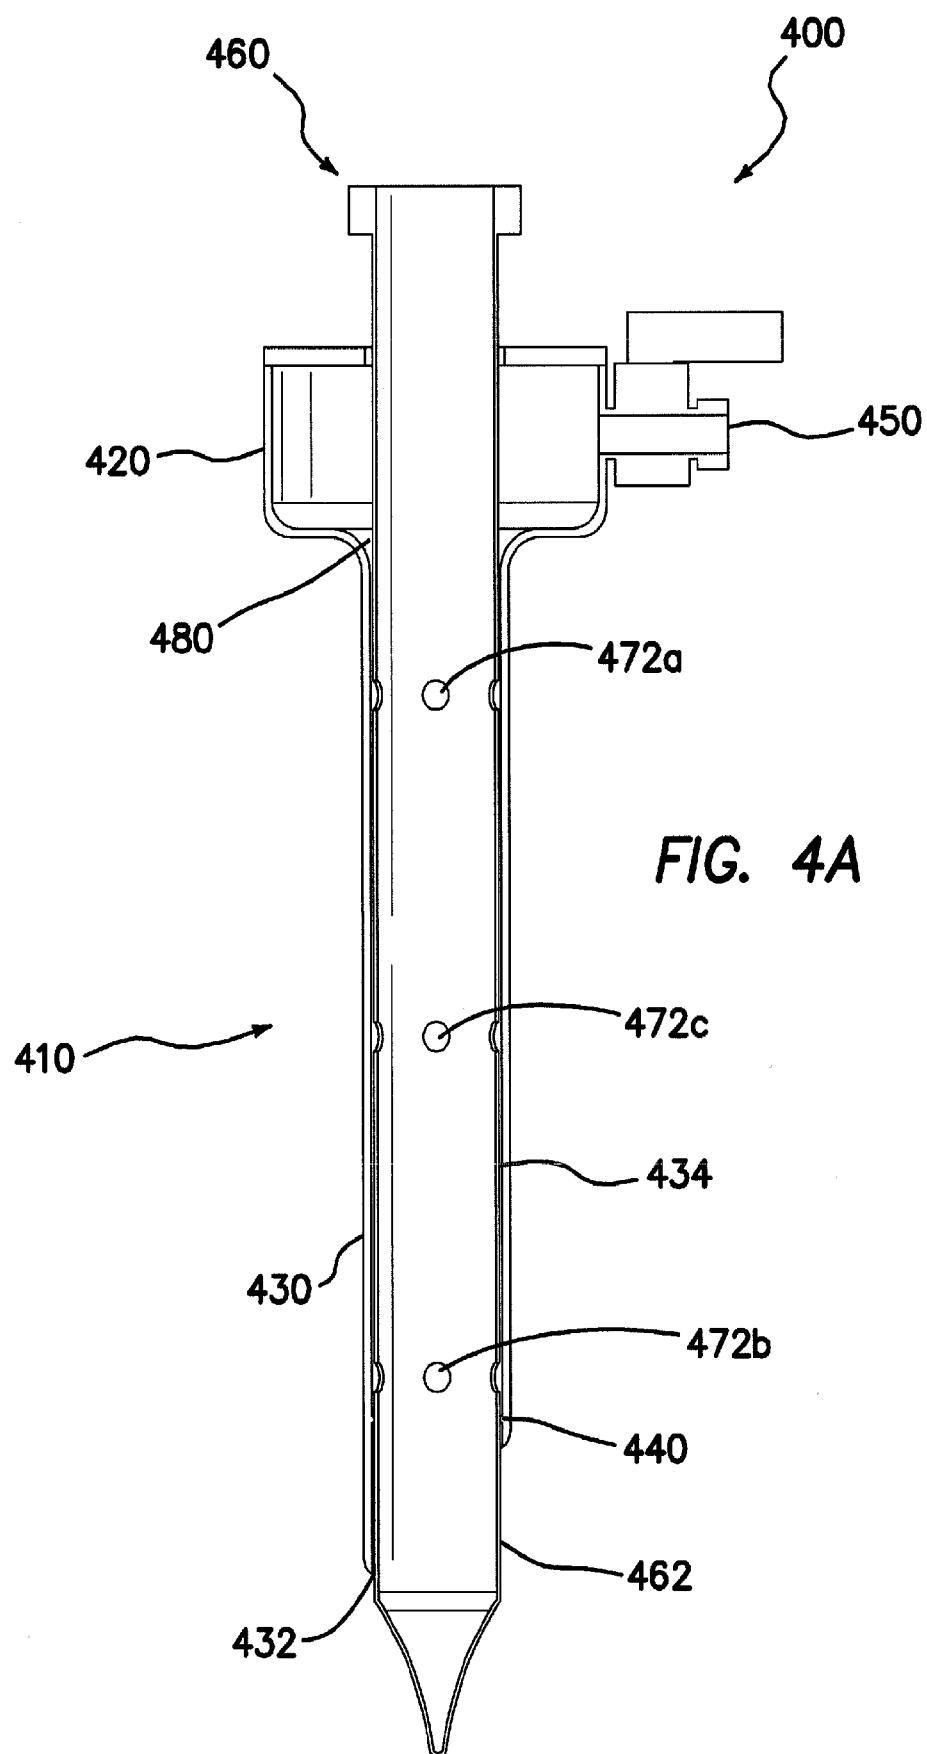


FIG. 4A

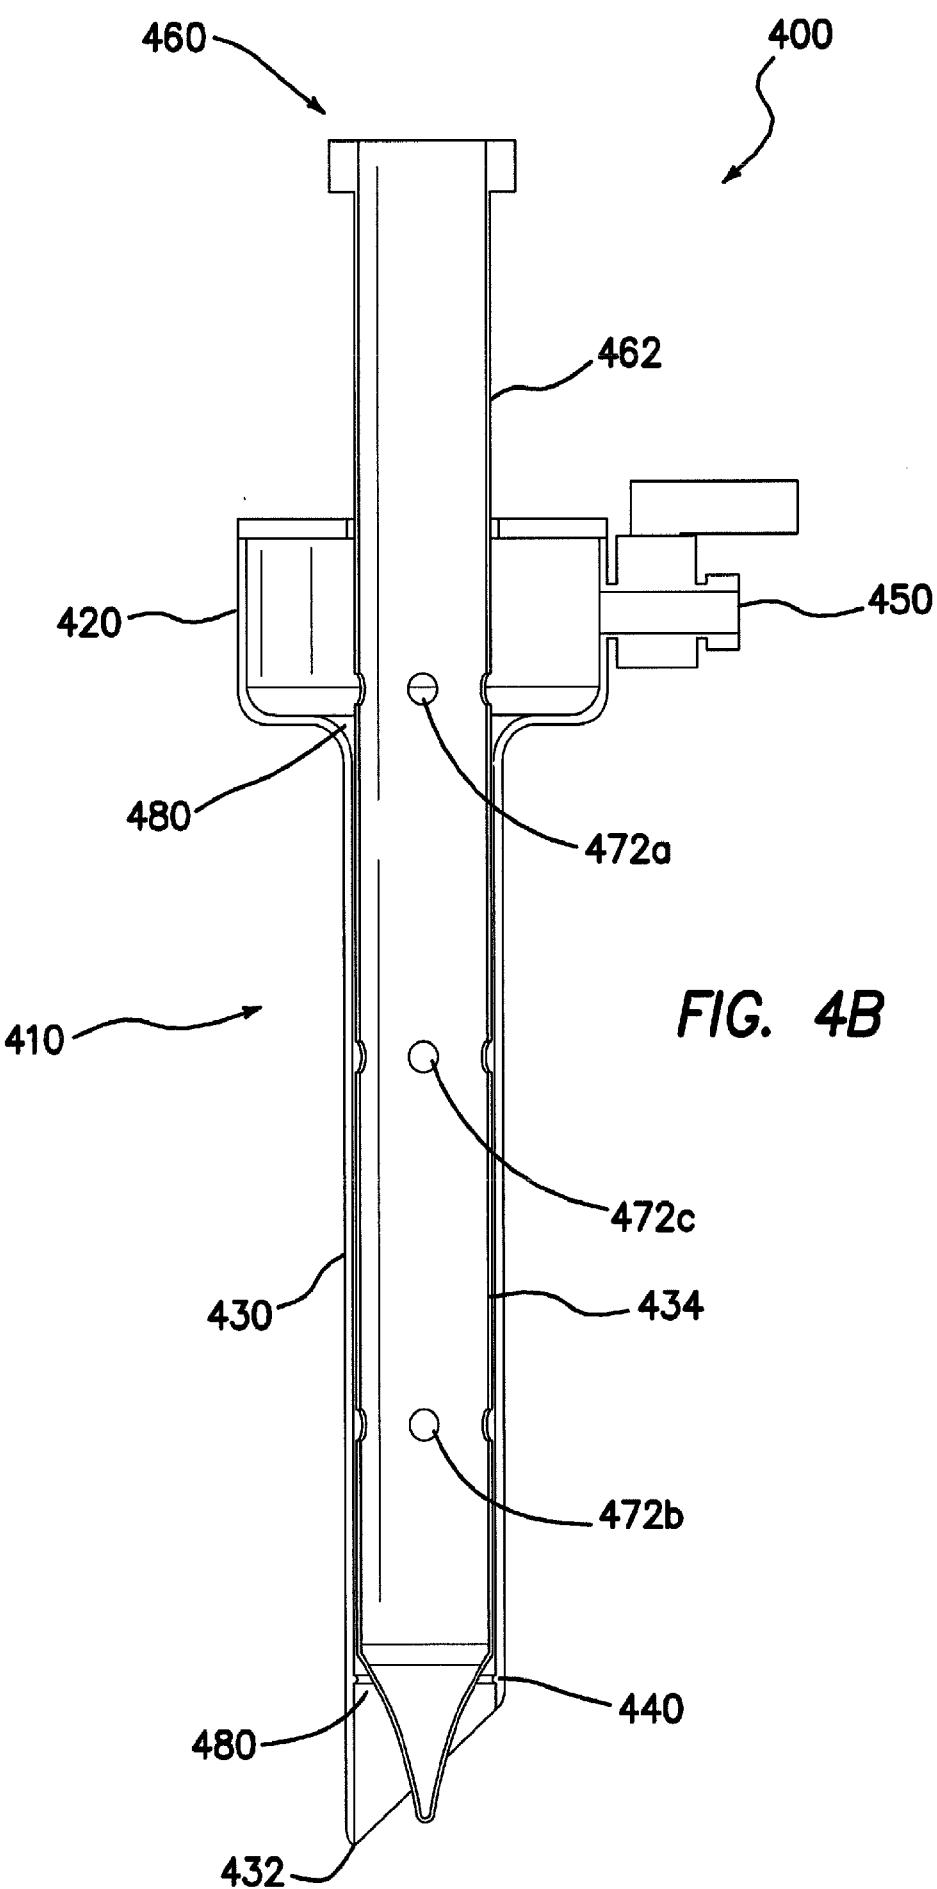


FIG. 4B

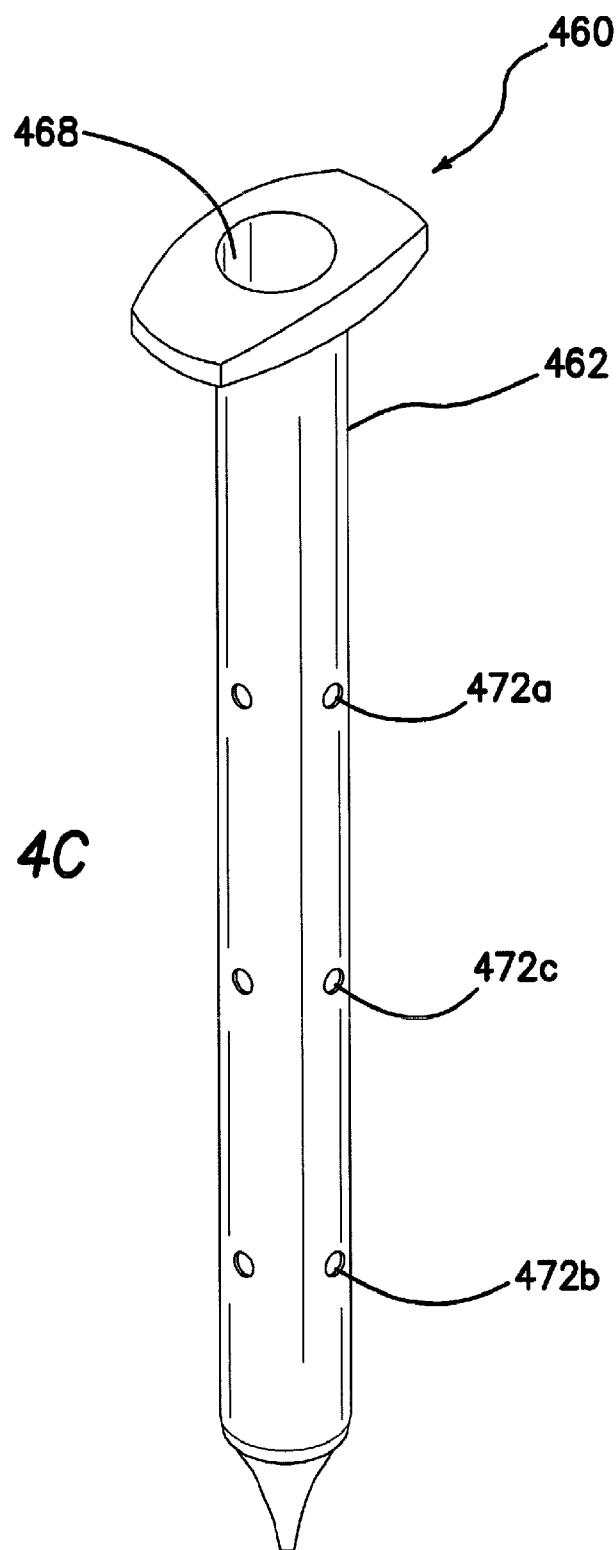


FIG. 4C

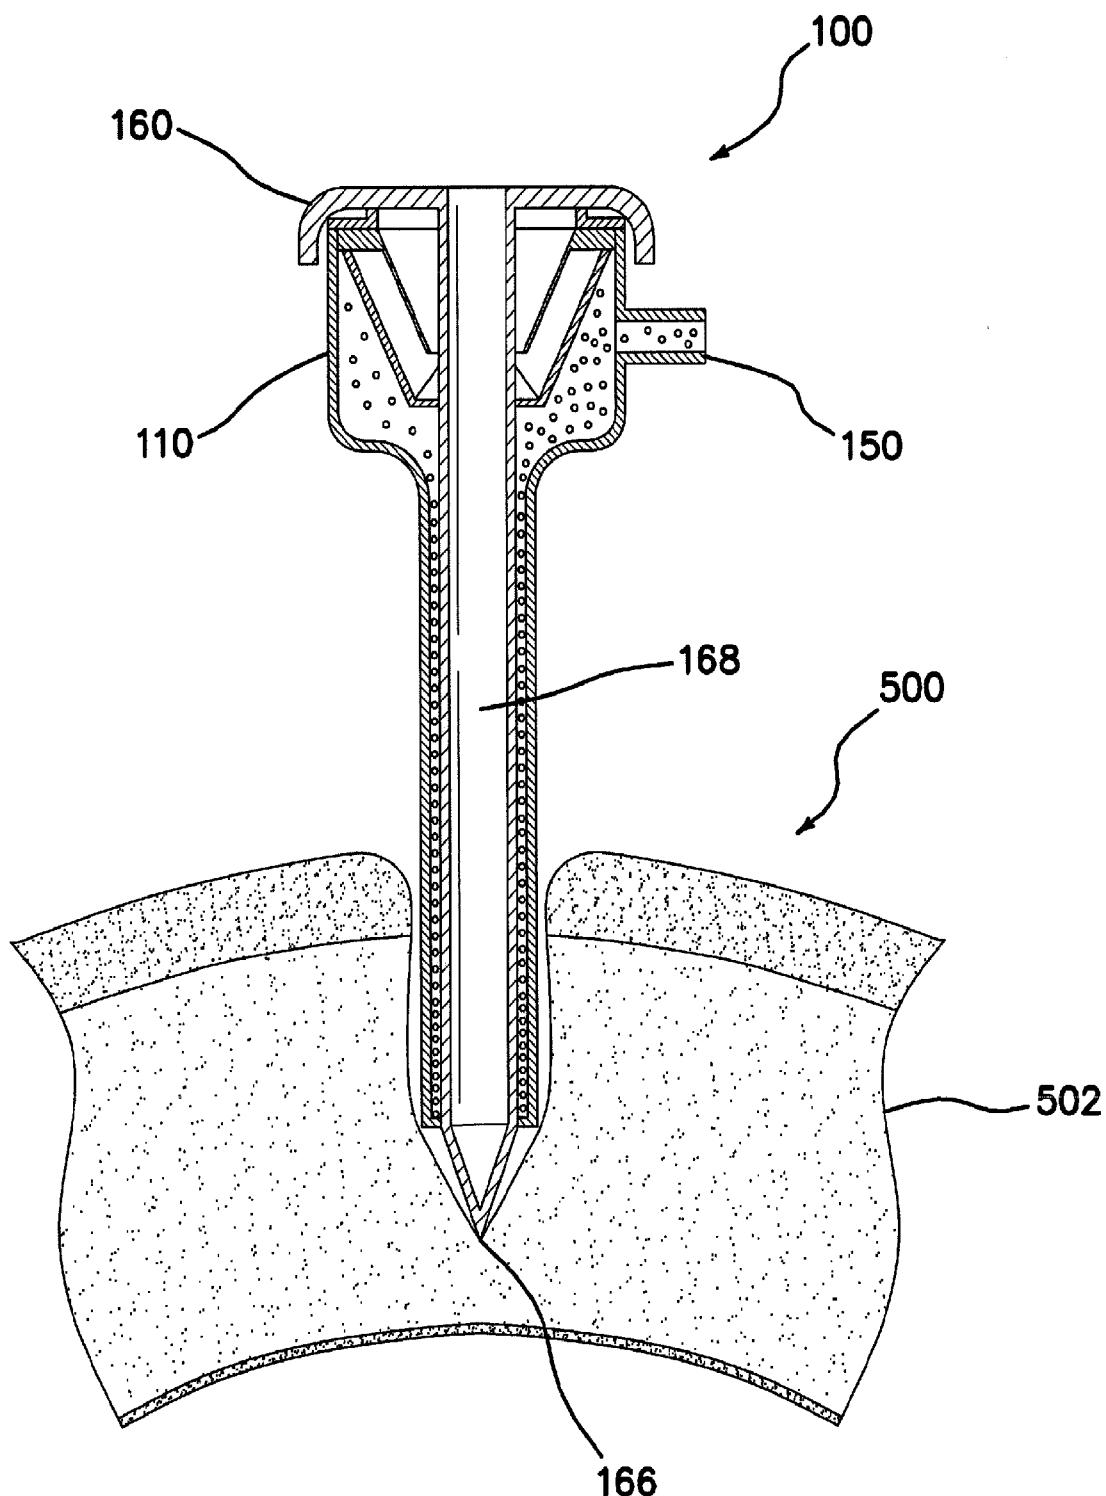


FIG. 5A

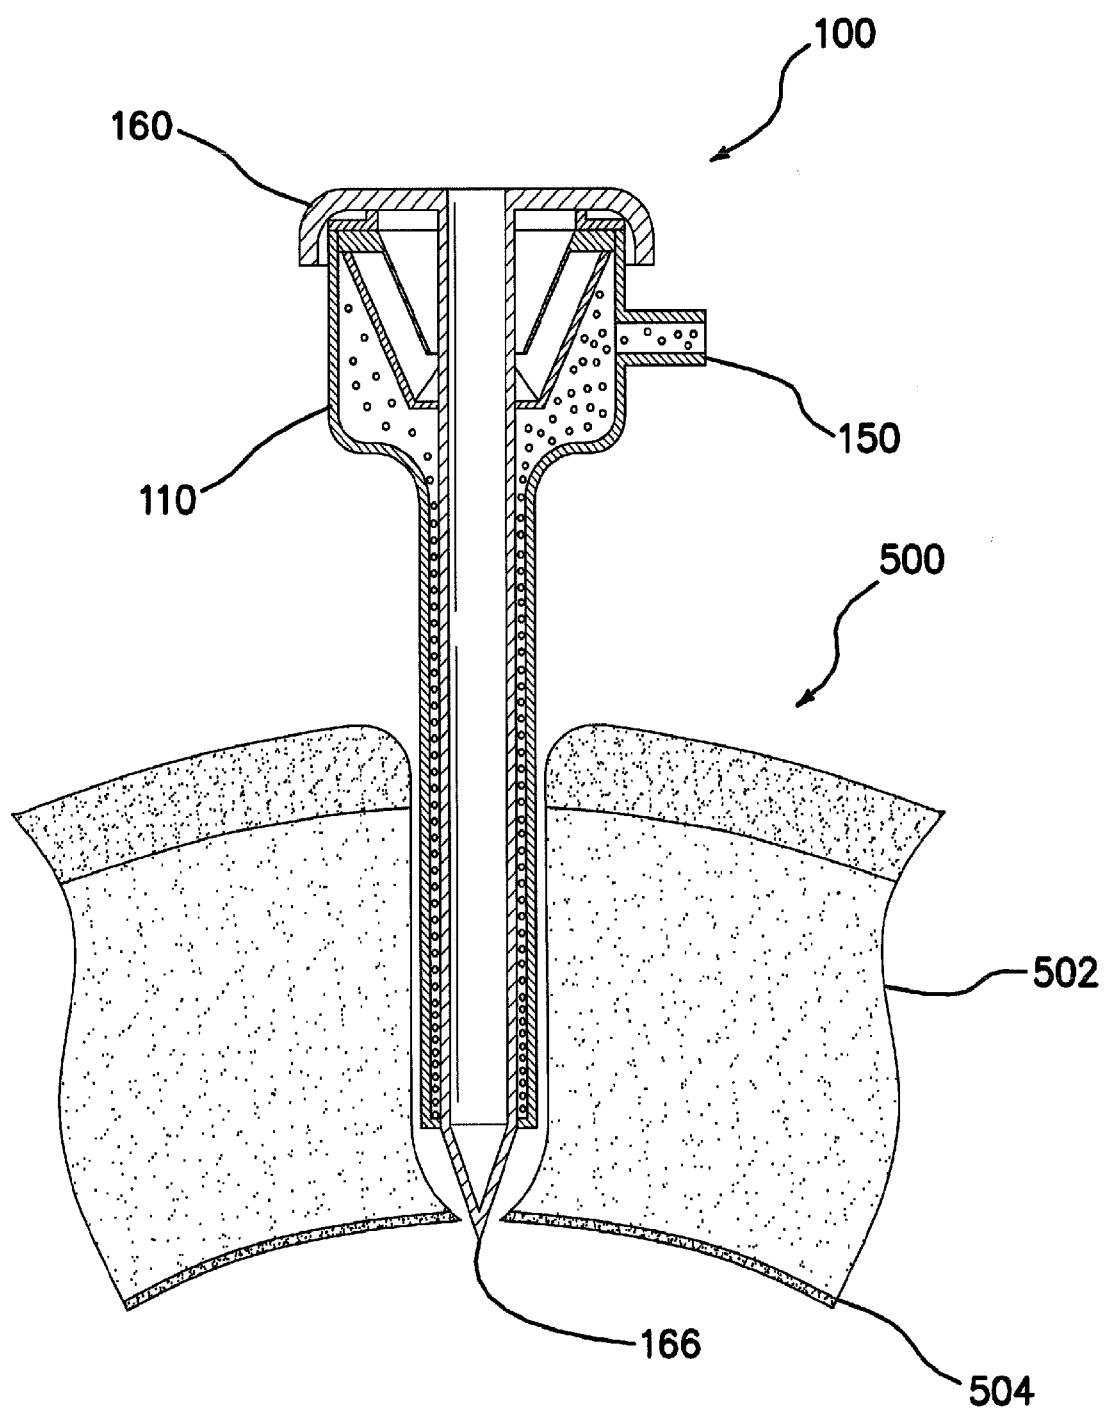


FIG. 5B

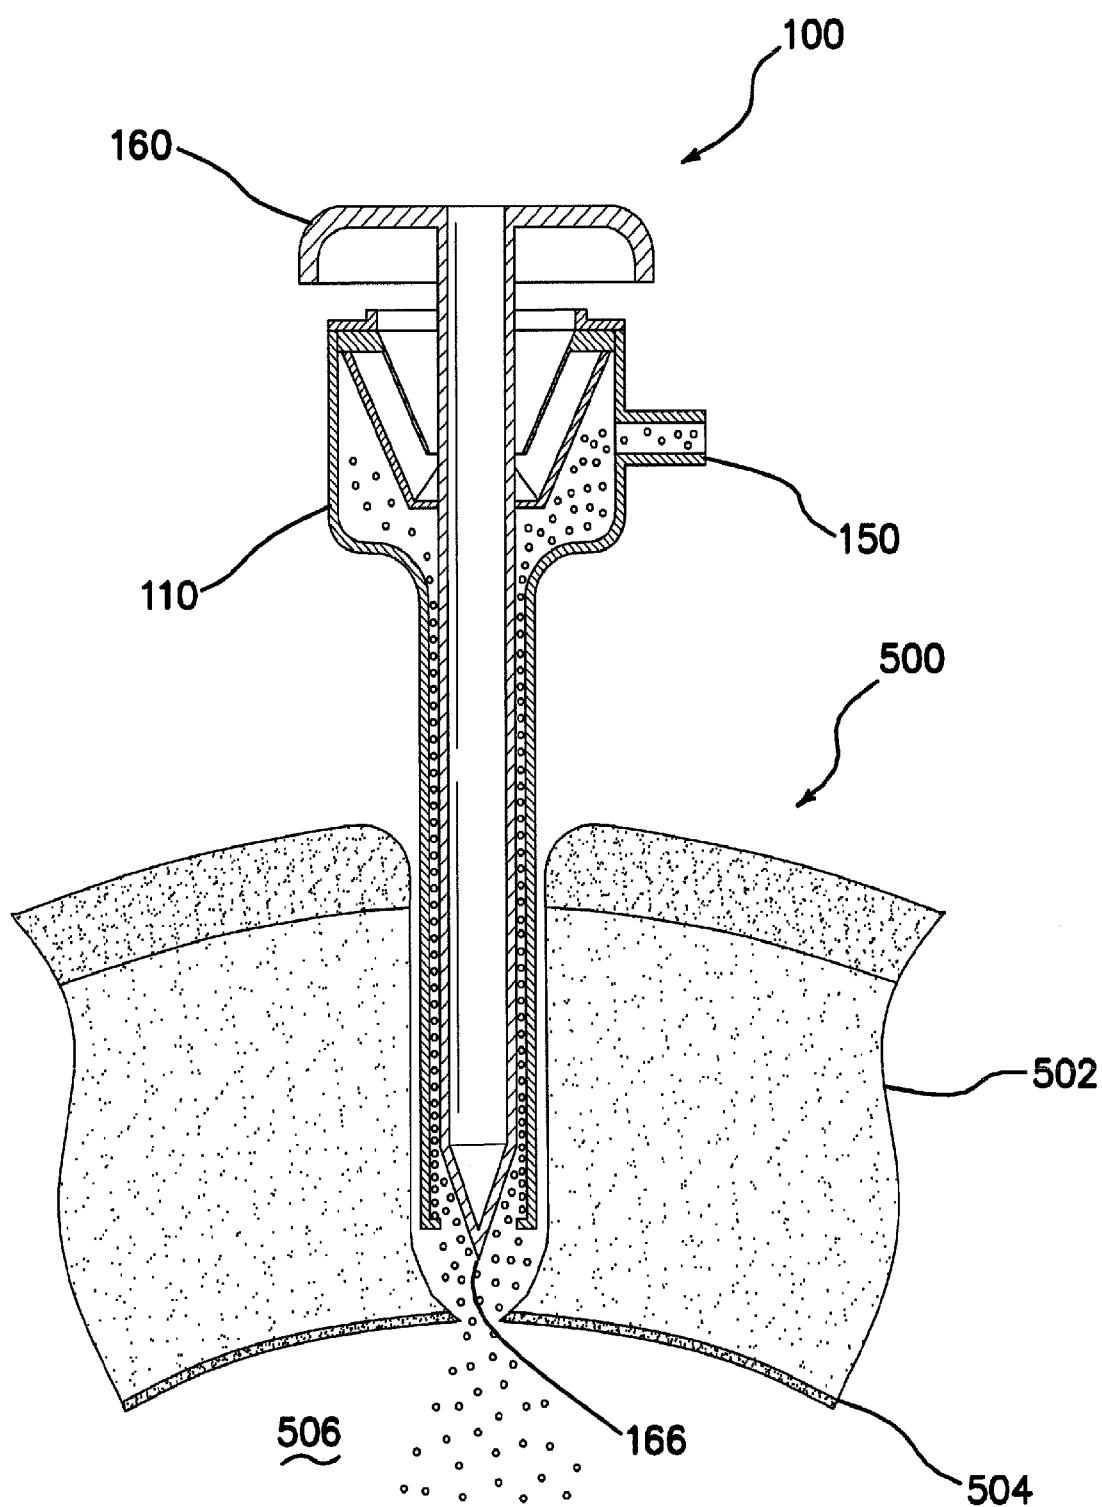


FIG. 5C

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 09/32026

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61M 5/178 (2009.01)

USPC - 604/167.01

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
604/167.01Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
604/164.01, 93.01

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWest, Google

Search Terms Used: Obturator, trocar, fluid, flow, insufflation, gas, cavity, cannula, lumen, seal, laparoscope

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/0288622 A1 (Albrecht et al.) 29 December 2005 (29.12.2005), Abstract, para [0011], [0050], [0041]-[0042], [0012], [0060], [0061], Figs. 3, 16, and 17B	1-5,8-13, 18-20
Y		----- 6-7, 14-17
Y	US 2007/0239108 A1 (Albrecht et al.) 11 October 2007 (11.10.2007), para [0007].	6
Y	US 5,634,908 A (Loomas) 03 June 1997 (03.06.1997), Abstract	7
Y	US 5,817,062 A (Flom et al.) 06 October 1998 (06.10.2005), Col 4, ln 22-55, Figs. 2 and 3.	15-17
Y	US 2006/0224174 A1 (Smith et al.) 05 October 2006 (05.10.2006), Para [0038], figs. 1, 7 and 9.	14

 Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

02 March 2009 (02.03.2009)

Date of mailing of the international search report

23 MAR 2009

Name and mailing address of the ISA/US
Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450
Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

专利名称(译)	填充访问系统		
公开(公告)号	EP2231233A1	公开(公告)日	2010-09-29
申请号	EP2009703532	申请日	2009-01-26
[标]申请(专利权)人(译)	应用医疗资源		
申请(专利权)人(译)	应用医疗资源CORPORATION		
当前申请(专利权)人(译)	应用医疗资源CORPORATION		
[标]发明人	ALBRECHT JEREMY J JOHNSON GARY M BRUSTAD JOHN R		
发明人	ALBRECHT, JEREMY, J. JOHNSON, GARY, M. BRUSTAD, JOHN, R.		
IPC分类号	A61M5/178 A61B17/34		
CPC分类号	A61M13/003 A61B17/3439 A61B17/3474 A61B2017/00907 A61B2017/3441 A61B2017/3456 A61B2017/347		
优先权	61/023539 2008-01-25 US		
其他公开文献	EP2231233B1 EP2231233A4		
外部链接	Espacenet		

摘要(译)

系统，装置和方法允许在将套管插入体腔之前吹入体腔。进入系统的一些实施例包括闭塞器，套管针和流体流动通道。进入系统具有闭合配置，其中进入系统的远端与流体流动通道流体隔离，以及打开配置，其中进入系统的远端流体连接到流体流动通道，从而允许流体流动，例如，吹入气体进入体腔。