

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 November 2011 (17.11.2011)

(10) International Publication Number
WO 2011/143264 A1

(51) International Patent Classification:

A61B 1/05 (2006.01)

(74) Agent: **DIPPERT, William, H.**; Eckert Seamans Cherin & Mellott, LLC, U.S. Steel Tower, 600 Grant Street-44th Fl., Pittsburgh, PA 15219-2788 (US).

(21) International Application Number:

PCT/US2011/035984

(22) International Filing Date:

10 May 2011 (10.05.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/333,189 10 May 2010 (10.05.2010) US

(71) Applicant (for all designated States except US):
NANAMED,LLC [US/US]; 157 Veterans Drive, Suite C, Northvale, NJ 07647 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **HADANI, Ron** [US/US]; 85 Huyler Landing Road, Cresskill, NJ 07626 (US). **HARAMATY, Lior**; 11 Whitewood Road, Tenafly, NJ 07670 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR IMAGING AN INTERIOR SURFACE OF AN INTRACORPOREAL CAVITY

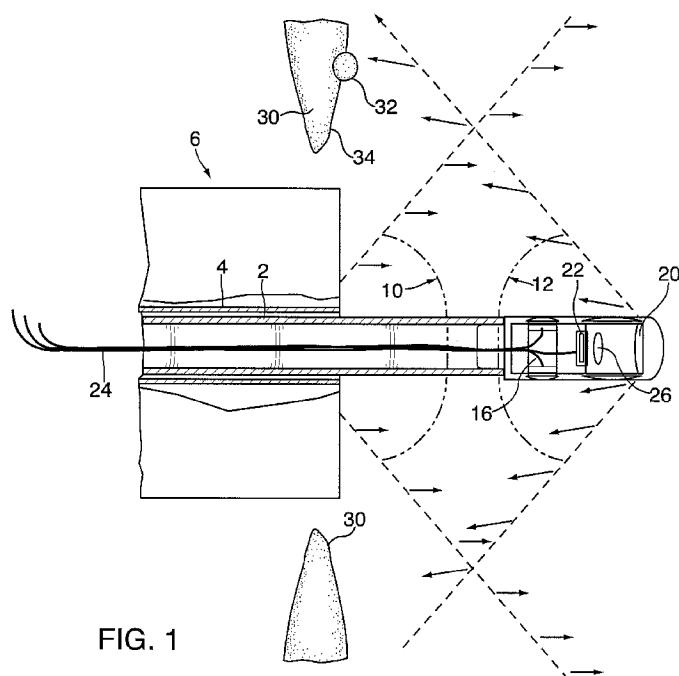

(57) Abstract: An endoscopic imaging catheter is configured for insertion, optionally via a longitudinal channel of an endoscopic insertion tube. The endoscopic imaging catheter includes reflecting and optical elements and an imaging element. The reflecting element reflects onto the imaging element through the optical element side and rear views of at least a portion, or the entire 360° view of a wall encircling an intrabody lumen around the axis of said the longitudinal channel.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

METHOD AND DEVICE FOR IMAGING AN INTERIOR SURFACE OF AN INTRACORPOREAL CAVITY

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is based upon and claims the benefit of the filing date of co-pending, commonly assigned U.S. Provisional Patent Application Serial No. 61/333,189, filed May 10, 2010, incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The present invention relates to an endoscope assembly. More particularly, the invention relates to an auxiliary endoscopic imaging catheter and a method of performing a medical procedure.

BACKGROUND OF THE INVENTION

[0003] An endoscope is a medical or industrial device comprising a flexible or rigid tube and a camera or fiber optics mounted on the distal end of the tube. The endoscope is insertable into an internal body cavity through a body orifice or a surgical incision to examine the body cavity and tissues as part of a diagnosis or therapeutic procedure. The tube of the endoscope has one or more longitudinal channels, which may be used for irrigation, or suction, or through which an instrument can reach the body cavity to take samples of suspicious tissues or to perform other surgical procedures such as polypectomy, tissue ablation or localized drug delivery.

[0004] There are many types of endoscopes, and they are named in relation to the organs or areas with which they are used. For example, gastrosopes are used for examination and treatment of the esophagus, stomach, and duodenum; colonoscopes are used for examination and treatment of the colon; bronchoscopes are used for examination and treatment of the lungs and bronchi; laparoscopes are

used for examination and treatment of the peritoneal cavity; sigmoidoscopes are used for examination and treatment of the rectum and the sigmoid colon; arthroscopes are used for examination and treatment of joints; cystoscopes are used for examination and treatment of the urinary bladder; ureteroscopes are used for examination and treatment of the ureters and kidneys; and angioscopes are used for examination and treatment of blood vessels.

[0005] Many conventional endoscopes include a single forward-viewing fiber bundle or a camera mounted at the distal end of the endoscope that captures and transmits an image to an eyepiece, in the case of fiber bundle, or to a video display monitor at the proximal end. The image is used to assist a medical professional in advancing the endoscope into a body cavity and looking for abnormalities. The camera provides the medical professional with a two-dimensional view from the distal end of the endoscope. To capture an image from a different angle or in a different portion of the endoscope, the endoscope must be maneuvered, repositioned, articulated, or moved back and forth. All these maneuvers of the endoscope prolong the procedure and cause added discomfort, complications, and risks to the patient. Additionally, in an environment such as the lower gastrointestinal tract, flexures, tissue folds, and unusual geometries of the organ may prevent the endoscope's forward-looking camera from viewing behind tissue folds, flexures, and other "hidden" areas of the lumen. The inability to view behind the folds, flexures, and other "hidden" areas may cause a potential polyp to be missed during colonoscopy.

OBJECTS OF THE INVENTION

[0006] It is an object of the invention to overcome the problem of limited forward-looking characteristics of known endoscopes.

[0007] It is also an object of the invention to provide an endoscopic imaging catheter comprising:

a longitudinally extending shaft having a proximal end, a distal end, and an outer surface, wherein the distal end comprises a portion that is transparent;

a source of light in the distal end of the shaft;

a proximally facing reflective element positioned within the distal end of the shaft; and

an imaging element positioned within the distal end of the shaft and in communication with the reflective element,

wherein the imaging element in the distal end of the shaft can obtain images of up to 360°, preferably 360°, around the distal end of the shaft and in a proximal or substantially proximal direction.

[0008] It is a further object of the invention to provide an auxiliary endoscopic imaging catheter for insertion via a longitudinal working channel in an endoscope or an endoscopic insertion tube, comprising:

a longitudinally extending shaft having a proximal end, a distal end, and an outer surface, wherein the distal end comprises a portion that is transparent;

a source of light in the distal end of the shaft;

a proximally facing reflective element positioned within the distal end of the shaft; and

an imaging element positioned within the distal end of the shaft and in communication with the reflective element,

wherein the imaging element in the distal end of the shaft can obtain images of up to 360°, preferably 360°, around the distal end of the shaft and in a proximal or substantially proximal direction.

[0009] These and other objects of the invention will become more apparent from the discussion below.

SUMMARY OF THE INVENTION

[00010] In one embodiment, the present invention provides for a retrograde or rear view that augments the forward-looking view of a conventional endoscope. This embodiment provides for a rear-looking video camera and a light source, mounted on the distal end of an endoscopic insertion tube, that together provide for an auxiliary endoscopic imaging catheter.

[00011] Optionally, the auxiliary endoscopic imaging catheter is designed to be insinuated into a channel of a conventional endoscope and to exit from the distal opening of the channel of the conventional endoscope.

[00012] According to an embodiment of the invention, the endoscope is an auxiliary endoscopic imaging catheter. The endoscope assembly includes a main endoscope that includes an insertion tube, a forward-viewing imaging device mounted at a distal end area of the insertion tube, and a channel extending through the insertion tube. The auxiliary endoscopic imaging catheter extends through the channel of the insertion tube of the main endoscope and exits from a distal opening of the channel of the insertion tube.

[00013] According to another embodiment of the invention, the auxiliary endoscopic imaging catheter is moveable along the channel of the main endoscope to adjust the distance between the camera and light source of the auxiliary endoscopic catheter and the camera and light source of the main endoscope in order to avoid optical interaction or cross-talk between them.

[00014] In an exemplary embodiment of the invention, the camera of the auxiliary endoscopic imaging catheter allows for capturing at least a portion of a fold, flexure, or other area “hidden” to a forward-looking main endoscope, without maneuvering or articulating the tip of the main endoscope.

[00015] Optionally, parts or the entire auxiliary endoscopic imaging catheter are disposable and or replaceable

[00016] Optionally, the auxiliary endoscopic imaging catheter is flexible and does or does not include a steering or articulation mechanism.

[00017] In accordance with another embodiment of the invention, an auxiliary endoscopic imaging catheter for insertion via a longitudinal channel of a main endoscope's insertion tube, comprises a distal head which includes a rear view camera and light source. The rear view camera includes optical components including a mirror, which without any movement, continuously reflects to the camera the surface of the cavity located behind to the side and optionally in front of the camera.

[00018] The present invention, in certain embodiments thereof, relates to a method and an apparatus for intrabody imaging and, more particularly, but not exclusively, to a method and an endoscope for imaging to the side of the endoscope.

[00019] According to certain embodiments of the present invention, there is provided an endoscopic imaging catheter which is optionally designed to be inserted via a working channel of an endoscopic insertion tube, and which allows the imaging of walls which encircle an intrabody lumen. Optionally, this catheter is used for imaging portions of the wall which are outside the view of a camera provided with the endoscope insertion tube, for example, portions of which are behind the view of such camera.

[00020] Optionally, both an insertion tube imager and a catheter imager are used together to image different and possibly overlapping parts of the intrabody lumen, optionally simultaneously. Optionally or alternatively, illumination is shared between the two imaging systems. Optionally, the imaging catheter includes an illumination guide or means. Optionally, such illumination means is arranged so that

it does not directly illuminate the imaging system of the imaging catheter.

Optionally or alternatively, the imaging catheter imaging system is arranged so that it is not directly illuminated by an illumination means of the endoscope, for example, if the catheter is advanced a sufficient amount. Optionally, this direct illumination is prevented by recessing one or more parts of the imaging system of the imaging catheter so that the body of the imaging catheter blocks light from the illumination means of the endoscope. Optionally or alternatively to changing an imaging axis of an imaging element of the imaging catheter, the illumination is reflected, for example, using a mirror, towards the wall of the intrabody lumen, optionally to overlap with a visual field of the endoscopic imaging catheter.

[00021] In another embodiment of the invention, the endoscopic imaging catheter is covered with a protective sheath, optionally disposable. Such a sheath, which is optionally made from a relatively inexpensive, transparent material such as polyethylene terephthalate (PET) or polycarbonate, allows using the endoscopic imaging catheter in multiple procedures, with multiple patients, without having to perform time consuming disinfective reprocessing procedures. Such a sheath may reduce the price of each one of the procedures. Optionally, such a sheath is designed for a single use to reduce the risk of patient to patient cross contamination. For example, the sheath may tear when removed or may be elastic and provided in everted form or rolled-up for mounting on the imaging catheter.

[00022] In another embodiment of the invention, the endoscopic imaging catheter is sized and shaped so that it can be used with a plurality of different endoscope insertion tube designs.

[00023] In another embodiment of the invention, the imaging catheter includes an imaging element and an optional image axis changing element (e.g., a mirror). Optionally, these elements are aligned along the longitudinal axis of the shaft.

[00024] Optionally, the imaging element and/or mirror are arranged to simultaneously image on multiple sides of or around the imaging catheter.

[00025] In another embodiment of an auxiliary endoscopic imaging catheter of the invention, for insertion via a working or longitudinal channel of an endoscopic insertion tube, the catheter comprises:

an optical element and

an imaging element,

wherein the optical element and the imaging element are capable of capturing an image of up to 360° of the side and rearward-looking views of a corporeal wall encircling an intrabody lumen.

[00026] In another embodiment of an auxiliary endoscopic imaging catheter of the invention, the optical element comprises a reflecting optical element that is distal or proximal in relation to said imaging element when the catheter exits the longitudinal channel.

[00027] In another embodiment of an auxiliary endoscopic imaging catheter of the invention, the optical element is distal or proximal in relation to said imaging element when the catheter exits the longitudinal channel.

[00028] In another embodiment of an auxiliary endoscopic imaging catheter of the invention, the catheter further comprises an illumination source located proximal or distal to the imaging element.

[00029] In another embodiment of an auxiliary endoscopic imaging catheter of the invention, the illumination source is structured and mounted as a 360° ring thus illuminating the side, rear, and optionally front field of view of said imaging element, approximately 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter.

[00030] In another embodiment of an auxiliary endoscopic imaging catheter of the invention, an illumination source is located proximal or distal to the optical element.

[00031] In another embodiment of an auxiliary endoscopic imaging catheter of the invention, the illumination source is structured and mounted as a 360° ring thus illuminating the side, rear, and optionally front field of view of said imaging element, approximately 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter.

[00032] In another embodiment of an auxiliary endoscopic imaging catheter of the invention, an illumination source is attached to one end of a rotatable wire.

[00033] In another embodiment of an auxiliary endoscopic imaging catheter of the invention, rotating or wobbling of said rotatable wire in its other end around its long axis allows rotating or wobbling said illumination source to cover a motion of 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter, allowing the illumination of said side and rear view or at least a portion, of the entire 360° view of a wall encircling an intrabody lumen, which is located behind the imaging element, around the axis of said the longitudinal channel.

[00034] In another embodiment of an auxiliary endoscopic imaging catheter of the invention, an illumination source comprises a single light source or a plurality of light sources.

[00035] In another embodiment of an auxiliary endoscopic imaging catheter of the invention, the illumination source comprises one or more LEDs.

[00036] In another embodiment of an auxiliary endoscopic imaging catheter of the invention, said endoscopic insertion tube is capable of performing a procedure from a group consisting of anoscopy, arthroscopy, bronchoscopy, colonoscopy,

cystoscopy, esophagogastro-duodenoscopy (EGD), laparoscopy, and sigmoidoscopy.

[00037] In another embodiment of an auxiliary endoscopic imaging catheter of the invention, a system comprises an endoscopic imaging catheter and a sheath sized and shaped to cover said the auxiliary endoscopic imaging catheter.

[00038] In an embodiment of a method of the invention of probing an intrabody lumen, the method comprises:

inserting a standard endoscope having a working channel into a patient's organ or corporeal lumen;

inserting an endoscopic imaging catheter of claim 1 into the working channel; and

advancing the distal tip of the imaging catheter distal to the working channel of the endoscope,

wherein first and second images of the intrabody lumen and a segment of an inner wall encircling said intrabody lumen can be captured.

[00039] In one embodiment of the invention, first and second images are captured substantially simultaneously.

[00040] In an embodiment of an endoscopic imaging catheter of the invention for capturing rearward images, the catheter comprises:

an optical element;

an imaging element; and

an illumination source,

wherein the optical element and the imaging element are capable of capturing an image of up to 360° of the side and rearward-looking views of a corporeal wall

encircling an intrabody lumen and wherein the illumination source comprises a 360° ring capable of illuminating up to 360° around a longitudinal axis of the catheter.

[00041] In an embodiment of an endoscopic imaging catheter of the invention for capturing rearward images, the optical element comprises a reflecting optical element that is distal in relation to said imaging element when the catheter exits the longitudinal channel.

[00042] In an embodiment of an endoscopic imaging catheter of the invention for capturing rearward images, the optical element is distal in relation to said imaging element when the catheter exits the longitudinal channel.

[00043] In an embodiment of an endoscopic imaging catheter of the invention for capturing rearward images, the illumination source is located proximal to the imaging element.

[00044] In an embodiment of an endoscopic imaging catheter of the invention for capturing rearward images, the illumination source is structured and mounted as a 360° ring thus illuminating the side, rear, and optionally front field of view of said imaging element, up to 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter.

[00045] In an embodiment of an endoscopic imaging catheter of the invention for capturing rearward images, the illumination source is located proximal to the optical element.

[00046] In an embodiment of an endoscopic imaging catheter of the invention for capturing rearward images, the illumination source is structured and mounted as a 360° ring thus illuminating the side, rear, and optionally front field of view of said imaging element, up to 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter.

[00047] In an embodiment of an endoscopic imaging catheter of the invention for capturing rearward images, the illumination source is attached to one end of a rotatable wire.

[00048] In an embodiment of an endoscopic imaging catheter of the invention for capturing rearward images, rotating or wobbling of said rotatable wire in its other end around its long axis allows rotating or wobbling said illumination source to cover a motion of 360° degrees around the longitudinal axis of the auxiliary endoscopic imaging catheter, allowing the illumination of said side and rear view or at least a portion, of the entire 360° view of a wall encircling an intrabody lumen, which is located behind the imaging element, around the axis of said the longitudinal channel.

[00049] In an embodiment of an endoscopic imaging catheter of the invention for capturing rearward images, the illumination source comprises a single light source or a plurality of light sources.

[00050] In an embodiment of an endoscopic imaging catheter of the invention for capturing rearward images, the illumination source comprises one or more LEDs.

[00051] In an embodiment of an endoscopic imaging catheter of the invention for capturing rearward images, the endoscopic imaging catheter is capable of performing a procedure from a group consisting of anoscopy, arthroscopy, bronchoscopy, colonoscopy, cystoscopy, esophagogastro-duodenoscopy (EGD), laparoscopy, and sigmoidoscopy.

[00052] In an embodiment of an endoscopic imaging catheter of the invention for capturing rearward images, a system comprises an endoscopic imaging catheter and a sheath sized and shaped to cover said endoscopic imaging catheter.

BRIEF DESCRIPTION OF THE DRAWINGS

[00053] Fig. 1 is a schematic of one embodiment of an auxiliary endoscopic imaging catheter of the invention;

[00054] Fig. 2 is a schematic of another embodiment of an auxiliary endoscopic imaging catheter of the invention; and

[00055] Figs. 3 and 4 are each an oblique view of a distal section of an auxiliary endoscope imaging catheter according to the invention.

DETAILED DESCRIPTION OF THE INVENTION

[00056] Some embodiments of the invention are herein described, by way of example only, with reference to the accompanying drawings. With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of embodiments of the invention. In this regard, the description taken with the drawings makes apparent to those skilled in the art how embodiments of the invention may be practiced.

[00057] Fig. 1 is a schematic representation of the distal portion of an auxiliary endoscopic imaging catheter 2, according to one embodiment of the present invention. Auxiliary endoscopic imaging catheter 2 is shown exiting a working channel 4 of a primary endoscope 6. A forward-looking field of view 10 of primary endoscope 6 is augmented by a side and rearward-looking field of view 12 of auxiliary endoscopic imaging catheter 2. Both fields of view 10 and 12 are 360° around the longitudinal axis (not shown) of primary endoscope 6 and auxiliary endoscopic imaging catheter 2, respectively. Auxiliary endoscopic imaging catheter 2 includes illumination component 16, which illuminates 360° around catheter 2 and correlates with the field of view 12 of auxiliary endoscopic imaging catheter 2.

[00058] The side and rearward-looking field of view 12 of auxiliary endoscopic imaging catheter 2 is enabled by a distal mirror or lens 20, which reflects the side

and rearward-looking image onto the imaging element or camera 22. Imaging element or camera 22 transmits electronic signals comprising the images through wire 24 to a camera control unit (not shown). The camera control unit converts the electronic signals to video images which may be displayed on a monitor (not shown). Optionally there may be one or more lens 26 between mirror 20 and camera 22.

[00059] In Fig. 1, a tissue fold 30 has a growth 32 (possibly a polyp), which is located on the distal side 34 of fold 30. Growth 32 is outside of, and cannot be seen or detected by, forward-looking field of view 10 of main endoscope 6. However, it is within, and thus can be seen and detected by, the side and rear looking field of view 12 of auxiliary endoscopic imaging catheter 2.

[00060] Fig. 2 is a schematic representation of the distal portion of an auxiliary endoscopic imaging catheter 42, according to another embodiment of the present invention. Auxiliary endoscopic imaging catheter 42 is shown exiting a working channel 44 of a primary endoscope 46. A forward-looking field of view 50 of primary endoscope 46 is augmented by a side and rearward-looking field of view 52 of auxiliary endoscopic imaging catheter 42. Both fields of view 50 and 52 are 360° around the longitudinal axis (not shown) of primary endoscope 46 and auxiliary endoscopic imaging catheter 42, respectively. Auxiliary endoscopic imaging catheter 42 includes illumination component 56, which illuminates 360° around catheter 42 and correlates with the field of view 52 of auxiliary endoscopic imaging catheter 42.

[00061] The side and rearward-looking field of view 52 of auxiliary endoscopic imaging catheter 42 is enabled by an imaging element or camera 62, which receives the side and rearward-looking image. Imaging element or camera 62 transmits electronic signals comprising the images through wire 64 to a camera control unit (not shown). The camera control unit converts the electronic signals to video

images which may be displayed on a monitor (not shown). Optionally there may be one or more lens 66 positioned proximally to camera 62.

[00062] A tissue fold 70 has a growth 72 (possibly a polyp), which is located on the distal side 74 of fold 70. Growth 72 is outside of, and cannot be seen or detected by, forward-looking field of view 50 of main endoscope 46. However, it is within, and thus can be seen and detected by, the side and rear looking field of view 52 of auxiliary endoscopic imaging catheter 42.

[00063] Schematic representations of distal ends of two different embodiments of the invention are shown in Figs. 3 and 4. In Fig. 3, the distal section 80 of a catheter shaft has a proximally facing mirror or reflective surface 82 spaced apart from a lens or optics system 84 in communication with camera 85, with an illumination ring 86. The outer surface 90 of distal portion 80 is transparent in most or all of the space between mirror 82 and lens or optics system 84 or optionally extended and including camera 85 and/or illumination ring 86. Optionally the outer surface 90 between camera 84 and illumination ring 86 is opaque or translucent.

[00064] In Fig. 4, the distal section 100 of a catheter shaft has a proximally facing, reflecting mirror or reflective surface 102 spaced apart from a lens 104, with a camera 106 and a light source 108. The outer surface 110 of distal portion 100 is transparent in most or all of the space between mirror 102 and lens 104.

[00065] Before at least one embodiment of the invention is explained in detail, it is to be understood that the invention is not necessarily limited in its application to the details of construction and the arrangement of the components and/or methods set forth in the following description and/or illustrated in the drawings and/or the Examples. The invention is capable of other embodiments or of being practiced or carried out in various ways.

[00066] The description above relates to an endoscopic imaging catheter which is intended for use with a “standard” endoscope, such as endoscope 96. Such standard endoscope may be used in various medical imaging procedures in which an intrabody cavity or lumen is imaged, for example, anoscopy, arthroscopy, bronchoscopy, colonoscopy, cystoscopy, esophagogastro-duodenoscopy (EGD), trans-nasal esophagoscopy (TNE), laryngoscopy, laparoscopy, and sigmoidoscopy.

[00067] A standard endoscope includes an insertion tube whose distal section can optionally be articulated, for example, by an articulation knob (or other control), which may be part of an endoscope control/handle unit. Optionally, the control/handle unit is similar to an endoscopic control handle that is incorporated in a conventional endoscope used for intrabody procedures, such as biopsy. The insertion tube may be detachable from the control/handle unit or in permanent connection. The diameter, length and flexibility of the insertion tube may depend on the procedure for which the endoscope is used. The endoscope may have one or more working channels, for example, for instrumentation, air insufflation, water irrigation, suction and/or light, for example as commonly used in the art. For example, if the insertion tube is used for colonoscopy, the diameter of the working channel which is integral to the insertion tube thereof may be from about 3 mm to about 4 mm, optionally, from about 3.2 mm to about 4.2 mm. Optionally, the insertion tube may have varying flexibility over its length.

[00068] In one embodiment of the invention, an endoscopic imaging catheter 2 or 42 as described above is inserted via a biopsy/working channel 4 or 44, longitudinally traversing the insertion tube through the working channel. In other embodiments, an imaging catheter according to the invention can be integral to the standard endoscope. Optionally, an imaging catheter is sheathed before being inserted into a biopsy/working channel. Optionally or alternatively, a sheath covers

the endoscope (or at least an insertion tube) and includes a channel and/or elongate extension for extension of the imaging catheter therethrough.

[00069] Optionally, a control handle is provided for manipulation of the imaging catheter, for example, for axial and/or rotational position control and/or for controlling of imaging and/or illumination features thereof. The control/handle unit optionally has a plurality of ports, for example, coupled to the biopsy/working channel, which are in communication with one or more channels in the insertion tube. Each port may allow the insertion of an endoscopic imaging catheter. For example, an endoscopic imaging catheter may be inserted via a biopsy tool port.

[00070] Optionally, the insertion tube has an imaging element mounted at a distal end thereof. Exemplary imaging elements include an image sensor, a tip of a fiber optic bundle, a charge coupled device (CCD) based sensor, a complementary metal oxide semiconductor (CMOS) based sensor and/or a radiation sensitive element. For clarity, this imaging element may be referred to herein as a frontal imaging element or as a main imaging element.

[00071] Optionally, an insertion tube has an illumination source mounted on the distal end thereof (or provided as a separate movable element, e.g., a catheter), for example, one or more light emitting diodes (LEDs) or fiberoptic light bundle(s). Optionally, an illumination source illuminates the field of view of the imaging element (and/or of imaging catheter). Optionally, a control unit is used for controlling and/or aiming frontal imaging element and/or illumination source. The cable or another port may be used for providing an illumination channel or fiber bundle that is connected to the frontal illumination source.

[00072] Optionally, the endoscopic imaging catheter may be extended out past the distal end of insertion tube, under visualization of the frontal/main imaging element. This may increase a safety of such extension.

[00073] According to some embodiments of the present invention, a reusable and/or a disposable sheath is placed over an endoscopic imaging catheter before insertion thereof into the intrabody lumen. A potential advantage of a disposable sheath is that it allows reusing the endoscopic imaging catheter multiple times. Optionally, a protective sheath is made of a layer of transparent flexible material, such as polyethylene terephthalate (PET), for example, 120-gauge PET, polyvinyl chloride (PVC), Polyethylene terephthalate copolymer (PETG), polyurethane, or other suitable transparent materials. Optionally, a sheath has a transparent segment that covers the distal end of an endoscopic imaging catheter. In such an embodiment, the rotatable shaft allows rotating an optical element without changing the orientation of the sheath. A potential advantage is that, the rotation of an optical element cannot damage the inner walls of an intrabody lumen, e.g., in an embodiment where the optical element is exposed. In some embodiments, with or without a sheath, a window is placed over the optical element. In some embodiments, the entire imaging catheter is rotated for achieving the above described lateral imaging.

[00074] It is expected that during the life of a patent maturing from this application many relevant systems and methods will be developed and the scope of the term illumination source, optical element, and imaging element is intended to include all such new technologies *a priori*.

[00075] The terms "comprises", "comprising", "includes", "including", "having" and their conjugates mean "including but not limited to". This term encompasses the terms "consisting of" and "consisting essentially of".

[00076] The phrase "consisting essentially of" means that the composition or method may include additional ingredients and/or steps, but only if the additional ingredients and/or steps do not materially alter the basic and novel characteristics of the claimed composition or method.

[00077] As used herein, the singular form "a", "an" and "the" include plural references unless the context clearly dictates otherwise. For example, the term "a compound" or "at least one compound" may include a plurality of compounds, including mixtures thereof.

[00078] The word "exemplary" is used herein to mean "serving as an example, instance or illustration". Any embodiment described as "exemplary" is not necessarily to be construed as preferred or advantageous over other embodiments and/or to exclude the incorporation of features from other embodiments.

[00079] The word "optionally" is used herein to mean "is provided in some embodiments and not provided in other embodiments". Any particular embodiment of the invention may include a plurality of "optional" features unless such features conflict.

[00080] Throughout this application, various embodiments of this invention may be presented in a range format. It should be understood that the description in range format is merely for convenience and brevity and should not be construed as an inflexible limitation on the scope of the invention. Accordingly, the description of a range should be considered to have specifically disclosed all the possible subranges as well as individual numerical values within that range. For example, description of a range such as from 1 to 6 should be considered to have specifically disclosed subranges such as from 1 to 3, from 1 to 4, from 1 to 5, from 2 to 4, from 2 to 6, from 3 to 6, etc., as well as individual numbers within that range, for example, 1, 2, 3, 4, 5, and 6. This applies regardless of the breadth of the range.

[00081] Whenever a numerical range is indicated herein, it is meant to include any cited numeral (fractional or integral) within the indicated range. The phrases "ranging/ranges between" a first indicate number and a second indicate number and "ranging/ranges from" a first indicate number "to" a second indicate number are

used herein interchangeably and are meant to include the first and second indicated numbers and all the fractional and integral numerals therebetween.

[00082] It is appreciated that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention, which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any suitable subcombination or as suitable in any other described embodiment of the invention. Certain features described in the context of various embodiments are not to be considered essential features of those embodiments, unless the embodiment is inoperative without those elements.

[00083] Although the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, it is intended to embrace all such alternatives, modifications and variations that fall within the spirit and broad scope of the appended claims.

[00084] All publications, patents and patent applications mentioned in this specification are herein incorporated in their entirety by reference into the specification, to the same extent as if each individual publication, patent or patent application was specifically and individually indicated to be incorporated herein by reference. In addition, citation or identification of any reference in this application shall not be construed as an admission that such reference is available as prior art to the present invention. To the extent that section headings are used, they should not be construed as necessarily limiting.

WHAT IS CLAIMED IS:

1. An auxiliary endoscopic imaging catheter for insertion via a longitudinal channel of an endoscopic insertion tube, comprising:

an optical element and
an imaging element,

wherein the optical element and the imaging element are capable of capturing an image of up to 360° of the side and rearward-looking views of a corporeal wall encircling an intrabody lumen.

2. The auxiliary endoscopic imaging catheter of claim 1, wherein the optical element comprises a reflecting optical element that is distal in relation to said imaging element when the catheter exits the longitudinal channel.

3. The auxiliary endoscopic imaging catheter of claim 1, wherein the optical element is distal in relation to said imaging element when the catheter exits the longitudinal channel.

4. The auxiliary endoscopic imaging catheter of claim 1, wherein the optical element is proximal in relation to said imaging element when the catheter exits the longitudinal channel.

5. The auxiliary endoscopic imaging catheter of claim 1, further comprising an illumination source located proximal to the imaging element.

6. The auxiliary endoscopic imaging catheter of claim 5, where the illumination source is structured and mounted as a 360° ring thus illuminating the side, rear, and optionally front field of view of said imaging element, up to 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter.

7. The auxiliary endoscopic imaging catheter of claim 1, further comprising an illumination source located distal to the imaging element.

8. The auxiliary endoscopic imaging catheter of claim 7, where the illumination source is structured and mounted as a 360° ring thus illuminating the side, rear, and optionally front field of view of said imaging element, up to 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter.
9. The auxiliary endoscopic imaging catheter of claim 1, further comprising an illumination source located proximal to the optical element.
10. The auxiliary endoscopic imaging catheter of claim 9, where the illumination source is structured and mounted as a 360° ring thus illuminating the side, rear, and optionally front field of view of said imaging element, up to 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter.
11. The auxiliary endoscopic imaging catheter of claim 1, further comprising an illumination source located distal to the optical element.
12. The auxiliary endoscopic imaging catheter of claim 11, where the illumination source is structured and mounted as a 360° ring thus illuminating the side, rear, and optionally front field of view of said imaging element, up to 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter.
13. The auxiliary endoscopic imaging catheter of claim 1, further comprising an illumination source attached to one end of a rotatable wire.
14. The auxiliary endoscopic imaging catheter of claim 13, wherein rotating or wobbling of said rotatable wire in its other end around its long axis allows rotating or wobbling said illumination source to cover a motion of 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter, allowing the illumination of said side and rear view or at least a portion, of the entire 360° view of a wall encircling an intrabody lumen, which is located behind the imaging element, around the axis of said the longitudinal channel.

15. The auxiliary endoscopic imaging catheter of claim 1, further comprising an illumination source comprising a single light source or a plurality of light sources.

16. The auxiliary endoscopic imaging catheter of claim 15, wherein the illumination source comprises one or more LEDs.

17. The auxiliary endoscopic imaging catheter of claim 1, wherein said endoscopic insertion tube is capable of performing a procedure from a group consisting of anoscopy, arthroscopy, bronchoscopy, colonoscopy, cystoscopy, esophagogastro-duodenoscopy (EGD), laparoscopy, and sigmoidoscopy.

18. A system comprising an endoscopic imaging catheter of claim 1 and a sheath sized and shaped to cover said the auxiliary endoscopic imaging catheter.

19. A method of probing an intrabody lumen, comprising:

inserting a standard endoscope having a working channel into a patient's organ or corporeal lumen;

inserting an endoscopic imaging catheter of claim 1 into the working channel; and

advancing the distal tip of the imaging catheter distal to the working channel of the endoscope,

wherein first and second images of the intrabody lumen and a segment of an inner wall encircling said intrabody lumen can be captured.

20. The method of claim 19, wherein said first and second images are captured substantially simultaneously.

21. An endoscopic imaging catheter for capturing rearward images, comprising:

an optical element;

an imaging element; and

an illumination source,

wherein the optical element and the imaging element are capable of capturing an image of up to 360° of the side and rearward-looking views of a corporeal wall encircling an intrabody lumen and wherein the illumination source comprises a 360° ring capable of illuminating up to 360° around a longitudinal axis of the catheter.

22. The endoscopic imaging catheter of claim 21, wherein the optical element comprises a reflecting optical element that is distal in relation to said imaging element when the catheter exits the longitudinal channel.

23. The endoscopic imaging catheter of claim 21, wherein the optical element is distal in relation to said imaging element when the catheter exits the longitudinal channel.

24. The endoscopic imaging catheter of claim 21, wherein the optical element is proximal in relation to said imaging element when the catheter exits the longitudinal channel.

25. The endoscopic imaging catheter of claim 21, wherein the illumination source is located proximal to the imaging element.

26. The endoscopic imaging catheter of claim 25, where the illumination source is structured and mounted as a 360° ring thus illuminating the side, rear, and optionally front field of view of said imaging element, up to 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter.

27. The endoscopic imaging catheter of claim 21, wherein the illumination source is located distal to the imaging element.

28. The endoscopic imaging catheter of claim 27, where the illumination source is structured and mounted as a 360° ring thus illuminating the side, rear, and

optionally front field of view of said imaging element, up to 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter.

29. The endoscopic imaging catheter of claim 21, wherein the illumination source is located proximal to the optical element.

30. The endoscopic imaging catheter of claim 29, where the illumination source is structured and mounted as a 360° ring thus illuminating the side, rear, and optionally front field of view of said imaging element, up to 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter.

31. The endoscopic imaging catheter of claim 21, wherein the illumination source is located distal to the optical element.

32. The endoscopic imaging catheter of claim 31, where the illumination source is structured and mounted as a 360° ring thus illuminating the side, rear, and optionally front field of view of said imaging element, up to 360° around the longitudinal axis of the auxiliary endoscopic imaging catheter.

33. The endoscopic imaging catheter of claim 21, wherein the illumination source is attached to one end of a rotatable wire.

34. The endoscopic imaging catheter of claim 33, wherein rotating or wobbling of said rotatable wire in its other end around its long axis allows rotating or wobbling said illumination source to cover a motion of 360° degrees around the longitudinal axis of the auxiliary endoscopic imaging catheter, allowing the illumination of said side and rear view or at least a portion, of the entire 360° view of a wall encircling an intrabody lumen, which is located behind the imaging element, around the axis of said the longitudinal channel.

35. The endoscopic imaging catheter of claim 21, wherein the illumination source comprises a single light source or a plurality of light sources.

36. The endoscopic imaging catheter of claim 35, wherein the illumination source comprises one or more LEDs.
37. The endoscopic imaging catheter of claim 21, wherein said endoscopic insertion is capable of performing a procedure from a group consisting of anoscopy, arthroscopy, bronchoscopy, colonoscopy, cystoscopy, esophagogastro-duodenoscopy (EGD), laparoscopy, and sigmoidoscopy.
38. A system comprising an endoscopic imaging catheter of claim 21 and a sheath sized and shaped to cover said endoscopic imaging catheter.
39. A method of probing an intrabody lumen, comprising:
 - inserting an endoscopic imaging catheter of claim 21 into an intrabody lumen; and
 - advancing the distal tip of the imaging catheter through the intrabody lumen, wherein first and second images of the intrabody lumen and a segment of an inner wall encircling said intrabody lumen can be captured.
40. The method of claim 39, wherein said first and second images are captured substantially simultaneously.

1/4


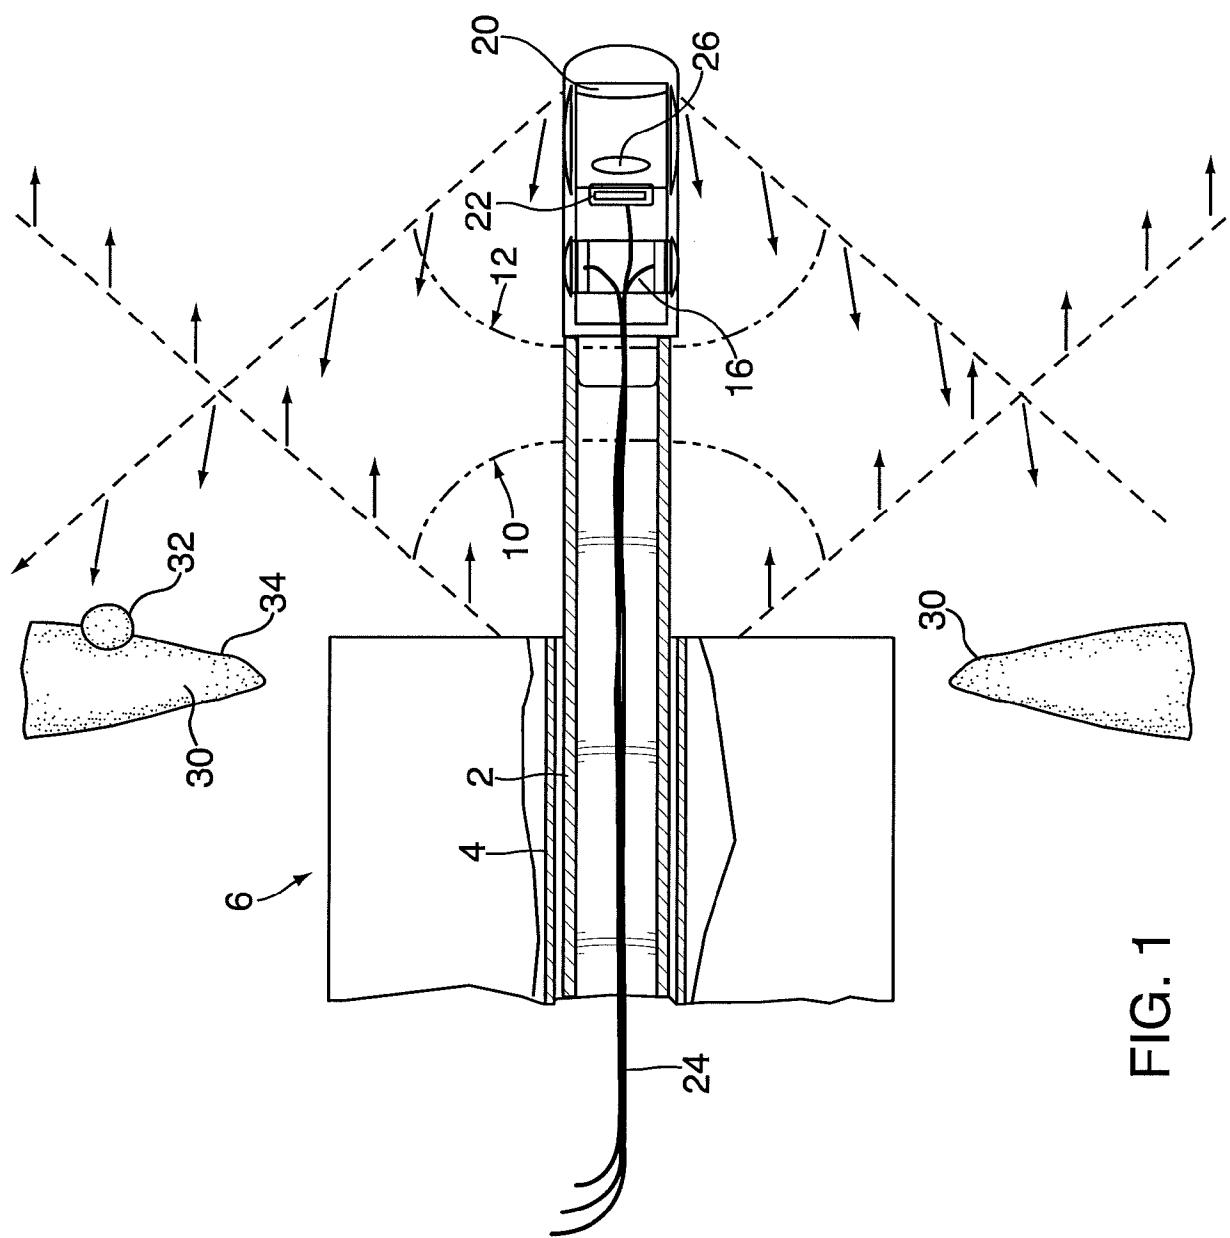


FIG. 1

2/4

FIG. 2

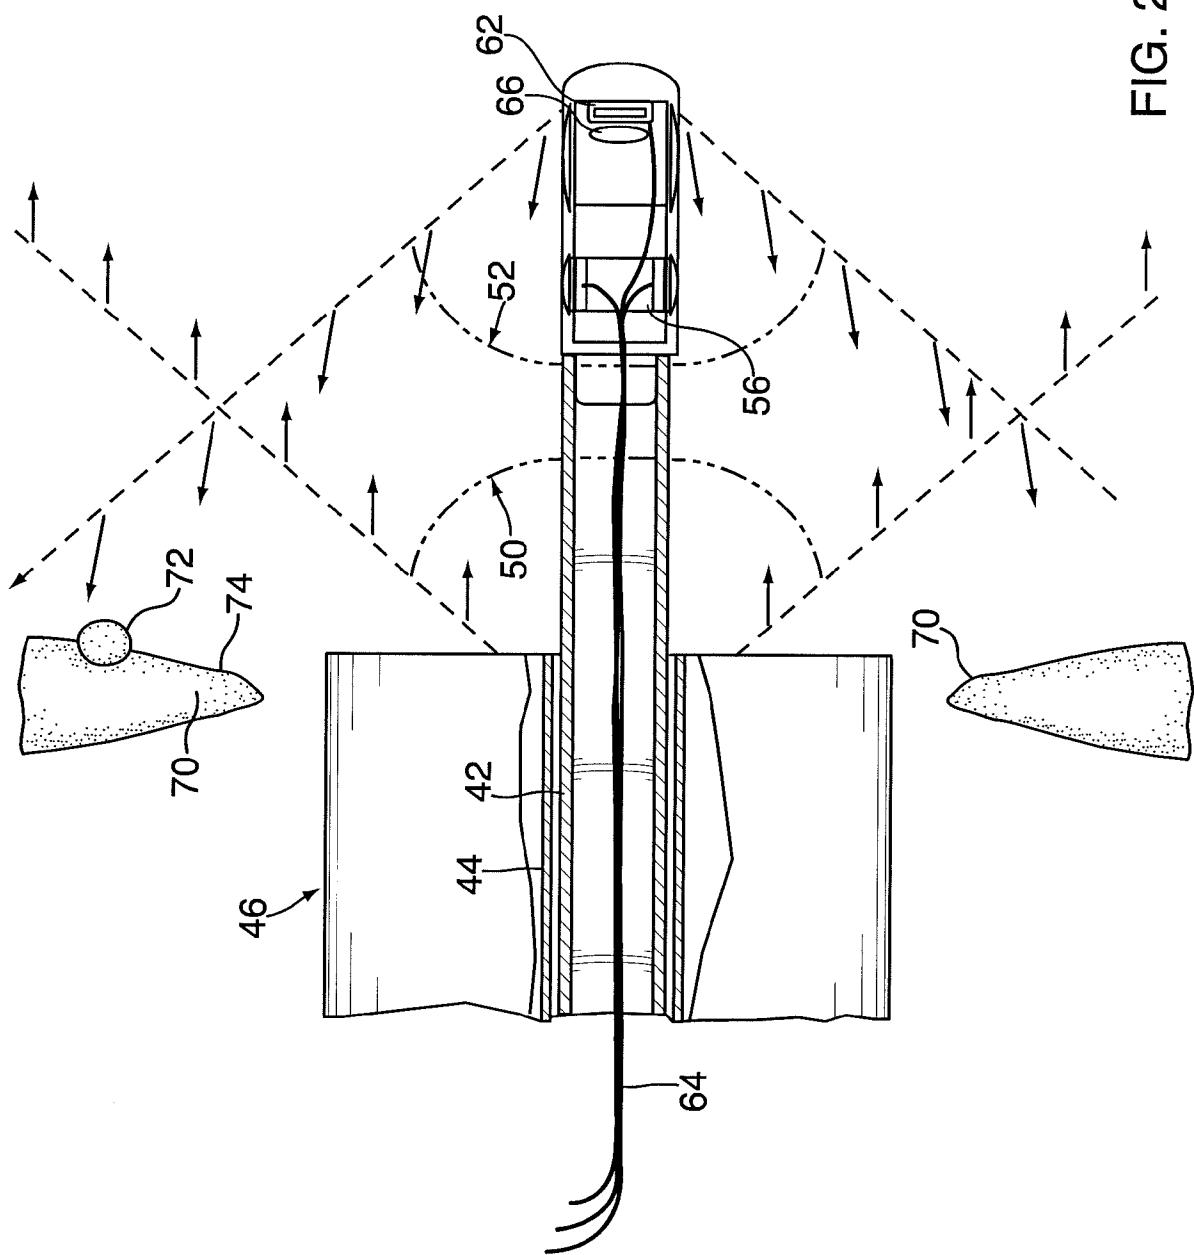

3/4

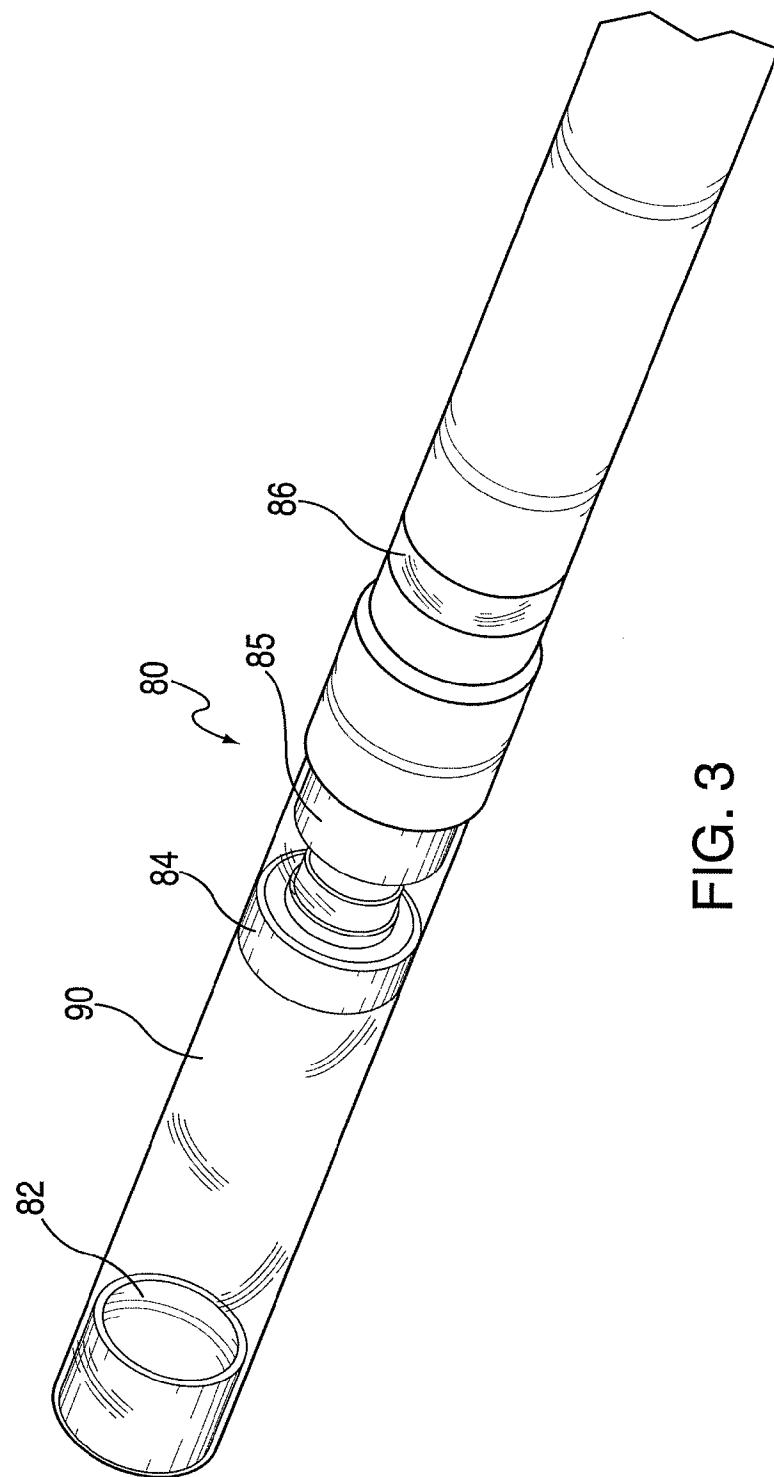


FIG. 3

4/4

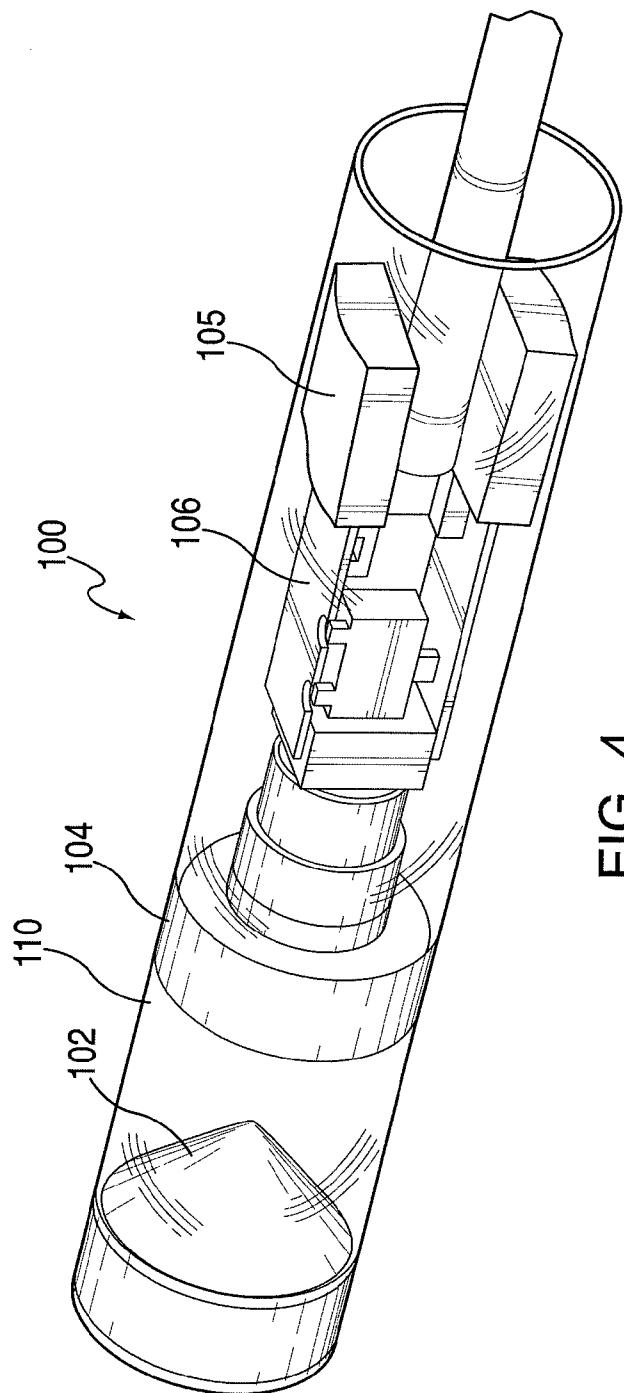


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 11/35984

A. CLASSIFICATION OF SUBJECT MATTER
 IPC(8) - A61B 1/05 (2011.01)
 USPC - 600/170

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC(8) - A61B 1/05 (2011.01)
 USPC - 600/170

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
 IPC(8) - A61B 1/00, 1/005, 1/012, 1/018, 1/04, 1/05
 USPC - 600/101, 104, 109, 113, 121, 153, 160, 170, 171, 173, 175, 176; 359/362, 367

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 PubWEST (PGPB, USPT, EPAB, JPAB); Google (patents, scholar, web)
 Search Terms: endoscope, channel, lumen, insert, imaging, video, camera, 360 panorama, view, look, vision, rear, back, behind, proximal, mirror, reflect, element, device, illuminate, light, LED, ring, rotate, wire, mount, attach, anoscopy, arthroscopy, bronchoscopy,

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2009/002467 A2 (BELSON et al.) 31 December 2008 (31.12.2008) Fig. 1A-1B, 5-7B, 20-21; Page 1, Paragraph 3 through Page 3, Paragraph 2, Page 6, Paragraph 1-2, Page 7, Paragraph 4 through Page 9, Paragraph 1, Page 11, Paragraph 2	1-40
Y	US 2007/0167682 A1 (GOLDFARB et al.) 19 July 2007 (19.07.2007) Fig. 1, 3A-3C, 5A-5C, 10A-10B, 12A-12D; Para [0096]-[0097], [0105]-[0106], [0115]-[0119], [0133]	1-20, 22-24, 33-34
Y	US 2005/0049462 A1 (KANAZAWA) 03 March 2005 (03.03.2005) Fig. 1-6, 18C; Para [0053]-[0056], [0067], [0069], [0071]-[0072], [0152], [0209]	6, 8, 10-12, 21-40
Y	US 2009/0012357 (SUZUSHIMA et al.) 08 January 2009 (08.01.2009) Fig. 5; Para [0091]	4, 24
Y	US 2008/0071288 A1 (LARKIN et al.) 20 March 2008 (20.03.2008) Fig. 18C- 18D; Para [0209]	5-6, 25-26

Further documents are listed in the continuation of Box C.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 10 August 2011 (10.08.2011)	Date of mailing of the international search report 17 AUG 2011
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201	Authorized officer: Lee W. Young PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774

专利名称(译)	用于对体内腔的内表面成像的方法和装置		
公开(公告)号	EP2568868A1	公开(公告)日	2013-03-20
申请号	EP2011781176	申请日	2011-05-10
申请(专利权)人(译)	NANAMED , LLC		
当前申请(专利权)人(译)	NANAMED , LLC		
[标]发明人	HADANI RON HARAMATY LIOR		
发明人	HADANI, RON HARAMATY, LIOR		
IPC分类号	A61B1/05 A61B1/06		
CPC分类号	A61B1/05 A61B1/00179 A61B1/0623 A61B1/0676		
优先权	61/333189 2010-05-10 US		
其他公开文献	EP2568868A4		
外部链接	Espacenet		

摘要(译)

内窥镜成像导管被配置用于可选地经由内窥镜插入管的纵向通道插入。内窥镜成像导管包括反射和光学元件以及成像元件。反射元件通过光学元件的至少一部分的侧视图和后视图反射到成像元件上，或围绕所述纵向通道的轴线围绕体内管腔的壁的整个360°视图。