

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 1 215 990 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:

**27.10.2004 Bulletin 2004/44**

(21) Application number: **00949773.6**

(22) Date of filing: **02.08.2000**

(51) Int Cl.<sup>7</sup>: **A61B 1/00**, G02B 23/24

(86) International application number:  
**PCT/GB2000/002980**

(87) International publication number:  
**WO 2001/022865 (05.04.2001 Gazette 2001/14)**

### (54) **ENDOSCOPE WITH VARIABLE DIRECTION OF VIEW**

ENDOSKOP MIT VARIABLER BLICKRICHTUNG

ENDOSCOPE A DIRECTION DE VISEE VARIABLE

(84) Designated Contracting States:  
**DE FR**

(30) Priority: **28.09.1999 GB 9922960**

(43) Date of publication of application:  
**26.06.2002 Bulletin 2002/26**

(73) Proprietor: **KEYMED  
(MEDICAL & INDUSTRIAL EQUIPMENT) LIMITED  
Southend-on-Sea Essex SS2 5QH (GB)**

(72) Inventor: **RAMSBOTTOM, Andrew, Paul  
Westcliff-on-Sea, Essex SS0 9TH (GB)**

(74) Representative: **Merrifield, Sarah Elizabeth et al  
Boulton Wade Tennant  
Verulam Gardens  
70 Gray's Inn Road  
London WC1X 8BT (GB)**

(56) References cited:  
**WO-A-99/42028 DE-U- 29 907 430  
US-A- 4 500 181**

- **PATENT ABSTRACTS OF JAPAN vol. 018, no.  
619 (C-1278), 25 November 1994 (1994-11-25) &  
JP 06 237881 A (OLYMPUS OPTICAL CO LTD),  
30 August 1994 (1994-08-30)**

**EP 1 215 990 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention relates to an improved swing prism arrangement for varying the direction of view in a borescope or endoscope.

**[0002]** Borescopes and endoscopes are well known devices for viewing features at remote or inaccessible locations, such as within complex machinery or within the human body. Many such devices are provided with a rotatable prism (a so-called "swing prism") at the distal end of the device to provide a continuously variable direction of view. Typically, the maximum range of variation in direction of view which can be obtained is in the region of 70° and it is usually necessary to provide different scopes for forward and lateral viewing. An endoscope with two rotatable prisms to extend the range of variation in direction of view is known from WO-A-9942028.

**[0003]** The present invention provides apparatus for use as a borescope or endoscope, comprising a tube having a proximal end and a distal end; a viewing port at the distal end; means in the tube for receiving a image of a viewed field through the viewing port for transmission to a viewing device, the image receiving means defining a longitudinal axis; a first reflector having a reflective surface mounted at 45° to the longitudinal axis and laterally offset therefrom, and mounted for rotation about a rotation axis perpendicular to and intersecting the longitudinal axis and intersecting the centre of the reflective surface; a second reflector having a reflective surface mounted at 45° to the longitudinal axis and intersected by the longitudinal axis, such that light entering the viewing port is reflected by the first reflector to the second reflector and by the second reflector into the image receiving means; and further comprising means to illuminate the viewed field, comprising means to transmit light to a third reflector in the distal end of the tube and having a reflective surface mounted symmetrically about the longitudinal axis with respect to the first reflector and rotatable synchronously with the first reflector about the rotation axis.

**[0004]** The means for receiving an image may comprise a plurality of lenses for transferring the image from the distal to the proximal end of the tube. In this case, the viewing device may comprise an eyepiece assembly at the proximal end of the tube.

**[0005]** Alternatively, the means for receiving the image may comprise an image-to-video conversion device. In this case, the viewing device may comprise a screen for displaying a video image.

**[0006]** The means to transmit light conveniently comprises a bundle of optical fibres and at least one light guide and/or at least one right-angle prism.

**[0007]** In one embodiment, the means to transmit light includes three right-angled prisms.

**[0008]** The means to transmit light may include a right-angle prism mounted such that its hypotenuse face is adjacent the back of the first reflective surface.

**[0009]** In the apparatus, one or more of the first, second and third reflectors typically comprise a right-angle prism.

**[0010]** The apparatus may further comprise means to prevent rotation of the viewed image as the first reflector rotates about the rotation axis.

**[0011]** When the image receiving means comprises an image-to-video conversion device, it may be mounted to rotate synchronously with the first reflector to prevent rotation of the viewed image.

**[0012]** Alternatively, the means to prevent rotation of the viewed image may comprise a dove prism, a double dove prism or a Pechan prism.

**[0013]** In this case, the apparatus preferably also comprises means to correct inversion of the image produced by the rotation preventing prism(s).

**[0014]** The means to correct inversion of the image may also comprise a dove prism, a double dove prism or a Pechan prism.

**[0015]** The invention will now be described in detail, by way of example only, with reference to the accompanying drawings in which:

FIGURES 1a-1c are schematic views of a prior art swing prism arrangement in the distal end of a borescope or endoscope;

FIGURE 2 is a schematic view of a swing prism arrangement in accordance with an embodiment of the present invention;

FIGURE 3 is a schematic view of the swing prism arrangement of Figure 2 further including means to provide directional illumination;

FIGURE 4 is a schematic view of a light guide arrangement to divert light through 90°;

FIGURE 5 is a schematic view of the arrangement in Figure 3 with further details of the directional illumination;

FIGURES 6a-6c are schematic views of a practical embodiment of the present invention;

FIGURES 7a-7c show arrangements for correcting image rotation; and

FIGURE 8 is a schematic view of an arrangement as in Figure 2 also including a retro focus lens system.

**[0016]** Figure 1a is a schematic view of a conventional swing prism arrangement in the distal tip of a borescope or endoscope 10. A right-angle prism 12 reflects light received through a viewing window 14 into an optical train 16 for transmission to the proximal end of the scope 10 (or through an imaging lens directly on to an image-to-video conversion device such as a CCD chip for transmission to a video screen). The direction of view (DOV) is the angle between the longitudinal axis L defined by the image receiving components in the scope 10, which may be a relay of lenses forming an optical train 16 as shown or an image-to-video conversion device such as a CCD chip, and the viewing axis V defining

the centre of the field of view (FOV). In Figure 1a, the direction of view is  $90^\circ$ . However, the prism 12 is rotatably mounted for rotation about an axis  $r$  perpendicular to the plane of the paper so that it can be tilted as shown in Figures 1b and 1c in order to change the direction of view.

**[0017]** The range of DOV variation achievable by such a mechanism is limited fundamentally by the size of the prism 12 in relation to the optical ray footprint through the prism 12 (the optical ray footprint being the area occupied by the bundle of light rays at a given surface). As the prism 12 is tilted, the angular shift in DOV is twice as large as the actual angular change in orientation of the prism 12. Hence, as the prism rotates, the optical ray footprint on the prism entry face 13 shifts and will eventually be clipped by the edges of the prism 12.

**[0018]** In order to minimise the optical ray footprint at the prism 12, the optical system is usually designed such that the entrance pupil of the system falls at or near to the mirrored surface 15 of the prism 12. The entrance pupil of an optical system is the image of the limiting aperture as viewed in object space. In a borescope or endoscope, the entrance pupil is usually the part of the system where the optical rays occupy the smallest footprint. The size of the entrance pupil determines the amount of light collected by the system and is related to the maximum image brightness and/or image size presented by the scope. There is a trade off between the basic design parameters of the scope, i.e. the entrance pupil size, prism size, field of view and the range of variation in DOV (sometimes referred to as the "swing range"). Generally, for any given size of prism 12, the achievable swing range will decrease as the field of view or the entrance pupil size increase.

**[0019]** A first embodiment of the present invention which achieves a larger range of variation in DOV is illustrated schematically in Figure 2. In this case, two reflectors 18, 20, such as two right-angle prisms with mirror coatings on their hypotenuse faces, are provided. The first prism 18 is mounted for rotation about an axis  $R$  which lies in the plane of the paper and intersects the reflective hypotenuse face 22 of the prism 18 at  $45^\circ$  and at its centre point. The second prism 20 is fixed. In this way, light received by the first prism 18 is reflected from its hypotenuse face 22 into the second prism 20, and reflected by the hypotenuse face 24 of the second prism 20 into the optical train 16 (or imaging lens or CCD chip etc.) of the scope 10.

**[0020]** The arrangement shown provides forward viewing, i.e. a DOV of  $0^\circ$ . However, if the first prism 18 is rotated about the axis  $R$  then the DOV (measured in a plane perpendicular to the plane of the paper) and the direction of the light rays received through the entry face 26 of the prism 18 will also rotate out of the plane of the paper by exactly the same angle as the prism 18 itself rotates. In this way, the optical ray footprint through the prism 18 does not change as the prism 18 rotates.

**[0021]** Therefore, in this arrangement the swing range

is no longer fundamentally limited by the size of the prism 18, which must now only be large enough to accommodate the entrance pupil size and field of view desired. The swing range achievable is now only limited by the mechanical arrangement and any obstructions in the tip of the scope 10.

**[0022]** The swing prism arrangement in accordance with the present invention allows a much wider range of variation in DOV than in conventional scopes. For example, a range of  $0^\circ$ - $120^\circ$  can easily be obtained, allowing both forward and lateral viewing by a single scope.

**[0023]** However, in order to use a borescope or endoscope in most environments it is necessary to illuminate the field of view (FOV). Typically, a bundle of optical fibres is provided in the scope to transmit light from a light source at the proximal end to the distal end of the scope, where it is projected out of an illumination port adjacent the viewing port. As the DOV changes the field of view may fall outside the field of illumination. Conventional swing prism scopes overcome this problem by splitting the bundle of optical fibres into a number of arms and directing each arm to project light over a different region of the DOV range. However, the wider the DOV range, the lower will be the luminous intensity of the illumination provided in each area and the corresponding brightness in the viewed image will decrease.

**[0024]** In accordance with the present invention, this limitation can be avoided by varying the direction of the illumination such that it is always coincident with the direction of view.

**[0025]** Figure 3 is a schematic diagram of an embodiment in which the illumination axis  $I$ , defining the centre of the illumination projected out of the scope, is variable synchronously with the direction of view. Here, a third prism 28 receives light from transmission means (as discussed further below) and reflects it out of the scope 10 as shown. The third prism 28 is symmetrically placed about the longitudinal axis  $L$  with respect to the first prism 18 and is linked to the first prism 18 such that they rotate synchronously about the same axis  $R$ , thereby directing light in the same direction as the DOV. Although the field of view FOV and the field of illumination FOI are laterally offset from one another as shown, within a few millimetres from the scope 10 the two overlap so that in practice the field of view will be illuminated.

**[0026]** In order to provide light into the third prism 28 in the direction of arrows 30, light is transmitted through the scope 10 by a bundle of optical fibres (not shown in Figure 3) in a direction generally parallel with the longitudinal axis  $L$ . This light must then be redirected round at least one  $90^\circ$  bend in order to enter the third prism 28. It is not possible within the confines of a typical borescope with a diameter of, say, 5mm to bend the optical fibres themselves around such an angle. However, this can be accomplished by means of a series of light guides and right-angled prisms as illustrated in Figure 4.

**[0027]** Light from a bundle of optical fibres (not

shown) can be coupled directly into a conventional light guide of rectangular cross-section 34. Light entering the light guide 34, whether from a fibre at the centre of the bundle or from a fibre at the edge of the bundle, and even when the light is directed at a relatively large angle  $\theta$  to the direction of the fibre, is efficiently contained by means of total internal reflection from the side walls of the light guide 34. Light exiting the light guide can be turned through  $90^\circ$  by means of a right-angled prism 36 and into a second light guide 38. The prism 36 must be placed as close as possible to the ends of the two light guides 34, 38 without touching. The small gap 9 (greater than about one wavelength) is necessary in order to preserve the total internal reflection at the surface.

**[0028]** As can be seen in Figure 4, any light contained within the first light guide 34 is necessarily also contained within the prism 36 since the exit face 37 of the prism 36 can be considered as a continuation of the side wall of the first light guide 34, totally reflecting the incident light in the same way. The entrance face 35 of the prism 36 acts similarly to light which has been turned through  $90^\circ$  by reflection from the hypotenuse face 39.

**[0029]** In this way, a series of light guides and prisms can be used to manipulate the light, if necessary through a complex folded path. For example, light may be turned through  $180^\circ$  so as to enter a fourth prism 40 placed back to back with the fixed prism 20 as shown in Figure 5. The fourth prism turns the light through a further  $90^\circ$  into the third prism 28. Since the illumination light is now directed from point at the same axial distance along the scope 10, as the prisms 18 and 20 which gather an image, it is possible to achieve a short tip length, i.e. the length between the distal end of the scope 10 and the viewing window. This is advantageous for use in particularly confined spaces.

**[0030]** Figures 6a to 6c illustrate in schematic form how the present invention may be embodied within the tip of a scope 10. Figure 6a shows a partially cross-sectioned view from above of the scope tip. Figures 6b and 6c respectively show an end view and a side view of the scope tip as in both cases the rotatable prisms 18 and 28 have been rotated about the axis R through approximately  $120^\circ$  as compared with their position shown in Figure 6a.

**[0031]** As best seen in Figure 6c, a bundle of optical fibres 32 is provided in the scope beneath the four prisms 18, 20, 40 and 28 and beneath the optical train 16. Two further fixed prisms 42 and 44 are provided to turn the light from the fibres 32 through  $180^\circ$  so as to enter the fourth prism 40. This fourth prism 40 diverts the light through  $90^\circ$  into the rotating prism 28. The rotating prism 28 again diverts the light through  $90^\circ$  so as to exit the scope through the viewing window 46. The viewing window 46 is preferably partially spherical so as to accommodate the rotating prisms and to allow a large swing range. As shown in Figure 6c, this arrangement is able to accommodate a swing range of  $120^\circ$ . A DOV of  $0^\circ$  and  $90^\circ$  are shown in dotted lines for comparison.

**[0032]** In a conventional swing prism scope, because the light passes through only one right-angled prism the image suffers left-right inversion which needs to be corrected elsewhere in the scope. In the swing prism arrangement of the present invention, light received from a viewed object passes through two right-angled prisms 18, 20 and therefore the image entering the optical train 16 from the prism 20 does not suffer left-right inversion. However, the image will rotate as the rotatable prism 18 is moved. This image rotation may be removed in various ways.

**[0033]** For example, if the scope 10 includes a CCD chip and imaging lens (not shown) rather than an optical train 16 so that an image is provided from the fixed prism 20, through the imaging lens, directly on to the chip, then the chip itself may be arranged to rotate to compensate for rotation of the prism 18.

**[0034]** Alternatively, optical means may be provided for rotating the image. In a borescope using a conventional optical relay train 16, the rotation of the rotating prism 18 can be mechanically linked to a compensating rotation of a suitable image rotation prism which may be included either within the relay lens section or within the ocular assembly (not shown) at the proximal end of the scope 10. Suitable prism arrangements include a dove prism 50, double dove prism 52 and Pechan prism 54 as illustrated in Figures 7a-7c respectively. The dove and double dove prisms can only operate in parallel light and therefore must be positioned either in a parallel relay section or behind the ocular lens. The Pechan prism 46 can operate in divergent or convergent beams, therefore offering greater flexibility in its positioning within the system.

**[0035]** It will be appreciated that these three examples are not exclusive and many other arrangements well known in the art could be used to remove image rotation.

**[0036]** The use of any of these image de-rotation prisms necessarily results in an image inversion and therefore this must be removed by the presence of a second, non-rotating dove, double dove or Pechan prism elsewhere within the optical system.

**[0037]** Another advantage of the system of the present invention is that it allows the use of a negative lens element in a retro-focus type design. Use of a negative lens element is common in fixed DOV systems in which large fields of view are required. The negative lens element serves to direct high obliquity, off-axis principal rays towards the effective aperture stop on the prism surface to maximise the amount of light captured by the prism and entering the optical system. This is not possible with a conventional swing prism scope, of the type illustrated in Figures 1a-1c, because as the prism 12 rotates the optical axis on the negative lens element shifts and leads to unacceptable optical aberrations. However, when a swing prism arrangement in accordance with the present invention is utilised then, as shown in Figure 8, a negative lens element 56 can be placed in front of the entry face of the first rotating prism

18. If the negative lens element 56 is arranged to rotate with the prism 18 about the axis R then the optical axis on the negative lens element 56 does not shift. Thus, the amount of light entering the optical system and in the turn the image brightness achievable is increased.

[0038] As those skilled in the art will appreciate, the present invention provides an improved swing prism scope with a greatly increased variation in the achievable direction of view, thereby obviating the need for separate scopes for forward and lateral viewing. The means for altering the direction of illumination also ensures that an object anywhere within the variable field of view can be properly illuminated for effective viewing. It will also be apparent to the skilled reader that a number of modifications and variations are necessary to the precise details and configurations described herein without departing from the scope of the claims.

### Claims

1. Apparatus for use as a borescope or endoscope (10), comprising a tube having a proximal end and a distal end; a viewing port at the distal end; means in the tube for receiving a image (16) of a viewed field through the viewing port for transmission to a viewing device, the image receiving means defining a longitudinal axis; a first reflector (18) having a reflective surface mounted at 45° to the longitudinal axis and laterally offset therefrom, and mounted for rotation about a rotation axis perpendicular to and intersecting the longitudinal axis and intersecting the centre of the reflective surface; a second reflector (20) having a reflective surface mounted at 45° to the longitudinal axis and intersected by the longitudinal axis; such that light entering the viewing port is reflected by the first reflector (18) to the second reflector (20) and by the second reflector (20) into the image receiving means (16); further comprising means to illuminate the viewed field, comprising means to transmit light to a third reflector (28) in the distal end of the tube and having a reflective surface mounted symmetrically about the longitudinal axis with respect to the first reflector (18) and rotatable synchronously with the first reflector (18) about the rotation axis.
2. Apparatus as claimed in claim 1, wherein the means for receiving an image comprises a plurality of lenses for transferring the image from the distal to the proximal end of the tube.
3. Apparatus as claimed in claim 2, wherein the viewing device comprises an eyepiece assembly at the proximal end of the tube.
4. Apparatus as claimed in claim 1, wherein the means for receiving the image comprises an image-to-video

eo conversion device.

5. Apparatus as claimed in claim 4, wherein the viewing device comprises a screen for displaying a video image.
6. Apparatus as claimed in any preceding claim, wherein the means to transmit light comprises a bundle of optical fibres and at least one light guide and/or at least one right-angle prism.
7. Apparatus as claimed in claim 6, wherein the means to transmit light includes three right-angled prisms.
8. Apparatus as claimed in any preceding claims, wherein the means to transmit light includes a right-angle prism mounted such that its hypotenuse face is adjacent the back of the first reflective surface.
9. Apparatus as claimed in any preceding claim, wherein one or more of the first, second and third reflectors comprises a right-angle prism.
10. Apparatus as claimed in any preceding claim, further comprising means to prevent rotation of the viewed image as the first reflector rotates about the rotation axis.
11. Apparatus as claimed in claim 10, wherein the image receiving means comprises an image-to-video conversion device which is mounted to rotate synchronously with the first reflector to prevent rotation of the viewed image.
12. Apparatus as claimed in claim 10, wherein the means to prevent rotation of the viewed image comprises a dove prism, a double dove prism or a Pechan prism.
13. Apparatus as claimed in claim 12, further comprising means to correct inversion of the image produced by the rotation preventing prism(s).
14. Apparatus as claimed in claim 13, wherein the means to correct inversion of the image comprises a dove prism, a double dove prism or a Pechan prism.
15. Apparatus as claimed in any preceding claim, wherein the apparatus is operable to provide a direction of view which is variable over a range of about 120°.

### Patentansprüche

1. Vorrichtung zur Verwendung als Boreskop oder Endoskop (10), umfassend ein Rohr mit einem proxi-

- malen Ende und einem distalen Ende; eine Sichtöffnung am distalen Ende; Mittel am Rohr zum Empfangen eines Bildes (16) eines durch die Sichtöffnung betrachteten Felds zur Übertragung zu einer Sichtvorrichtung, wobei das Bildempfangsmittel eine Längsachse definiert; einen ersten Reflektor (18) mit einer in 45° zur Längsachse angebrachten und lateral dazu versetzten reflektierenden Fläche, und angebracht zur Rotation um eine Rotationsachse, welche orthogonal zur Längsachse ist und diese schneidet und welche das Zentrum der reflektierenden Oberfläche schneidet; einen zweiten Reflektor (20) mit einer in 45° zur Längsachse angebrachten reflektierenden Fläche und von der Längsachse geschnitten derart, dass in die Sichtöffnung gelangendes Licht von dem ersten Reflektor (18) zu dem zweiten Reflektor (20) und von dem zweiten Reflektor (20) in das Bildempfangsmittel (16) reflektiert wird; ferner umfassend Mittel zum Beleuchten des betrachteten Felds, umfassend Mittel zum Übertragen von Licht zu einem dritten Reflektor (28) am distalen Ende des Rohrs und mit einer bezüglich des ersten Reflektors (18) symmetrisch um die Längsachse angebrachten reflektierenden Fläche und synchron mit dem ersten Reflektor (18) um die Rotationsachse drehbar.
2. Vorrichtung nach Anspruch 1, wobei das Mittel zum Empfangen eines Bildes eine Vielzahl von Linsen zum Übermitteln des Bildes von dem distalen zu dem proximalen Ende des Rohrs umfasst.
  3. Vorrichtung nach Anspruch 2, wobei die Sichtvorrichtung am proximalen Ende des Rohrs eine Okularvorrichtung umfasst.
  4. Vorrichtung nach Anspruch 1, wobei das Mittel zum Empfangen des Bildes eine Bild-zu-Video-Umwandlungsvorrichtung umfasst.
  5. Vorrichtung nach Anspruch 4, wobei die Sichtvorrichtung einen Bildschirm zum Darstellen eines Videobildes umfasst.
  6. Vorrichtung nach einem der vorangehenden Ansprüche, wobei das Mittel zum Übertragen von Licht ein Bündel optischer Fasern und wenigstens einen Lichtleiter und/oder wenigstens ein Rechtwinkel-Prisma umfasst.
  7. Vorrichtung nach Anspruch 6, wobei das Mittel zum Übertragen von Licht drei Rechtwinkel-Prismen umfasst.
  8. Vorrichtung nach einem der vorangehenden Ansprüche, wobei das Mittel zum Übertragen von Licht ein Rechtwinkel-Prisma umfasst, welches derart angebracht ist, dass seine Hypotenuse an die Rückseite der ersten reflektierenden Fläche angrenzt.
  9. Vorrichtung nach einem der vorangehenden Ansprüche, wobei einer oder mehrere der ersten, zweiten und dritten Reflektoren ein Rechtwinkel-Prisma umfasst.
  10. Vorrichtung nach einem der vorangehenden Ansprüche, welche darüber hinaus Mittel zum Verhindern der Rotation des gesehenen Bildes umfasst, wenn der erste Reflektor um die Rotationsachse rotiert.
  11. Vorrichtung nach Anspruch 10, wobei das Bildempfangsmittel eine Bild-zu-Video-Umwandlungsvorrichtung umfasst, welche angebracht ist, um synchron mit dem ersten Reflektor zu rotieren, um eine Rotation des gesehenen Bildes zu verhindern.
  12. Vorrichtung nach Anspruch 10, wobei das Mittel zum Verhindern der Rotation des gesehenen Bildes ein Dove-Prisma, ein Doppel-Dove-Prisma oder ein Pechan-Prisma umfasst.
  13. Vorrichtung nach Anspruch 12, welche darüber hinaus Mittel zum Korrigieren der Inversion des von dem/den Rotation-verhindernden Prisma/Prismen erzeugten Bildes umfasst.
  14. Vorrichtung nach Anspruch 13, wobei das Mittel zum Korrigieren der Inversion des Bildes ein Dove-Prisma, ein Doppel-Dove-Prisma oder ein Pechan-Prisma umfasst.
  15. Vorrichtung nach einem der vorangehenden Ansprüche, wobei die Vorrichtung betreibbar ist, um eine über einen Bereich von ungefähr 120° variable Blickrichtung vorzusehen.

#### Revendications

1. Appareil destiné à être utilisé en tant que fibroscope ou endoscope (10), comprenant un tube ayant une extrémité proximale et une extrémité distale ; un orifice d'observation à l'extrémité distale ; un moyen dans le tube pour recevoir une image (16) d'un champ observé à travers l'orifice d'observation pour sa transmission à un dispositif d'observation, le moyen de réception d'image définissant un axe longitudinal ; un premier réflecteur (18) ayant une surface réfléchissante montée à 45° par rapport à l'axe longitudinal et décalé latéralement par rapport à celui-ci, et monté afin de pouvoir tourner autour d'un axe de rotation perpendiculaire à et interceptant l'axe longitudinal et passant par le centre de la surface réfléchissante ; un second réflecteur (20)

ayant une surface réfléchissante montée à 45° par rapport à l'axe longitudinal et interceptant l'axe longitudinal ; de sorte que la lumière pénétrant par l'orifice d'observation soit réfléchi par le premier réflecteur (18) vers le second réflecteur (20) et par le second réflecteur (20) dans le moyen de réception d'image (16) ; comprenant en outre un moyen pour éclairer le champ observé, comprenant un moyen pour transmettre de la lumière vers un troisième réflecteur (28) à l'extrémité distale du tube et ayant une surface réfléchissante montée symétrique au premier réflecteur par rapport à l'axe longitudinal (18) et de façon à pouvoir tourner en synchronisme avec le premier réflecteur (18) autour de l'axe de rotation.

2. Appareil selon la revendication 1, dans lequel le moyen de réception d'une image comprend une pluralité de lentilles pour transférer l'image de l'extrémité distale à l'extrémité proximale du tube.
3. Appareil selon la revendication 2, dans lequel le dispositif d'observation comprend un montage d'oculaire à l'extrémité proximale du tube.
4. Appareil selon la revendication 1, dans lequel le moyen de réception de l'image comprend un dispositif de conversion d'image en vidéo.
5. Appareil selon la revendication 4, dans lequel le dispositif d'observation comprend un écran pour afficher une image vidéo.
6. Appareil selon l'une quelconque des revendications précédentes, dans lequel le moyen de transmission de lumière comprend un faisceau de fibres optiques et au moins un guide de lumière et/ou au moins un prisme à angle droit.
7. Appareil selon la revendication 6, dans lequel le moyen de transmission de lumière comporte trois prismes à angle droit.
8. Appareil selon l'une quelconque des revendications précédentes, dans lequel le moyen de transmission de lumière comporte un prisme à angle droit monté de façon que sa face d'hypoténuse soit adjacente au dos de la première surface réfléchissante.
9. Appareil selon l'une quelconque des revendications précédentes, dans lequel un ou plusieurs des premier, second et troisième réflecteurs comprend un prisme à angle droit.
10. Appareil selon l'une quelconque des revendications précédentes, comprenant en outre un moyen pour empêcher la rotation de l'image observée lorsque le premier réflecteur tourne autour de l'axe de rota-

tion.

11. Appareil selon la revendication 10, dans lequel le moyen de réception d'image comprend un dispositif de conversion d'image en vidéo qui est monté de façon à tourner en synchronisme avec le premier réflecteur pour empêcher la rotation de l'image observée.
12. Appareil selon la revendication 10, dans lequel le moyen pour empêcher la rotation de l'image observée comprend un prisme de Dove, un prisme de Dove double ou un prisme de Péchan.
13. Appareil selon la revendication 12, comprenant en outre un moyen pour corriger l'inversion de l'image produite par le(s) prisme(s) empêchant la rotation.
14. Appareil selon la revendication 13, dans lequel le moyen de correction de l'inversion de l'image comprend un prisme de Dove, un prisme de Dove double, ou un prisme de Péchan.
15. Appareil selon l'une quelconque des revendications précédentes, dans lequel l'appareil peut être mis en fonctionnement pour produire une direction de visée qui est variable dans un intervalle d'environ 120°.

FIG. 1a.

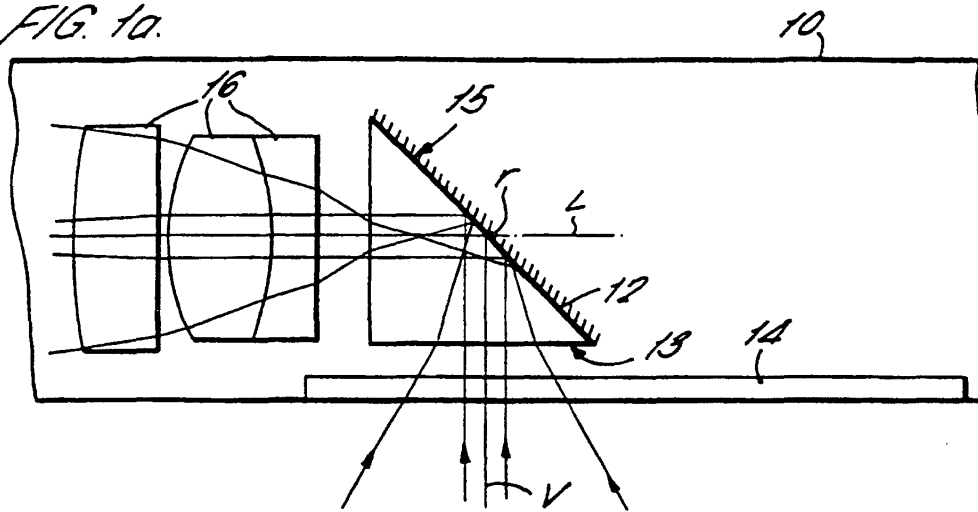


FIG. 1b.

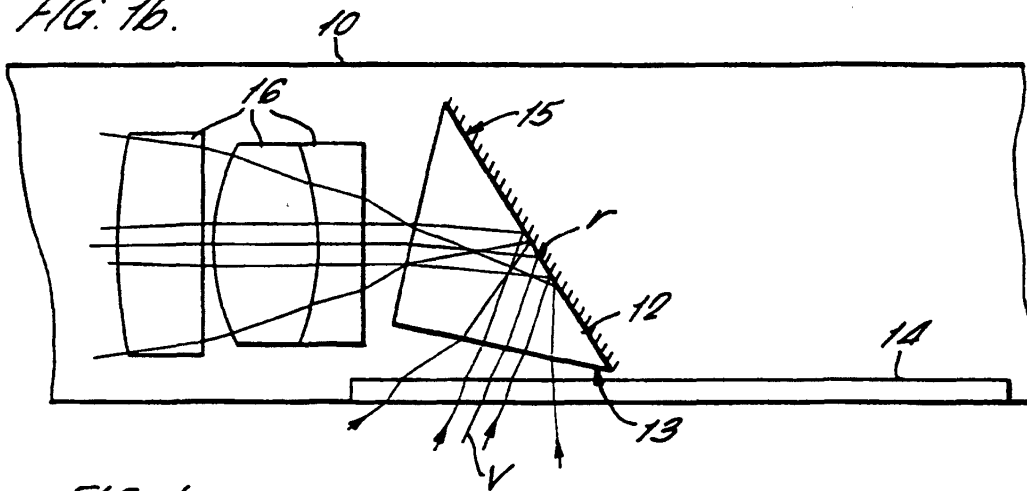
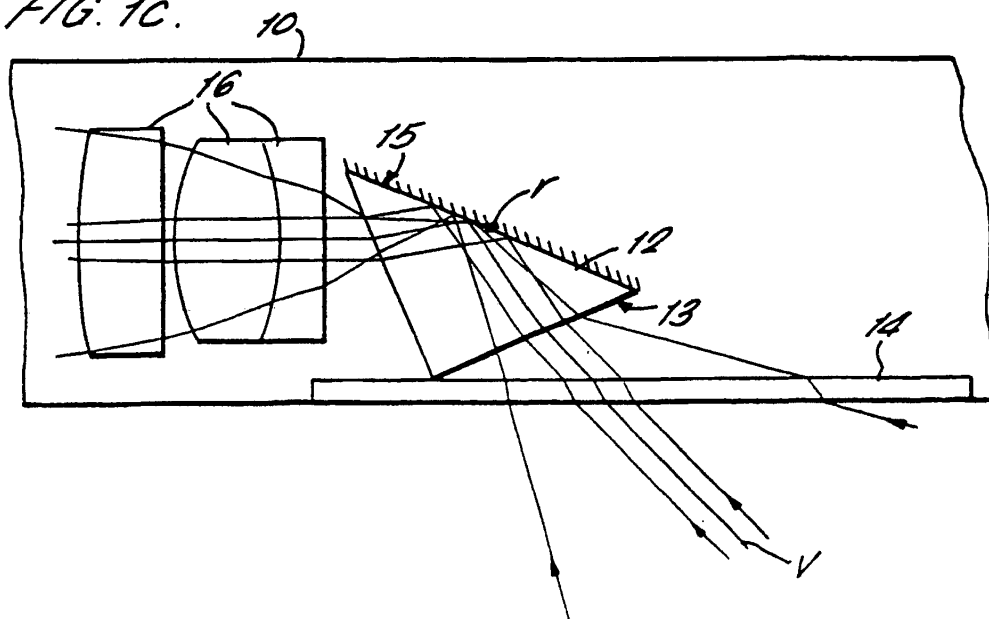
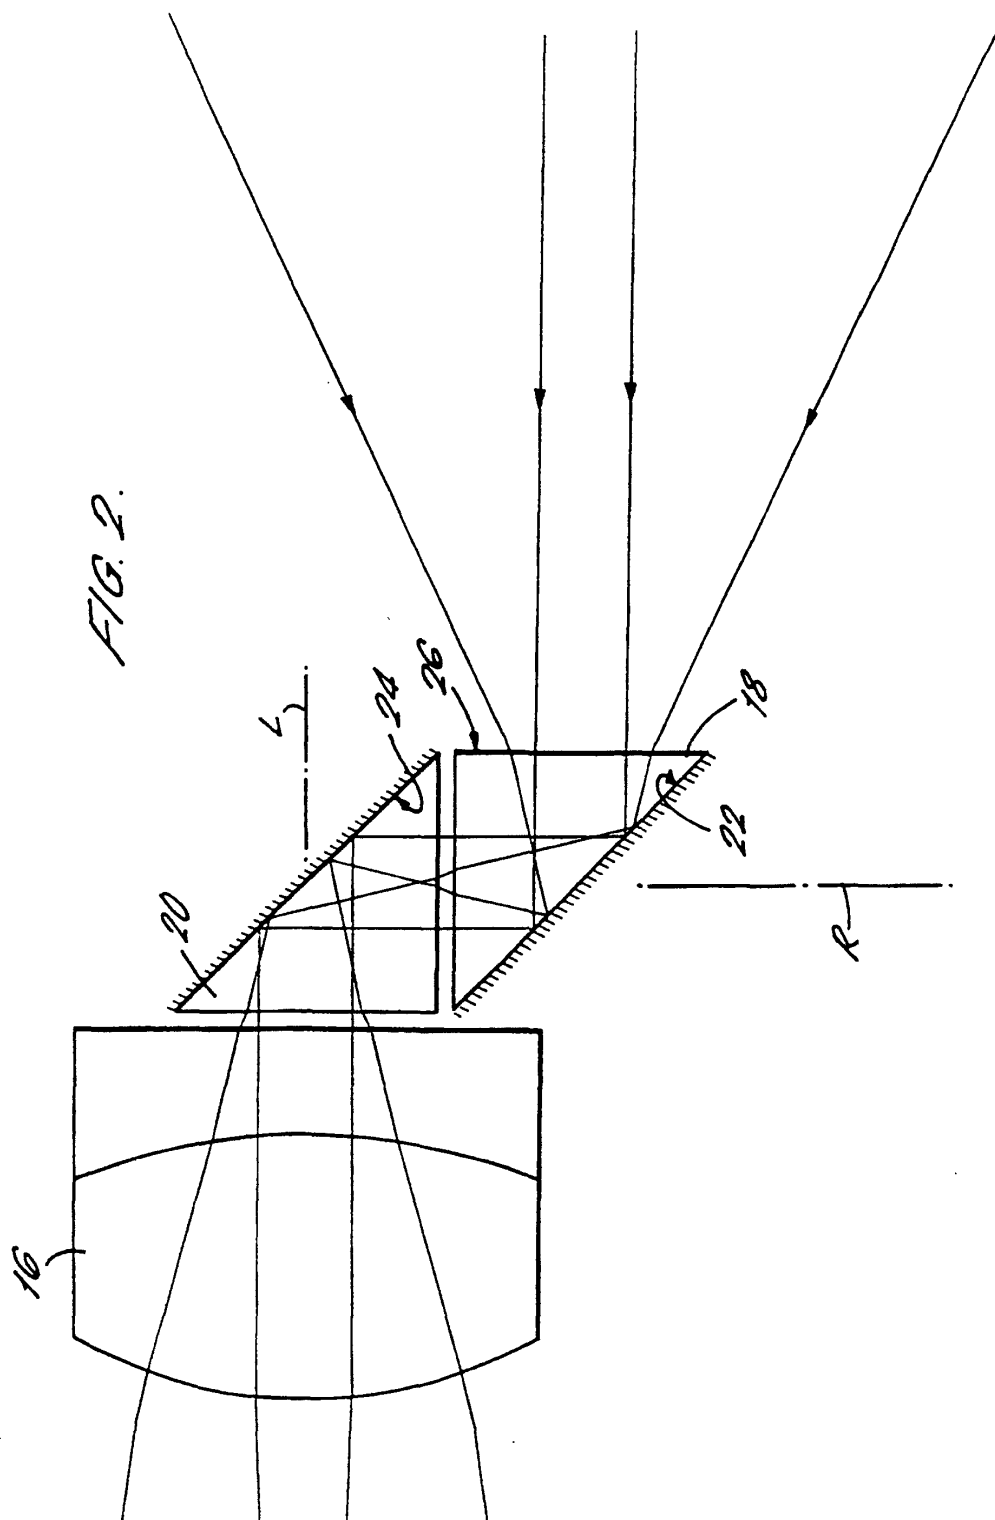


FIG. 1c.







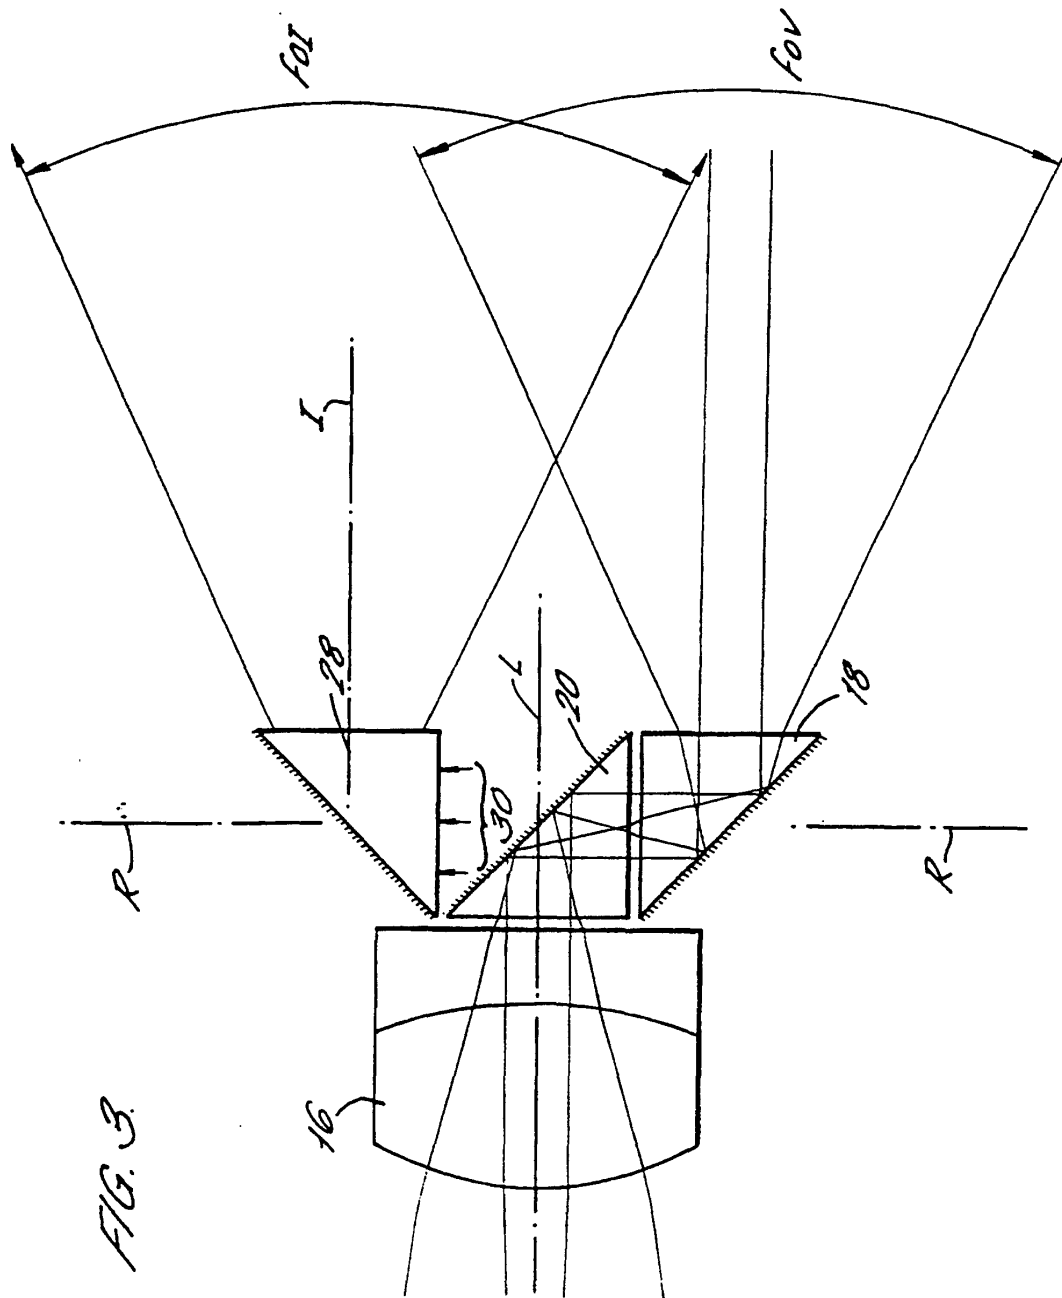
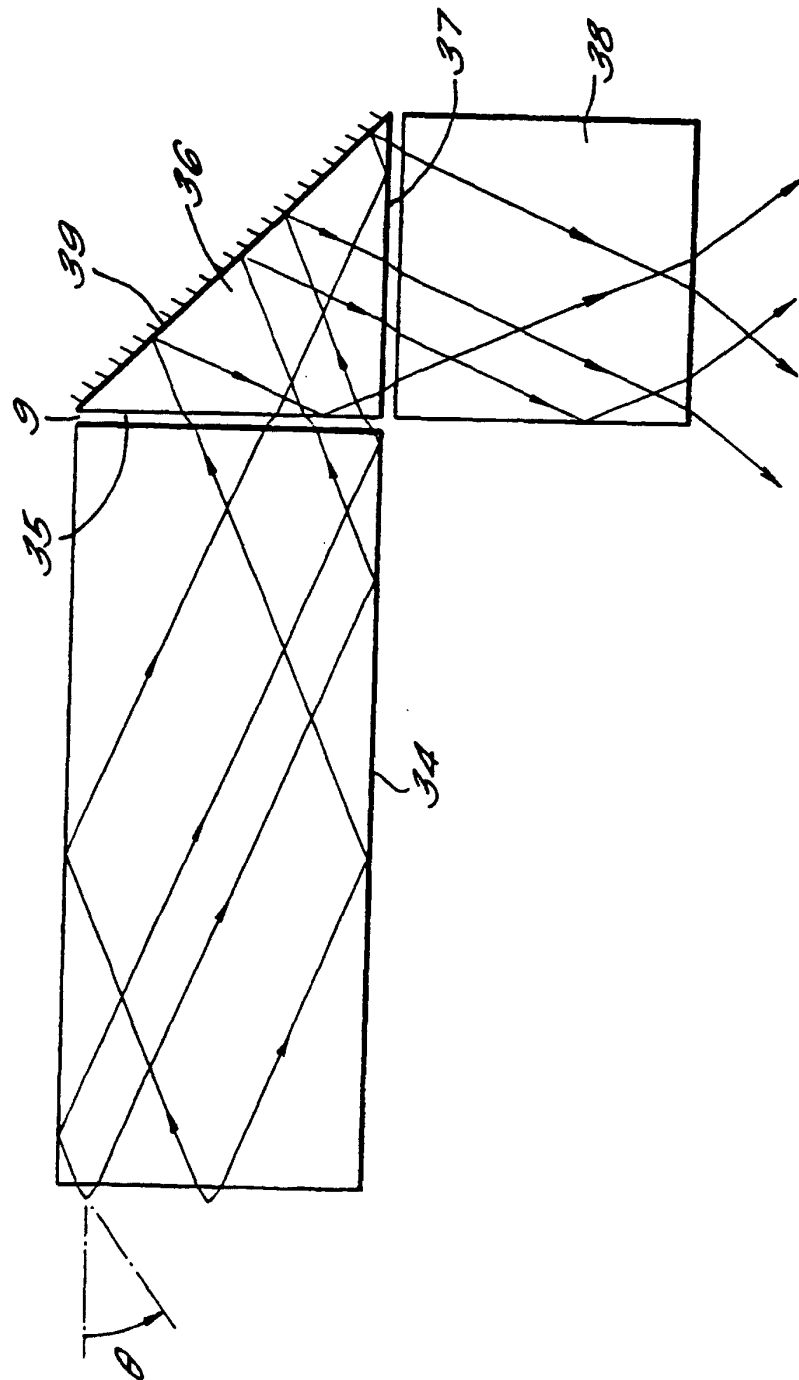


FIG. 4.



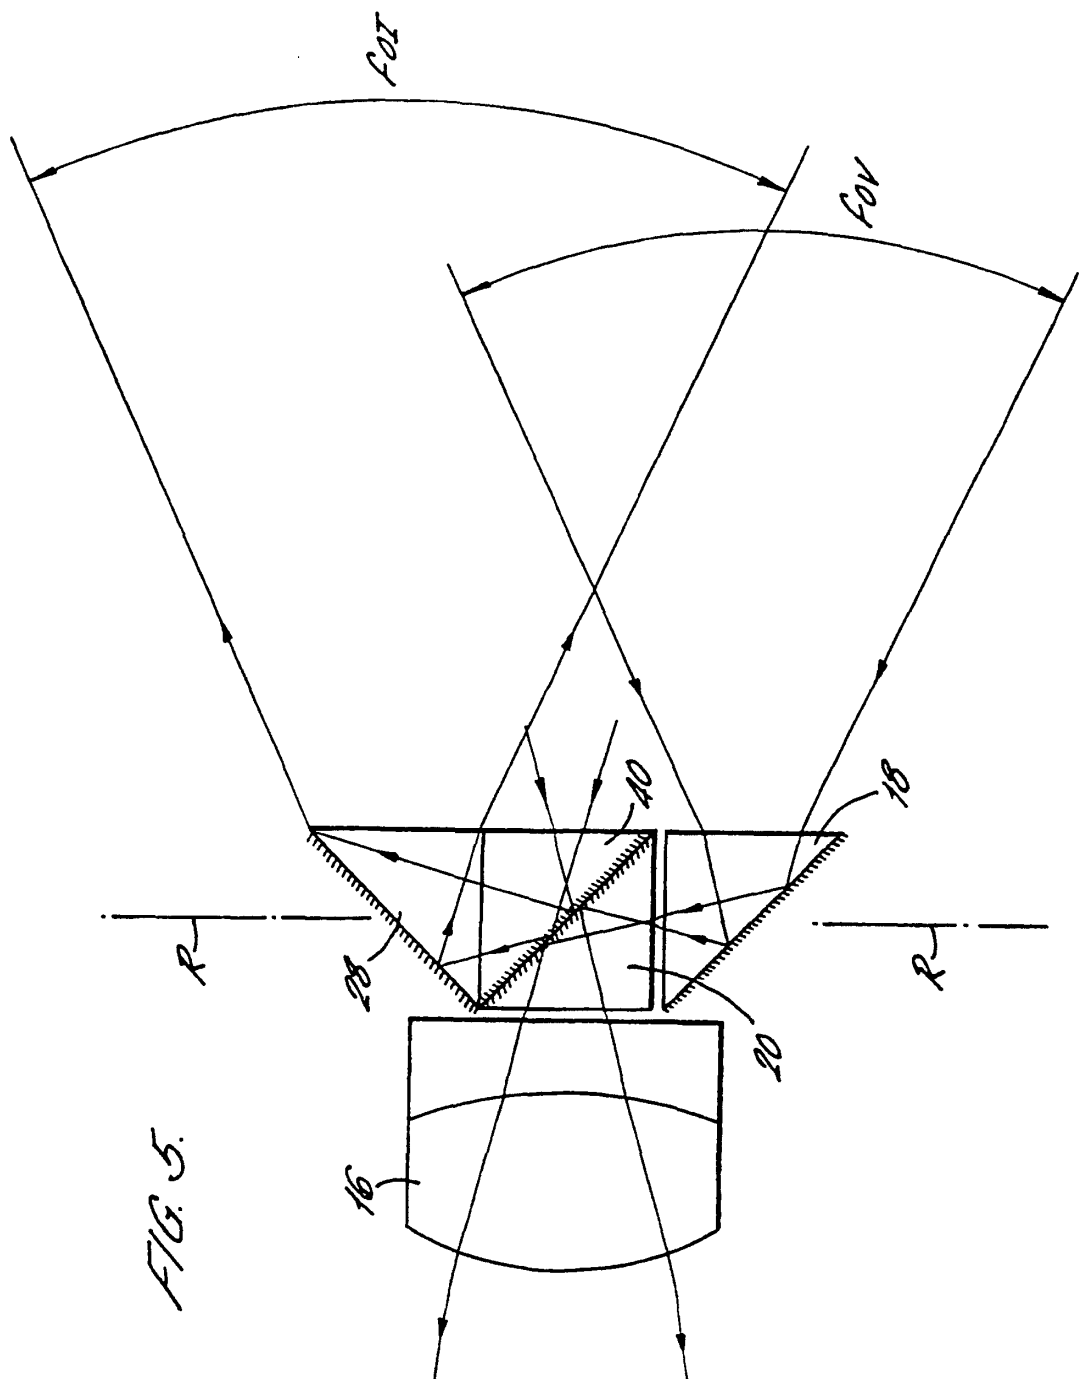


FIG. 6a.

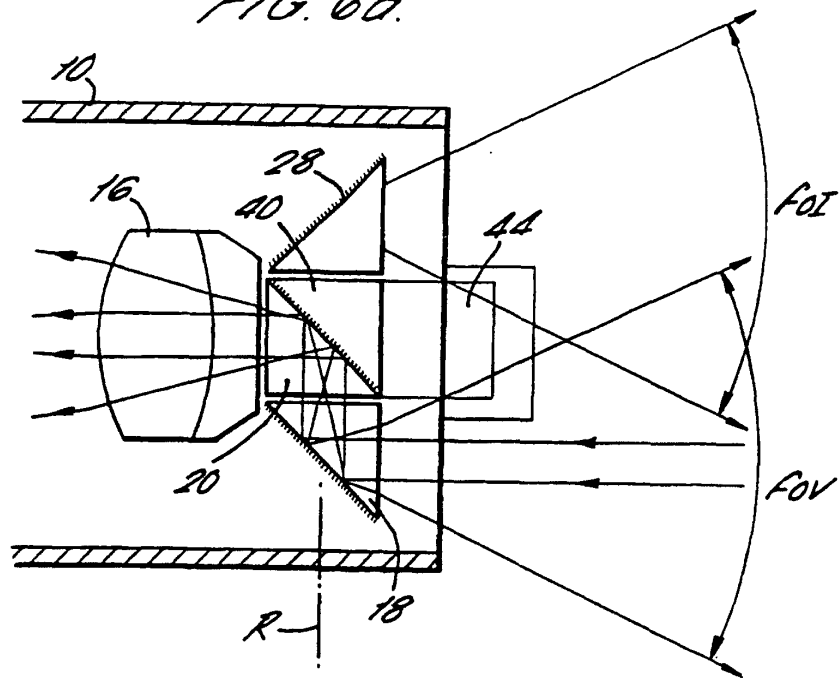


FIG. 6b.






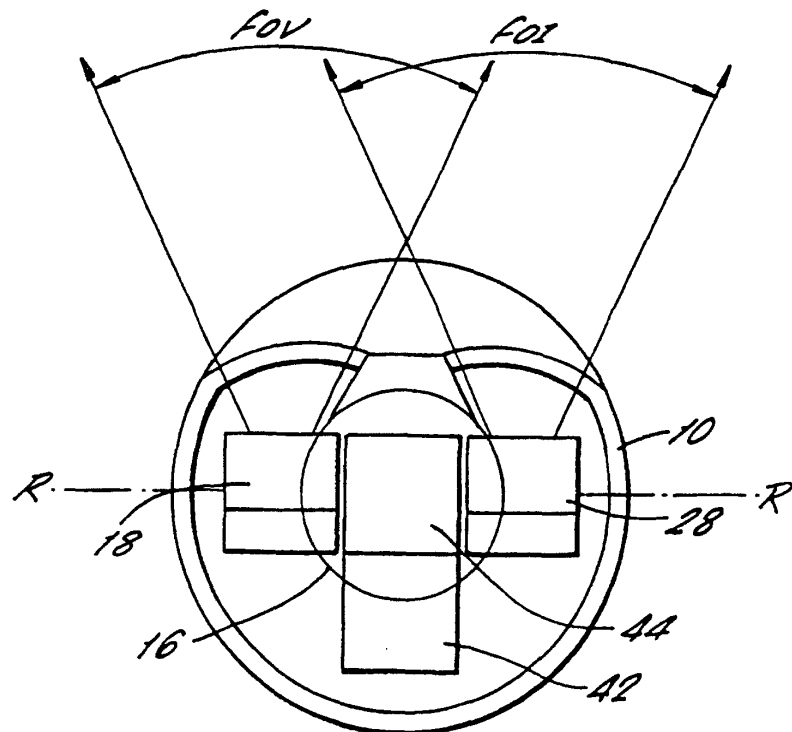


FIG. 6C.

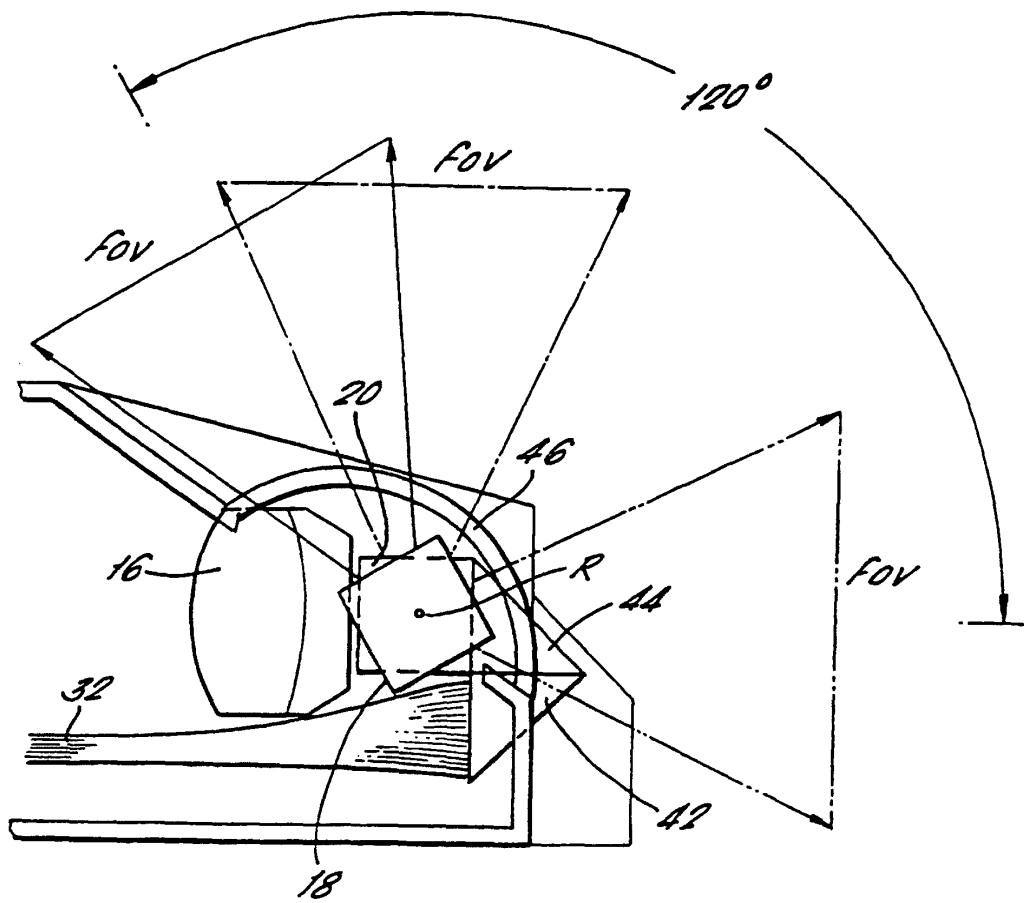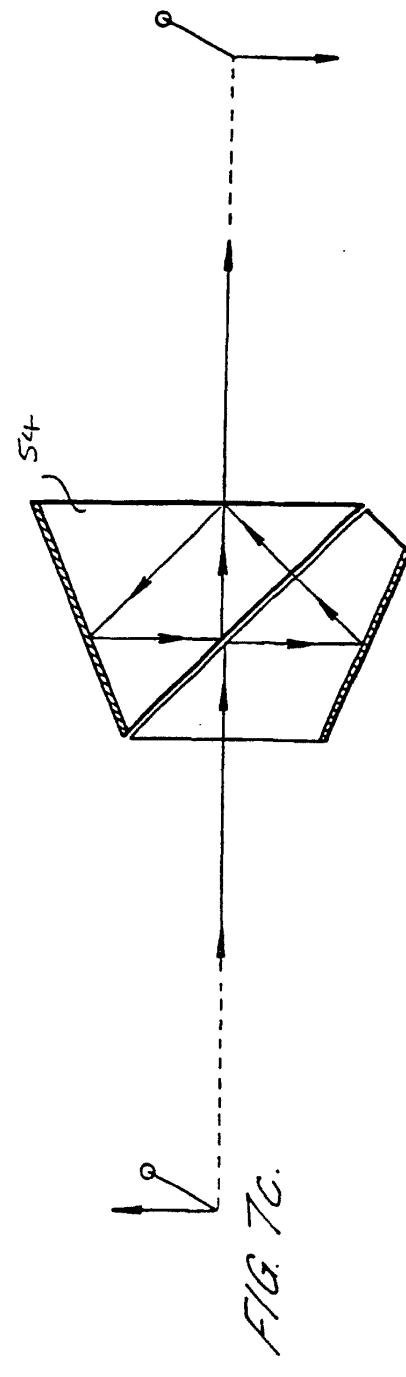

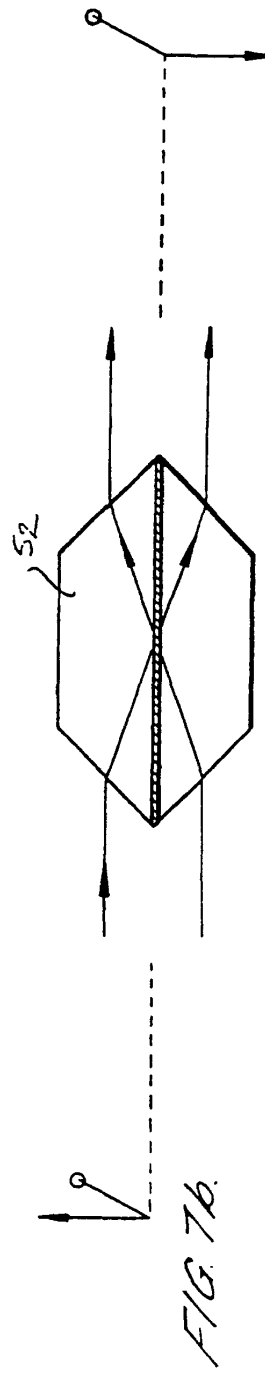

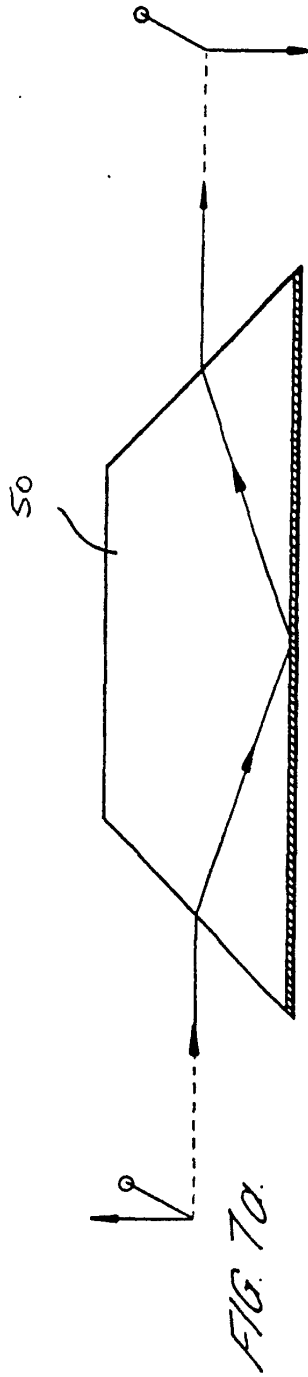

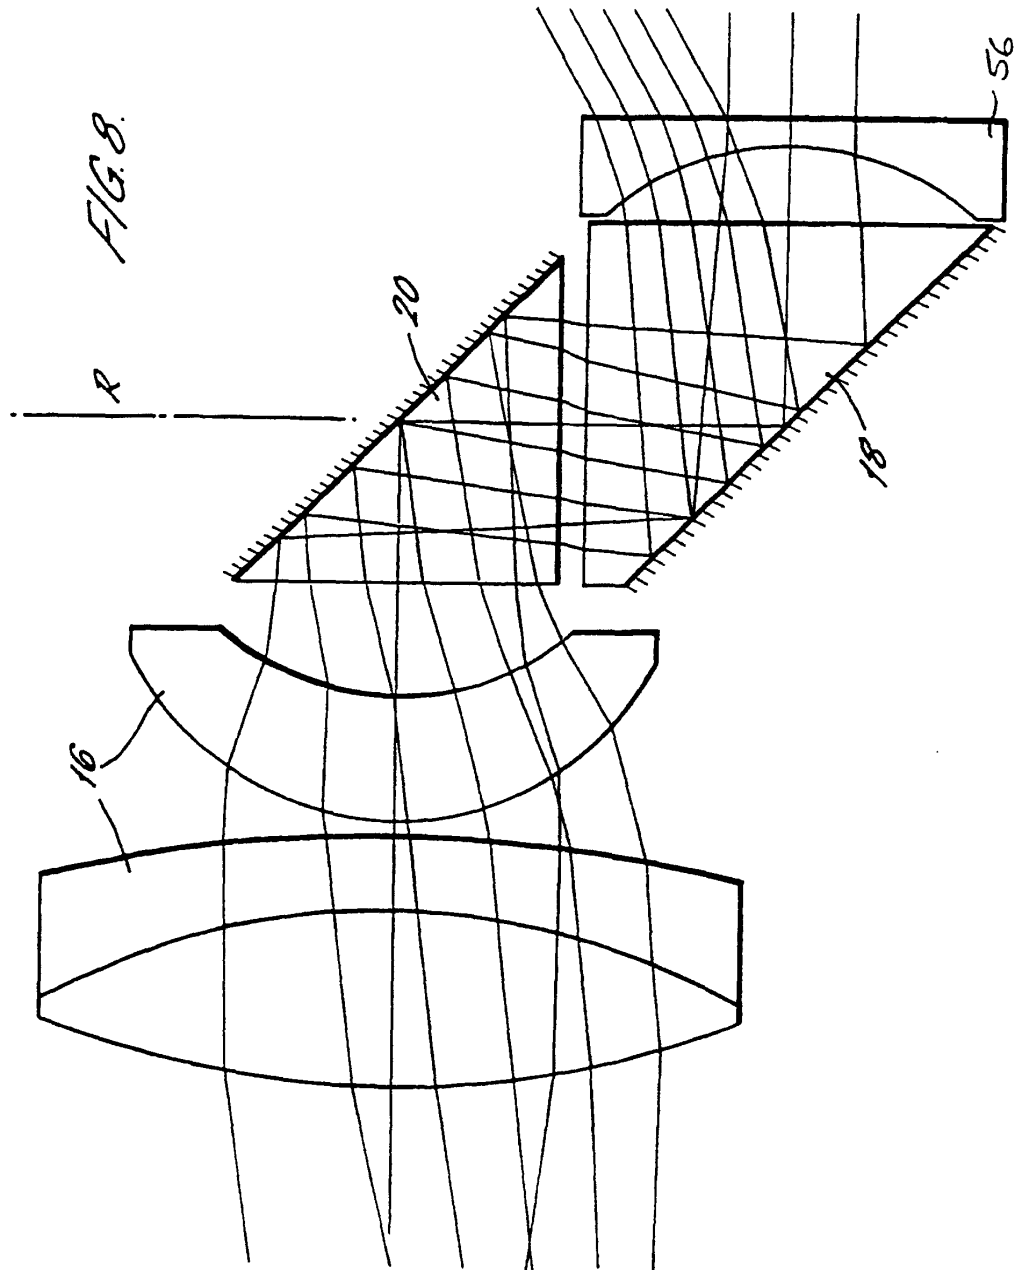

|                |                              |         |            |
|----------------|------------------------------|---------|------------|
| 专利名称(译)        | 内窥镜具有可变的视角                   |         |            |
| 公开(公告)号        | <a href="#">EP1215990B1</a>  | 公开(公告)日 | 2004-10-27 |
| 申请号            | EP2000949773                 | 申请日     | 2000-08-02 |
| [标]申请(专利权)人(译) | 卡麦德(医疗器械)有限公司                |         |            |
| 申请(专利权)人(译)    | KEYMED ( 医疗及工业设备 ) 有限公司      |         |            |
| 当前申请(专利权)人(译)  | KEYMED ( 医疗及工业设备 ) 有限公司      |         |            |
| [标]发明人         | RAMSBOTTOM ANDREW PAUL       |         |            |
| 发明人            | RAMSBOTTOM, ANDREW, PAUL     |         |            |
| IPC分类号         | A61B1/00 G02B23/24 G02B23/26 |         |            |
| CPC分类号         | A61B1/00183 G02B23/243       |         |            |
| 优先权            | 1999022960 1999-09-28 GB     |         |            |
| 其他公开文献         | EP1215990A1                  |         |            |
| 外部链接           | <a href="#">Espacenet</a>    |         |            |

#### 摘要(译)

公开了用作管道镜或内窥镜的装置。该装置包括在远端具有观察口 ( 14 ) 的管 ( 10 ) 。诸如光学链 ( 16 ) 或图像到视频转换装置的图像接收装置接收所观看视野的图像以传输到诸如监视器的观看装置。图像接收装置限定纵向轴线 ( L ) 。具有与纵向轴线成45°的反射表面并从其横向偏移的第一棱镜 ( 18 ) 安装成围绕垂直于纵向轴线并与纵向轴线相交并且与反射表面的中心相交的旋转轴线 ( R ) 旋转。还提供了具有与纵向轴线成45°的反射表面并与其相交的第二棱镜 ( 20 ) 。通过这种布置, 进入观察窗 ( 14 ) 的光由第一棱镜 ( 18 ) 反射到第二棱镜 ( 20 ) , 并由第二棱镜 ( 20 ) 反射到图像接收装置中。该设备还包括照亮所观察的场的装置。这包括诸如光纤束的装置, 以将光传输到具有相对于第一反射器关于纵向轴线 ( L ) 对称安装的反射表面的第三棱镜 ( 28 ) , 并且可以与第一反射器同步地围绕旋转轴 ( R ) 。以这种方式, 该装置具有可以在大约120°的范围内变化的视线方向, 并且可变照明方向确保了无论视向如何, 照明也被提供。

