



(11)

EP 2 230 987 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
27.02.2013 Bulletin 2013/09

(51) Int Cl.:
A61B 17/04 (2006.01) **A61B 17/06** (2006.01)
A61B 1/00 (2006.01) **A61B 17/00** (2006.01)
A61B 11/018 (2006.01)

(21) Application number: **09700321.4**

(86) International application number:
PCT/US2009/030030

(22) Date of filing: **02.01.2009**

(87) International publication number:
WO 2009/089101 (16.07.2009 Gazette 2009/29)

(54) **Medical systems for endoscopically suturing perforations**

Medizinische Systeme für endoskopische Perforationsnaht

Systèmes médicaux de suture de perforations par voie endoscopique

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

(30) Priority: **03.01.2008 US 18786**

- MCLAWHORN, Tyler, Evans**
Winston-Salem
NC 27106 (US)
- JOHNSON, Travis, Benton**
Dobson
NC 27014 (US)

(43) Date of publication of application:
29.09.2010 Bulletin 2010/39

(74) Representative: **Wächter, Jochen et al**
Kroher-Strobel
Rechts- und Patentanwälte
Bavariaring 20
80336 München (DE)

(73) Proprietor: **Cook Medical Technologies LLC**
Bloomington, IN 47404 (US)

(72) Inventors:

- SURTI, Vihar, C.**
Winston-Salem
NC 27104 (US)

(56) References cited:

WO-A-01/01868	WO-A-93/01750
WO-A-2004/103157	WO-A-2008/045376
US-A1- 2005 090 709	

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**FIELD OF THE INVENTION**

[0001] The present invention relates generally to medical systems for suturing tissue, such as for endoscopically suturing perforations in tissue.

BACKGROUND OF THE INVENTION

[0002] Openings or perforations in the walls of internal organs and vessels may be naturally occurring, or formed intentionally or unintentionally. These openings may be used to gain access to adjacent structures of the body, such techniques being commonly referred to as transluminal procedures. For example, culdoscopy was developed over 70 years ago, and involves transvaginally accessing the peritoneal cavity by forming an opening in the *cul de sac*. This access to the peritoneal cavity allows medical professionals to visually inspect numerous anatomical structures, as well as perform various procedures such as biopsies or other operations, such as tubal ligation. Many transluminal procedures for gaining access to various body cavities using other bodily lumens have also been developed. Natural orifices such as the mouth, nose, ear, anus or vagina may provide access to such bodily lumens and cavities. The bodily lumen(s) of the gastrointestinal tract are often endoscopically explored and can be utilized to provide access to the peritoneal cavity and other body cavities, all in a minimally invasive manner.

[0003] Compared to traditional open surgery or laparoscopic surgery, transluminal procedures are less invasive by eliminating abdominal incisions (or other exterior incisions) and incision related complications, while also reducing postoperative recovery time, reducing pain, and improving cosmetic appearance. At the same time, there remain challenges to transluminal procedures, including providing a suitable conduit to the openings and body cavities, robust medical devices that are maneuverable via the conduit and operable within the body cavity, sterility of the conduit, maintaining insufflation of the body cavity, proper closure of the opening, and prevention of infection. For example, when an opening is formed in a bodily wall of the gastrointestinal tract, such as in the stomach or intestines, spillage of the stomach contents, intestinal contents or other bodily fluids into the adjacent body cavity can occur. Travel of bacteria laden fluids outside of the gastrointestinal tract may cause unwanted and sometimes deadly infection.

[0004] In order to permanently close naturally occurring, intentionally or unintentionally formed perforations and allow the tissue to properly heal, numerous medical devices and methods have been developed employing sutures, adhesives, clips, tissue anchors and the like. One such class of devices aims to endoscopically close perforations, such as those within the gastrointestinal tract. Accordingly, various medical devices have been

proposed that attach to the endoscope to facilitate perforation closure. Some of these medical devices employ suction to orient the tissue for suturing or anchor placement, while others require the use of tissue graspers or other devices to orient the tissue.

[0005] For example, US 2005/090709 A1 discloses an endoscope for treatment in a body cavity comprising an observing optical unit and a unit inserting tool having a unit inserting channel, in which the observing optical unit is inserted, as well as a treatment tool inserting channel in which a treatment tool is inserted.

[0006] WO 93/01750 A discloses a surgical stitching instrument for minimally invasive surgery which is actuated via a pair of gripping tongs on the proximal end and which comprises a displaceable mouthpiece and a stationary mouthpiece, each having a clamping device. A needle is retained by the clamping devices at one or both ends. The clamping devices are effected via a foot-pedal switch.

BRIEF SUMMARY OF THE INVENTION

[0007] The object of the present invention is to provide medical systems for suturing a perforation in tissue, that may be used endoscopically and/or laparoscopically, and that offer simple, reliable and controllable placement of sutures around a perforation for complete closure thereof. This object is solved by the features of claim 1. One embodiment of a medical system, constructed in accordance with the teachings of the present invention, generally includes an endoscope, an endcap, a needle, a suture, a first grip system and a second grip system. The endoscope has a working channel and defines a longitudinal axis. The endcap is fitted to a distal end of the endoscope. The needle has first and second opposing ends, and a suture is attached to the needle. The first grip system is slidably connected to the endcap for longitudinal translating and structured to selectively engage the needle. The second grip system is structured to selectively engage the needle, and slidably passes through one of the endcap and the working channel of the endoscope. The first grip system and second grip system are configured for relative longitudinal translation to selectively pass the needle between the first and second grip systems.

[0008] The second grip system includes a control member for longitudinal translation extending through the working channel of the endoscope. The first grip system and the second grip system have an adjustable gripping force. The first and second grip systems are longitudinally spaced apart and define a suture area therebetween. The grip systems preferably include an adjustable opening having a natural state that is sized to engage the needle, and which are manually adjustable to reduce the size of the adjustable opening.

[0009] The endcap defines an interior space sized to receive a distal end of the endoscope. The first grip system is structured to selectively engage the needle with a

predetermined first gripping force, while a second grip system is longitudinally spaced from the first grip system and structured to selectively engage the needle with a second gripping force. The second grip system has an adjustable gripping force to modify the second gripping force between a first level and a second level.

[0010] The second level of the second gripping force is greater than the first gripping force. The first level of the second gripping force is lower than the first gripping force. The first grip system may be a plate defining an adjustable opening. The first grip system may also include a pair of wires defining an adjustable space therebetween. The second grip system may include a collet having gripping fingers, adjustable forceps or other structures providing an adjustable gripping force. The endcap preferably includes support structures for guiding the needle and/or guiding the slideable movement of the first grip system and/or the second grip system.

[0011] In one embodiment of a method for passing a needle, a medical system as described above is provided. The endcap of the medical system is fitted to a distal end of the endoscope, unless it is integrally formed therewith. The medical system is introduced to a first site proximate the perforation, wherein the first grip system is on a first side of the tissue and the second grip system is on a second side of the tissue. The first and second grip systems are translated relative to one another to pass the needle and suture from the first grip system, through the tissue, to the second grip system. The medical system is moved to a second site proximate the perforation, and the first and second grip systems are again translated relative to one another to pass the needle and suture from the second grip system, through the tissue to the first grip system. The step of passing the suture through the tissue may be performed without withdrawing the medical system from a location proximate the perforation. The suture is passed through the tissue in a purse-string fashion. The method also includes positioning the needle within the first grip system, and translating the first and second grip systems relative to one another to position the needle within the second grip system. The gripping force of the second grip system is then adjusted to exceed the first gripping force, and the first and second grip systems are translated relative to one another to pass the needle from the first grip system to the second grip system. The gripping force of the second grip system is adjusted to be less than the first gripping force, and the first and second grip systems are translated relative to one another to pass the needle from the second grip system to the first grip system.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The accompanying drawings incorporated in and forming a part of the specification illustrate several aspects of the present invention, and together with the description serve to explain the principles of the invention. In the drawings:

[0013] FIG. 1 is a perspective view of a medical system constructed in accordance to the teachings of the present invention;

[0014] FIG. 2 is a perspective view of a portion of the medical system depicted in FIG. 1;

[0015] FIG. 3 is a perspective view of a portion of the medical system depicted in FIG. 1;

[0016] FIG. 4 is a perspective view of a portion of the medical system depicted in FIG. 1;

[0017] FIG. 5 is a side view of a needle forming a portion of the medical system depicted in FIG. 1;

[0018] FIG. 6 is a perspective view of a portion of the medical system depicted in FIG. 1;

[0019] FIG. 7 is cross-sectional view of a portion of the medical system depicted in FIGS. 1 and 6;

[0020] FIGS. 8-13 are front views, partially in cross-section, illustrating a method of employing the medical system depicted in FIG. 1;

[0021] FIG. 14 is a plan view of tissue having a perforation being sutured using the medical system depicted in FIGS. 1-13;

[0022] FIG. 15 is a cross-sectional view showing closure of the perforation and tissue depicted in FIG. 14;

[0023] FIG. 16 is a front view of an alternate embodiment of the needle depicted in FIG. 5;

[0024] FIG. 17 is a plan view showing an alternate embodiment of a portion of the medical system depicted in FIGS. 3 and 4;

[0025] FIG. 18 is a perspective view of an alternate embodiment of a portion of the medical system depicted in FIGS. 6 and 7;

[0026] FIG. 19 is a perspective view showing an alternate embodiment of a portion of the medical system depicted in FIG. 3;

[0027] FIG. 20 is a perspective view showing another alternate embodiment of a portion of the medical system depicted in FIG. 3; and

[0028] FIG. 21 is a plan view of FIG. 20.

40 DETAILED DESCRIPTION OF THE INVENTION

[0029] The terms "proximal" and "distal" as used herein are intended to have a reference point relative to the user. Specifically, throughout the specification, the terms "distal" and "distally" shall denote a position, direction, or orientation that is generally away from the user, and the terms "proximal" and "proximally" shall denote a position, direction, or orientation that is generally towards the user.

[0030] Turning now to the figures, FIGS. 1-3 depict a medical system 20 for suturing closed a perforation 14 in tissue 12 (shown in FIGS. 11-14), constructed in accordance with the teachings of the present invention. The medical system 20 generally comprises an endoscope 22 and a medical device 24 adapted for use with the endoscope 22. The endoscope 22 may be any scope known to those skilled in the art, and therefore may have various lengths, diameters and functionality. The endoscope 22 generally defines a central axis 10 which ex-

tends in a longitudinal direction. The medical device 24 generally includes an endcap 26, a needle 28, a distal grip system 30 (or first grip system) and a proximal grip system (or second grip system). The distal and proximal grip systems 30, 32 are longitudinally spaced apart to define a suturing area 34. As will be later described with reference to FIGS. 8-13, tissue 12 is positioned within the suturing area 34, and the needle 28 is passed through the tissue 12, back-and-forth between the distal grip system 30 and the proximal grip system. A suture 36 is connected to the needle 28 such that the suture 36 is repeatedly passed through the tissue 12. In particular, the suture 36 is preferably woven through the tissue 12 around the perforation 14 in the tissue 12, whereby one end or both ends of the suture 36 may be used to draw the perforation 14 closed.

[0031] With reference to FIGS. 1 and 2, the endcap 26 includes a tubular body 38 defining an interior cavity 40 sized to be fitted on a distal end of the endoscope 22. The endcap 26 may be structured to frictionally engage the endoscope 22 for selective retention of the endcap 26 on the endoscope 22, although other means for connecting the endcap 26 to the endoscope 22 may be employed, as is known in the art. The endoscope 22 and medical device 24 are therefore adapted to be traversed through the body of a patient in this connected configuration shown in the figures.

[0032] As best seen in FIG. 2, the endcap 26 generally includes a first guide body 42 and a second guide body 44. The endcap 26 may be formed of various materials, preferably a plastic and more preferably a clear or translucent plastic such as SLA or other acrylic. The first guide body 42 is sized and structured to support and orient the distal gripping system 30, while the second guide body 44 is structured to guide and support the needle 28 relative to the proximal grip system 32. The first guide body 42 generally includes a distal guide flange 48, a proximal guide flange 50 and one or more reinforcing ribs 52 extending longitudinally between the distal and proximal guide flanges 48, 50. The distal guide flange 48 includes two passageways 54, and a proximal guide flange 50 includes a passageway 56, all of the passageways 54, 56 for slidably receiving portions of the distal grip system 30 therein. The second guide body 44 generally includes a support arm 58 and a guide flange 60 having a guide hole 62 therein. The guide hole 62 is preferably frustoconical, and tapers in the proximal direction for guiding the needle 28 therethrough towards the proximal grip system 32.

[0033] Turning now to FIGS. 3 and 4, the distal grip system 30 generally includes a gripping arm 70, a gripping plate 72, and a control wire 74. A connecting plate 76 may be used to connect the control wire 74 to the gripping arm 70 using any known means of mechanical connection such as soldering, welding, bonding, adhesives, fasteners or intercooperating mechanical structures such as tongue and grooves or tabs or detents etc. A sheath 78 is used to encase the control wire 74, the

wire 74 being slidably received within the sheath 78. The sheath 78 extends to a proximal end of the endoscope 22 (not shown), where a proximal end of the sheath 78 may be accessed by the medical professional for manipulating the control wire 74. As the sheath 78 extends proximally along the endoscope 22, the sheath 78 has a length similar to the length of the endoscope 22, as does the control wire 74.

[0034] The gripping arm 70 generally includes one or more guide rods 80, two being shown in FIG. 3, and having a generally square cross-section. It will be recognized that the guide rods 80 are structured to be received within the passageways 54 of the distal guide flange 48. The guide rods 80 may have other cross-sectional shapes including rectangular, triangular, circular, trapezoidal or others. A gripping bracket 82 extends transversely from the guide rods 80 and defines a slot 84 sized and shaped to receive the gripping plate 72 (FIG. 4). The free end 86 of the gripping bracket 82 is a traumatically shaped as shown, and includes a guide hole 88 for receiving the needle 28. The guide hole 88 is preferably frustoconical in shape for guiding the needle 28 therein.

[0035] As shown in FIG. 4, the gripping plate 72 generally includes a gripping hole 94 sized to receive and engage the needle 28. In particular, the gripping hole 94 is adjustable in size by way of a slit 96 extending along the plate through gripping hole 94. As such, the slit 96 divides the gripping plate 72 into a right half 72R and left half 72L which may move relative to one another to adjust the size of the gripping hole 94. Preferably the gripping plate 72 is formed of a resilient material such as a metal or plastic that allows the size of gripping hole 94 to adjust. For example, stainless steel, alloys such as nitinol or aluminum, and thermoplastics may be used to form the gripping plate 72. Similar materials may also be used for the other parts of the upper grip system 30 including its gripping arm 70. A pair of attaching holes 90 are sized and positioned to cooperate with attaching holes 92 formed in the gripping bracket 82, through which a threaded fastener or other structure may be placed to connect the gripping plate 72 to the gripping bracket 82. As will be discussed in more detail herein, the distal grip system 30 and its gripping plate 72 are structured to grasp the needle 28 with a predetermined gripping force determined

45 by the materials and structure of the plate 72, including the size of the gripping hole 94 and size (width and length) slit 96, as will be appreciated by those skilled in the art.

[0036] Turning now to FIG. 5, the needle 28 is shown in detail. The needle includes an elongate body 100 having a first end 102 and second end 104 opposite the first end 102. The needle body 100 may be solid or hollow, and is preferably formed of a rigid material. Suitable materials for the needle 28 generally include metals such as stainless steel, alloys such as nitinol, plastics such as polyvinylchloride, polyimide, polyamide, polyetherketone and others known to those skilled in the art. The first and second ends 102, 104 of the needle body 100 are tapered to define a sharpened tip for piercing the tissue

12. An annular notch 106 is formed adjacent the first end 102, while a second annular notch 108 is formed adjacent the second end 104. Stated another way, the first and second notches 106, 108 define reduced diameter portions of the needle body 100 about which the distal grip system 30 and proximal grip system 32 may selectively engage the needle 100.

[0037] A connecting hole 105 is formed in the needle body 100 for connecting the suture 36 to the needle 28. The suture 36 may be connected via the hole 105 or otherwise, using various means, such as by tying, knots, adhesives, mechanical connectors (adjustable loops, clamps, etc.), bonding techniques such as plastic welding, melting, heat bonding and the like. Similarly, either the needle body 100 or the suture 36 may be mechanically deformed, such as by crimping or using other techniques, to interconnect the suture 36 and needle 28. One end of the suture 36 is attached to the needle 28, while the other end extends proximally along the endoscope 22 or through its working channel 23, as shown in FIG. 1.

[0038] The proximal grip system 32 is shown in FIGS. 6 and 7, and generally includes a control wire 112 slidably received within a catheter 114. The proximal grip system 32 further includes a collet 110 connected to a distal end of the control wire 112. The collet 110 includes a base 116 and a plurality of gripping fingers 118 as is known in the art. As best seen in FIG. 7, the collet 110 includes an internal space 120 sized to receive the needle 28 therein. The collet 110 is formed of a resilient material such as a metal or alloy, whereby the gripping fingers 118 are structured to adjust the size of the internal space 120. Distal ends 122 of the gripping fingers 118 are flared for guiding the needle 28 into the internal space 120, and inducing a compressive force on the gripping fingers 118 to reduce the size of the internal space 120. Teeth 124 may be formed on the interiors of the gripping fingers 118 proximate the internal space 120 for selectively engaging the notch 108 in the needle 100, although the teeth 124 and notch 108 may not be needed to operate the collet 110.

[0039] As best seen in FIG. 7, the proximal grip system 32 is sized to be received within the working channel 23 of an endoscope 22, and is translatable within the working channel 23. As such, the proximal grip system 32, and namely the control wire 112 and catheter 114, have a sufficient length to pass fully through to the working channel 23 of the endoscope 22 and exit a proximal end thereof (not shown) for manipulation by the medical professional. Either the working channel 23 or the catheter 114 may be used to press against the exterior of the collet 110, and in particular the flared distal ends 122 of the gripping fingers 118, to cause the internal space 120 to reduce its size and grasp the needle 28. Accordingly, the catheter 114 is preferably formed of polytetrafluoroethylene (PTFE), expanded polytetrafluoroethylene (EPTFE), polyethylene ether ketone (PEEK), polyvinylchloride (PVC), polycarbonate (PC), polyamide including nylon, polyimide, polyurethane, or polyethylene (high, medium or low density), including multi-layer or single layer con-

structions with or without reinforcement wires, coils or filaments.

[0040] Typically, the catheter 114 will be advanced over the control wire 112 (and/or the wire 112 is pulled proximally) to cause the grasping fingers 118 to collapse around the needle 28 with an adjustable gripping force. Preferably, the internal space 120 is sized and structured to naturally grip the needle 28 (such as through the teeth 124 and notch 118 or simply through frictional engagement) at a first level of the gripping force, and then the collet 110 and control wire 112 may be translated relative to the catheter 114 (or guide channel 23 of the endoscope 22) to provide an increase in the gripping force to a second level. As such, it will be recognized that the proximal grip system 32 provides an adjustable gripping force which may be controlled by the medical professional from the proximal end of the control wire 112 and catheter 114.

[0041] As will now be described with reference to FIGS. 8-13, the medical system 20 may pass the needle 28 to suture close a perforation 14 formed in the tissue 12. The methods of passing the needle 28 and suturing the perforation 14 include fitting the medical device 24, and namely its endcap 26, to a distal end of the endoscope 22 (unless it is integrally formed with the endoscope or similar endoscopic or laparoscopic device). Preferably, the proximal grip system 32 is preloaded with the needle 28, although the needle 28 could be preloaded within the distal grip system 30. The medical system 20 is translated through the body to a position proximate the perforation 14. In particular, the endoscope 22 is used to visualize the tissue 12 and perforation 14, as well as the suturing space 34 between a distal and proximal grip systems 30, 32. The medical system 20 is manipulated such that the tissue 12 enters the suturing space 34, as shown in FIG. 8.

[0042] The distal grip system 30 and proximal grip system 32 are then translated relative to one another again (the proximal grip system 32 may be translated distally or the distal grip system 30 may be translated proximally, or both) such that the needle 28 passes through the tissue 12 and becomes engaged by the distal grip system 30 with its first gripping force, as shown in FIG. 9. In particular, the gripping hole 94 will increase in size to deflect the right and left portions, 72R, 72L of the gripping plate 72 until the hole 94 overlaps with the notch 106 formed in the body 100 of the needle 28 (see FIGS. 4 and 5). Then, the proximal grip system 32 is operated to reduce the second gripping force from its second level to its first level. That is, the control wire 112 and catheter 114 are translated relative to one another to reduce the force on the exterior of the collet 110 and to increase the size of the internal space 120 containing the needle 28. The first gripping force of the distal grip system 30 is generally greater than the first level of the second gripping force (of the proximal grip system 32), and therefore relative translation of the distal and proximal grip systems 30, 32 allows the needle 28 and suture 36 to be passed to the distal grip system 30, as shown in FIG. 10.

[0043] When the needle 28 and suture 36 have been passed through the tissue at least once, the medical system 20, and in particular the endoscope 22 is rotated from the first puncture site, as shown in FIG. 11. With the distal grip system 30 engaging the needle 28 with a first gripping force, the distal grip system 30 (or the proximal grip system 32 or both) is translated to again pass the needle 28 and the suture 36 through the tissue 12. The exposed end 104 of the needle 28 is moved through the guide hole 62 formed in the guide flange 60 of the endcap 26, until it can be grasped by the proximal grip system 32. In particular, the needle 28 enters the internal space 120 of the collet 110 (see FIG. 7) and is engaged with a second gripping force. As previously noted, the distal grip system 30 and its gripping plate 72 will engage the needle 28 with a first gripping force. Generally, the second gripping force is about equal to or less than the first gripping force. To transfer the needle 28, the proximal grip system 32 is activated through relative translation of the catheter 114 and control wire 112 (see FIG. 7) to increase the second gripping force from its first level to a second level. Generally, the second level of the second gripping force is greater than the first gripping force. Accordingly, the distal grip system 30 may be translated in a distal direction, and/or the proximal grip system 32 translated in a proximal direction, to again pass the needle 28 from the distal grip system 30 to the proximal grip system 32, as shown in FIG. 12.

[0044] In this manner, the suture 36 may be weaved through the tissue 12 and around the perforation 14 by repeating the above-described steps, as shown in FIG. 14. The suture 36 may follow a generally annular path round the periphery of the perforation 14, or may criss-cross back and forth from opposing sides of the perforation 14. In either case, the medical system 20 is withdrawn from the patient, thereby withdrawing the needle 28 and one end of the suture 36. Accordingly, both ends of the suture 36 will be available to the medical professional and may be used to draw the perforation 14 closed, as shown in FIG. 15. Generally, the suture 36 has been passed through the tissue 12 in a purse-string fashion, whereby pulling proximally on the ends of the suture 36 will naturally cause the perforation 14 to close. The ends of the suture 36 may be tied utilizing endoscopic tying techniques including passing knots, or a suture lock 130 may be employed as is known in the art.

[0045] Based on the foregoing it will be recognized by those skilled in the art that the medical systems of the present invention facilitate improved closure of perforations. The medical systems are simple to operate, and the methods for employing the medical systems may be performed endoscopically and/or laparoscopically without removing the medical system 20 or device 24 every time a pass is made through the tissue. The systems and methods offer reliable and controllable placement of suture(s) around a perforation for complete and reliable closure thereof.

[0046] It will also be recognized that many variations

of the medical system 20 will be readily ascertainable to one of ordinary skill in the art. For example, the gripping structure of the distal grip system 30 and proximal grip system 32 may take many forms. Similarly, the needle 28 may also take many forms. One alternate construction of a needle 128 is shown in FIG. 16. In particular, the needle includes a needle body 200 and having a first end 202 and a second end 204 opposite the first end 202. At the first end 202, a first annular rib 206 and a second annular rib 208 are formed. Generally the first rib 206 has an outer diameter about the same size or larger than the gripping hole 94 formed in the gripping plate 72 of the distal grip system 30. Accordingly, the first rib 206 will cause enlargement of the gripping hole 94 but can pass therethrough. The second large rib 208 serves as a stop to positively locate the needle 28 longitudinally within the gripping plate 72. The second end 204 of the needle body 200 does not include a notch or other structure increasing/decreasing the diameter of the body 200, as the collet 110 of the proximal gripping system 32 is sufficient to grasp onto the needle 128 without the need for such gripping structures.

[0047] Turning now to FIG. 17, an alternate embodiment of the upper grip system 330 has been shown. In particular, the gripping arm 370 is substantially similar to the gripping arm 70 previously described with reference to FIG. 3, but the gripping plate 72 has been replaced by a pair of gripping wires 372R and 372L. The wires 372R and 372L are fixed to the gripping arm 370 within its slot 372 in a side-by-side fashion. The wires 372R and 372L will expand and increase the space therebetween as the needle 28 is being pushed through the wires. The wires should be formed of a resilient material by which they will return to their initial position once they reach the notch 106 formed in the needle 28 or when the needle 28 is removed.

[0048] In FIG. 18, an alternate construction of a lower grip system 432 is shown. Generally, the proximal grip system 432 is an endoscopic forceps having opposing gripping fingers 418 defining a internal space 420 therein. Two control wires 422 are connected to the first and second gripping fingers 418, which are hinged together about pivot 424, in a scissors-like fashion to provide an adjustable gripping force between the fingers 418 for retaining the needle 28 within the internal space 420. It will be recognized that many other variations of the grip systems are possible, including the use of baskets, snares, loops, as well as employing magnets in the upper and lower grip systems 30, 32, in conjunction with the needle 28 being magnetized or formed with magnets embedded therein. Adjustability of magnet position or electromagnets may be employed to provide an adjustable gripping force. Further, either or both of the grip systems 30, 32 may function to apply an adjustable gripping force.

[0049] In FIG. 19, an alternate embodiment of the distal grip system 630 is shown. The distal grip system 630 generally includes a gripping arm 670, however the gripping plate (see, e.g. plate 72 in FIGS. 3 and 4) has been

eliminated. In this embodiment, the gripping arm 670 includes a gripping bracket 682 that defines a slot 684 extending longitudinally through the gripping bracket 682 and has a width W. Coextensive with the slot 684 is a guide hole 688 for receiving the needle 28. The guide hole 688 has a predetermined diameter, while the slot 684 provides adjustability to the diameter of the guide hole 688 via flexure of the portions of the gripping bracket 682 separated by the slot 684. In this manner, the gripping arm 670 and its gripping bracket 682 provide a press fit or friction fit with the needle 28 for passing the needle through tissue. As discussed above, the distal grip system 630 and its gripping arm 670 are structured to grasp the needle 28 with a predetermined gripping force determined by the materials, size and structure of the gripping bracket 682, including the size of the gripping hole 688 and size (width and length) slot 684, as will be appreciated by those skilled in the art. It will also be recognized that the ends of the needle 28 may be flat and without a groove, while still capable of being gripped by the distal grip system 630.

[0050] In FIGS. 20-21, another alternate embodiment of the distal grip system 730 is shown. The distal grip system 730 generally includes a gripping arm 770 within an endcap 726 similar to previous embodiments, however in this embodiment gripping bracket 782 is curved to improve visibility through the endoscope. The gripping bracket 782 includes a first connecting portion 784, a second curved portion 786, and a third end portion 788. As best seen in FIG. 21, the second curved portion 786 is preferably formed to have a radius generally matching a radius of the endcap 726 and/or the endoscope (e.g. the radius of the inner surface of the second curved portion 786 may be about equal to an outer diameter of the endoscope). The second curved portion 786 also preferably has a thickness T_{gb} about equal to a thickness T_e of the wall of the endcap 726. As with the embodiment of FIG. 19, the third end portion 788 of the gripping bracket 782 may include a slot 794 and a gripping hole 798 sized to fractionally engage the needle 28 for passing it through tissue.

[0051] The foregoing description of various embodiments of the invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise embodiments disclosed. Numerous modifications or variations are possible in light of the above teachings. In one variation, the distal grip system could be pivotally attached to the endcap and the needle driven through an arc via an actuating mechanism operated at a proximal end of the device. Appropriate guides, supports and the proximal grip system may be designed to pass the needle back and forth between the distal grip system.

Claims

1. A medical system (20) for suturing a perforation (14)

in tissue (12), the medical system (20) comprising:

an endoscope (22) having a working channel (23) and defining a longitudinal axis;
an endcap (26, 726) fitted to a distal end of the endoscope (22);
a needle (28, 128) having a first end and a second end opposite the first end;
a suture (36) attached to the needle (28, 128);
a first grip system (30, 330, 630, 730) slidably connected to the endcap (26, 726) for longitudinal translation and longitudinal direction, the first grip system (30, 330, 630, 730) structured to selectively engage the needle (28, 128);
a second grip system (32, 432) structured to selectively engage the needle (28, 128); and
the first grip system (30, 330, 630, 730) and second grip system (32, 432) configured for relative longitudinal translation to selectively pass the needle (28, 128) between the first grip system (30, 330, 630, 730) and the second grip system (32, 432);

characterised in that

the second grip system (32, 432) slidably passes through the working channel (23) of the endoscope (22) for longitudinal translation, the second grip system (32, 432) includes a control member (112, 422) extending through the working channel (23) of the endoscope (22), and the second grip system (32, 432) has an adjustable gripping force.

2. The medical system (20) of claim 1, wherein the second grip system (32, 432) includes a collet (110) or an endoscopic forceps having an internal space (120, 420) for retaining the needle (28, 128).
3. The medical system (20) of claim 2, wherein the second grip system (32, 432) has gripping fingers (118, 418) structured to adjust the size of the internal space (120, 420).
4. The medical system (20) of claim 1, wherein the first grip system (30, 330, 630, 730) has a non-adjustable first gripping force.
5. The medical system (20) of claim 4, wherein the first grip system (30, 330, 630, 730) includes an adjustable opening (94, 688, 798) having a natural state that is sized to engage the needle (28, 128), and wherein the second grip system (32, 432) includes a collet (110) or an endoscopic forceps having an adjustable internal space (120, 420), the adjustable internal space (120, 420) having a natural state that is sized to engage the needle (28, 128).
6. The medical system (20) of claim 1, wherein the first grip system (30, 330, 630, 730) includes a control

wire (74) extending proximally along the outside of the endoscope (22).

7. The medical system (20) of claim 1, wherein the first grip system (30, 330, 630, 730) is radially aligned with the second grip system (32, 432) passing through the working channel (23) of the endoscope (22). 5

8. The medical system (20) of claim 4, wherein the second gripping force is adjustable between a first level lower than the first gripping force and a second level greater than the first gripping force. 10

9. The medical system (20) of claim 1, wherein the first grip system (30, 330, 630, 730) has a pair of wires (372R, 372L) defining an adjustable space therebetween. 15

10. The medical system (20) of claim 8, wherein the second grip system (32, 432) includes a collet (110) and a catheter (114), and wherein relative translation between catheter (114) and collet (110) adjusts the second gripping force between the first and second levels. 20

11. The medical system (20) of claim 1, wherein the first grip system (30, 330, 630, 730) includes an L-shaped gripping arm (70, 370, 670, 770) slidably attached to an outer portion of the endcap (26, 726). 25

12. The medical system (20) of claim 1, wherein the first grip system (30, 330, 630, 730) includes an L-shaped gripping arm (770) having a curved gripping bracket (782) to improve visibility through the endoscope (22). 30

13. The medical system (20) of claim 12, wherein a curved portion (786) of the gripping bracket (782) has a radius matching a radius of the endcap (726) or the endoscope (22). 35

14. The medical system (20) of claim 1, wherein the endcap (26, 726) includes a support arm (58) for the second grip system (32, 432), the support arm (58) including a guide hole (62) aligned with a gripping member (110) of the second grip system (32, 432). 40

Patentansprüche 45

1. Medizinisches System (20) zum Nähen einer Perforation (14) in einem Gewebe (12) mit:

einem Endoskop (22), das einen Arbeitskanal (23) aufweist und eine Längsachse definiert; 50

einer Endkappe (26, 726), die mit einem distalen Ende des Endoskops (22) verbunden ist;

einer Nadel (28, 128) mit einem ersten Ende und einem zweiten Ende gegenüber dem ersten Ende; 55

einem Faden (36), der an der Nadel (28, 128) befestigt ist;

einem ersten Greifsystem (30, 330, 630, 730), das für eine Längsverschiebung und Längsausrichtung verschiebbar mit der Endkappe (26, 726) verbunden ist, wobei das erste Greifsystem (30, 330, 630, 730) derart ausgebildet ist, um selektiv die Nadel (28, 128) zu erfassen; 60

einem zweiten Greifsystem (32, 432), das derart ausgebildet ist, um selektiv die Nadel (28, 128) zu erfassen; und

wobei das erste Greifsystem (30, 330, 630, 730) und das zweite Greifsystem (32, 432) für eine relative Längsverschiebung ausgestaltet sind, um die Nadel (28, 128) selektiv zwischen dem ersten Greifsystem (30, 330, 630, 730) und dem zweiten Greifsystem (32, 432) zu übergeben; **dadurch gekennzeichnet, dass** 65

das zweite Greifsystem (32, 432) zur Längsverschiebung verschiebbar durch den Arbeitskanal (23) des Endoskops (22) hindurchtritt, das zweite Greifsystem (32, 432) ein Steuerelement (112, 422) umfasst, das sich durch den Arbeitskanal (23) des Endoskops (22) erstreckt, und das zweite Greifsystem (32, 432) eine einstellbare Greifkraft aufweist.

2. Medizinisches System (20) nach Anspruch 1, wobei das zweite Greifsystem (32, 432) eine Klemmbuchse (110) oder eine endoskopische Zange umfasst, die einen Innenraum (120, 420) zum Festhalten der Nadel (28, 128) aufweist. 70

3. Medizinische System (20) nach Anspruch 2, wobei das zweite Greifsystem (32, 432) Greiffinger (118, 418) aufweist, die ausgebildet sind, um die Größe des Innenraums (120, 420) einzustellen. 75

4. Medizinisches System (20) nach Anspruch 1, wobei das erste Greifsystem (30, 330, 630, 730) eine nicht einstellbare erste Greifkraft aufweist. 80

5. Medizinisches System (20) nach Anspruch 4, wobei das erste Greifsystem (30, 330, 630, 730) eine einstellbare Öffnung (94, 688, 798) umfasst, die einen natürlichen Zustand mit einer Größe zum Erfassen der Nadel (28, 128) aufweist, und wobei das zweite Greifsystem (32, 432) eine Klemmbuchse (110) oder eine endoskopische Zange umfasst, die einen einstellbaren Innenraum (120, 420) aufweist, wobei der einstellbare Innenraum (120, 420) einen natürlichen Zustand mit einer Größe zum Erfassen der Nadel (28, 128) aufweist. 85

6. Medizinisches System (20) nach Anspruch 1, wobei

das erste Greifsystem (30, 330, 630, 730) einen Steuerdraht (74) umfasst, der sich proximal entlang der Außenseite des Endoskops (22) erstreckt.

7. Medizinisches System (20) nach Anspruch 1, wobei das erste Greifsystem (30, 330, 630, 730) radial mit dem zweiten Greifsystem (32, 432), das sich durch den Arbeitskanal (23) des Endoskops (22) erstreckt, ausgerichtet ist. 5

8. Medizinisches System (20) nach Anspruch 4, wobei die zweite Greifkraft zwischen einem ersten Niveau, das niedriger ist als die erste Greifkraft, und einem zweiten Niveau, das größer ist als die erste Greifkraft, einstellbar ist. 10 15

9. Medizinisches System (20) nach Anspruch 1, wobei das erste Greifsystem (30, 330, 630, 730) ein Paar Drähte (372R, 372L) aufweist, die zwischen sich einen einstellbaren Raum definieren. 20

10. Medizinisches System (20) nach Anspruch 8, wobei das zweite Greifsystem (32, 432) eine Klemmbuchse (110) und einen Katheter (114) umfasst und wobei die relative Verschiebung zwischen dem Katheter (114) und der Klemmbuchse (110) die zweite Greifkraft zwischen dem ersten und dem zweiten Niveau einstellt. 25

11. Medizinisches System (20) nach Anspruch 1, wobei das erste Greifsystem (30, 330, 630, 730) einen L-förmigen Greifarm (70, 370, 670, 770) umfasst, der verschiebbar an einem äußeren Abschnitt der Endkappe (26, 726) angebracht ist. 30 35

12. Medizinisches System (20) nach Anspruch 1, wobei das erste Greifsystem (30, 330, 630, 730) einen L-förmigen Greifarm (770) umfasst, der eine kurvenförmige Greifklammer (782) aufweist, um die Sicht durch das Endoskop (22) zu verbessern. 40

13. Medizinisches System (20) nach Anspruch 12, wobei der kurvenförmige Abschnitt (786) der Greifklammer (782) einen Radius aufweist, der an einen Radius der Endkappe (726) oder des Endoskops (22) angepasst ist. 45

14. Medizinisches System (20) nach Anspruch 1, wobei die Endkappe (26, 726) einen Tragarm (58) für das zweite Greifsystem (32, 432) umfasst, wobei der Tragarm (58) eine Führungsöffnung (62) umfasst, die mit der Klemmbuchse (110) des zweiten Greifsystems (32, 432) ausgerichtet ist. 50 55

(14) dans un tissu (12), le système médical (20) comprenant :

un endoscope (22) ayant un canal de travail (23) et définissant un axe longitudinal ;
un embout (26, 726) monté à une extrémité distale de l'endoscope (22) ;
une aiguille (28, 128) ayant une première extrémité et une seconde extrémité opposée à la première extrémité ;
un fil de suture (36) attaché à l'aiguille (28, 128) ;
un premier système de préhension (30, 330, 630, 730) relié à l'embout (26, 726) de manière coulissante pour une translation longitudinale et une direction longitudinale, le premier système de préhension (30, 330, 630, 730) étant structuré pour engager sélectivement l'aiguille (28, 128) ;
un second système de préhension (32, 432) structuré pour engager sélectivement l'aiguille (28, 128) ; et
le premier système de préhension (30, 330, 630, 730) et le second système de préhension (32, 432) étant configurés pour une translation longitudinale relative pour faire passer sélectivement l'aiguille (28, 128) entre le premier système de préhension (30, 330, 630, 730) et le second système de préhension (32, 432) ;
caractérisé en ce que
le second système de préhension (32, 432) passe de manière coulissante à travers le canal de travail (23) de l'endoscope (22) pour une translation longitudinale, le second système de préhension (32, 432) inclut un organe de commande (112, 422) s'étendant à travers le canal de travail (23) de l'endoscope (22), et le second système de préhension (32, 432) a une force de préhension réglable.

2. Système médical (20) selon la revendication 1, dans lequel le second système de préhension (32, 432) inclut un anneau de serrage (110) ou une pince endoscopique ayant un espace interne (120, 420) pour retenir l'aiguille (28, 128).

3. Système médical (20) selon la revendication 2, dans lequel le second système de préhension (32, 432) a des doigts de préhension (118, 418) structurés pour régler la taille de l'espace interne (120, 420).

4. Système médical (20) selon la revendication 1, dans lequel le premier système de préhension (30, 330, 630, 730) a une première force de préhension non réglable.

5. Système médical (20) selon la revendication 4, dans lequel le premier système de préhension (30, 330, 630, 730) inclut une couverture réglable (94, 688),

Revendications

1. Système médical (20) pour suturer une perforation

798) ayant un état naturel qui est dimensionné pour engager l'aiguille (28, 128), et dans lequel le second système de préhension (32, 432) inclut un anneau de serrage (110) ou une pince endoscopique ayant un espace interne réglable (120, 420), l'espace interne réglable (120, 420) ayant un état naturel qui est dimensionné pour engager l'aiguille (28, 128). 5

bras de support (58) pour le second système de préhension (32, 432), le bras de support (58) incluant un trou de guidage (62) aligné avec un organe de préhension (110) du second système de préhension (32, 432).

6. Système médical (20) selon la revendication 1, dans lequel le premier système de préhension (30, 330, 630, 730) inclut un fil de commande (74) s'étendant de manière proximale le long de l'extérieur de l'endoscope (22). 10

7. Système médical (20) selon la revendication 1, dans lequel le premier système de préhension (30, 330, 630, 730) est radialement aligné avec le second système de préhension (32, 432) passant à travers le canal de travail (23) de l'endoscope (22). 15

20

8. Système médical (20) selon la revendication 4, dans lequel la seconde force de préhension est réglable entre un premier niveau inférieur à la première force de préhension et un second niveau supérieur à la première force de préhension. 25

9. Système médical (20) selon la revendication 1, dans lequel le premier système de préhension (30, 330, 630, 730) a une plaire de fils (372R, 372L) définissant un espace réglable entre ceux-ci. 30

10. Système médical (20) selon la revendication 8, dans lequel le second système de préhension (32, 432) inclut un anneau de serrage (110) et un cathéter (114), et dans lequel une translation relative entre le cathéter (114) et l'anneau de serrage (110) règle la seconde force de préhension entre les premier et second niveaux. 35

11. Système médical (20) selon la revendication 1, dans lequel le premier système de préhension (30, 330, 630, 730) inclut un bras de préhension en forme de L (70, 370, 670, 770) attaché à une portion extérieure de l'embout (26, 726) de manière coulissante. 40

45

12. Système médical (20) selon la revendication 1, dans lequel le premier système de préhension (30, 330, 630, 730) inclut un bras de préhension en forme de L (770) ayant un support de préhension incurvé (782) pour améliorer la visibilité à travers l'endoscope (22). 50

13. Système médical (20) selon la revendication 12, dans lequel une portion incurvée (786) du support de préhension (782) a un rayon correspondant à un rayon de l'embout (726) ou de l'endoscope (22). 55

14. Système médical (20) selon la revendication 1, dans lequel le capuchon d'extrémité (26, 726) inclut un

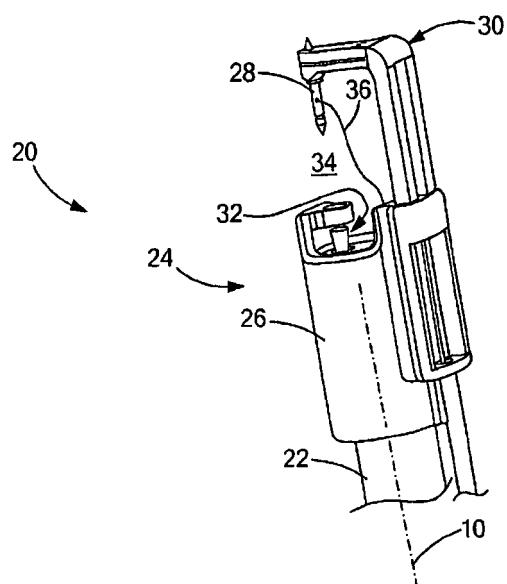


FIG. 1

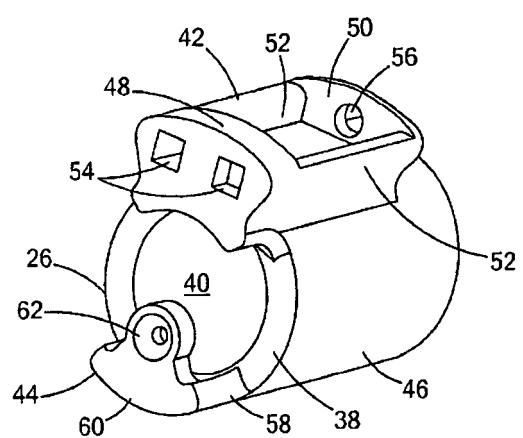


FIG. 2

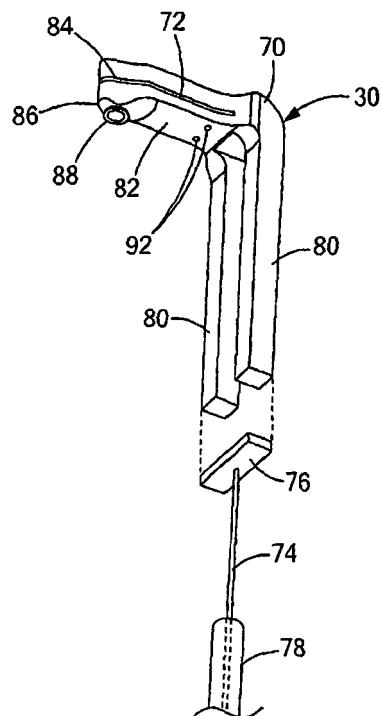


FIG. 3

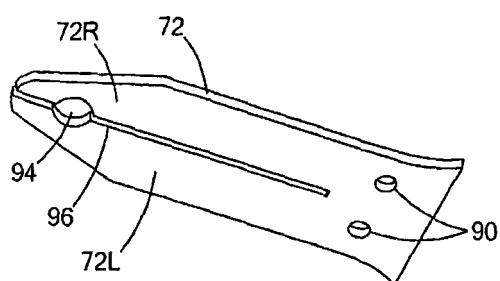
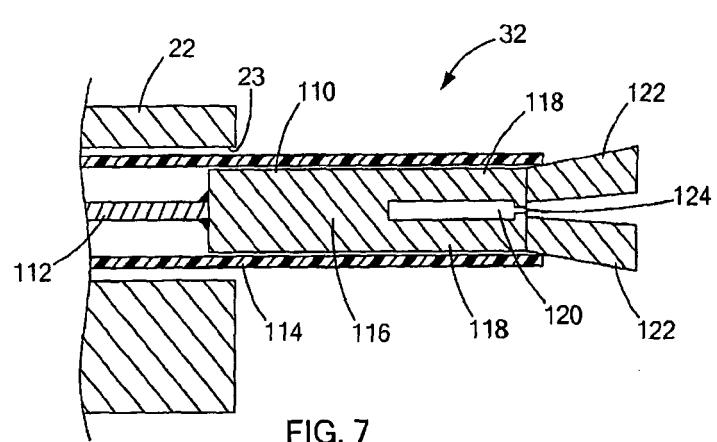
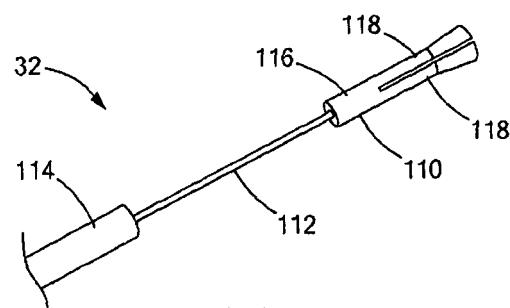
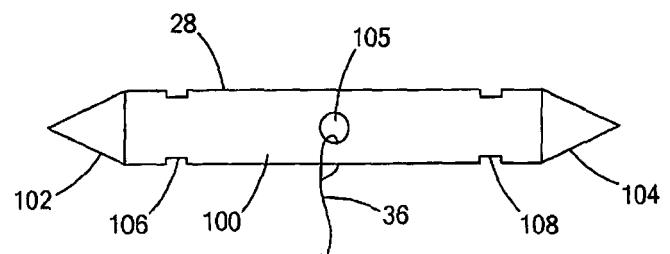


FIG. 4



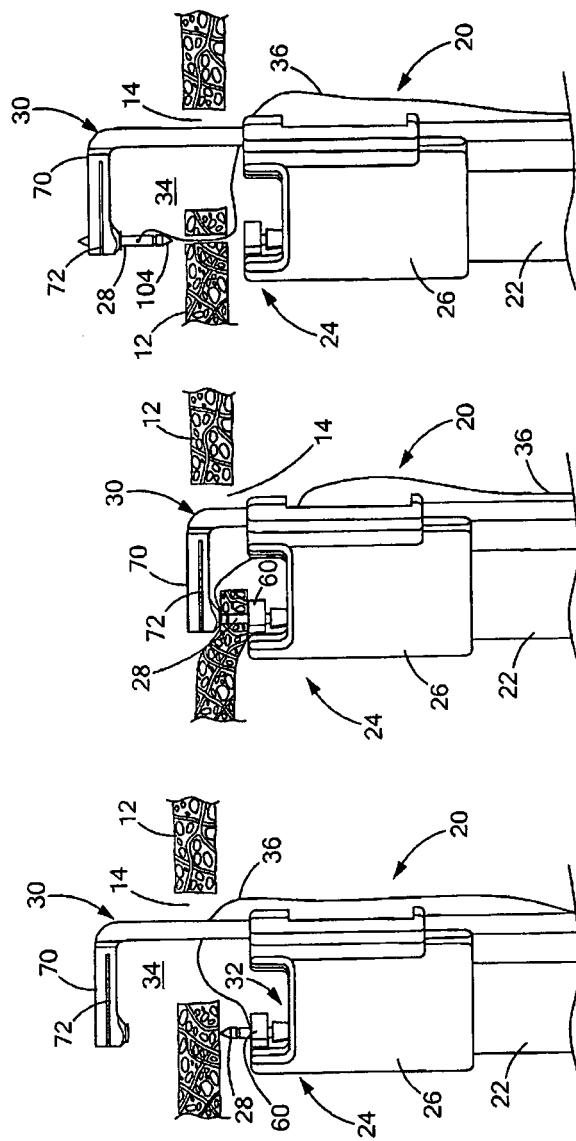


FIG. 8

FIG. 10

FIG. 9

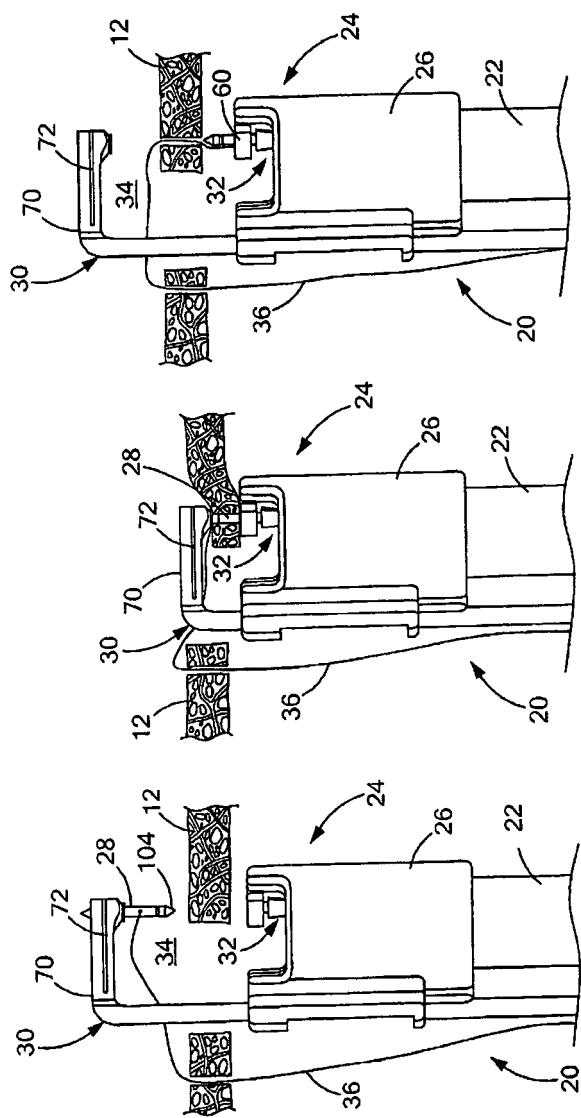


FIG. 11

FIG. 12

FIG. 13

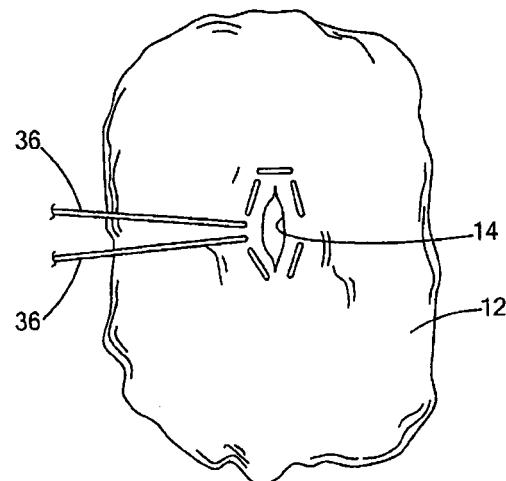


FIG. 14







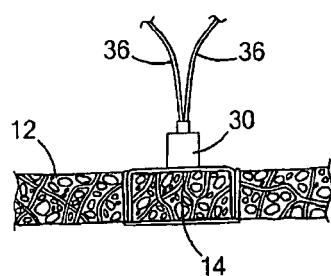


FIG. 15

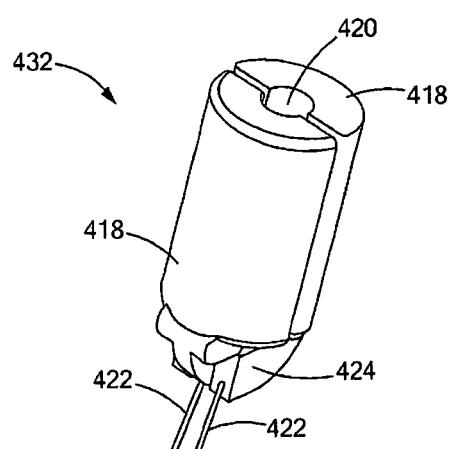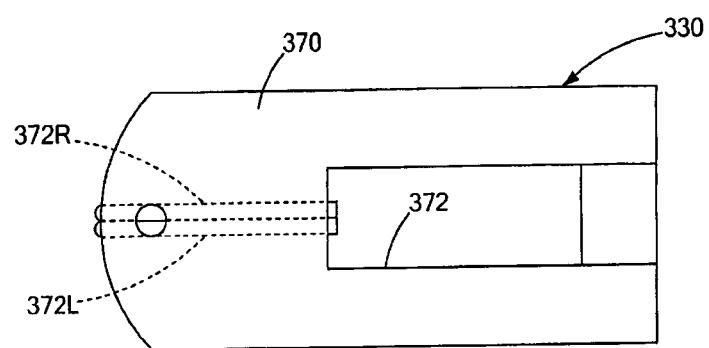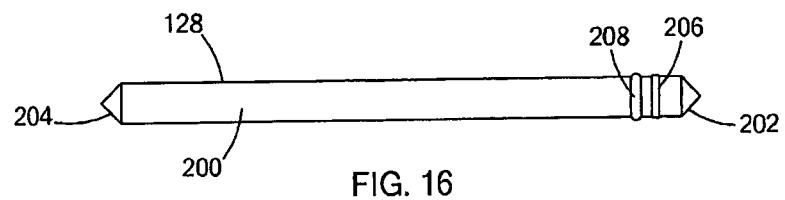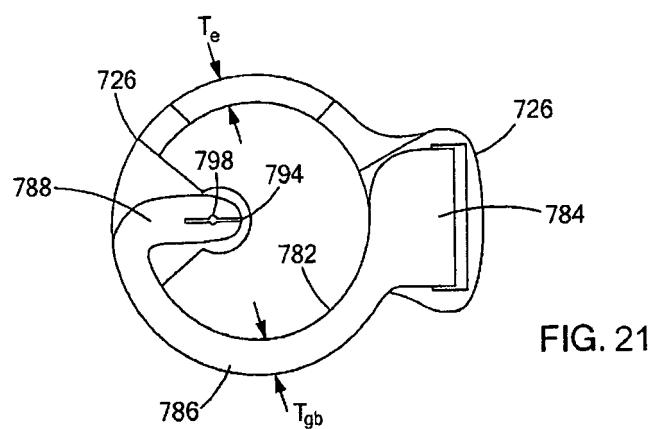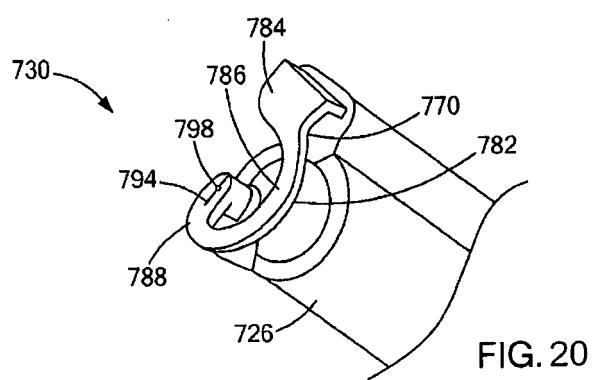

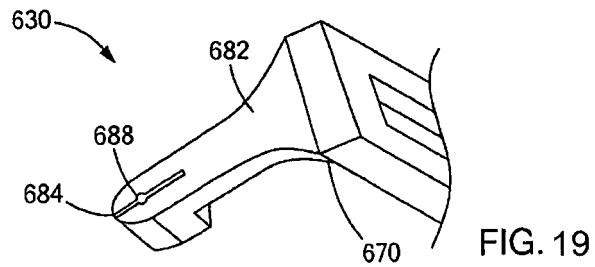

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2005090709 A1 **[0005]**
- WO 9301750 A **[0006]**

专利名称(译)	用于内窥镜缝合穿孔的医疗系统		
公开(公告)号	EP2230987B1	公开(公告)日	2013-02-27
申请号	EP2009700321	申请日	2009-01-02
[标]申请(专利权)人(译)	WILSONCOOK医疗		
申请(专利权)人(译)	WILSON-COOK MEDICAL INC.		
当前申请(专利权)人(译)	库克医疗技术有限责任公司		
[标]发明人	SURTI VIHAR C MCLAWHORN TYLER EVANS JOHNSON TRAVIS BENTON		
发明人	SURTI, VIHAR, C. MCLAWHORN, TYLER, EVANS JOHNSON, TRAVIS, BENTON		
IPC分类号	A61B17/04 A61B17/06 A61B1/00 A61B17/00 A61B1/018		
CPC分类号	A61B17/0469 A61B1/00087 A61B1/018 A61B17/0487 A61B17/0491 A61B17/0625 A61B2017/0609		
优先权	61/018786 2008-01-03 US		
其他公开文献	EP2230987A2		
外部链接	Espacenet		

摘要(译)

公开了用于使针穿孔并在组织中缝合穿孔的医疗系统和装置，其可以通过内窥镜和/或腹腔镜使用，并且提供围绕穿孔的缝合线的简单，可靠和可控的放置，以完全闭合。医疗系统的一个实施例通常包括内窥镜(22)，端盖(26)，针(28)，缝合线(36)，以及被配置用于相对平移以选择性地通过的第一和第二抓握系统(30,32)。第一和第二抓握系统之间的针。

