



US 20030167063A1

(19) **United States**

(12) **Patent Application Publication**
Kerr

(10) **Pub. No.: US 2003/0167063 A1**

(43) **Pub. Date: Sep. 4, 2003**

(54) **LAPAROSCOPIC PORT SITE FASCIAL CLOSURE DEVICE**

(52) **U.S. Cl. 606/144**

(76) **Inventor: Stephen Kerr, Manhattan Beach, CA (US)**

(57) **ABSTRACT**

Correspondence Address:
BAYMOND A. MILLER
PEPPER HAMILTON LLP
ONE MELLON CENTER, 50TH FLOOR
500 GRANT STREET
PITTSBURGH, PA 15219 (US)


A laparoscopic fascial closure device for fashioning a secure closure about a laparoscopic puncture site. The device comprises an elongate cannula having proximal and distal ends. A needle suture complex is selectively deployed from the distal end of the device that is operative to deploy a suture across the puncture site from within the body and draw the free ends of the suture outwardly from the body via the laparoscopic port site. The device is configured to be utilized through a ten millimeter or larger laparoscopic port, and is operative to position the suture at the puncture site such that the suture extends in a diametrically-opposed configuration at least 1.0 cm or greater across opposed sides of the puncture site.



(21) **Appl. No.: 10/086,318**



(22) **Filed: Mar. 1, 2002**



Publication Classification



(51) **Int. Cl.⁷ A61B 17/04**

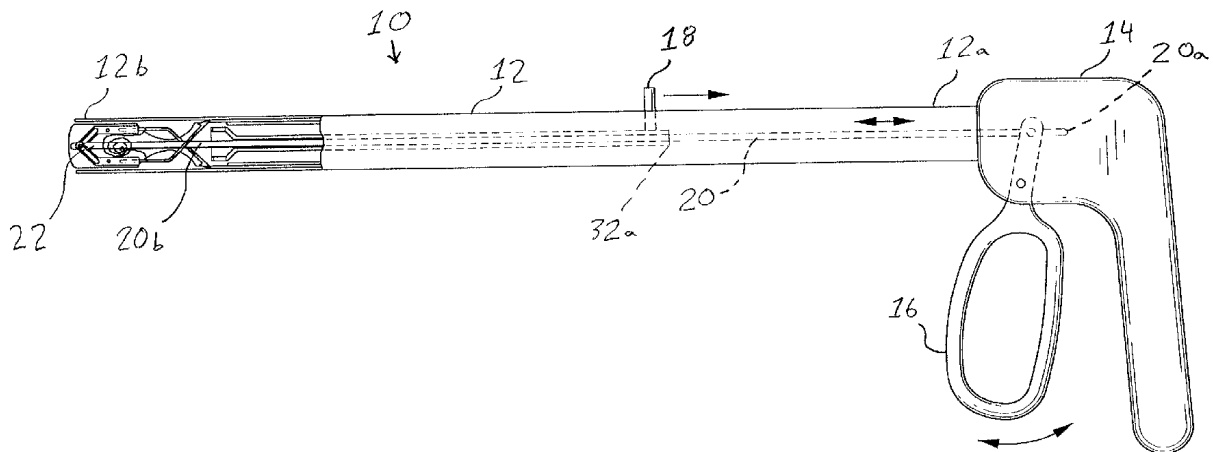

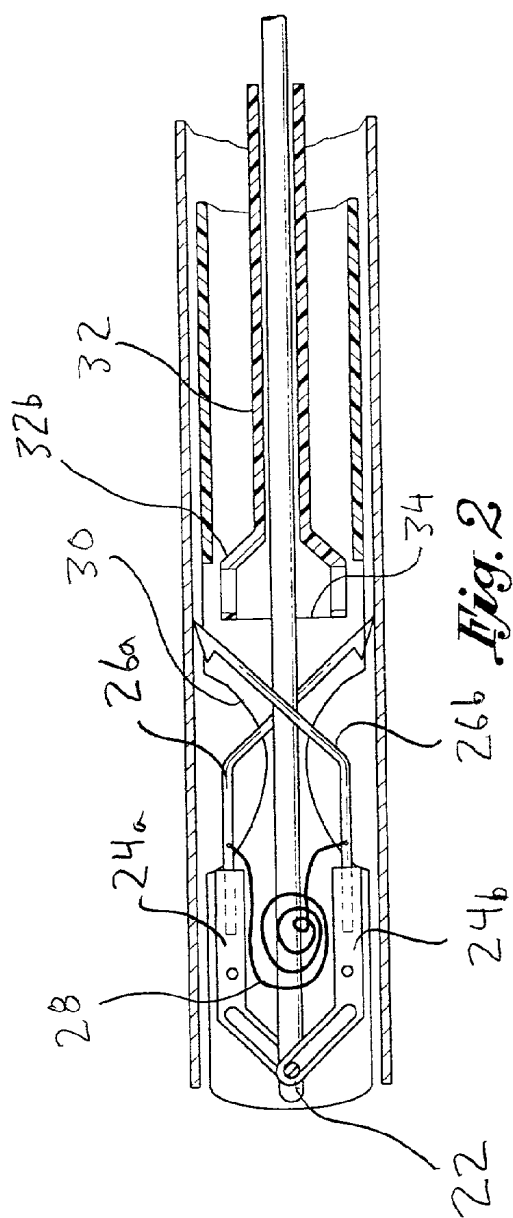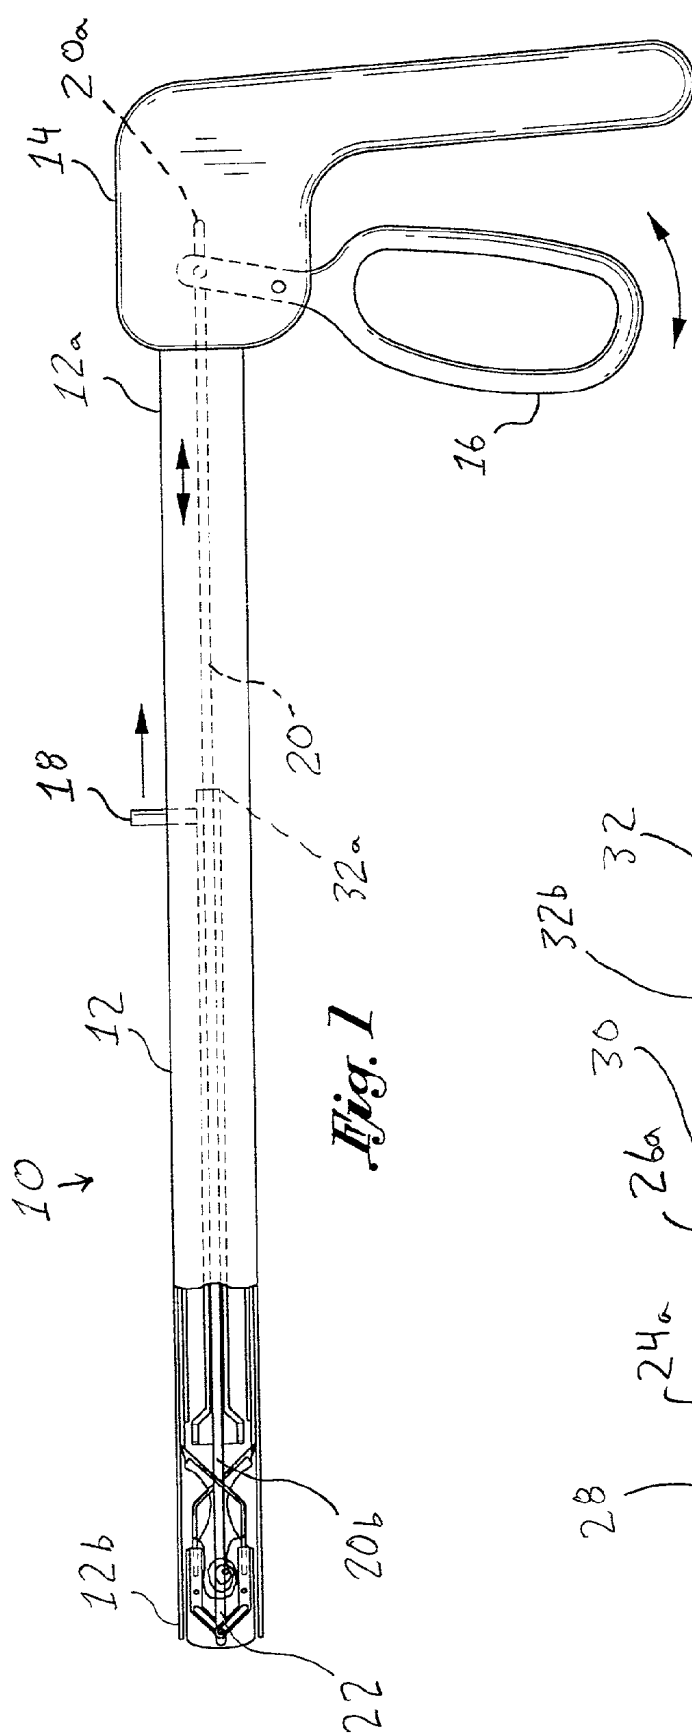

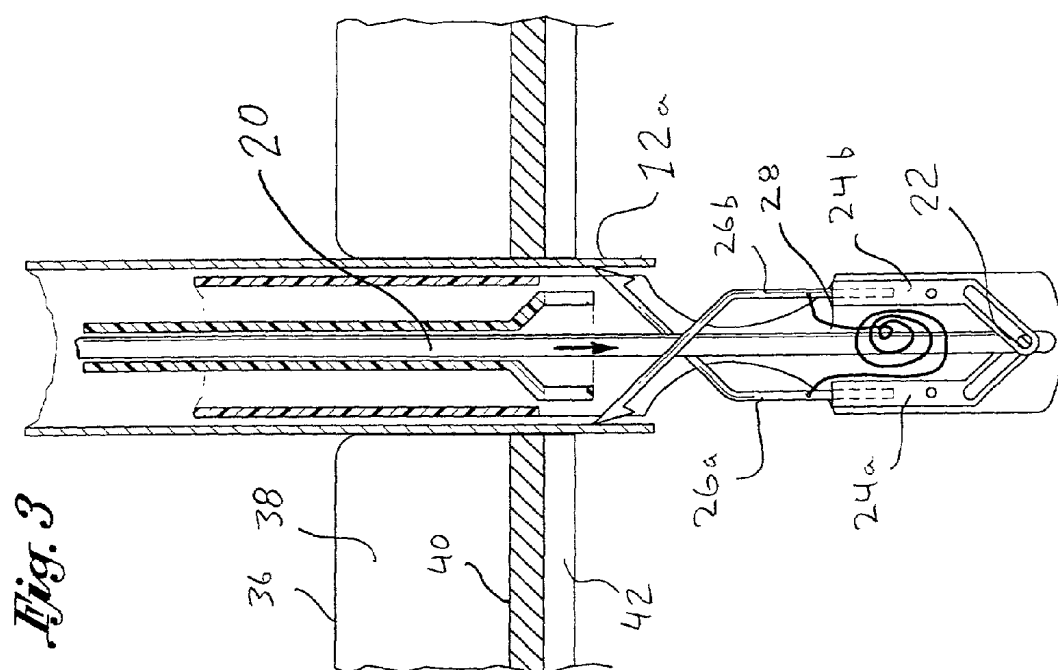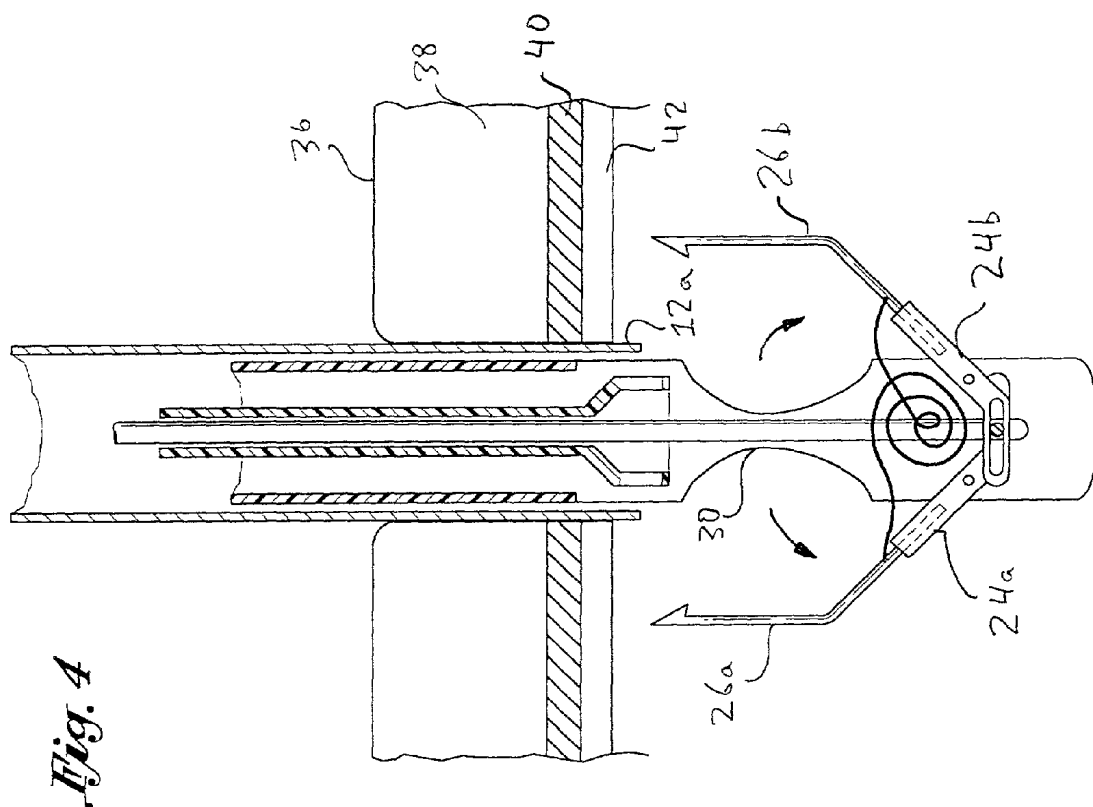

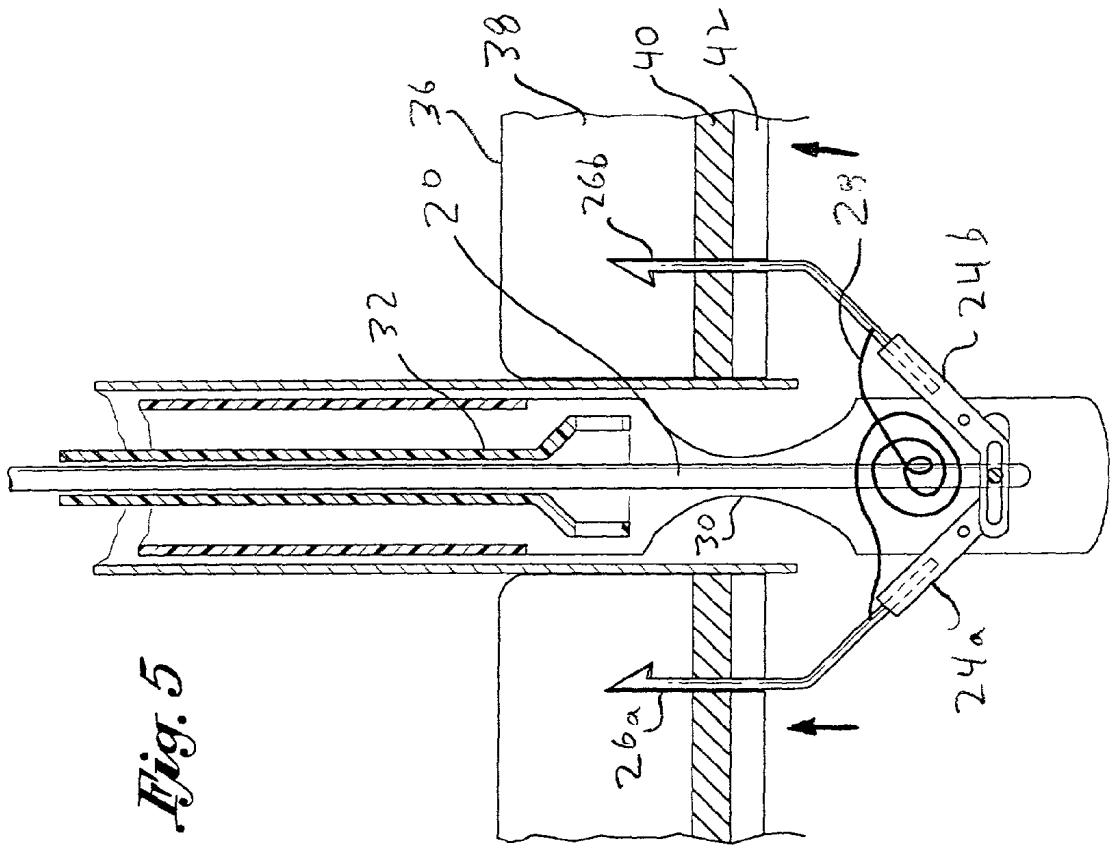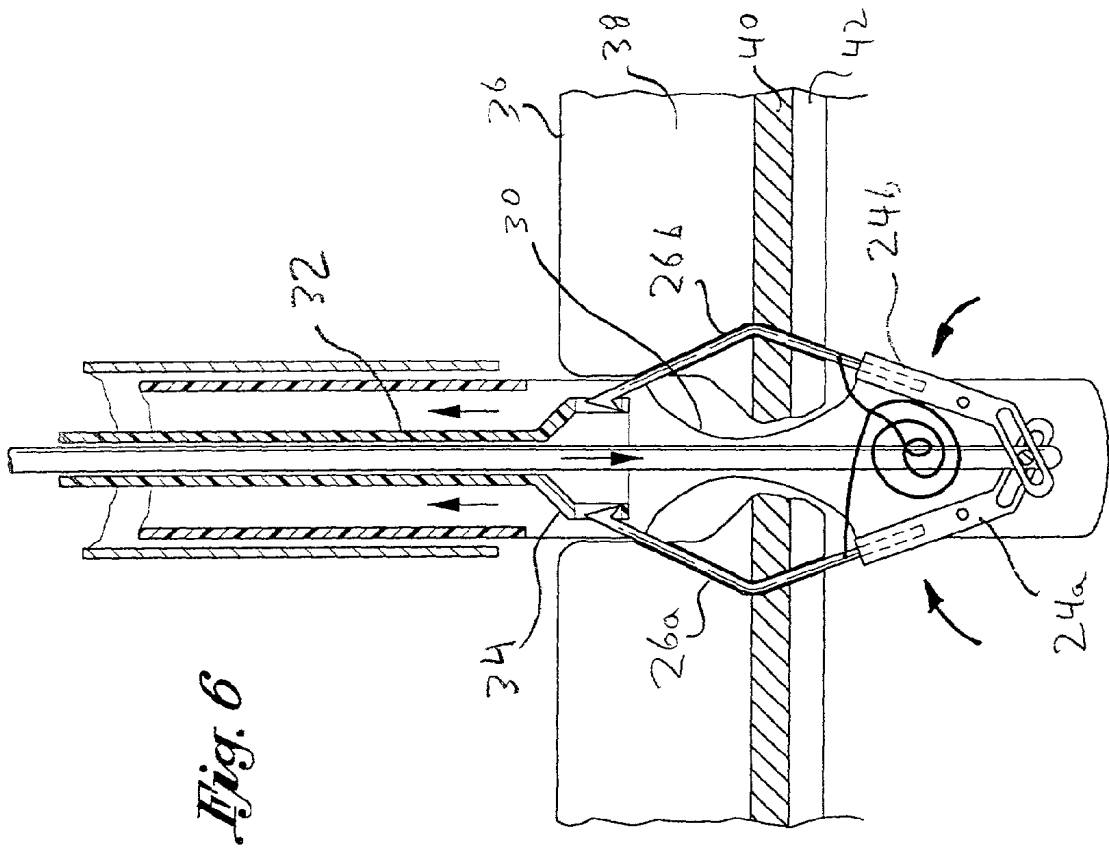

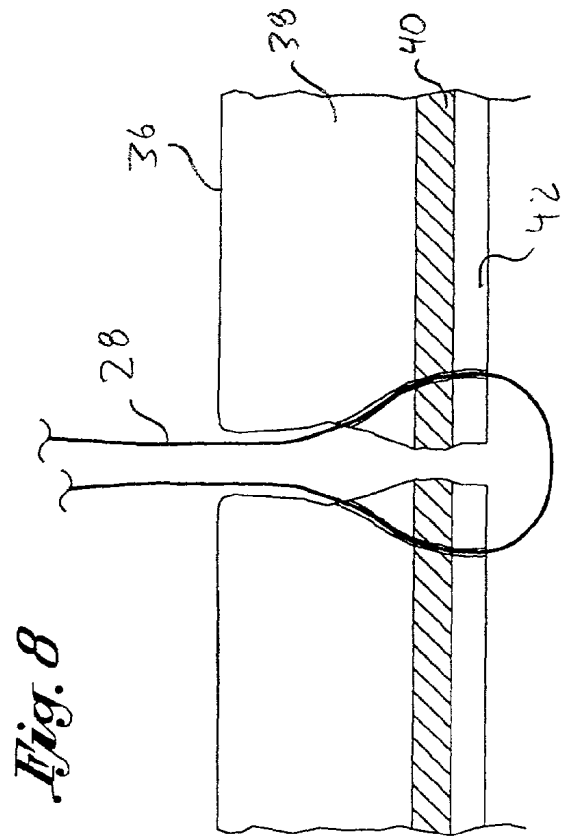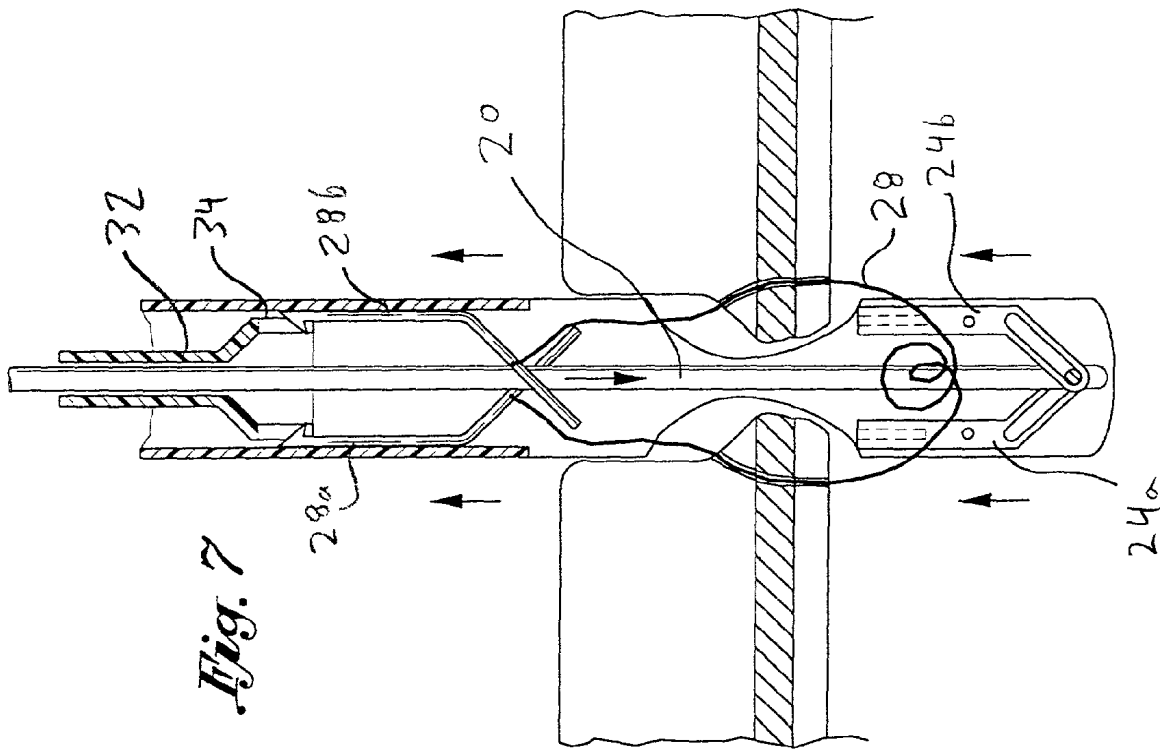

LAPAROSCOPIC PORT SITE FASCIAL CLOSURE DEVICE

BACKGROUND OF THE INVENTION

[0001] Laparoscopic surgery is a well-known, widely utilized surgical technique that advantageously reduces patient recovery time due to its minimal tissue damage, which consequently permits the patient to return to normal activity in a shorter period of time. Generally, laparoscopic surgery relies upon the formation of one or more trocar puncture wounds through which are deployed surgical instruments and a rod-like telescope with a light source to enable the surgeon to view the organs and conduct the surgery.

[0002] Notwithstanding the tremendous advantages afforded by laparoscopic surgery, such technique still presents substantial clinical problems. More specifically, the puncture wounds created within the body by the surgeon to gain access to the surgical site are often difficult and time-consuming to close, and can place great demands on the surgeon. Such task is made even more difficult when laparoscopic surgery is performed upon obese patients where there is a relatively deep puncture wound formed through a relatively small puncture site or incision. Indeed, the puncture site frequently needs to be enlarged following the laparoscopic procedure to ensure that the site is closed at the interior abdominal wall. Ironically, the need to enlarge the puncture site in order to adequately close the same partially negates the primary advantages of laparoscopic surgery; however, such practice is essential insofar as failure to properly close the puncture wound can lead to serious medical complications.

[0003] To address such shortcomings, numerous attempts have been made to develop instruments capable of quickly and effectively forming a closure of a laparoscopic fascial defect or puncture site. Exemplary of such attempts include those devices disclosed in U.S. Pat. No. 5,741,279, issued to Gordon et al., on Apr. 21, 1998, entitled ENDOSCOPIC SUTURE SYSTEM; U.S. Pat. No. 5,374,275, issued to Bradley et al., on Dec. 20, 1994, entitled SURGICAL SUTURING DEVICE AND METHOD OF USE; U.S. Pat. No. 5,964,773, issued to Greenstein on Oct. 12, 1999, entitled LAPAROSCOPIC SUTURING DEVICE AND SUTURE NEEDLES; U.S. Pat. No. 5,403,329, issued to Flinchcliffe on Apr. 4, 1995; and U.S. Pat. No. 5,507,757, issued to Sauer et al. on Apr. 16, 1996, entitled METHOD OF CLOSING PUNCTURE WOUNDS, the teachings of all of which are expressly incorporated herein by reference.

[0004] Such attempts, however, have proven less than satisfactory and fail to provide a practical solution to the foregoing problems. In this regard, substantially all such devices allegedly designed to facilitate the closure of a laparoscopic puncture site are incapable of deploying a suture a sufficient distance about the puncture site to fashion an appropriate closure. In this respect, prior art devices, such as those referenced above, are operative to stitch a suture into position at points diametrically across the puncture site; however, such suture typically only extends thereacross by a limited distance, which is less than 1.0 cm. Such limited distance fails to sufficiently approximate the peritoneum and fascia surrounding the puncture site sufficiently to form an adequate closure. While it is recognized that a suture extending a greater distance across the puncture site would be more

advantageous, the capability of prior art devices position such a suture have not heretofore been available insofar as any laparoscopic fascial closure device must necessarily be insertable through a 10 mm laparoscopic port, which places considerable spacial constraints on the design of such devices.

[0005] Additionally disadvantageous with such prior art closure devices include the failure of such devices to selectively deploy needles for positioning and stitching a suture across the puncture site that can ultimately be withdrawn from the puncture wound without the need to enlarge the incision or puncture site. Among those devices possessing such defect include those disclosed in U.S. Pat. Nos. 5,964,733 and 5,403,329, referenced above, which deploy needles that, after having been deployed to fix a suture in position across an intra-abdominal puncture site, are inoperative to become repositioned within the device deployed thereby to thus atraumatically withdraw such needles from the patient.

[0006] Accordingly, there is a substantial need in the art for a laparoscopic fascial closure device that overcomes the aforementioned shortcomings in the art. Specifically, there is a need for such a device that is capable of being deployed through a 10 mm or larger laparoscopic port or puncture site that is further capable of deploying a suture at least 1.0 cm across from the periphery thereof. There is additionally a need for such a device that is capable of deploying a suture across a laparoscopic puncture site that provides for the retraction and capture of needles utilized to secure such suture in position back within the device deployed thereby to thus enable the needles to be easily and atraumatically withdrawn from the laparoscopic puncture wound.

BRIEF SUMMARY OF THE INVENTION

[0007] The present invention specifically addresses and alleviates the above-identified deficiencies in the art. More specifically, the present invention is directed to a laparoscopic fascial closure device that is operative to fashion a secure closure of laparoscopic puncture wounds, and in particular, in abdominal tissues. According to a preferred embodiment, the device comprises an elongate cannula or other hollow tubular member having proximal and distal ends, the latter being configured to be inserted within the body via the laparoscopic trocar-created punctures used to perform the laparoscopic procedure. To that end, the cannula is sized to be inserted through a puncture site of at least 10 mm or greater.

[0008] Disposed within the cannula, and more particularly the distal end thereof, is a needle/suture complex consisting of two diametrically-opposed needle members having an elongate suture extending therebetween that are operatively transitional from a first insertion configuration, whereby the needles are confined within the distal-most end of the cannula for insertion through the abdomen to the puncture site; a second operative configuration whereby the needle members extend outwardly from the distal-most end of the cannula such that each respective needle is oriented toward the fascia surrounding the puncture site in a generally perpendicular orientation. Such needle members, according to said second configuration, are further oriented to extend outwardly from the distal-most end of the cannula by a distance of at least 1.0 cm or greater and pierce through the peritoneum and fascia at diametrically opposed points across

the puncture site. To facilitate the ability of the needle/suture complex to gather tissue about a puncture site to form the desired closure, the needle/suture complex will preferably be positioned upon a tapered mount having a generally hourglass shape to thus enable tissue to gather thereabout.

[0009] The needle members are further operative to assume a third retraction configuration whereby each respective tip of the two diametrically-opposed needles are brought into and contained within the distal end of the cannula. To facilitate the ability of the device to assume the third configuration, a grasping mechanism is disposed within the cannula that is operative to grasp each respective needle tip and draw the same back into the cannula. The needle/suture complex is mounted upon a connecting rod disposed within the cannula, which is operative to be advanced downwardly into the cannula such that the needles of the needle/suture complex are deployed through and ultimately retracted back within the lumen of the cannula. When in such third configuration, the device is then withdrawn from the body.

[0010] In use, the suture connected across the respective needles is caused to extend across the puncture site with the free ends thereof being drawn upwardly from the puncture wound as the device is withdrawn from the body, which thus leaves the two ends of the sutures free to be cut away from the needles and then tied down to close the fascial defect. Advantageously, because the suture is positioned such that the same extends at least 1.0 cm or greater across opposed sides of the puncture site, a sufficient amount of tissue is utilized to give strength to the closure. Additionally, such design advantageously eliminates the need to deploy additional sutures across the suture site, as is necessary with prior art needle passing devices which must be passed multiple times across the puncture wound site. The device further forms a closure in such a manner that the pneumoperitoneum is maintained, thus enabling the device to be utilized without direct visualization with a laparoscope.

[0011] It is therefore an object of the present invention to provide a laparoscopic port site fascial closure device that is substantially more effective and efficient at forming a closure about a laparoscopic puncture site than prior art devices and techniques.

[0012] Another object of the present invention is to provide a laparoscopic port site fascial closure device that is capable of forming a closure about a laparoscopic puncture site utilizing a single deployment thereof.

[0013] Another object of the present invention is to provide a laparoscopic port site fascial closure device that can form a closure about a laparoscopic puncture site in a manner that is far less traumatic than prior art devices and techniques.

[0014] Another object of the present invention is to provide a laparoscopic port site fascial closure device that is able to form a closure about a laparoscopic puncture site such that the pneumoperitoneum is maintained such that the abdominal wall is kept away from the abdominal viscera.

[0015] Another object of the present invention is to provide a laparoscopic port site fascial closure device that is capable of being utilized without direct visualization.

[0016] Still further objects of the present invention include a laparoscopic port site fascial closure device that can be

utilized to form a closure about virtually any type of laparoscopic puncture site that is at least 10 mm or greater, is of simple construction, reliable, and exceedingly simple and time efficient to utilize.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] These, as well as other features of the present invention, will become more apparent upon reference to the drawings wherein:

[0018] **FIG. 1** is a side, partial cross-sectional view of a laparoscopic port site fascial closure device constructed in accordance with a preferred embodiment of the present invention.

[0019] **FIG. 2** is an expanded cross-sectional view of the distal end of the device depicted in **FIG. 1**.

[0020] **FIG. 3** is a cross-sectional view of the distal-most end of the device depicted in **FIG. 2** shown deployed through a laparoscopic puncture wound through the skin, subcutaneous fat, fascia, and peritoneum of a patient.

[0021] **FIG. 4** is a cross-sectional view of the distal end of the device depicted in **FIGS. 2-3** depicting a needle suture complex being deployed through the distal-most end thereof, the needle suture complex assuming an operative configuration for stitching a suture across the puncture site formed within the fascia and peritoneum.

[0022] **FIG. 5** is a cross-sectional view of the device depicted in **FIGS. 2-4** showing the needle/suture complex extending upwardly into the peritoneum, fascia and subcutaneous fat layers.

[0023] **FIG. 6** is a cross-sectional view of the device depicted in **FIGS. 2-5**, whereby the needles of the needle/suture structure are shown being captured within the distal end of the device.

[0024] **FIG. 7** is a cross-sectional view of the device depicted in **FIGS. 2-6** wherein the needles of the needle/suture complex are captured entirely within the distal end of the device as the device is shown being pulled upwardly from the laparoscopic puncture wound such that the suture of the needle/suture complex remains fixed in position across the laparoscopic puncture site formed within the fascia and peritoneum.

[0025] **FIG. 8** is a cross-sectional view depicting the placement of the suture following withdrawal of the laparoscopic fascial closure device from the patient's body.

DETAILED DESCRIPTION OF THE INVENTION

[0026] The detailed description set forth below is intended as a description of the presently preferred embodiment of the invention, and is not intended to represent the only form in which the present invention may be constructed or utilized. The description sets forth the functions and sequences of steps for constructing and operating the invention. It is to be understood, however, that the same or equivalent functions and sequences may be accomplished by different embodiments and that they are also intended to be encompassed within the scope of the invention.

[0027] Referring now to the Figures, and initially to **FIG. 1**, there is shown a laparoscopic fascial closure device **10**

constructed in accordance with a preferred embodiment of the present invention. As illustrated, the device **10** comprises an elongate cannula member **12** having proximal and distal ends **12a**, **12b**, with the distal end **12b** being operative for insertion into the patient, and the proximal end **12a** having a handle **14** and actuation mechanisms **16**, **18** to facilitate handling and operation of the device by a surgeon, discussed more fully below.

[0028] Axially disposed within the lumen of the cannula **12** is an elongate connecting rod **20** having a proximal end **20a** that is secured to a trigger mechanism **16** extending outwardly from the proximal end **12a** of the cannula **12**. As will be appreciated by those skilled in the art, the trigger mechanism **16** cooperates with the handle **14** formed upon the proximal end **12a** of the cannula **12** to thus enable a surgeon to simultaneously grasp and operate the device **10**. The distal end **20b** of the connecting rod **20** is coupled to a needle/suture complex **22**, more clearly seen in **FIG. 2**, the latter consisting of an opposed pair of angled needle holders **24a**, **24b** pivotally connected to the connecting rod **20**, an opposed pair of angled needles **26a**, **26b** received within dedicated ones of the needle holders **24a**, **24b**, and an elongate suture **28** having a first end attached to a respective one of the needles, and the other end attached to the respective other end of the needle. The needle/suture complex **22** will further preferably be positioned upon a tapered mount **30** having a generally hourglass shape to facilitate the ability of the device to form a closure, discussed more fully below, as more clearly seen in **FIG. 6**.

[0029] Additionally provided within the device **10** of the present invention is a needle trap mechanism **32**, more clearly depicted in **FIG. 2**, comprised of an elongate cylindrical sleeve axially mounted about a portion of the connecting rod **20**. The needle trap includes a proximal end **32a** having a handle or other graspable member formed thereon, shown as **18** in **FIG. 1**, the latter extending partially from the cannula member **12** to thus enable a surgeon to manipulate the same. Formed upon the distal end **32b** of the needle trap is a generally bell-shaped or frusto-conical shaped housing **34** operative to grasp the tips of the opposed needles **26a**, **26b** and ultimately contain the same therewithin such that the needles **26a**, **26b** may ultimately be pulled from their respective needle holders **24a**, **24b** within which they are received following deployment of the device **10** and contained within the cannula **12**, as discussed more fully below.

[0030] The device **10** of the present invention is specifically configured to be deployed through laparoscopic ports of at least 10 mm or greater. As will be recognized by those skilled in the art, although certain laparoscopic procedures are performed utilizing laparoscopic ports of less than 10 mm, by far the majority of such procedures rely upon at least one or more larger ports having a size of 10 mm or greater. It should be understood, however, that the present invention could be adapted for deployment through smaller laparoscopic ports, as may be necessary in other applications.

[0031] Referring now to **FIG. 3**, there is shown the distal end of the device **10** depicted in **FIGS. 1-2** shown deployed through the distal end of a laparoscopic port and within the abdominal cavity of a patient. As discussed above, the distal end of the device **10** will be inserted through a laparoscopic port. The formation of laparoscopic ports is well-known in the arts and utilized extensively in the practice of laparo-

scopic surgery. Briefly, such ports are formed via the use of trocars followed by the placement of a port into the patient, the latter defining a channel through which surgical instruments and laparoscopes are deployed for a given surgical procedure. The device **10** of the present invention is specifically used following the surgical procedure to form a closure about the puncture site within the body through which the port was utilized.

[0032] Initially, the distal end of the device **10** is inserted through the port such that the distal-most end of the device **10** extends into the abdominal cavity through layers of skin **36**, subcutaneous fat **38**, fascia **40**, and peritoneum **42**. The connecting rod **20** is then actuated via the trigger (not shown) such that the connecting rod **20** extends downwardly through the distal end **12b** of the cannula **12** such that the needle/suture complex **22** is caused to extend therefrom. As illustrated, the needle/suture complex **22** will be deployed within the abdominal cavity, and beneath the skin **36**, subcutaneous fat **38**, fascia **40** and peritoneal **42** layers through which the port extends.

[0033] Once the needle/suture complex **22** is caused to extend through the distal-most end **12b** of the cannula **12**, the needle/suture complex **22** transitions from its first, folded configuration depicted in **FIGS. 2-3** to a second operative configuration, as illustrated in **FIG. 4**. In such operative configuration, the needle holder arms **24a**, **24b** pivot outwardly such that the needles **26a**, **26b** held thereby spread out and extend away from the distal opening of the cannula **12a**. To achieve that end, it is contemplated that the needle holder arms **24a**, **24b** may be outwardly biased via the use of springs or some other biasing force. As illustrated, the needle holder arms **24a**, **24b** and needles **26a**, **26b** held thereby are formed to have bends therein to thus enable the needles **26a**, **26b** to achieve an orientation whereby the needles are positioned in a perpendicular fashion relative the peritoneum **42** and fascia **40**, and generally parallel to the cannula **12** of the device **10**. The arms **24a**, **24b** and needles **26a**, **26b** are further configured such that the same extend in diametrically opposed directions and, importantly, extend from the distal-most end of the cannula **12**, and hence the laparoscopic port opening or puncture site, by a distance of at least 1.0 cm or greater.

[0034] In this respect, one of the chief advantages of the operation of the device **10** of the present invention is the ability of the same to ultimately stitch a suture into position a sufficient distance about the port opening to thus cause a more secure closure to ultimately be formed. Prior art devices, in contrast, are incapable of delivering a suture sufficiently across a laparoscopic puncture wound site to fashion a desired secure closure within the abdominal cavity.

[0035] To that end, there is shown in **FIG. 5** the process by which the suture **28**, as deployed by the needle/suture complex **22**, is positioned across the laparoscopic puncture site. The opposed needles **26a**, **26b** extend upwardly and penetrate the peritoneum **42** and fascia **40** in a generally perpendicular fashion and are operative to traverse the peritoneum **42**, subcutaneous fat **38** and fascia **40** prior to being captured within the lumen of the cannula **12**, discussed more fully below. As will be appreciated, such pathway of penetration defined by the opposed needles **26a**, **26b** provide for substantially more secure suture placement. To facilitate the ability of the device **10** to form a closure of the puncture

site via placement of the suture **28**, tapered mount **30** upon which the needle/suture complex **22** is positioned enables tissue to be gathered radially thereabout.

[0036] In order to safely and atraumatically withdraw the needles **26a**, **26b** deploying the suture **28** about the puncture site, there is further shown in **FIG. 6 a** a mechanism by which the present invention operates to accomplish same. As illustrated, the needle/suture complex **22** is operative to assume a third retraction configuration whereby the tips of the respective needles **26a**, **26b** are captured by the needle trap mechanism **32**, and ultimately caused to detach from the respective needle holders **24a**, **24b** and remain contained within the cannula **12** of the device **10**. Specifically, as the connecting rod **20** is pushed downwardly, the needle holder arms **24a**, **24b** are forced to rotate inwardly. Such motion consequently causes the needle tips of the opposed needles **26a**, **26b** to likewise rotate inwardly, such that the tips are received within the capture area **34** formed upon the distal-most end of the needle trap mechanism **32** positioned axially about the connecting rod **20**. Once captured, the needle trap mechanism **32**, with needle tips captured thereby, is pulled upwardly through the cannula **12** via a lever (i.e., lever **18** in **FIG. 2**) formed on the proximal end thereof extending from the cannula **12** such that each respective needle **26a**, **26b** is caused to dislodge from the needle holder arm **24a**, **24b** that it had respectively engaged. As a consequence, the needles **26a**, **26b** become disengaged from the needle suture complex **22** and are ultimately contained safely within the lumen of the cannula **12**.

[0037] As illustrated in **FIG. 7**, as a result of the removal of the needles **26a**, **26b** from the needle holder arms **24a**, **24b**, the needles **26a**, **26b** are caused to advance upwardly through the cannula **12** with the suture ends remaining attached thereto. As will be readily appreciated, by virtue of having been stitched across opposed sides of the laparoscopic port or puncture site, the suture **28** will extend thereacross and upwardly through the piercings made by the respective needles **26a**, **26b** through the peritoneum **42**, fascia **40**, fatty tissue **38** and ultimately through the previously formed laparoscopic port channel. As will be appreciated, such suture **28** will be pulled through the body by merely withdrawing the entire device **10** from the patient, as shown in **FIG. 6**.

[0038] Ultimately, the suture **28** will be positioned across the laparoscopic puncture site in the manner depicted in **FIG. 8**. As illustrated, the respective ends of the suture **28** will extend outwardly from the body but around the puncture site to thus fashion a closure of the site. To that end, the suture **28** may be manipulated according to a variety of techniques to thus ensure that the puncture site remains closed thereby.

[0039] Additional modifications and improvements of the present invention may also be apparent to those of ordinary skill in the art. For example, it is contemplated that a variety of mechanisms exist that are capable of capturing needle tips of the needles deployed by the needle/suture complex **22** of the present invention. Additionally, it is contemplated that a variety of needle and needle holder configurations may be derived that are capable of causing the needles to ultimately penetrate through the peritoneum, fascia and fatty tissue, in a generally perpendicular orientation, and further are caused to advance through such tissues at a distance of 1.0 cm or

greater from the periphery of the puncture site sought to be closed. Moreover, a variety of mechanisms may be utilized to deploy the needle/suture complex, which may include a connecting rod configured to retract, twisted or otherwise manipulated to cause the needle/suture complex to transition to its various operative configurations. Thus, the particular combination of parts and steps described and illustrated herein is intended to represent only certain embodiments of the present invention, and is not intended to serve as limitations of alternative devices and methods within the spirit and scope of the invention.

What is claimed is:

1. A laparoscopic fascial closure device for fashioning a closure of a laparoscopic puncture site comprising:

- (a) an elongate, hollow cannula member having proximal and distal ends;
 - (b) an elongate connecting rod disposed axially within said cannula, said connecting rod having a proximal end orientated towards said proximal end of said cannula and a distal end orientated toward said distal end of said cannula, said connecting rod having a trigger formed upon the proximal end thereof operative to selectively cause said connecting rod to advance distally or retract proximally within said cannula;
 - (c) a needle/suture complex mounted upon said distal end of said connecting rod, said needle/suture complex comprising at least one pair of needles having a suture extending therebetween, said needles being operatively transitional between:
 - (i) a first folded configuration wherein said needles are operative to extend through the lumen of said cannula;
 - (ii) a second operative configuration wherein said needles extend in opposed directions from the distal end of said cannula such that each respective needle extends a distance of at least 1.0 cm from the periphery of said puncture site; and
 - (iii) a third retracted configuration wherein said needles are biased inwardly toward the lumen of said cannula;
 - (d) a needle trap mechanism disposed within the lumen of said cannula and operative to lockingly engage with said needles of said needle/suture complex when said needles assume said third operative configuration; and
 - (e) wherein said needle trap mechanism is operative to draw said needles into the lumen of said cannula such that the device may be withdrawn from the body with the suture extending between the needles, forming a closure of said laparoscopic puncture site.
2. The device of claim 1 wherein said distal end of said cannula is positionable through a laparoscopic port having a size of 10 mm or greater.
3. The device of claim 1 wherein said needle/suture complex further comprises at least one pair of needle holder arms, each respective one of said at least one pair of said needle holder arms being operative to receive a respective one of said pair of needles.
4. The device of claim 3 wherein each respective one of said pair of needles is operative to disengage from said

needle holder arms as said needle/suture complex transitions from its second operative configuration to its third operative configuration.

5. The device of claim 1 wherein each respective one of said pair of needles are biased to extend in diametrically opposed directions across said puncture site as said needle/suture complex assumes said second operative configuration.

6. The device of claim 3 wherein each respective one of said pair of needle holder arms are biased to extend in diametrically opposed directions across said puncture site as said needle holder arms assume said second operative configuration.

7. The device of claim 1 further comprising a handle formed on the proximal end of said cannula.

8. The device of claim 7 wherein said handle and said trigger are positioned relative one another to enable the handle to be grasped and the trigger to be manipulated by a single hand of a user.

9. The device of claim 1 wherein said needle trap mechanism comprises an elongate cylindrical sleeve axially mounted about said connecting rod within said cannula, said

needle trap mechanism having a proximal end with a lever formed thereon, extending from said cannula, and a bell-shaped distal end having a needle catch formed therein, said needle catch being operative to lockingly engage with said needle tips of said needle/suture complex when said complex assumes said third operative configuration.

10. The device of claim 9 wherein said lever formed upon said needle trap mechanism is operative to cause said needle trap mechanism to extend distally and retract proximally within the said cannula.

11. The device of claim 10 wherein said needle trap mechanism, when lockingly engaged with said needle tips of said needles, captures said needles within said cannula when said needle trap mechanism retracts proximally within said cannula.

12. The device of claim 1 further comprising a tapered mount formed upon said distal end of said connecting rod and holding said needle/suture complex, said tapered mount having a generally hourglass shape.

* * * * *

专利名称(译)	腹腔镜端口部位筋膜闭合装置		
公开(公告)号	US20030167063A1	公开(公告)日	2003-09-04
申请号	US10/086318	申请日	2002-03-01
[标]申请(专利权)人(译)	KERR STEPHEN		
申请(专利权)人(译)	KERR STEPHEN		
当前申请(专利权)人(译)	KERR STEPHEN		
[标]发明人	KERR STEPHEN		
发明人	KERR, STEPHEN		
IPC分类号	A61B17/00 A61B17/04 A61B17/06 A61B17/11		
CPC分类号	A61B17/0057 A61B17/0469 A61B2017/00637 A61B2017/06071 A61B2017/0472 A61B2017/0496 A61B2017/00663		
其他公开文献	US6743241		
外部链接	Espacenet USPTO		

摘要(译)

一种腹腔镜筋膜闭合装置，用于围绕腹腔镜穿刺部位形成安全闭合。该装置包括具有近端和远端的细长套管。针缝线复合体从装置的远端选择性地展开，其可操作以从身体内部穿过穿刺部位展开缝合线，并经由腹腔镜端口部位将缝合线的自由端从身体向外拉出。该装置被配置成通过十毫米或更大的腹腔镜端口使用，并且可操作以将缝合线定位在穿刺部位处，使得缝合线在穿刺的相对侧上以直径相对的构型延伸至少1.0cm或更大。现场。

