



US 20140163323A1

(19) **United States**

(12) **Patent Application Publication**

Mohajer-Shojaee

(10) **Pub. No.: US 2014/0163323 A1**

(43) **Pub. Date: Jun. 12, 2014**

(54) **LAPAROSCOPIC CANNULA WITH SUTURING CAPABILITY**

A61B 17/02 (2006.01)

A61B 17/04 (2006.01)

(76) Inventor: **Reza Mohajer-Shojaee**, Encino, CA (US)

(52) **U.S. Cl.**

CPC *A61B 17/3423* (2013.01); *A61B 17/0218* (2013.01); *A61B 17/0469* (2013.01); *A61B 17/0666* (2013.01); *A61B 17/3498* (2013.01); *A61M 13/003* (2013.01)

USPC **600/204**

(21) Appl. No.: **13/984,240**

(22) PCT Filed: **Feb. 6, 2012**

(86) PCT No.: **PCT/US2012/025373**

§ 371 (c)(1),
(2), (4) Date: **Feb. 19, 2014**

Related U.S. Application Data

(60) Provisional application No. 61/443,286, filed on Feb. 16, 2011.

Publication Classification

(51) **Int. Cl.**


A61B 17/34 (2006.01)

A61M 13/00 (2006.01)

A61B 17/06 (2006.01)

ABSTRACT

A cannula for use in laparoscopic surgery has a central passage which may accept a trocar to create a laparoscopic incision in a body wall to an inner body cavity. A tubular section of the cannula is then pressed into the incision to form a port. After completion of the operation a needle having a blunt distal end with a suture-engaging notch surrounded by a sheath with a sharpened edge is pressed through inclined passages in the side walls of the cannula so as to extend into the body tissue on one side of the cannula and into the body cavity, carrying the suture which is then grasped by an instrument to remove the suture and join it to a needle projecting from the opposite side of the cannula. The needle is then withdrawn so the suture may be knotted on the outer side of the body wall.

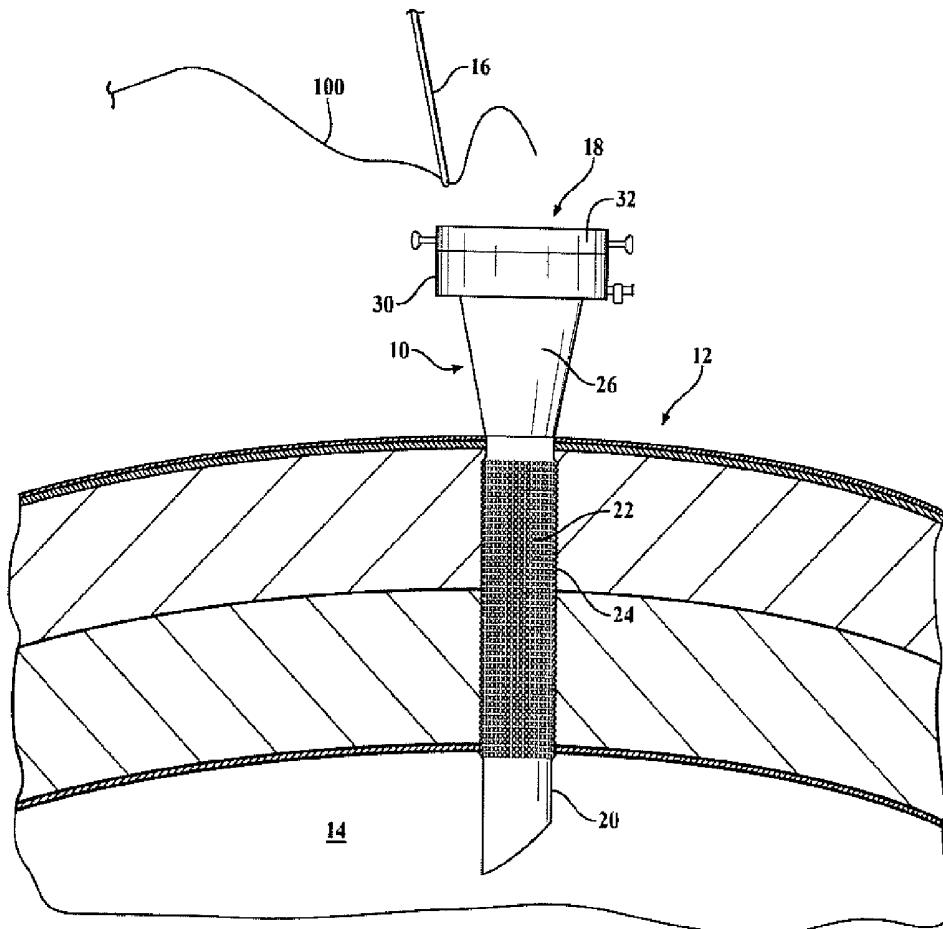

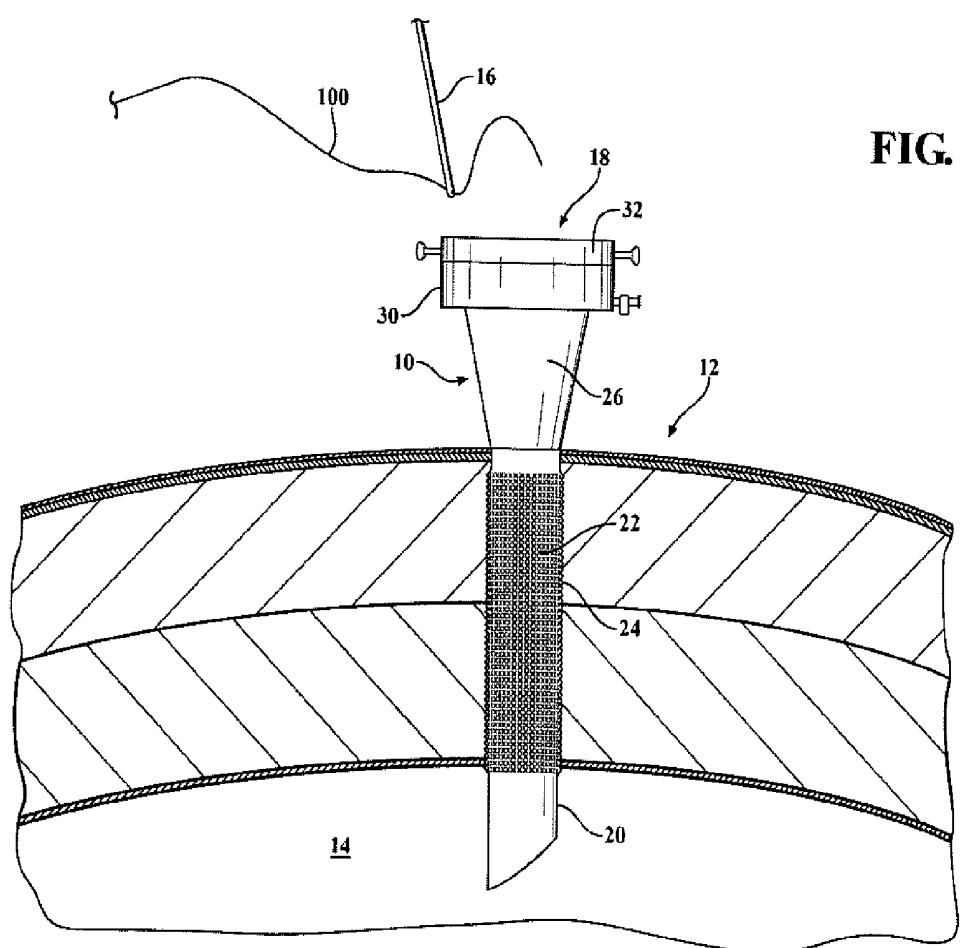
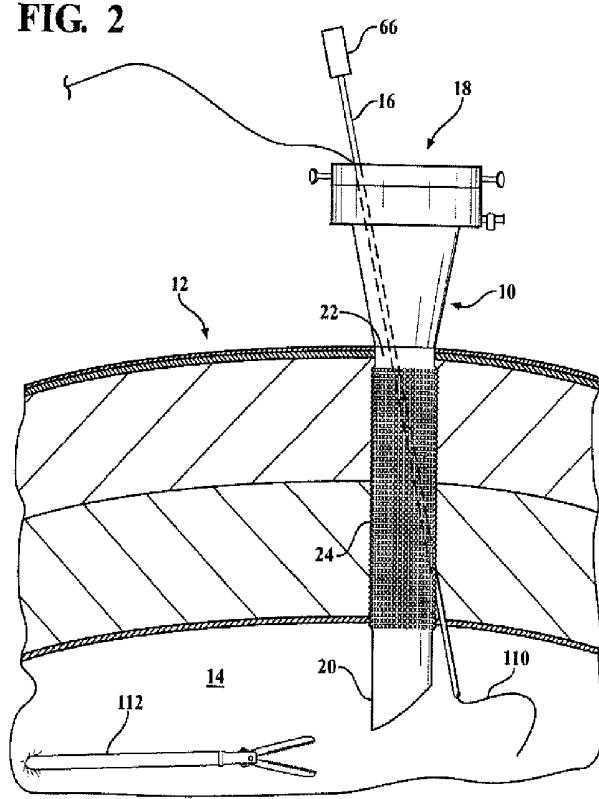
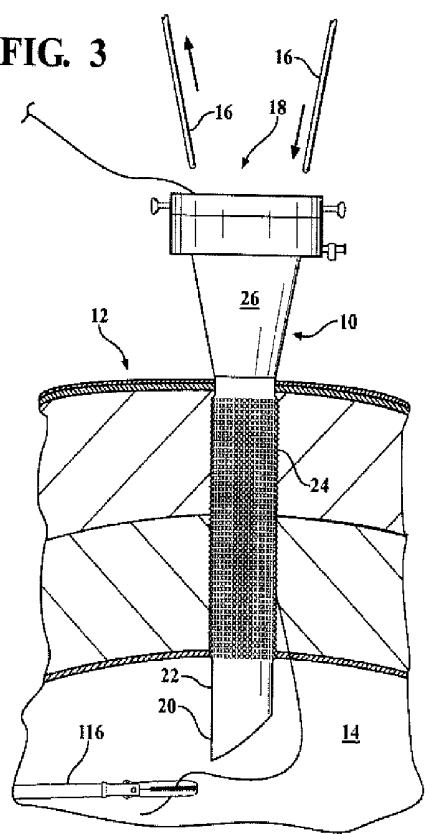
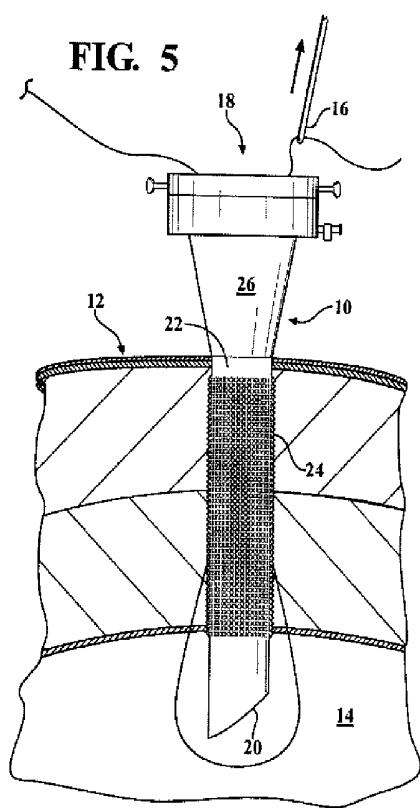
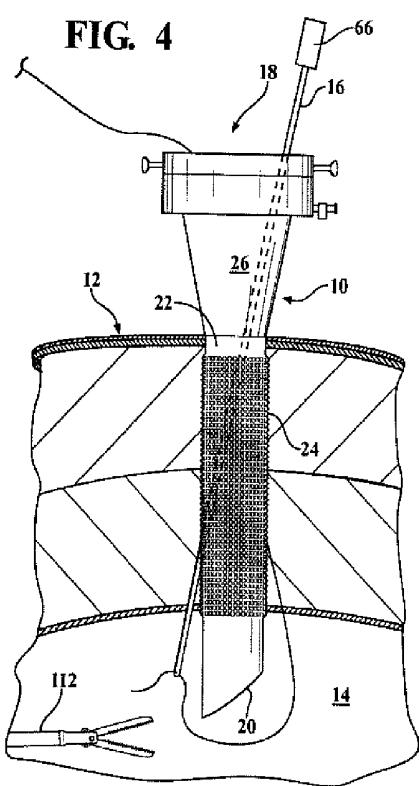
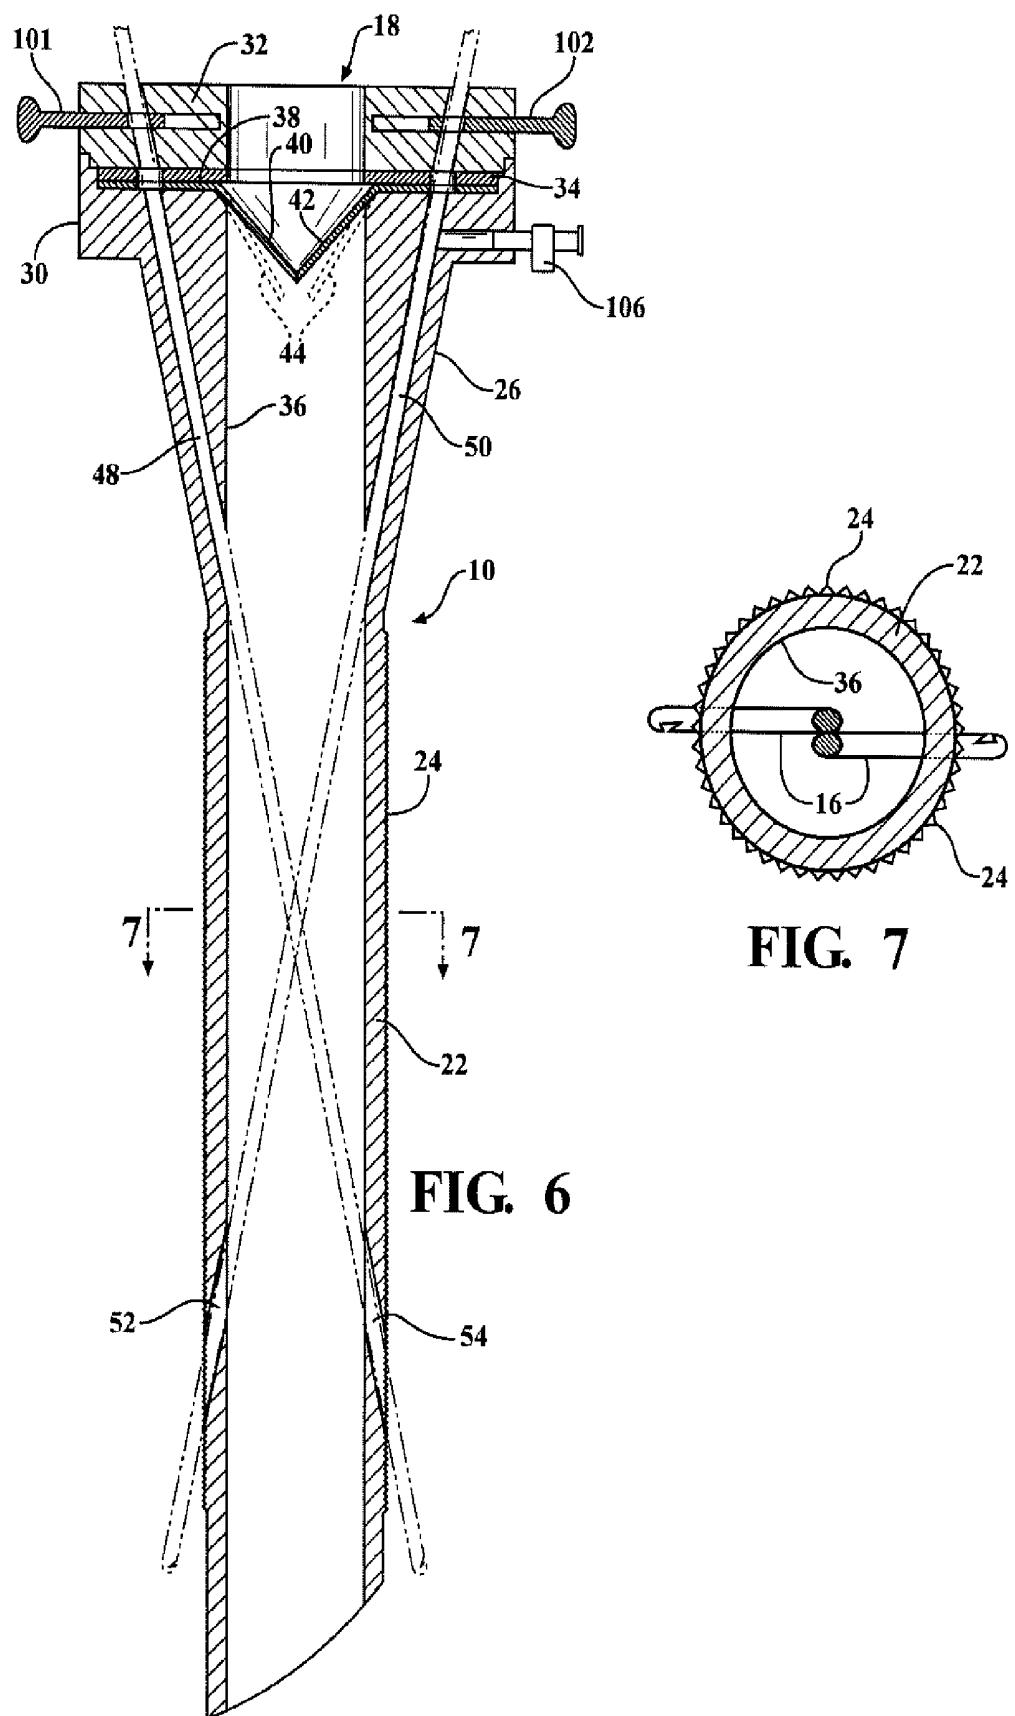
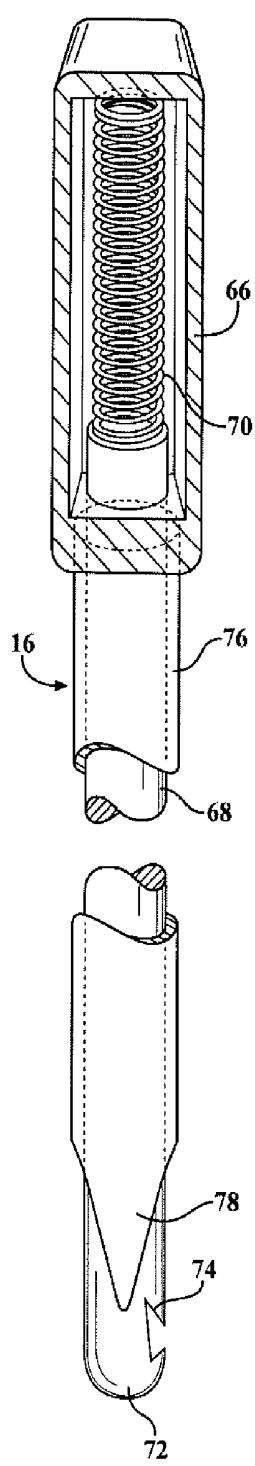
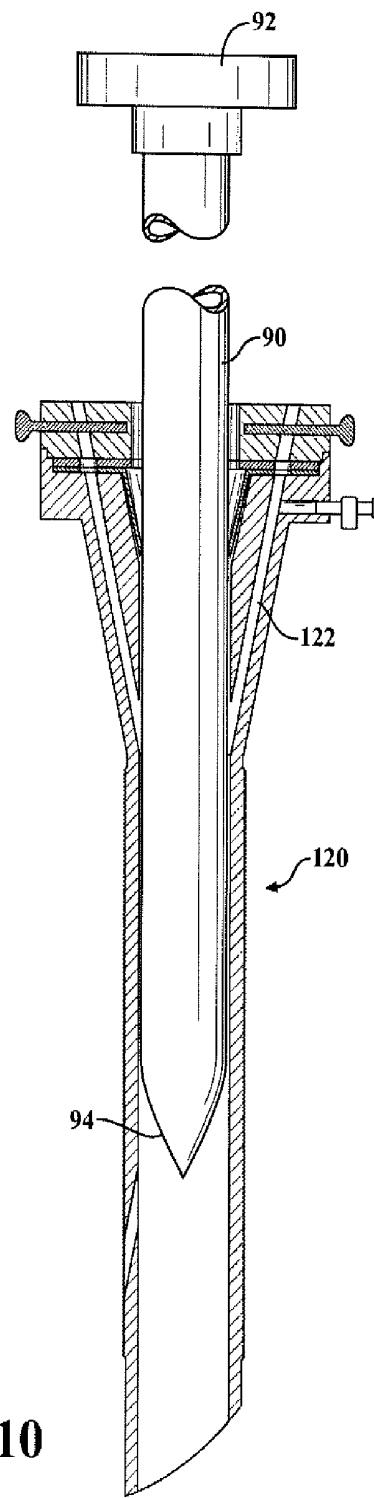
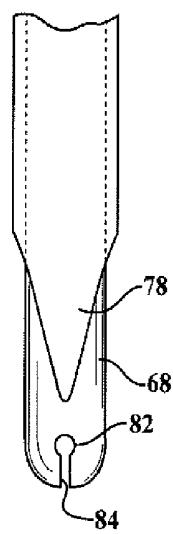
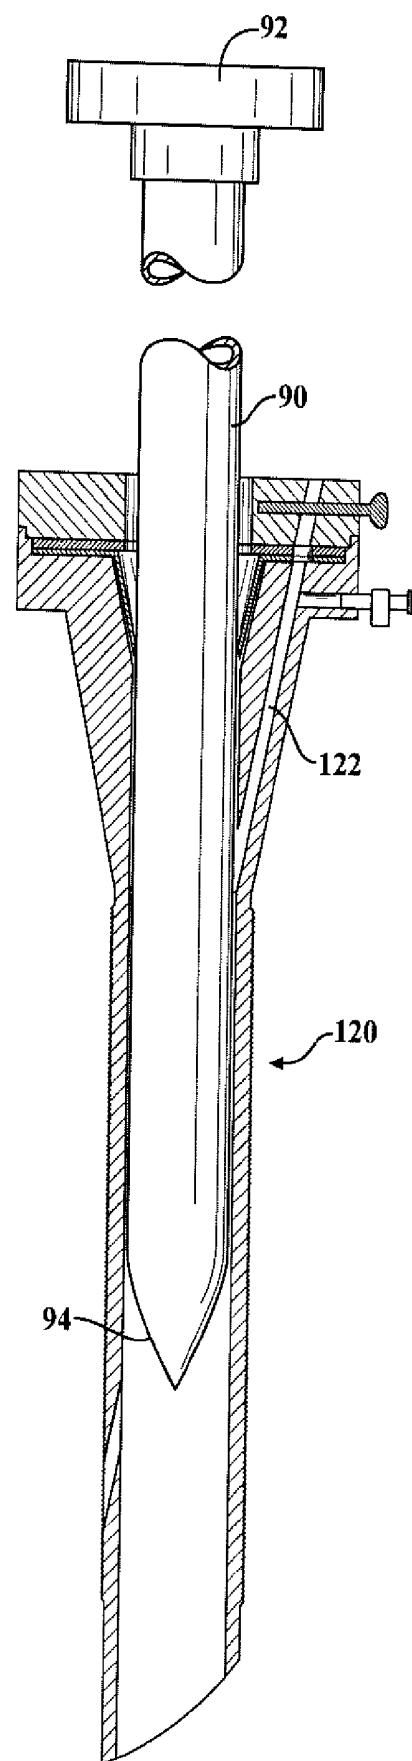


FIG. 2**FIG. 3**





**FIG. 8****FIG. 9****FIG. 10**

**FIG. 11**

LAPAROSCOPIC CANNULA WITH SUTURING CAPABILITY

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority of U.S. Provisional Patent Application No. 61/443,286 filed Feb. 16, 2011, the contents of which are incorporated herein by reference.

FIELD OF THE INVENTION

[0002] This invention relates to cannulas and accessories for use in laparoscopic surgery and more particularly to a cannula enabling suturing of a laparoscopic incision.

BACKGROUND OF THE INVENTION

[0003] In the performance of a laparoscopic operation, an incision is first made through the body wall into a body cavity typically using a trocar, an elongated tube having a three point sharpened distal end. The trocar is often supported in a cannula, a shorter tube which passes into the incision made by the trocar and lines the wall of the incision, providing a port for entry into the incision. Various laparoscopic instruments such as oculars, cameras, or instruments similar to scissors or pliers may be introduced into the incision through the cannula to perform the necessary operation. The cannula also typically includes a port for receiving gas which may be introduced into the body cavity through the incision to inflate the cavity to increase the accessibility of the surgical site.

[0004] In typical laparoscopic procedures with most existing laparoscopic instruments, in order to close the incision and suture any cuts made in the cavity, it is necessary to remove the cannula, deflating the surgical cavity, and introduce a new suture guide which may have ports for needles connected to sutures for closing the incision. Other newer suturing devices do not require the removal of the cannula in order to introduce suturing devices, in that the suturing device itself is inserted through the center of the initial cannula. These suturing devices are cost prohibitive.

[0005] Accordingly, after the suture carrying cannula or the suturing device is introduced, it is typically necessary to reinsufflate the body cavity.

SUMMARY OF THE INVENTION

[0006] The present invention is directed toward a single laparoscopic tool which allows a surgeon to make an incision; enter a body cavity; inflate the cavity; perform an operation through the cannula of the tool, which serves as a port, along with other instruments inserted through additional ports; and then close the incision through the same cannula with a suture carried by one or more needles passed through passages formed through the wall of the cannula. Therefore, the entire operation from incision to suturing can be performed with a single cannula, substantially simplifying the operative process relative to previous laparoscopic techniques.

[0007] In a preferred embodiment of the invention, which will be subsequently described in detail, a generally cylindrical cannula has a laterally enlarged section at its proximal end, which end lies externally of an incision, containing one or a pair of inclined passages for receiving suture needles passing through the side walls of the cannula, where they allow the needles to enter the interior volume of the tubular section of the cannula. In the two needle version, needles inserted into these inclined passages from the proximal end

cross one another, with slight lateral separation, approximately midway through the length of the tubular section of the cannula. Another pair of passages in the opposed side walls of the tubular section of the cannula are formed near the distal end and align with the two passages at the proximal end so that a suturing needle passed into the top of the cannula through one of the inclined passages extends across the width of the tubular section and can exit the cannula at one of the two distal passages.

[0008] Shortly beyond the proximal end of the cannula, each of the inclined passages passes through manually actuatable valves which may be opened to allow the needles to pass through them and may be closed when the needles are removed to prevent the escape of the insufflating gases which have been passed through the cannula and into the body cavity.

[0009] A gas conduit controlled by a valve preferably feeds into one of the inclined passages at the proximal end of the cannula, when there is no needle in that passage, to allow inflation of the body cavity to provide clearance for the surgical operation. The proximal end of the tubular passage through the cannula carries a flap valve near its upper end which closes under the pressure of insufflating gases to prevent the escape of the gases through the proximal end of the cannula port.

[0010] The suturing needles used with the present invention must pass through a portion of the body wall section when they exit through the distal passages through the cannula wall so that the sutures can engage and bring together portions of the body cavity on opposed sides of the cannula in order to close off the incision. Accordingly, the suture needles must have the ability to cut through the cavity wall. The suture needles are accordingly formed with a central cylindrical section which has a blunt distal end with a suture-engaging configuration. The proximal end of the suture needle is disposed within a handle where it is engaged by a compression spring which biases the cylindrical section toward an extended position from the handle. The cylindrical section is surrounded by a sheath which has a pointed distal end capable of cutting through tissue. The proximal end of the cutting sheath is fixed to the handle. When the blunt end of the tubular section is unobstructed, the spring bias causes it to extend beyond the end of the cutting sheath. When the needle is pressed against the body wall, the blunt end of the tubular section is forced against the spring bias and the pointed end of the cutting sheath extends downwardly into the tissue so that upon further pressure on the handle of the needle it cuts through the tissue, outside of the wall of the body cavity, so that a suture carried by the distal end of the needle is within the body cavity. The free end of the suture within the body cavity is then grasped by a pliers-like tool introduced into the body cavity from another port and manipulated by the surgeon using an endoscope, introduced through still another port, to view the interior of the body cavity.

[0011] A second suturing needle is then introduced through the other cavity in the cannula so that it pierces the tissue of the body cavity at a point displaced from the point of entrance into the cavity of the first suturing needle. The pliers-like tool may be used to join the free end of the suture to the distal end of the second needle. The second needle is then pulled back through the cannula to the exterior of the body cavity where the two ends of the suture may be knotted to secure the incision.

[0012] In an alternative embodiment of the invention, the cannula has only a single inclined passage for a suture needle which is used to carry a suture into the body cavity. The free end of the suture within the body cavity may then be grasped by an instrument introduced through a second port and detached from the needle. The entire cannula may then be rotated about its central axis while in the incision so that the suture may be reinserted on the needle end and drawn through the cannula passage, allowing the two ends of the suture to be knotted to close the incision. The two passage embodiment avoids the need to rotate the cannula within the cavity which may induce bleeding from the incision.

[0013] Since all of these operations, with either embodiment, can be performed by a single cannula, there is no need to remove the cannula in order to achieve the suture.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] Other objects, advantages, and applications of the present invention will be made apparent by the following detailed description of preferred embodiments of the invention. The description makes reference to the accompanying drawings in which:

[0015] FIGS. 1-5 all represent sections through the wall of a body cavity in which the first embodiment of the cannula of the present invention has been inserted and the sequential steps employed in performing suturing of the wall of the body cavity using the cannula and the suturing needles of the present invention;

[0016] FIG. 6 is a cross-sectional view of the cannula of the present invention illustrating the paths of the two suturing needles in phantom lines;

[0017] FIG. 7 is a cross section through the drawing of FIG. 6, taken along line 7-7, illustrating the relationship of the two suturing needles as they pass through the barrel of the cannula;

[0018] FIG. 8 is a sectional view, partially broken away, of the suturing needle of the present invention;

[0019] FIG. 9 illustrates the cutting end of an alternative form of suturing needle;

[0020] FIG. 10 is a cross-sectional view of the first embodiment of the cannula of the present invention with a trocar inserted into the barrel of the cannula; and

[0021] FIG. 11 is a cross-sectional view of a second embodiment of the cannula of the present invention with a trocar inserted into the barrel of the cannula.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

[0022] FIGS. 1-5 illustrate a first embodiment of a cannula, generally indicated at 10, disposed in an operating position within a wall, generally indicated at 12, of a body cavity 14. These drawings illustrate the sequence of operations in utilizing the cannula 10 and a pair of suture needles 16 to close the incision in the body wall 12 required to position the cannula 10 with its proximal end 18 externally of the body cavity and its distal end 20 within the body cavity.

[0023] The cannula 10, illustrated in cross section in FIGS. 6 and 7, includes a tubular section 22 of somewhat greater length than the body wall 12 so it may extend through the body wall with its lower end 20 in the underlying body cavity 14. The tubular section 22 is formed with serrations 24 on its surface to firmly secure it within the body wall 12.

[0024] At the proximal end of the cannula 10 the side walls of the cannula flare outwardly in a section 26 so that the width of the cannula on the proximal side of the tubular section 24 has a greater width than the balance of the tubular section.

[0025] At the extreme proximal end of the cannula 10 the walls extend laterally in a section 30 and a top member 32 is connected to the proximal end of the section 30 with a gasket 34 between them. The gasket 34 has a central hole which allows the continuation of the interior wall 36 of the tubular section 22 to extend the full length of the trocar 20, as is best seen in FIG. 6. A second gasket 38 is disposed directly beneath the gasket 34. The gasket 38 has a pair of wall sections 40 and 42 at its center which act as a flap valve. In FIG. 6 the flap valve sections 40 and 42 illustrated in full line are shown closed and in dotted lines 44 are shown in an open position. The flap sections 44 are normally in the open position but when gas pressure is experienced on their distal side they are forced into the closed position of the full lines 40, 42.

[0026] As shown in FIG. 4, a pair of inclined suture cavities 48 and 50 are formed through the sections 26, 30 and 32. Their proximal ends open at the top of the section 32 and the lower ends of these passages 48 and 50 merge with the tubular interior 36 of the trocar at the distal end of the wall section 26. The passages 48 and 50 are adapted to receive two suture needles 16 which pass through the trocar 10 in the manner illustrated in the dotted lines in FIGS. 2, 4 and 6. The distal ends of the suture needles 16 pass through the side walls of the tubular section 22 of the trocar at a pair of slots in the side wall 52 and 54.

[0027] As is best seen in FIG. 7, the proximal passages 48 and 50 for the suture needles and the distal passages 52 and 54 are slightly separated laterally so that the two needles do not interfere with one another at the cross section 7-7 of FIG. 6.

[0028] The trocar needles 16 are illustrated in detail in FIG. 8. The two suture needles are substantially identical. They each have a handle 66 at the proximal end and a cylindrical straight needle 68 having its proximal end within the handle 66 bearing against a compression spring 70. The compression spring biases the needle cylinder 68 toward an extended position from the handle. The lower end of the needle 68 has a blunt end 72 and a side slot 74 adapted to capture a suture. The outer side of the tubular inner member 68 is surrounded by a tubular sheath 76 which has its proximal end fixed with respect to the handle 66 in such a manner that it is not subjected to the biasing action of the spring 70. The distal end of the sheath 76 terminates in a sharpened cutting edge 78.

[0029] When the suture needle 16 is manually pressed downwardly against a resistive surface such as the tissue of the body cavity 12, the blunt end 72 forces the tube 68 to move upwardly within the handle compressing the spring 70 until the cutting tip 78 of the outer sheath 76 extends beyond the end 72 of the tube 68 and begins to penetrate the body tissue. When the cutting edge 78 has passed through the wall 12 into the body cavity 14, there is no longer any pressure on the end 72 and it extends beyond the cutting tip 78 under the spring bias, so that the cutting tip 78 will not contact the interior body organs.

[0030] FIG. 9 illustrates an alternative form for the end of the tube 68. Rather than having the edge configuration 74, a hole 82 connected to the bottom of the needle 68 by passage 84 is employed. The suture may be forced through the narrow neck of the passage 84 into the hole 82 to retain the suture.

[0031] FIG. 10 illustrates a preferred manner of performing an incision through the body wall 12 so that the cannula 10

may line the incision and act as a port for the insertion of various laparoscopic instruments such as endoscopes, surgical cutters, and the like. The trocar generally indicated at 120 in FIG. 10 represents an alternative embodiment having only a single inclined passage 122 for a suture needle. Accordingly, after a suture has been introduced to the body cavity 14 through the single passage, it must be grasped by an instrument 112 introduced through a second port and freed from the needle. The trocar 110 is rotated by 90 degrees about its central axis within the incision. The instrument 112 then reattaches the suture to the needle and the needle and attached suture are withdrawn through the trocar and the two ends of the suture are knotted to close the incision.

[0032] To start the incision a surgeon will use a scalpel to make a small cut through the outer edge of the body wall 12 and then will bring the slanted end 20 of the cannula 10 or 110 into contact with the incision. A trocar 90 (FIG. 10) is then inserted through the central passage 36 of the cannula 110. The trocar has a handle 92 at its proximal end and a sharpened cutter 94 at its distal end. By pressure imposed on the handle 92, the trocar 94 will be forced through the body wall to form the laparoscopic incision. When the trocar end 94 is passed into the body cavity 14, the cannula 10 is pressed down through the incision and the trocar is withdrawn.

[0033] The proximal ends of the two suture needle passages 48 and 50 in the trocar 10 are controlled by two valves 101 and 102. These valves may be pushbutton valves or rotatable valves and they may be moved between a position in which the passages 48 and 50 are closed and positions wherein they are open to allow the entry of suture needles 16. After the incision is made, with the valves 101 and 102 closed off, valve 106 which is connected to a source of inflating gas, preferably CO₂, is opened to feed CO₂ gas into the passage 50 leading to the interior volume 36 of the cannula 10 and into the body cavity 14. The CO₂ inflates the body cavity to enlarge its area and provide the surgeon with increased operating room. After the cavity 14 is filled and inflated, the valve 106 is closed off.

[0034] The cannula 10 is then ready for use as a port for the performance of a laparoscopic operation and various devices such as an endoscope, a surgical cutter, and the like may be passed through the port.

[0035] The surgeon will typically create one or more additional ports at spaced points on the outer surface of the body tissue so that various operations may be performed through certain of the ports under a physician's observation through an endoscope in an additional port.

[0036] After the laparoscopic operation is completed, it is necessary to suture the incisions used to form the ports. This is generally done in the sequence illustrated by FIGS. 1-5 using the two needle trocar. First, a suture 100 is connected to the distal end of a suture needle 16, one of the valves 101 or 102 is opened, and the needle is passed through that valve and through the interior of the cannula and out one of the exit ports 52 or 54, cutting passages through the body tissue on the distal side of the passages 52 or 54. This brings one end of the suture 110 into the body cavity 14 as illustrated in FIG. 2.

[0037] Next, as illustrated in FIG. 3, the free end of the suture is grasped by an instrument 112 which is introduced through another port (not shown) into the incision. The instrument 112 removes the suture from the end of the needle and the needle may then be withdrawn from the cannula and its entry valve closed, or it may be left within the cannula. Then, as illustrated in FIG. 4, a second needle, or the same one that inserted the suture into the body cavity, if it has been removed,

is inserted into the cavity through the opposite inclined passage used for the first insertion. The instrument 112 is manipulated to engage the free end of the suture with the suture engaging formation either 74 or 82 at the end of this needle within the incision and, as shown in FIG. 5, the free end of the incision is pulled back through the passage occupied by the suture needle so that both free ends of the suture extend out of the proximal section 18 of the cannula. The cannula may then be removed and the suture knotted to close up the incision.

[0038] The cannula 10 may be removed from the incision at any time after the operation is completed. During the execution of the operation there is no need to lose the insufflating gas pressure so that the incision needs to be reinflated and the cannula 10 acts as a port for use in the entire operation.

Having thus described my invention I claim:

1. A cannula for use in laparoscopic surgery performed through a wall of a body cavity, the cannula comprising:

an elongated tubular section having interior walls open at both its proximal and distal ends and having a central axis;

a first passage through the walls of the tubular section, inclined with respect to the central axis, the first passage having a first opening through the wall of the tubular section adjacent the proximal end of the tubular section, and a second opening through the wall of the tubular section adjacent to the distal end of the tubular section at a position on the tubular wall diametrically opposed to the position of the first opening, the first and second openings being aligned so that a first straight suture needle having a sheath with a distal cutting edge may be passed through both the first and second openings with the section of the needle intermediate the first and second openings transversing the interior of the tubular section and with the distal end of the needle projecting out of the second opening and through the wall of the body cavity;

a first valve disposed in the first passage which may be placed in an open position to allow clearance for the needle or a closed position, when the needle is not in the first passage, to block the flow of gases through the first passage;

a conduit extending through the wall of the tubular section to connect to an insufflation gas source at the exterior of the wall at one end and the interior of the tubular wall at its other end;

a second valve disposed in said conduit; and

a gas valve extending across the interior of the tubular section on the proximal side of the connection between the conduit and the interior of the tubular section;

whereby the cannula can be used as a guide for a trocar to form an incision through the wall of the body cavity so that the cannula may be inserted through the incision, allowing the body cavity to be insufflated through said conduit in the body cavity, as a laparoscopic entry port, and as a device to allow suturing the cavity closed using the needle.

2. The cannula of claim 1, further including a second passage through the walls of the tubular section at a position diametrically opposed to the first passage, the second passage being inclined with respect to the central axis of the tubular section at an angle complementary to the angle of inclination of the first passage, so that extensions of the first and second passages cross one another in the center of the tubular section;

whereby said first straight needle may be passed through the first passage and a second straight needle may be passed through the second passage.

3. The cannula of claim **2**, wherein said gas valve extending across the interior of the tubular section on the proximal side of the connection between the conduit and the interior of the tubular section comprises a pair of opposed flaps adapted to be moved into an overlapping closed position by the gas pressure at such time as the body cavity has been insufflated and to allow the passage of instruments through the central passage from the proximal end of the central passage.

4. The cannula of claim **1**, comprising a section of increased lateral dimension relative to the dimension of the exterior of the tubular section at the proximal end of the cannula with all of said valves being located in the section of increased lateral dimension.

5. The cannula of claim **4**, further including a termination at the distal end of the tubular section, inclined with respect to the central axis of the tubular section.

6. The cannula of claim **1**, wherein said straight needle comprises a cylindrical section having a handle at its proximal end supporting a compression spring bearing against the needle to bias it in an axial direction away from the handle and an outer sheath having a sharpened distal end and a proximal end fixed on the handle, the cylindrical section comprising a blunt distal end having a suture-engaging aperture formed therein; whereby when said blunt end abuts body tissue, forces imposed on the handle move the cylindrical section against the bias imposed by the compression spring, allowing the sharpened end of the tubular section to extend beyond the blunt section of the cylindrical section and thereby cut abutting tissue.

7. The cannula of claim **2**, wherein said first and second passages are positioned on the tubular section so that extensions of the first and second passages are separated laterally from one another.

8. The cannula of claim **1**, wherein the interior end of the conduit extending through the wall of the tubular section to

connect to an insufflations gas source connects to said first passage through the walls of the tubular section.

9. A method of using a cannula having an elongated tubular section with a central axis and at least one passage extending through the sidewalls of the tubular section at diametrically opposed points on the sidewall so that the passage is inclined with respect to said central axis in a laparoscopic operation to cut an incision through a body wall into a body cavity, to act as a port for the insertion of laparoscopic surgical tools into the body cavity, and to provide for suturing the incision following the laparoscopic operation, comprising:

passing a tubular trocar having an outer diameter complementary to the inner diameter of the tubular section through the tubular section against the body wall to form an incision;

pressing the tubular wall of the cannula into the incision to create a laparoscopic port through which said operations may be performed;

closing the incision by passing a first needle assembly carrying a suture through said passage into the body cavity, the assembly comprising a cylindrical needle having a blunt distal end with a suture engaging configuration, a handle with a compression spring biasing the spring toward an extended position with respect to the handle, and a tubular sheath surrounding the cylindrical needle, a proximal end fixed to the handle and a sharpened distal end;

grasping one suture end in the cavity to remove it from the suture engaging configuration on the cylindrical needle distal end; and

drawing the one suture end out of the body cavity and knotting it with a second end of the suture to close the incision.

10. The method of claim **9**, wherein the one end of the suture is drawn out of the cavity by a second needle assembly identical to the first needle assembly.

11. The method of claim **10**, wherein the second needle assembly constitutes the first needle assembly.

* * * * *

专利名称(译)	腹腔镜插管具有缝合能力		
公开(公告)号	US20140163323A1	公开(公告)日	2014-06-12
申请号	US13/984240	申请日	2012-02-06
[标]申请(专利权)人(译)	MOHAJER SHOJAAE REZA		
申请(专利权)人(译)	MOHAJER-SHOJAAE , REZA		
当前申请(专利权)人(译)	MOHAJER-SHOJAAE , REZA		
[标]发明人	MOHAJER SHOJAAE REZA		
发明人	MOHAJER-SHOJAAE, REZA		
IPC分类号	A61B17/34 A61M13/00 A61B17/06 A61B17/02 A61B17/04		
CPC分类号	A61B17/0469 A61B17/0057 A61B17/0218 A61B17/0482 A61B17/0485 A61B17/06066 A61B17/3421 A61B17/3423 A61B17/3474 A61B17/3498 A61B2017/00637 A61B2017/00663 A61B2017/0472 A61B2017/3445 A61B2017/3449 A61B2017/347 A61M13/003		
优先权	61/443286 2011-02-16 US		
其他公开文献	US9033872		
外部链接	Espacenet USPTO		

摘要(译)

用于腹腔镜手术的套管具有中心通道，该中心通道可接受套管针以在体壁中形成腹腔镜切口至内体腔。然后将套管的管状部分压入切口以形成端口。在完成手术之后，具有钝端的钝针具有由具有尖锐边缘的护套包围的缝线接合凹口，该针被挤压通过套管侧壁中的倾斜通道，以便延伸到身体组织的一侧。套管和进入体腔，携带缝合线，然后用缝合器抓住缝合线以移除缝合线并将其连接到从套管的相对侧突出的针上。然后抽出针头，使得缝合线可以在体壁的外侧打结。

