



US 20190083183A1

(19) **United States**

(12) **Patent Application Publication**

Moll et al.

(10) **Pub. No.: US 2019/0083183 A1**

(43) **Pub. Date: Mar. 21, 2019**

(54) **SURGICAL SYSTEM WITH CONFIGURABLE RAIL-MOUNTED MECHANICAL ARMS**

(71) Applicant: **Auris Health, Inc.**, Redwood City, CA (US)

(72) Inventors: **Frederic H. Moll**, San Francisco, CA (US); **Alan Lau Yu**, Union City, CA (US)

(21) Appl. No.: **16/195,206**

(22) Filed: **Nov. 19, 2018**

Related U.S. Application Data

(63) Continuation of application No. 15/094,179, filed on Apr. 8, 2016, now Pat. No. 10,159,533.

(60) Provisional application No. 62/145,418, filed on Apr. 9, 2015.

Publication Classification

(51) **Int. Cl.**

A61B 34/30 (2016.01)
A61G 13/10 (2006.01)
A61G 13/04 (2006.01)

A61G 13/06

(2006.01)
A61B 90/57

(2016.01)


(52) **U.S. Cl.**

CPC **A61B 34/30** (2016.02); **A61G 13/10** (2013.01); **A61G 13/04** (2013.01); **A61G 13/101** (2013.01); **A61B 2034/304** (2016.02); **A61B 2090/571** (2016.02); **A61G 13/06** (2013.01)

(57)

ABSTRACT

A robotic surgical system comprises a horizontal platform to support a patient, a rail positioned about the horizontal platform, a carriage operatively coupled to and configured to translate along the rail, and a robotic arm operatively coupled to the carriage and translated about the patient by the rail. The robotic arm is configured to operate on the patient in a variety of positions provided by the translating carriage. The rail provides a rounded path for the carriage, such as a U-shaped path. The U-shaped path may comprise a first leg and a second leg, the first leg longer than the second leg. Furthermore, the system may comprise a plurality of carriages operatively coupled to the rail and a plurality of robotic arms. Also, the system may further comprise a central base which the horizontal platform can articulate relative to, such as by translating horizontally or vertically, rotating, or titling.

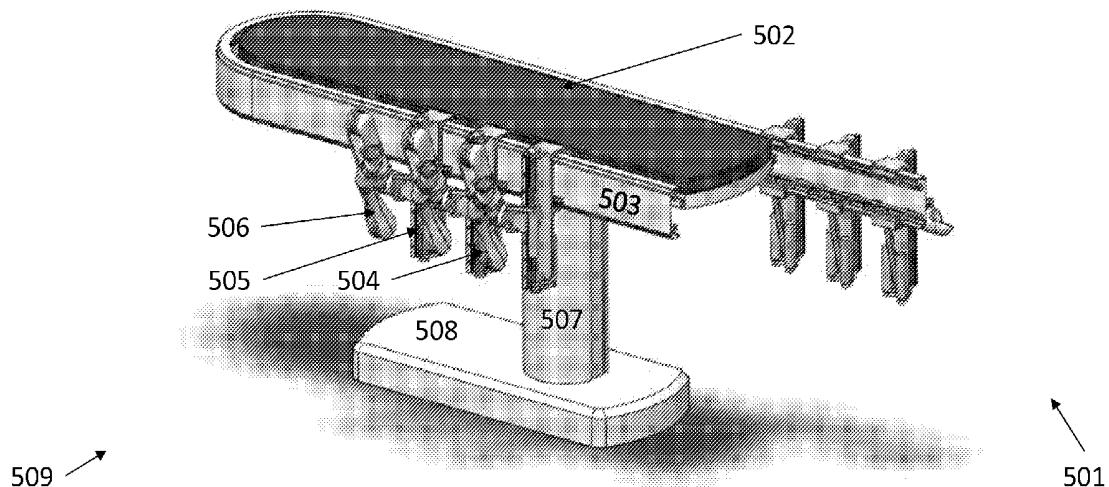

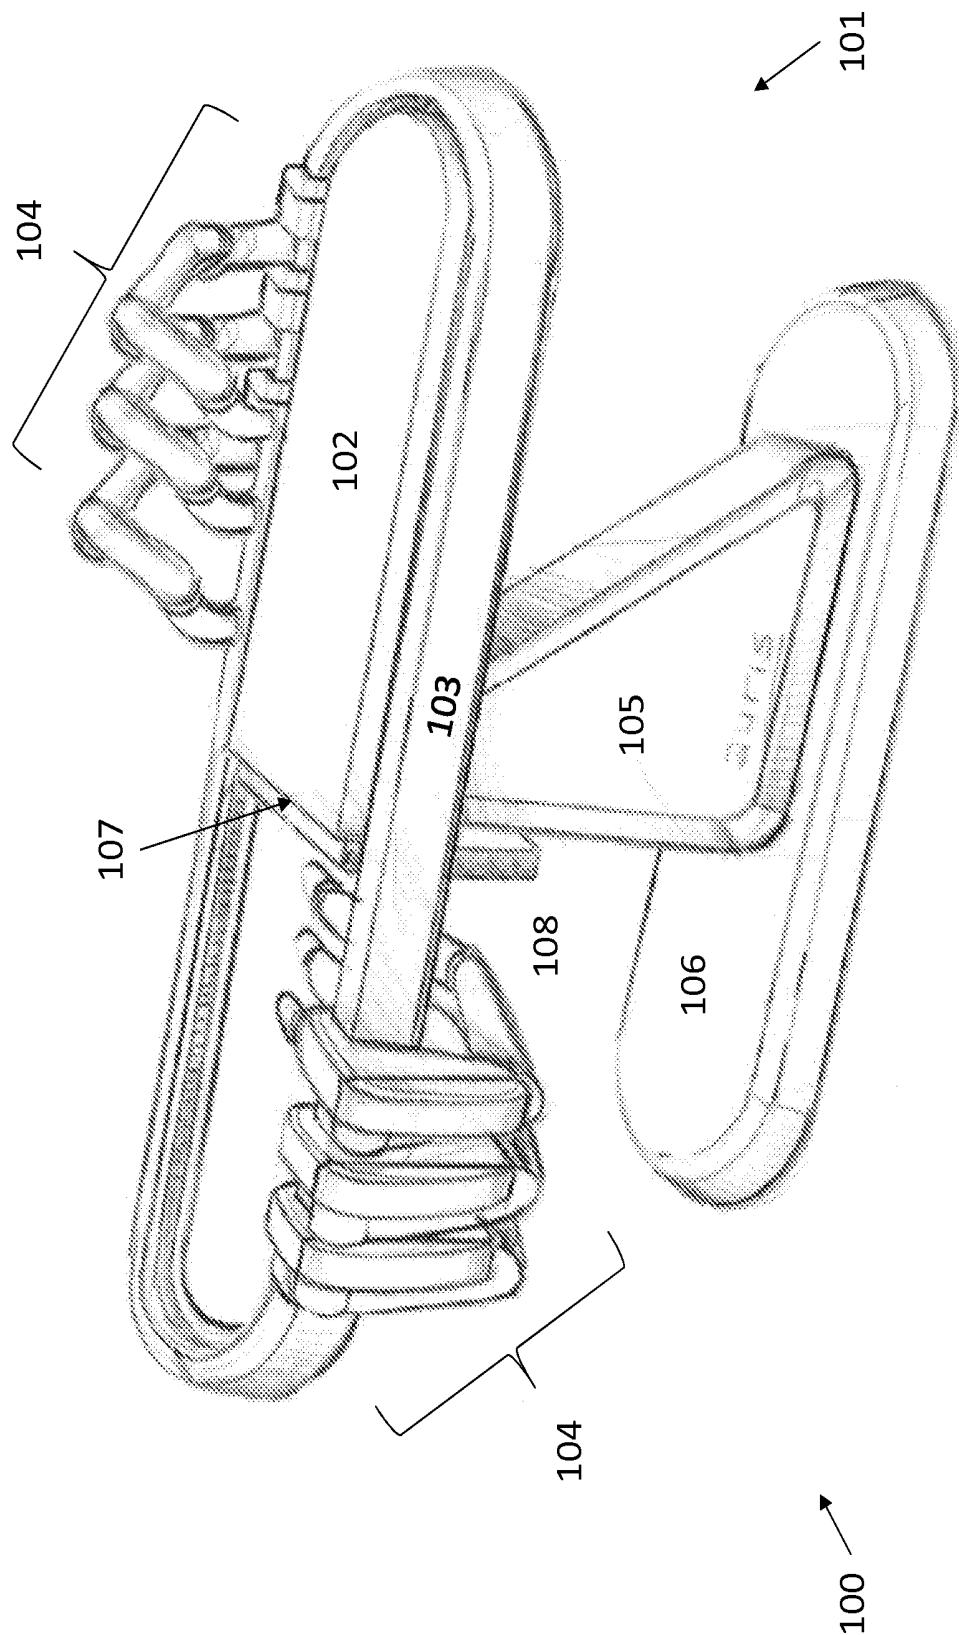


FIG. 1

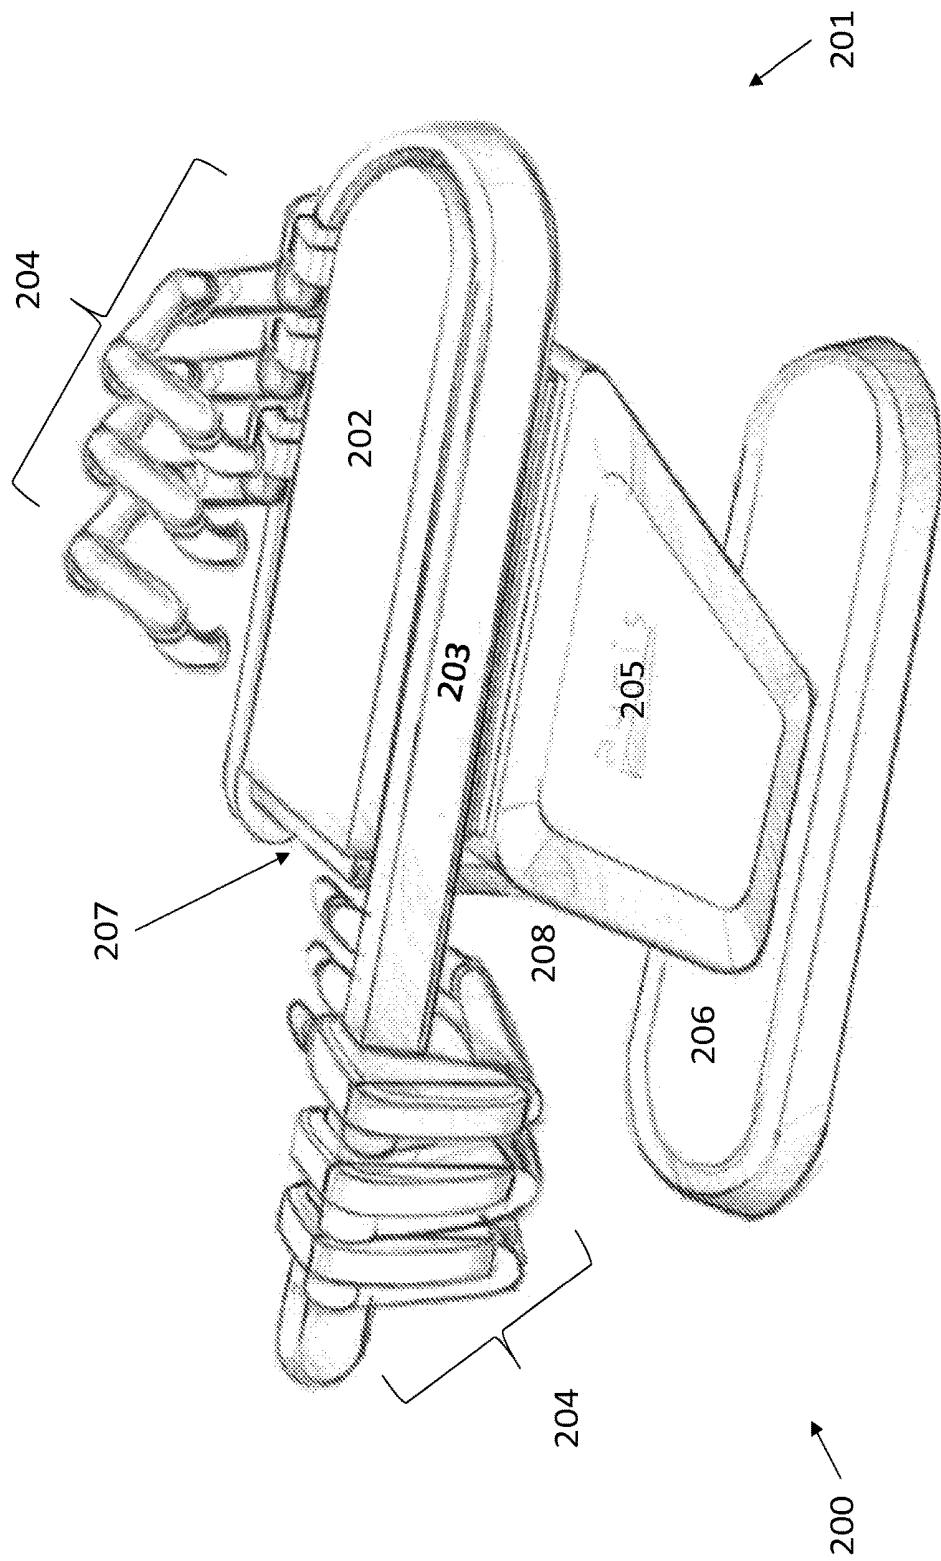


FIG. 2

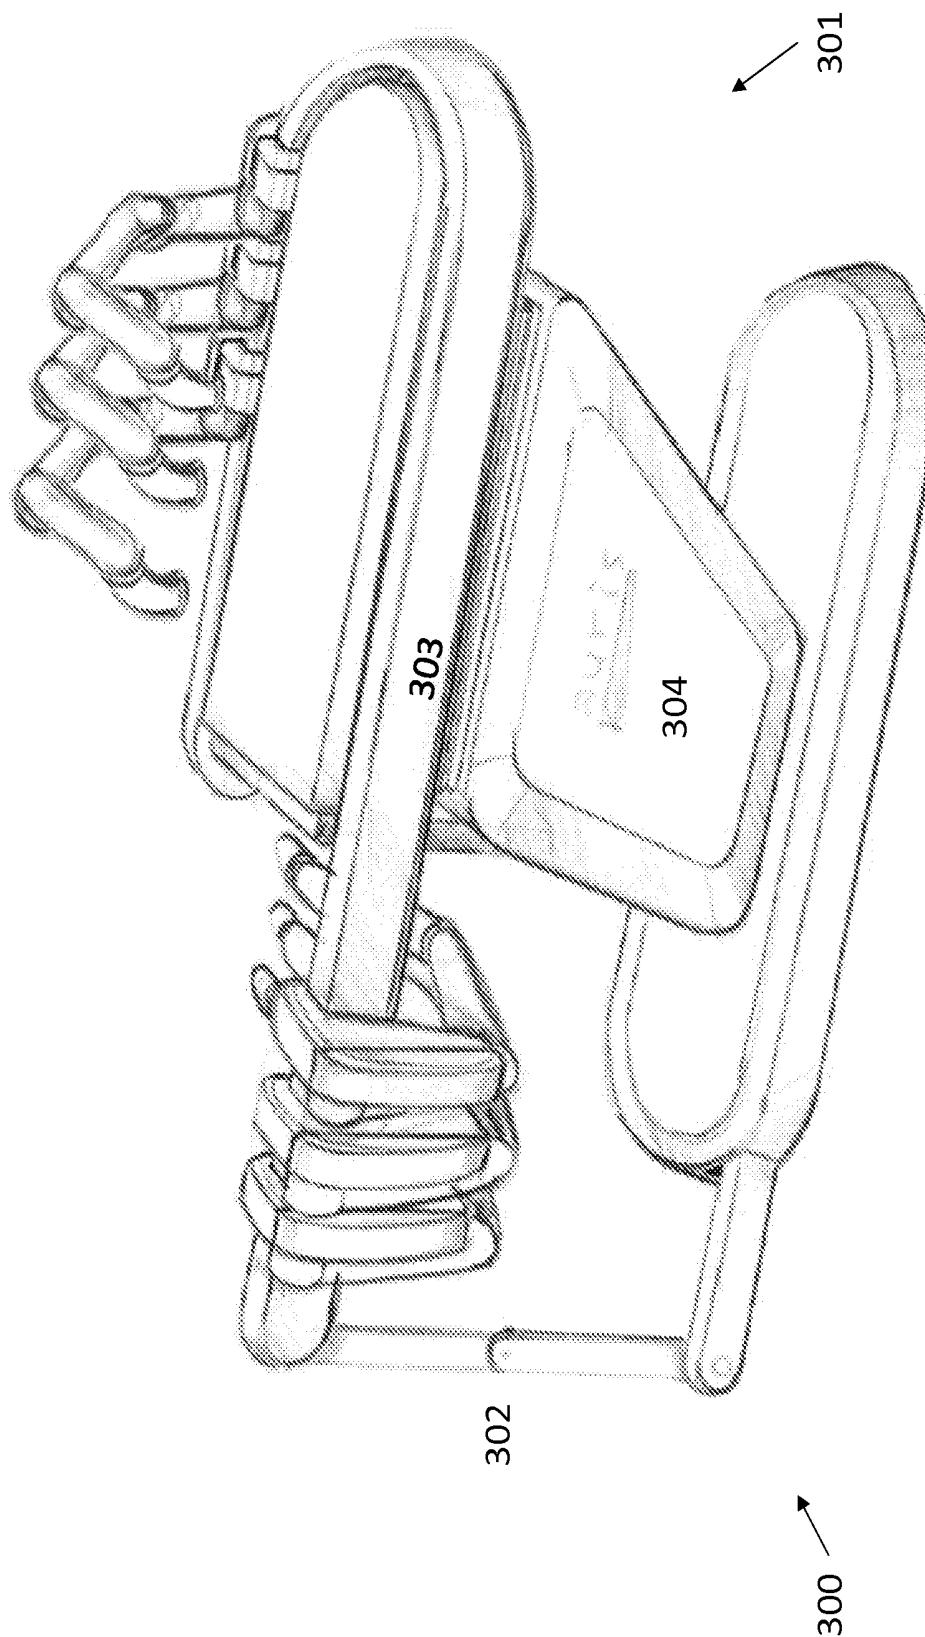


FIG. 3

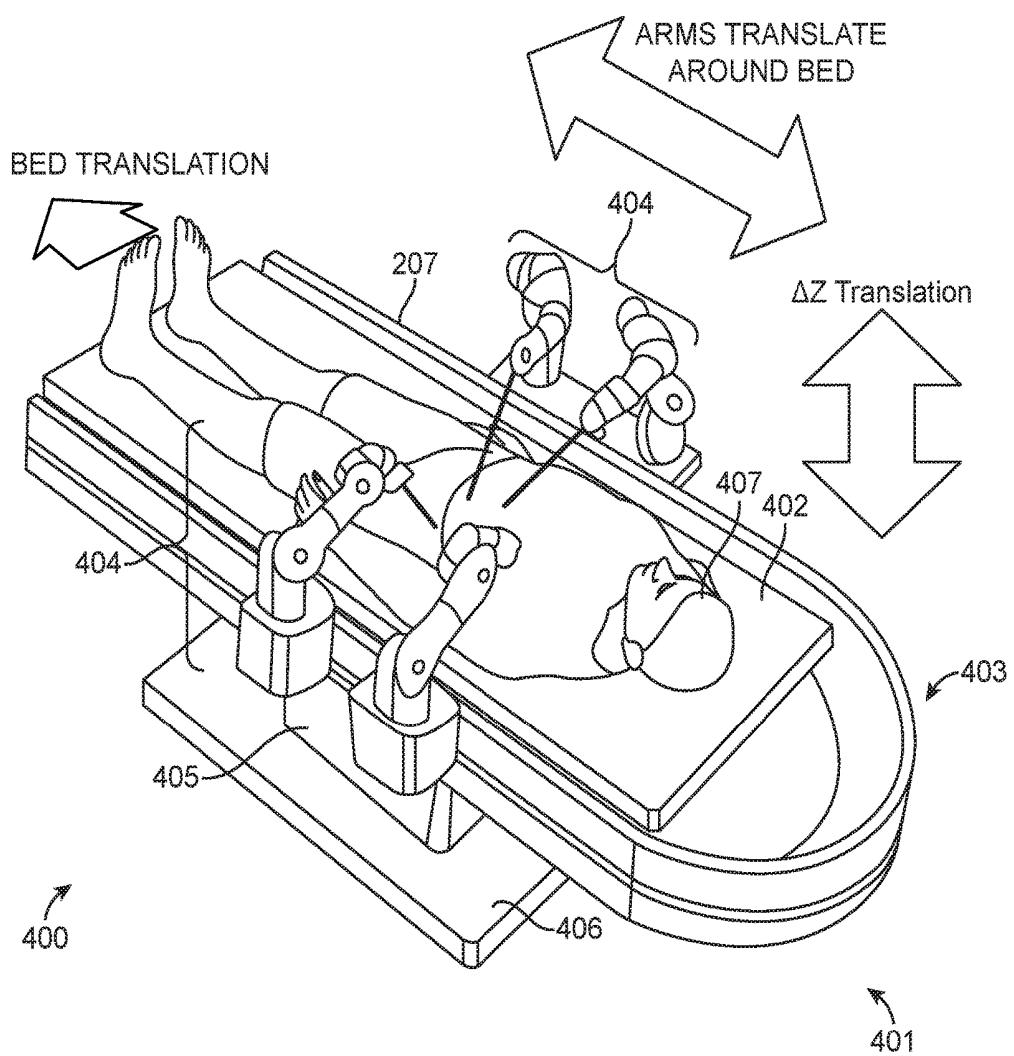


FIG. 4

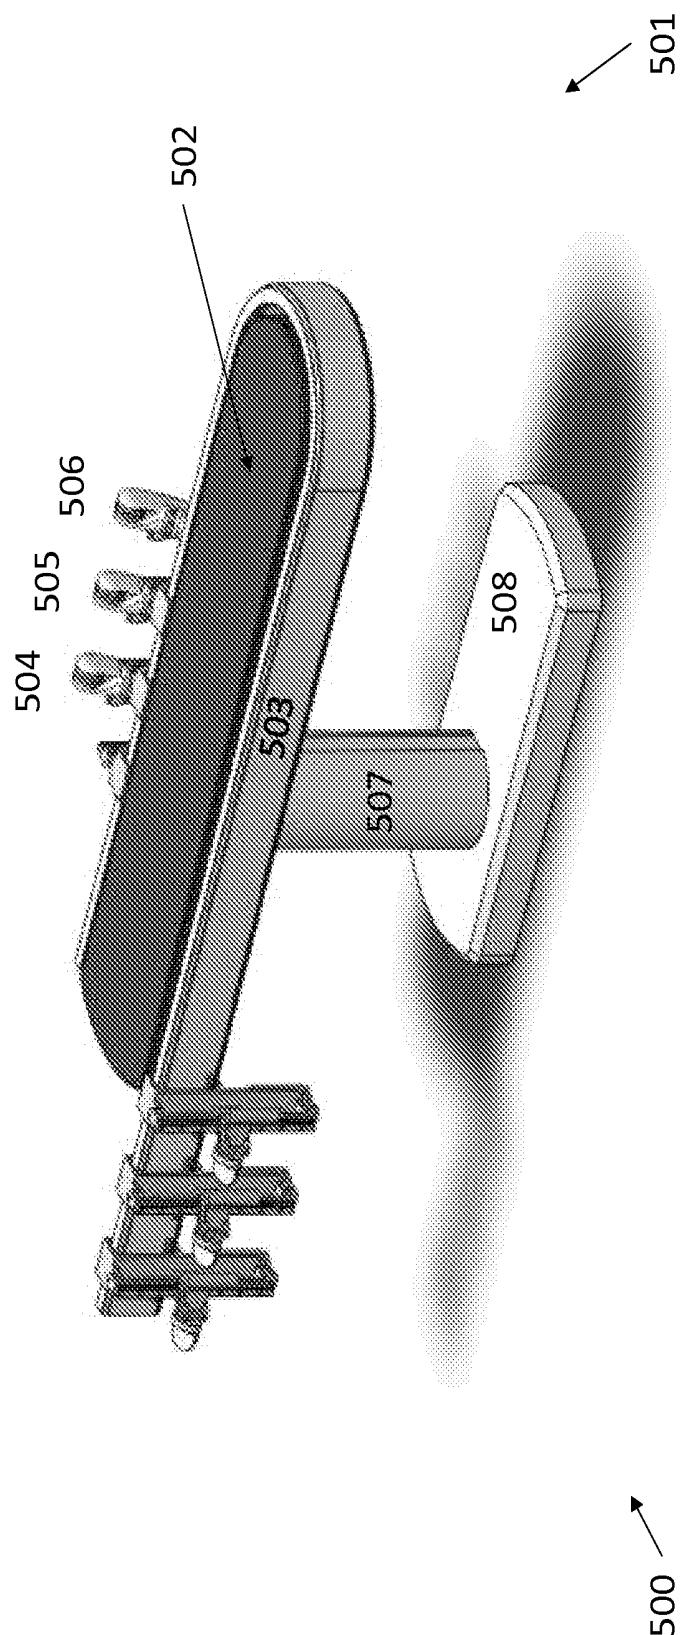


FIG. 5A

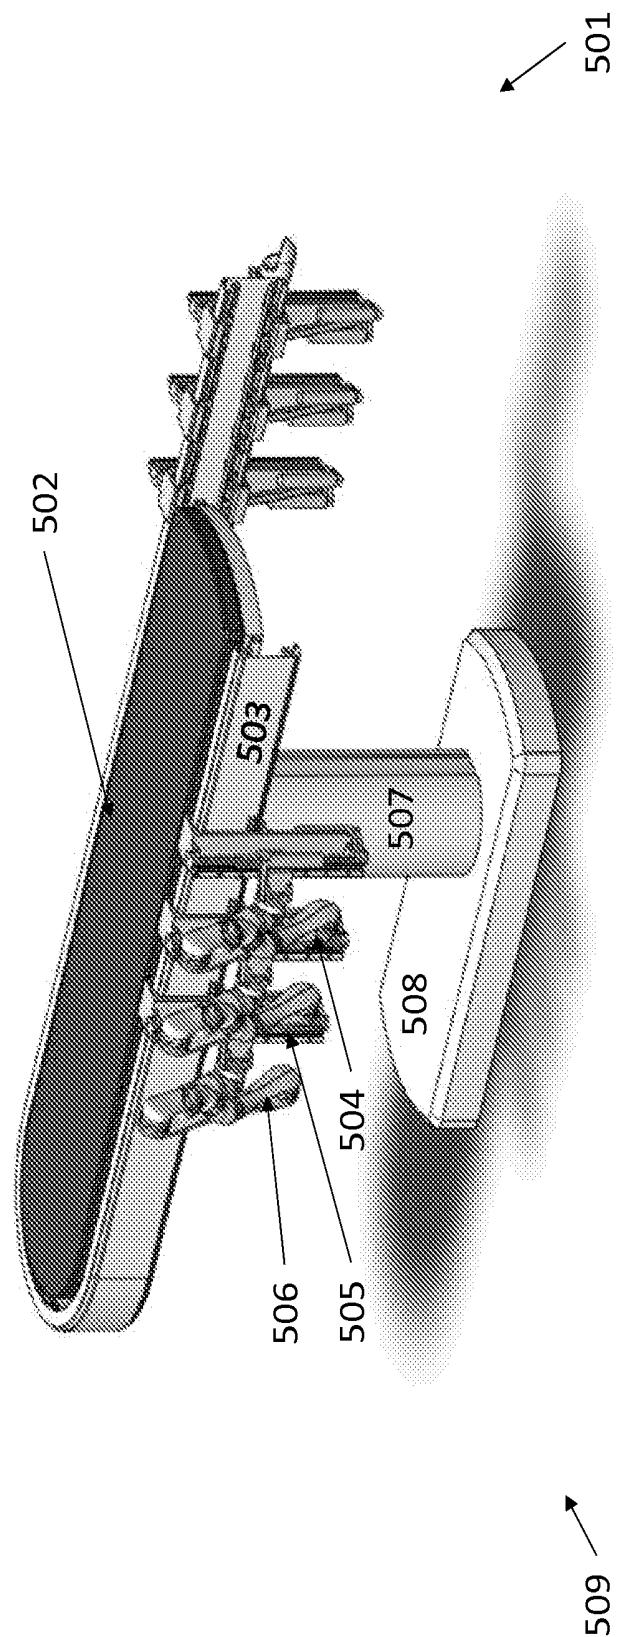


FIG. 5B



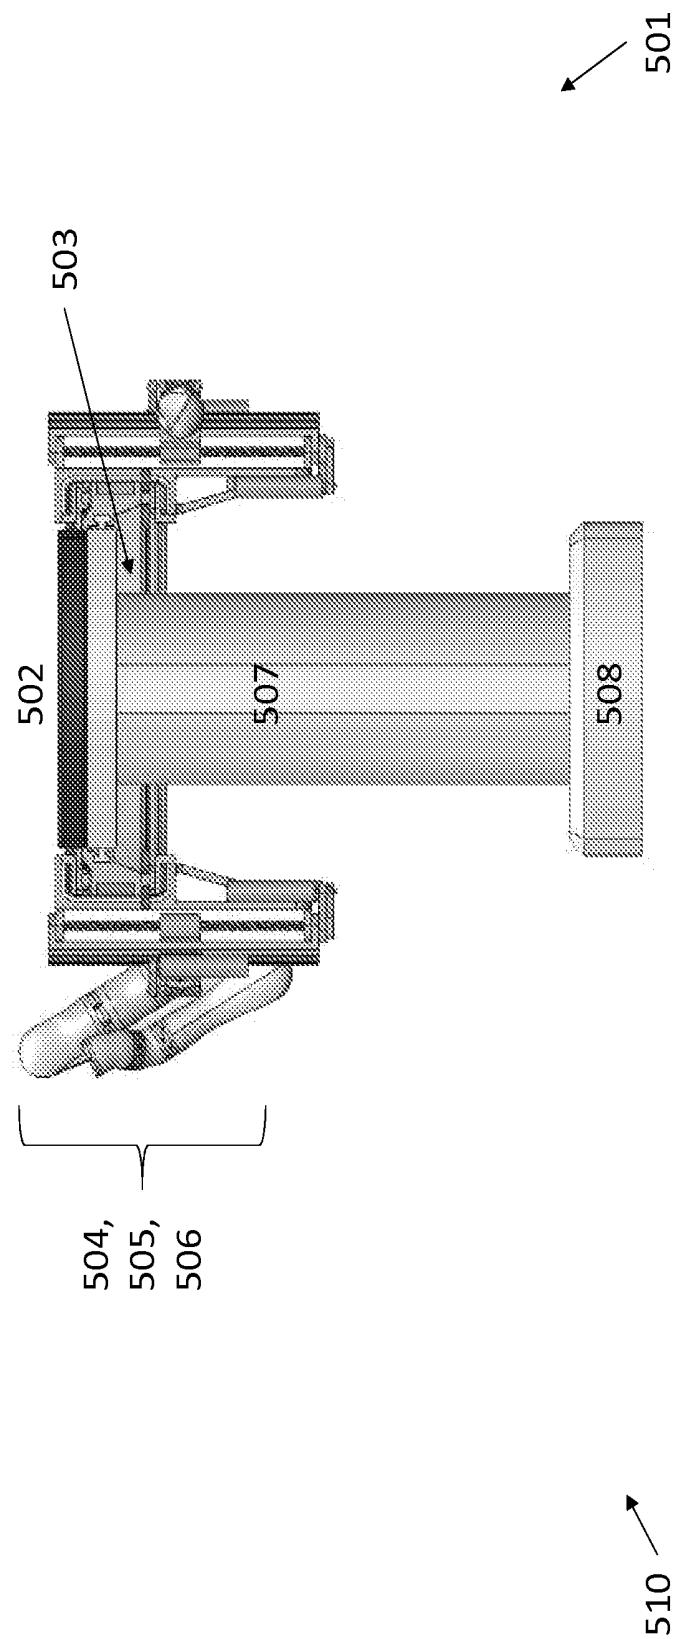


FIG. 5C

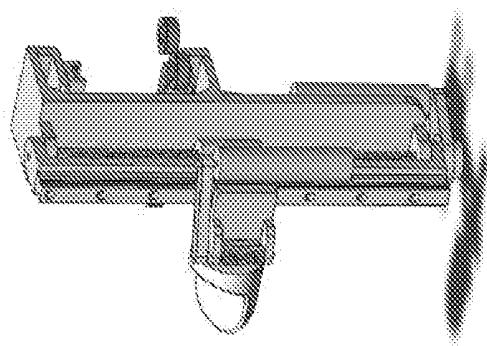

513

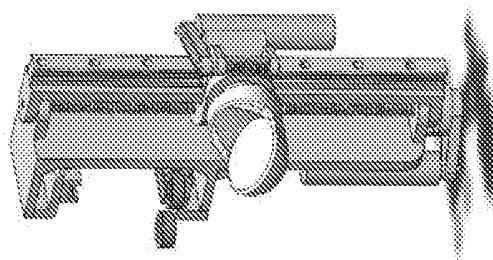

512



511

FIG. 5D

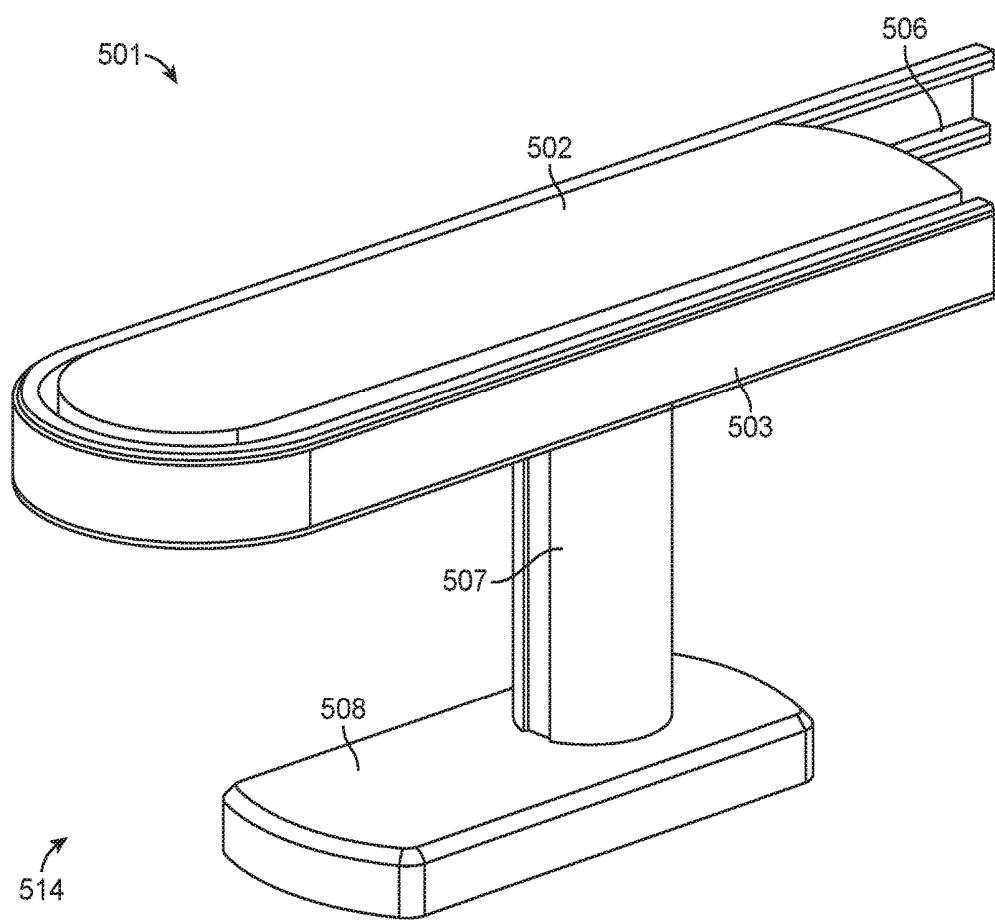


FIG. 5E

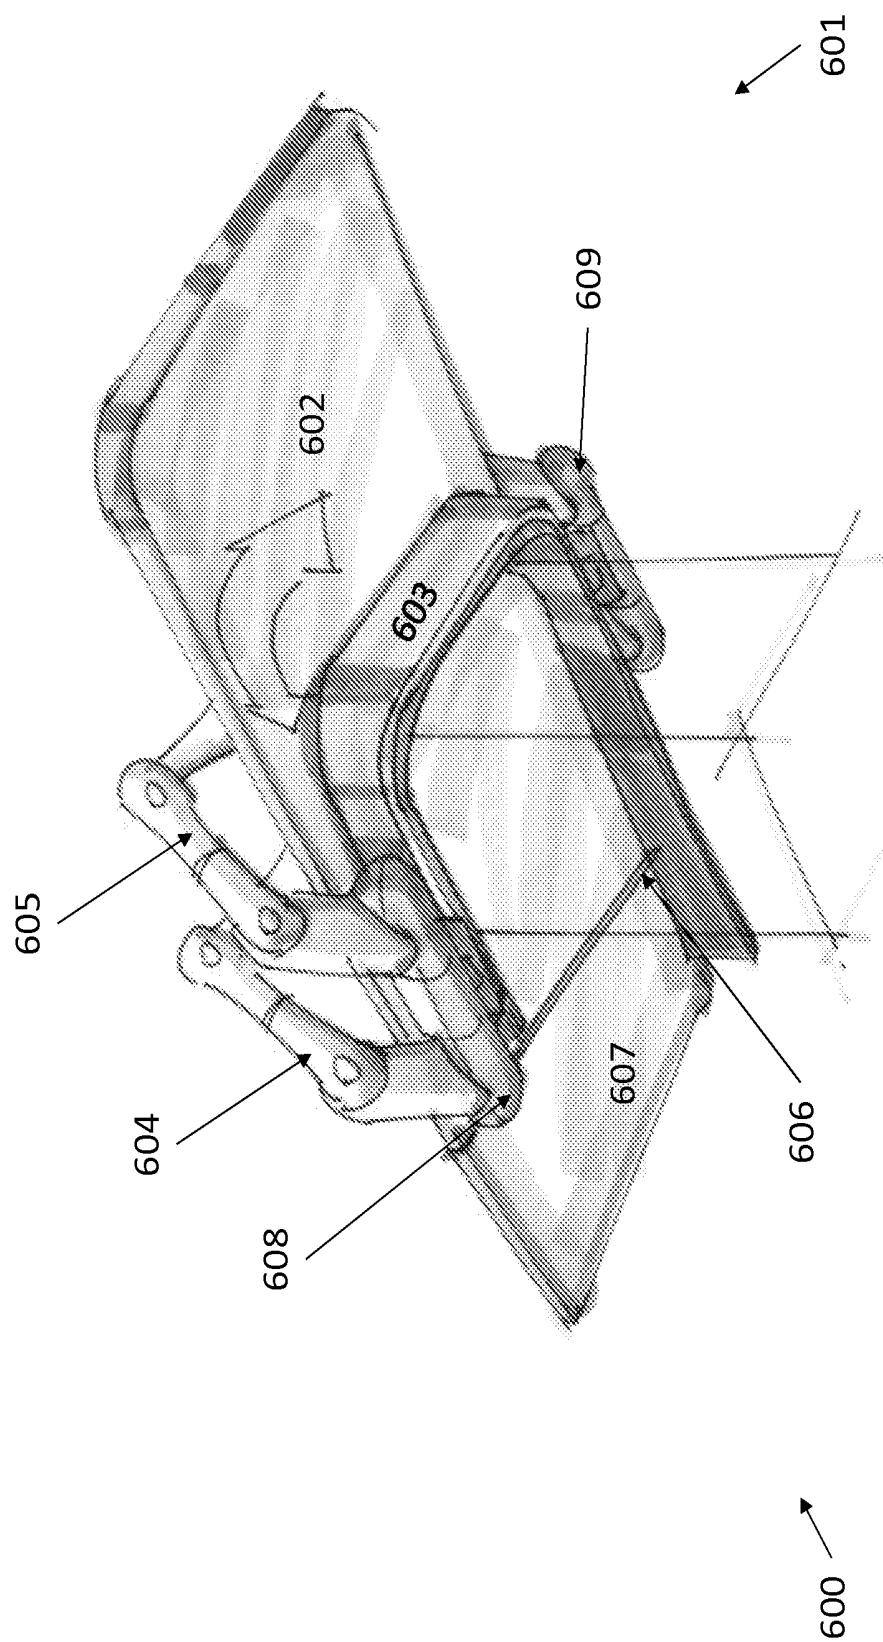
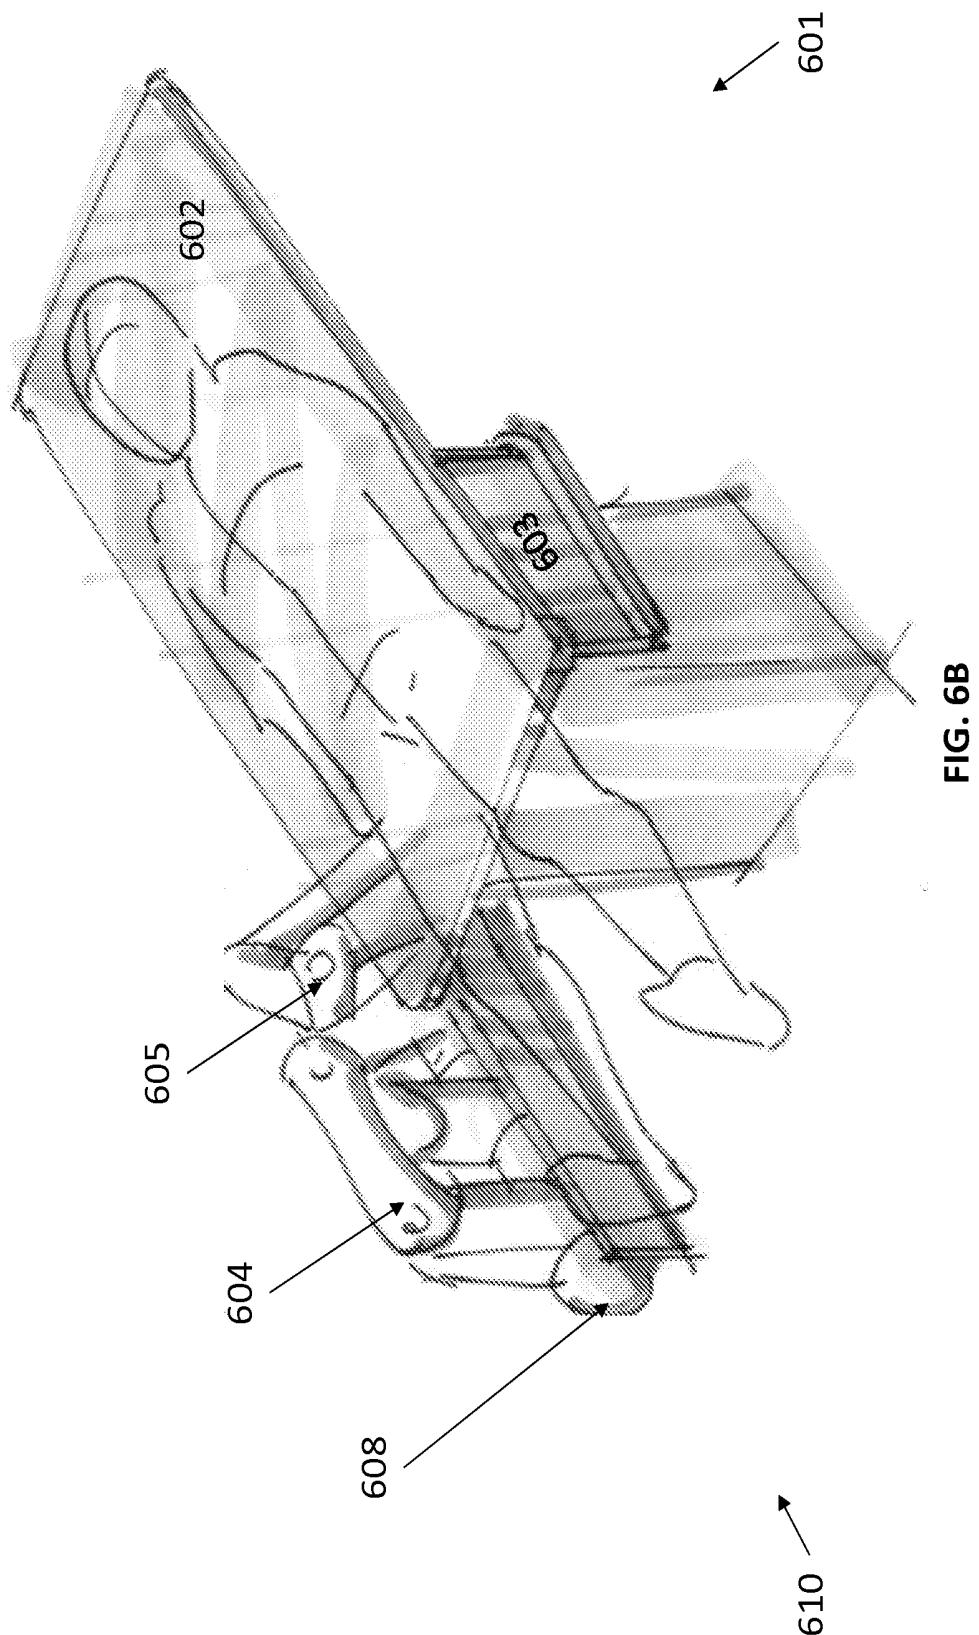


FIG. 6A



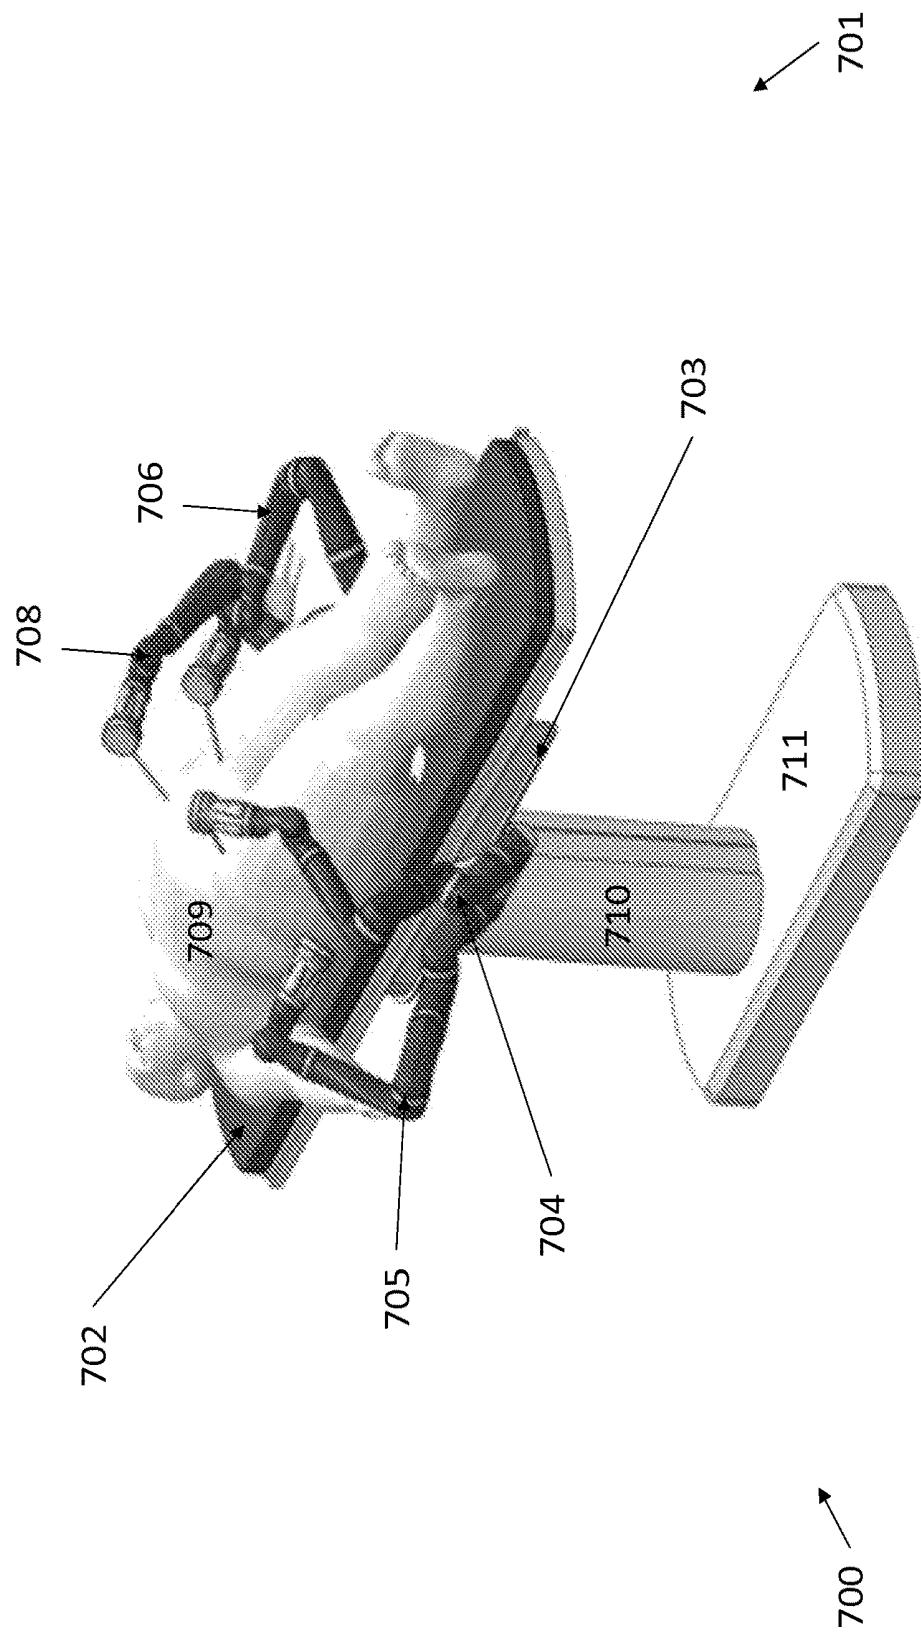


FIG. 7A

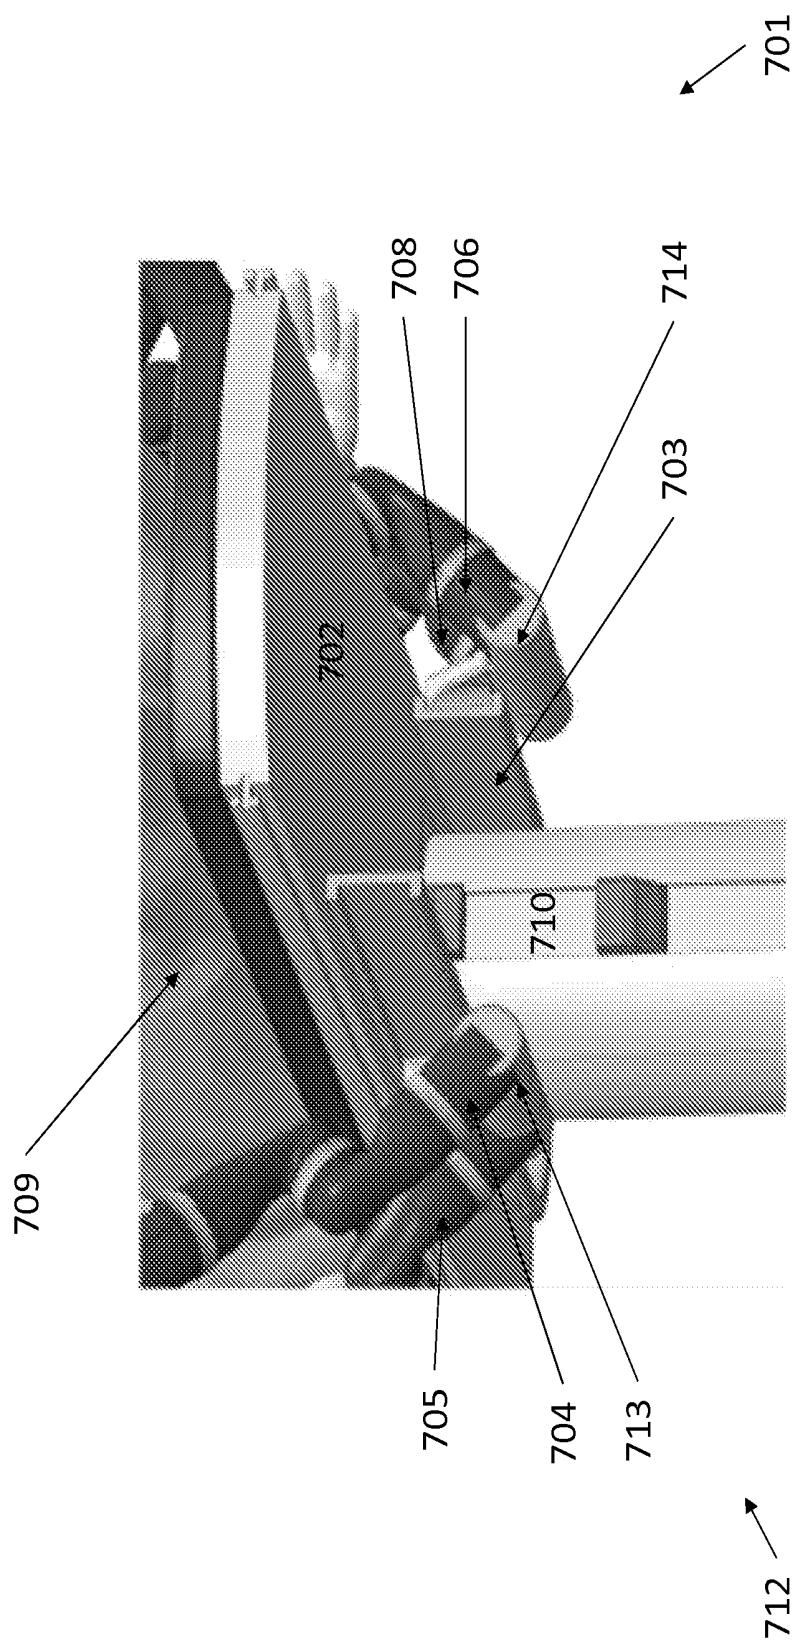


FIG. 7B

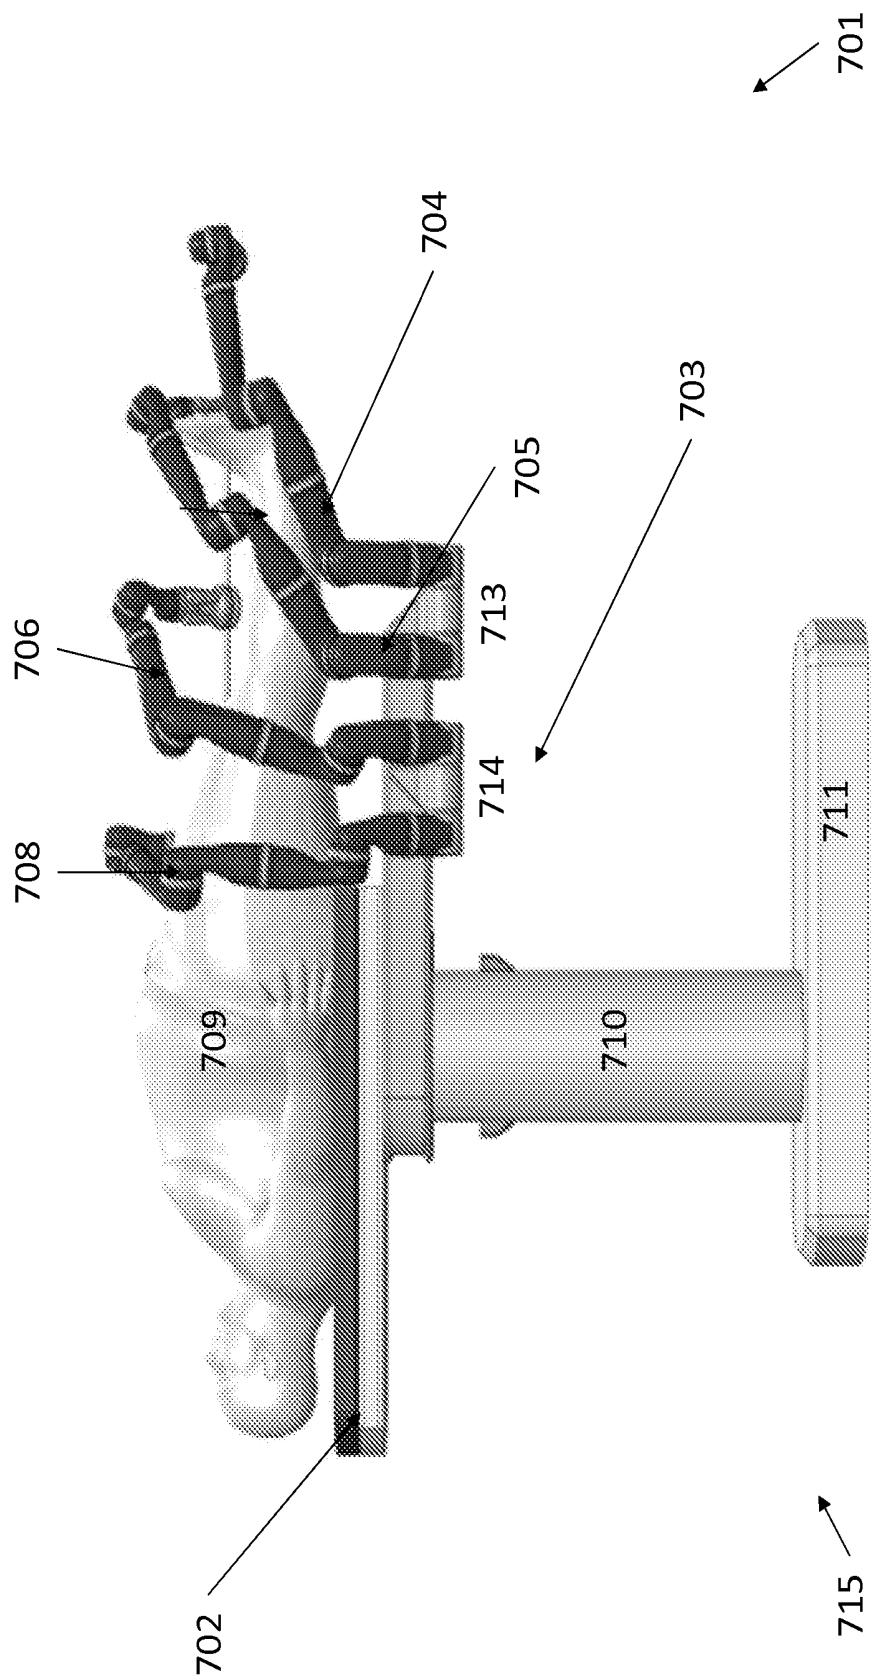


FIG. 7C

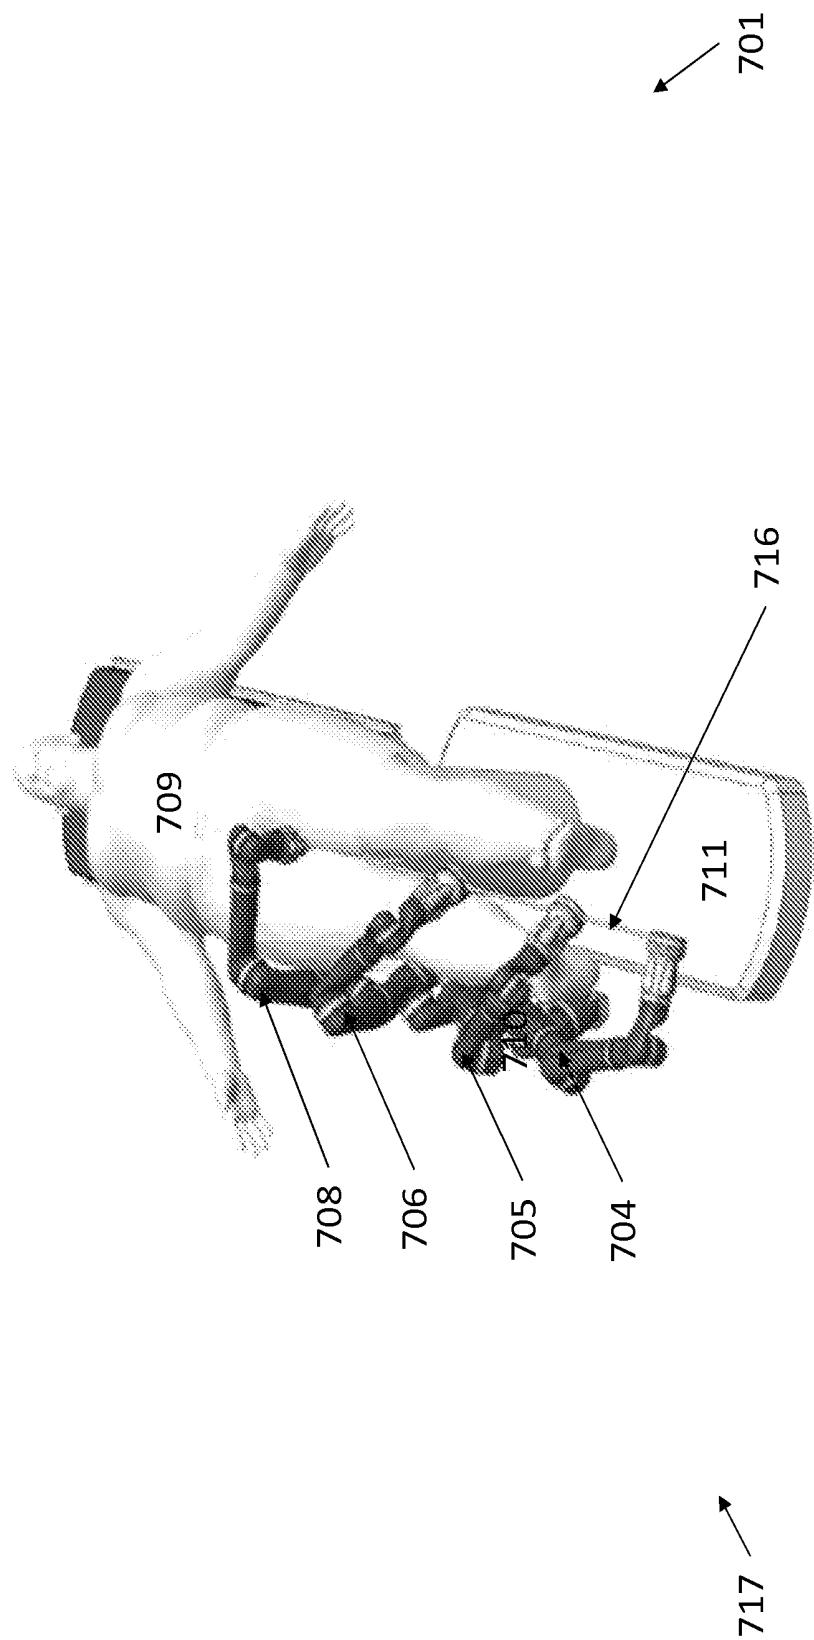


FIG. 7D

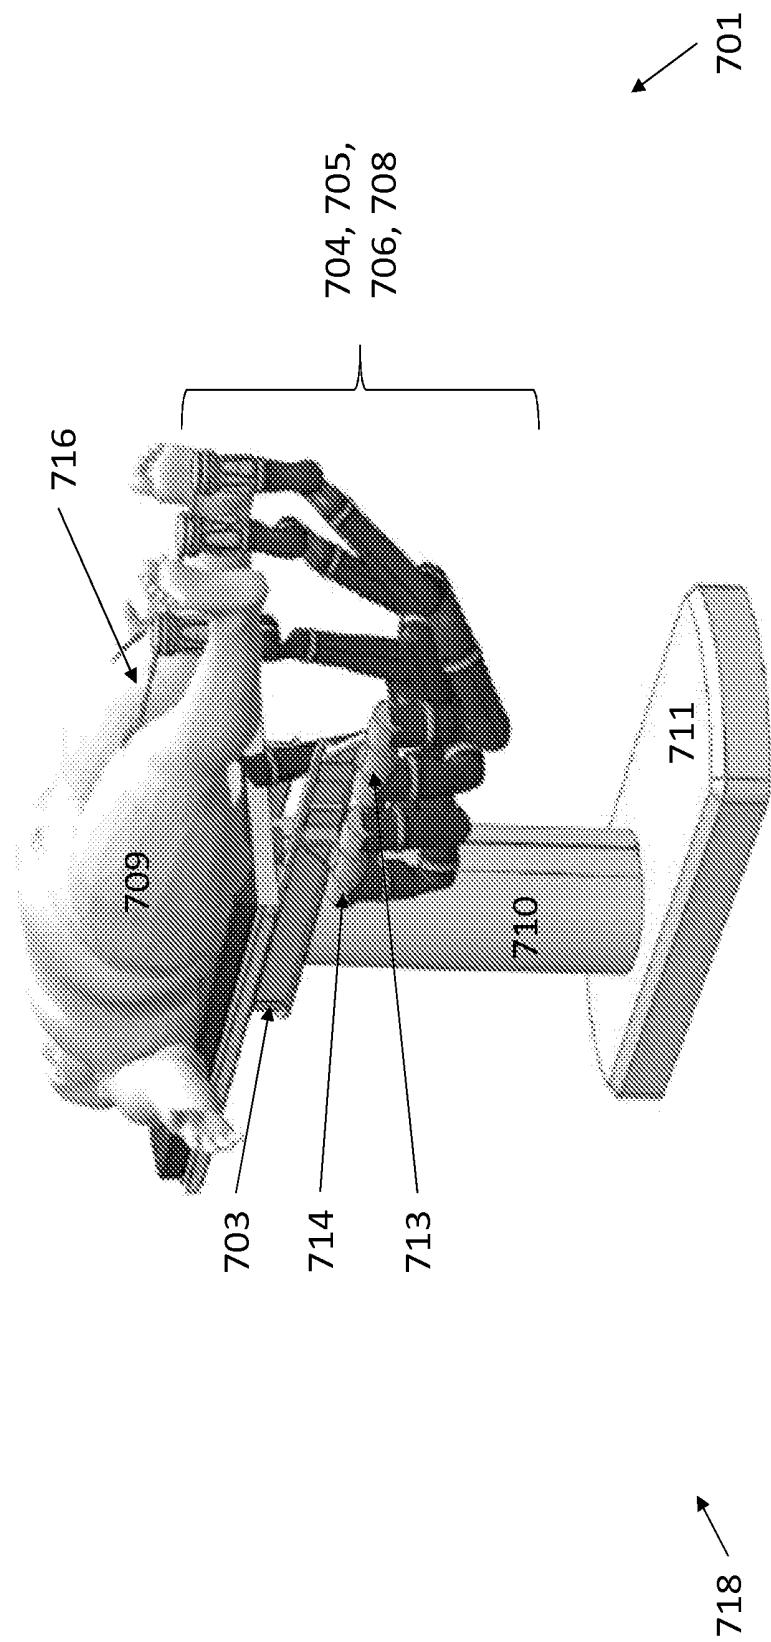


FIG. 7E

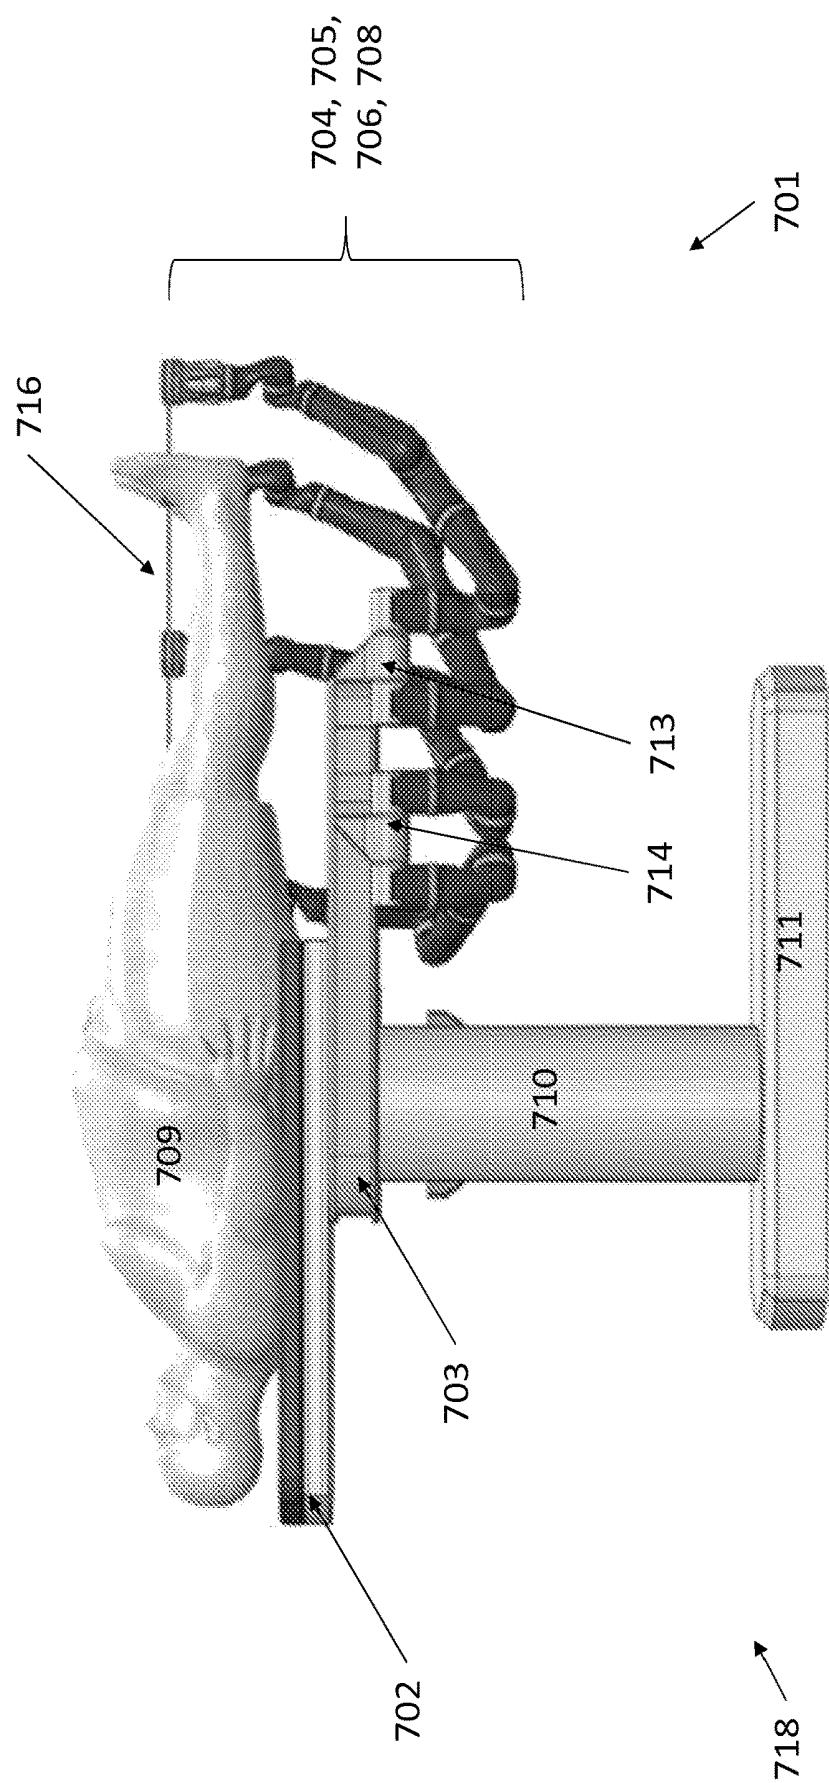


FIG. 7F

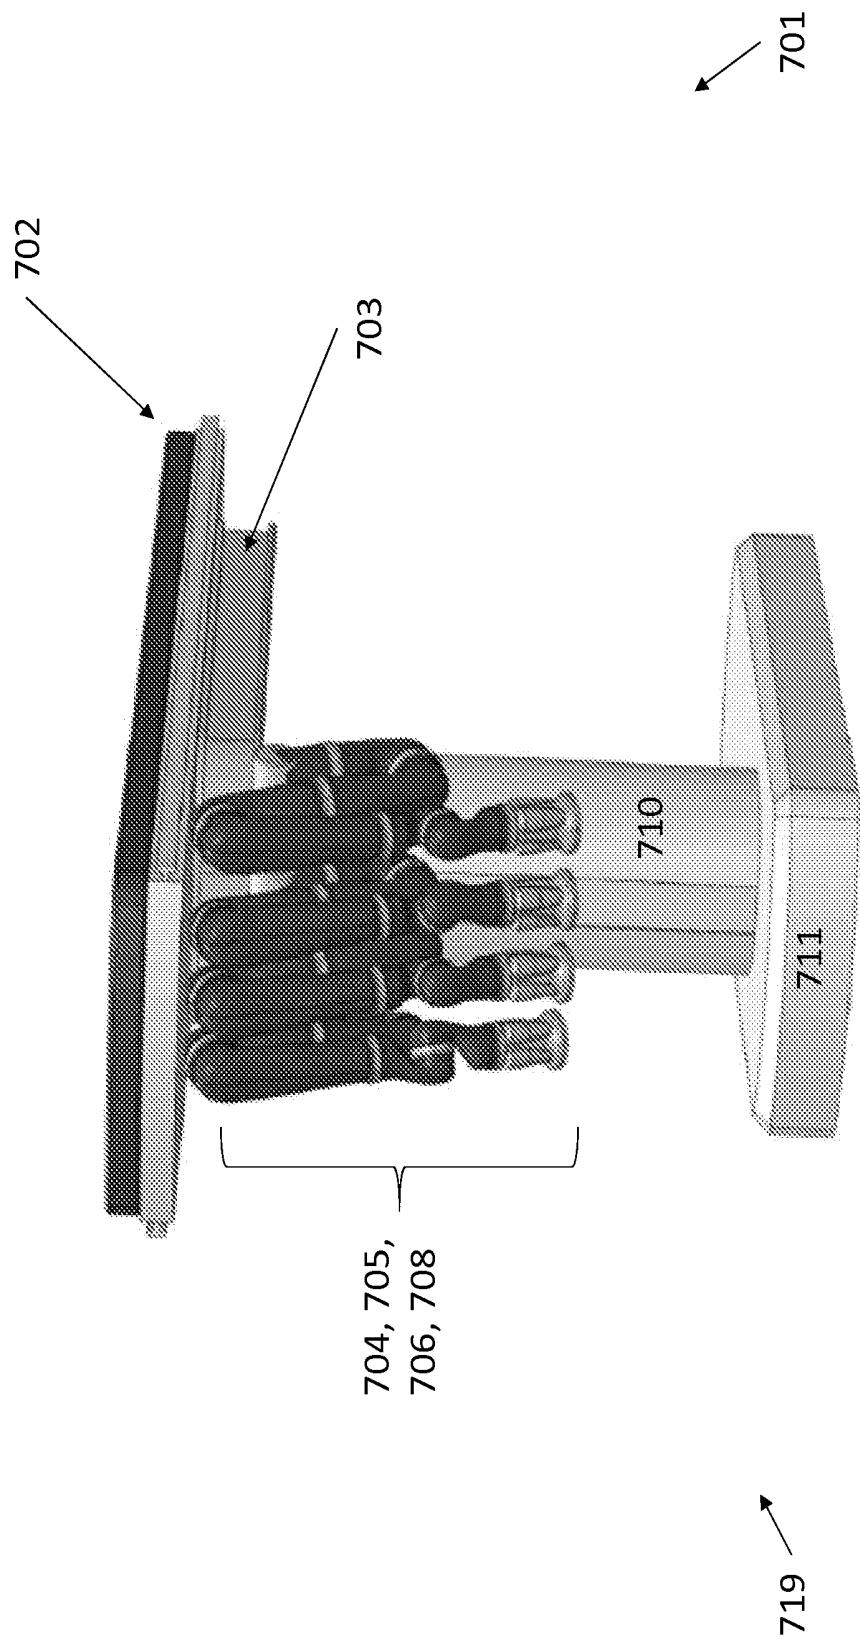


FIG. 7G

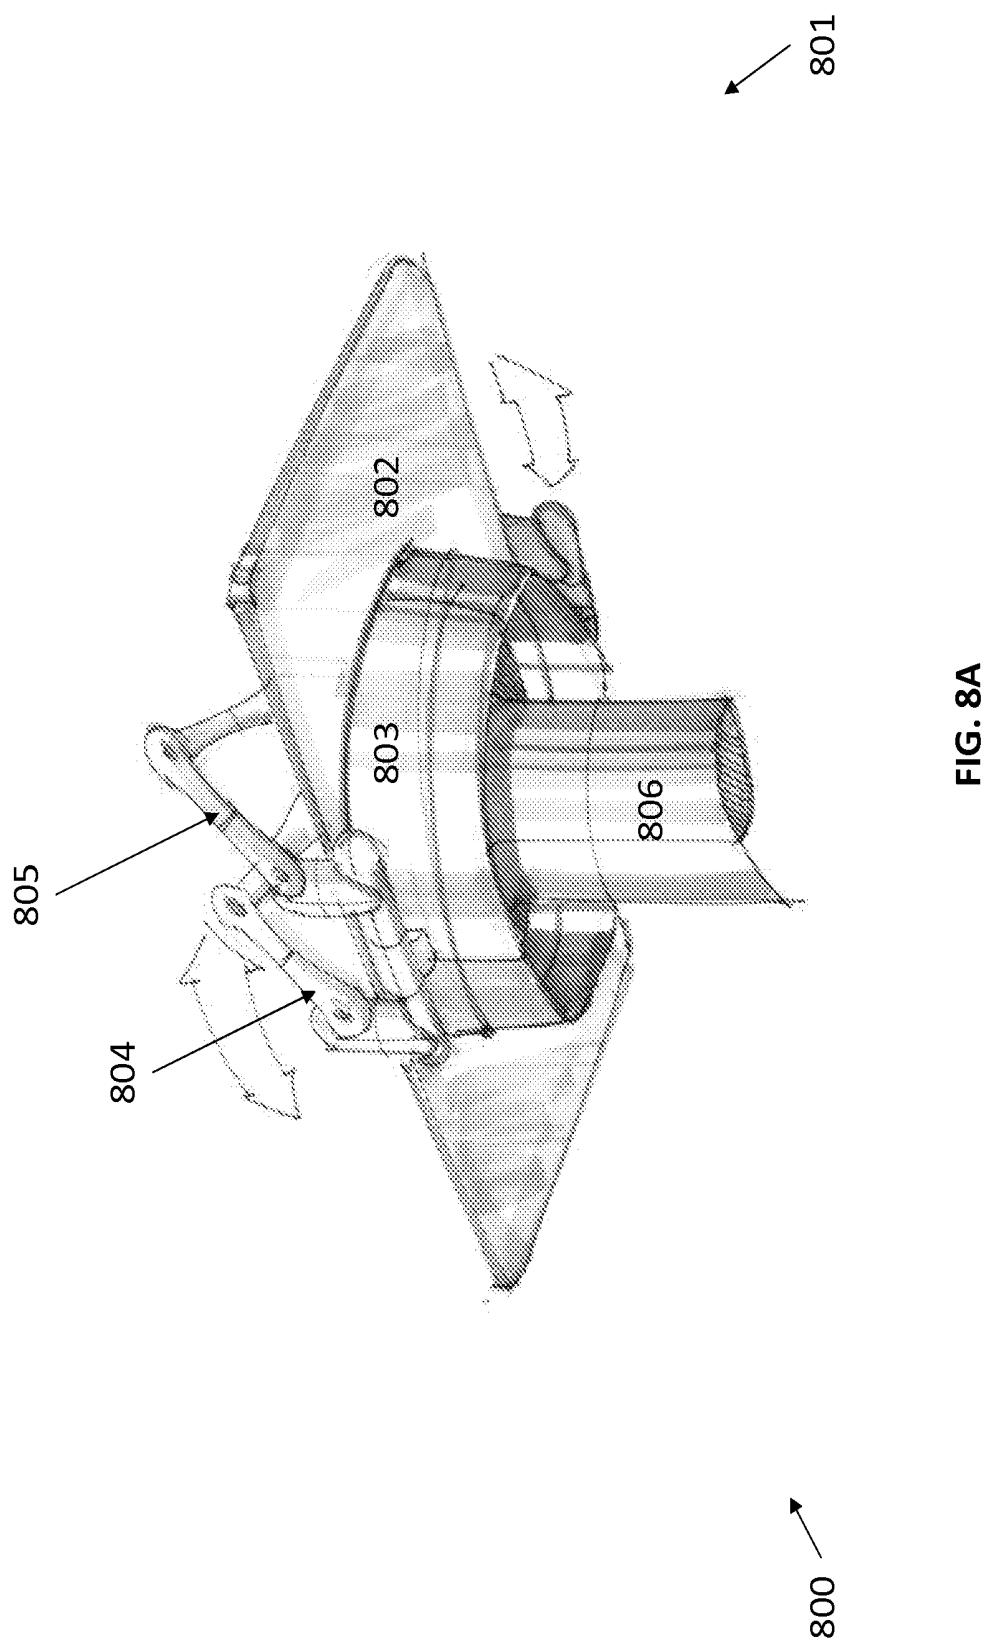


FIG. 8A

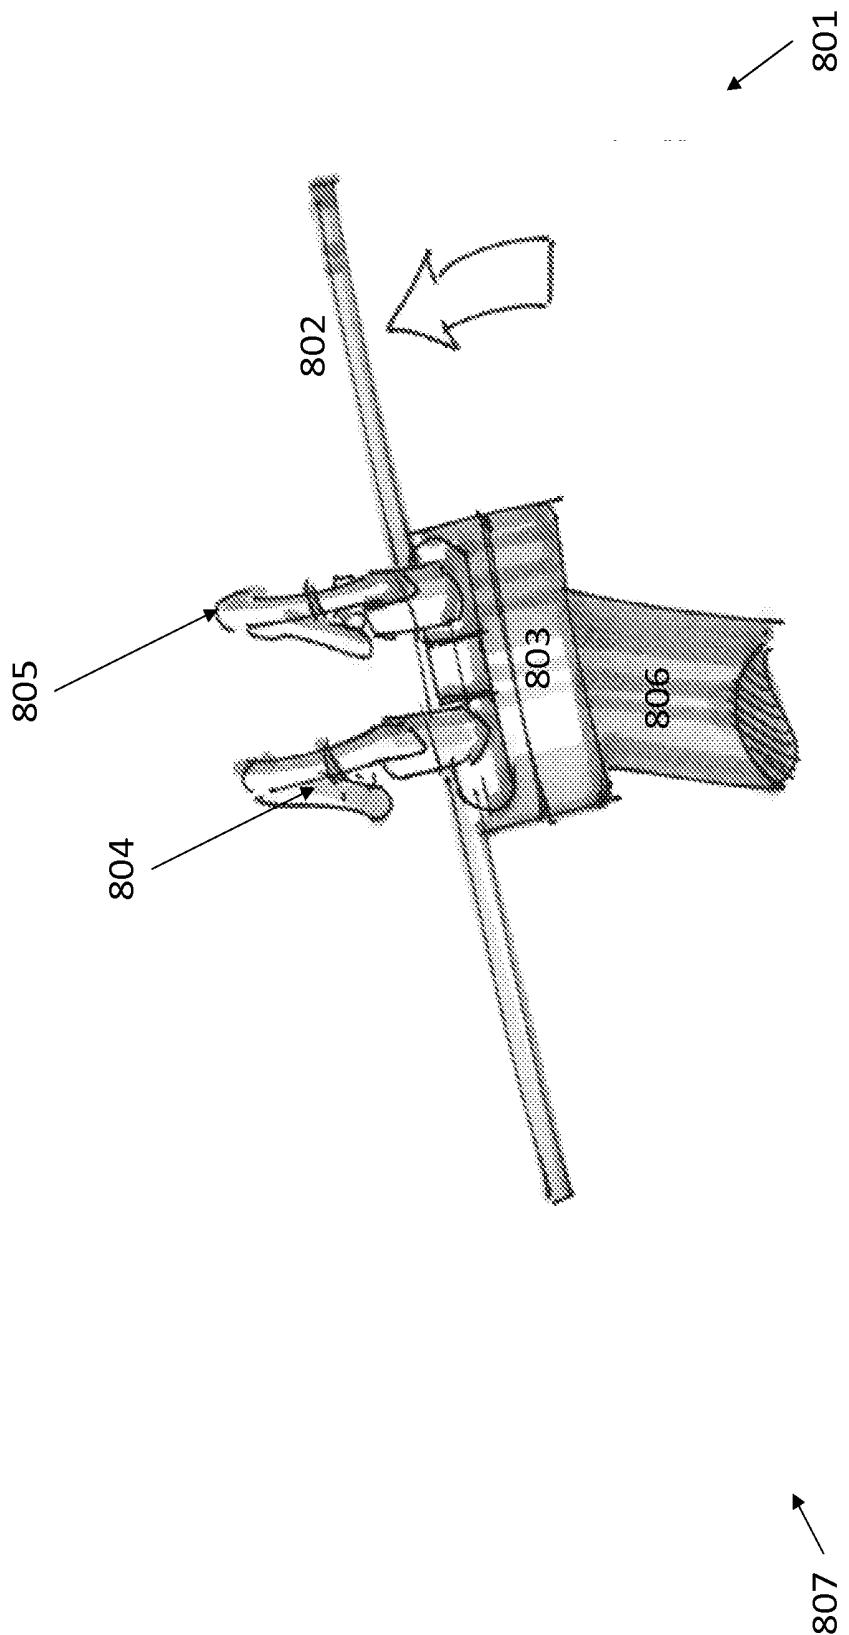


FIG. 8B

SURGICAL SYSTEM WITH CONFIGURABLE RAIL-MOUNTED MECHANICAL ARMS

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 62/145,418, filed Apr. 9, 2015, which application is incorporated herein by reference.

[0002] The present invention relates to medical instruments, tools, and methods that may be incorporated into a robotic system, such as those disclosed in U.S. patent application Ser. No. 14/523,760, filed Oct. 24, 2014, U.S. Provisional Patent Application No. 62/019,816, filed Jul. 1, 2014, U.S. Provisional Patent Application No. 62/037,520, filed Aug. 14, 2014, and U.S. Provisional Patent Application No. 62/057,936, filed Sep. 30, 2014, the entire contents of which are incorporated herein by reference.

INCORPORATION BY REFERENCE

[0003] All publications and patent applications mentioned in this specification are herein incorporated by reference in their entirety to the same extent as if each individual publication or patent application was specifically and individually indicated to be incorporated by reference.

FIELD OF THE INVENTION

[0004] The field of the present invention relates to a robotics platform that may be used in a number of surgical procedures. More particularly, the field of the invention pertains to robotic platforms that enable robotically-controlled tools to perform diagnostic and therapeutic surgical procedures.

BACKGROUND OF THE RELATED ART

[0005] Use of robotic technologies presents a number of advantages over traditional, manual surgery procedures. In addition to other advantages, robotic surgeries often allow for greater precision, control, and access. Despite these advantages, however, the pre-existing robotics platforms have built-in limitations that are tied to their structural designs and underpinnings. In the absence of a truly flexible system, hospitals and health care practitioners are forced to acquire a variety of robotic systems in order to robotically perform a variety of procedures. The high capital costs, combined with the relatively specialization of the systems, have slowed adoption of robotics platforms for surgery.

[0006] Accordingly, there is a need for a robotics platform that is configurable for a number of procedures.

BRIEF SUMMARY OF THE INVENTION

[0007] In general, the present invention provides a medical device that comprises a rail having a rounded path, a carriage configured to translate along the rail, the carriage being operatively coupled to the rail, a robotic arm operatively coupled to the carriage, and a horizontal platform proximate to the rail, wherein the robotic arms are configured to perform medical procedures on a patient on the platform. In one aspect, the rounded path is U-shaped. In one aspect, the U-shaped path comprises of a first leg and a second leg, wherein the first leg is longer than the second leg. In another aspect, the rail is configured around a central base. In one aspect, the central base is shaped like a column.

[0008] In another aspect, a horizontal platform is operatively coupled to the top of the base. In one aspect, the rail is disposed below the platform. In one aspect, the rail is around the platform. In one aspect, the arm is configured to be angled over platform.

[0009] In another aspect, the platform is a surgical bed, configured to support the weight of a patient. In one aspect, the surgical bed comprises a first part and a second part, wherein the second part is configured to articulate relative to the first part.

[0010] In another aspect, the rail is configured around a horizontal platform. In one aspect, the platform is a surgical bed, configured to support the weight of a patient.

[0011] In another aspect, the rounded path is circular. In one aspect, the rail is disposed below the platform. In one aspect, the rail is around the platform.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The invention will be described, by way of example, and with reference to the accompanying diagrammatic drawings, in which:

[0013] FIG. 1 illustrates a surgical bed with an oval track for robotic arms along the edge of the bed, consistent with an embodiment of the present invention;

[0014] FIG. 2 illustrates a surgical bed with a U-shaped track for robotic arms along the edge of the bed, consistent with an embodiment of the present invention;

[0015] FIG. 3 illustrates an alternative robotics platform to system 201 from FIG. 2;

[0016] FIG. 4 illustrates a surgical bed with a rounded track for robotic arms along the edge of the bed, consistent with an embodiment of the present invention;

[0017] FIG. 5A illustrates a surgical bed with a rounded track for robotic arms along the edge of the bed, consistent with an embodiment of the present invention;

[0018] FIG. 5B illustrates the surgical bed with a rounded track from FIG. 5A, consistent with an embodiment of the present invention;

[0019] FIG. 5C illustrates the surgical bed with a rounded track from FIGS. 5A, 5B, consistent with an embodiment of the present invention;

[0020] FIG. 5D illustrates several views of carriages for mechanical arms used in system 501 from FIGS. 5A, 5B;

[0021] FIG. 5E illustrates the surgical bed with a rounded track from FIG. 5A, consistent with an embodiment of the present invention;

[0022] FIGS. 6A and 6B illustrate a surgical bed with a rounded track for robotic arms along the edge of the bed, consistent with an embodiment of the present invention;

[0023] FIG. 7A illustrates a surgical bed with a rounded track for robotic arms underneath the edge of the bed, consistent with an embodiment of the present invention;

[0024] FIG. 7B illustrates the underside of the surgical bed with a rounded track from FIG. 7A;

[0025] FIG. 7C illustrates the surgical bed with a rounded track from FIGS. 7A, 7B;

[0026] FIG. 7D illustrates the surgical bed with a rounded track from FIGS. 7A, 7B, 7C;

[0027] FIG. 7E illustrates the surgical bed with a rounded track from FIG. 7C;

[0028] FIG. 7F illustrates the surgical bed with a rounded track from FIG. 7E;

[0029] FIG. 7G illustrates the surgical bed with a rounded track from FIGS. 7A-7F; and

[0030] FIGS. 8A and 8B illustrate a surgical bed with a rounded track for robotic arms underneath the edge of the bed, consistent with an embodiment of the present invention.

DETAILED DESCRIPTION OF THE DRAWINGS

[0031] Although certain preferred embodiments and examples are disclosed below, inventive subject matter extends beyond the specifically disclosed embodiments to other alternative embodiments and/or uses, and to modifications and equivalents thereof. Thus, the scope of the claims appended hereto is not limited by any of the particular embodiments described below. For example, in any method or process disclosed herein, the acts or operations of the method or process may be performed in any suitable sequence and are not necessarily limited to any particular disclosed sequence. Various operations may be described as multiple discrete operations in turn, in a manner that may be helpful in understanding certain embodiments; however, the order of description should not be construed to imply that these operations are order dependent. Additionally, the structures, systems, and/or devices described herein may be embodied as integrated components or as separate components.

[0032] In clinical applications, the design of the base of the robotics platform often constrains the types of procedures that may be performed by the system. For example, in a system where robotic appendages are only available around the abdomen, urology procedures are precluded from being performed. Likewise, robotic arms below the abdomen may not be useful for laparoscopic procedures. Accordingly, the present invention provides a flexible design such that robotic arms may be delivered to multiple access points in a patient around a surgical bed.

[0033] FIG. 1 illustrates a surgical bed with an oval track for robotic arms along the edge of the bed, consistent with an embodiment of the present invention. As shown in the isometric view 100 of the robotic system 101, the system 101 comprises of a surgical bed 102, a rail 103 for mechanical arms 104, a support stand 105, and a system base 106. The surgical bed allows for a hinge 107 such that a portion 108 of surgical bed 102 may be declined at a different angle from the rest of the bed. This may be desirable for certain operations, such as when performing a procedure that requires access a patient's lower abdomen, such as ureteroscopy or hysteroscopy.

[0034] Encircling the surgical bed 102, the rail 103 provides a structure to slidably translate the mechanical arms 104 to a desired location around the surgical bed 102. The rail 103, which may be referred to as a "track", and the mechanical arms 104 may be slidably translated along it in order to facilitate access for the arms. The rail 103 also provides allows for the conveyance and reception of power, controls, fluidics, aspiration to the mechanical arms 104. The rail 103 may be fully circular and surround all sides of the surgical bed 102.

[0035] The mechanical arms 104 may be operatively coupled to the rail 103. The mechanical arms may also be robotic. The translation of the mechanical arms 104 may be actuated either manually or robotically. The mechanical arms 104 may be coupled independently to the rail 103 or in groups via a mechanical carriage that may slide around the rail 103. In addition to providing structural support to the mechanical arms 104, the carriage may be used to convey

and receive power, controls, fluidics, and aspiration to and from the arms 104 to the rail 103.

[0036] In combination or individually, the support stand 105 and the system base 106 may be used to house electronics, fluidics, pneumatics, and aspiration. The electronics may be used from control, localization, navigation of the arms 104. Thus, as a robotically-driven platform, system 101 provides for a comprehensive surgical bed and tool solution that may be used to perform any number of procedures around a patient.

[0037] FIG. 2 illustrates a surgical bed with a U-shaped track for robotic arms along the edge of the bed, consistent with an embodiment of the present invention. As shown in the isometric view 200 of the robotic system 201, the system 201 comprises of a surgical bed 202, a rail 203 for mechanical arms 204, a support stand 205, and a system base 206. Like in system 101, the surgical bed 202 allows for a hinge 207 such that a portion 208 of surgical bed 202 may be declined at a different angle from the rest of the bed 202. As discussed earlier, this may be desirable for certain operations, such as when performing a procedure that requires access a patient's lower abdomen, such as ureteroscopy, hysteroscopy, or colonoscopy.

[0038] Running along the surgical bed 202, the rail 203 provides a structure to slidably translate the mechanical arms 204 to a desired location around the surgical bed 202. Unlike rail 103, rail 203 uses a U-shape that enhances access the surgical bed 202. This may provide advantages when position the patient and accessing operative sites on a patient's lower abdomen. The longer leg of the rail 203 allows for the mechanical arms to be aligned to convey a medical instrument into the patient by means of a "virtual rail" such as one discussed in the aforementioned patent applications. As before, the rail 203 may be referred to as a "track", and the mechanical arms 204 may be slidably translated along it in order to facilitate access for the arms. The rail 203 also provides allows for the conveyance and reception of power, controls, fluidics, aspiration to the mechanical arms 204.

[0039] In combination or individually, the support stand 205 and the system base 206 may be used to house electronics, fluidics, pneumatics, and aspiration. The electronics may be used from control, localization, navigation of the arms 204. Thus, as a robotically-driven platform, system 201 provides for an improved, comprehensive surgical bed and tool solution that may be used to perform any number of procedures around a patient.

[0040] As deployed, the mechanical arms 104 from system 101 and mechanical arms 204 and system 201 are positioned to perform endolumenal procedures to access the access points in the lower abdomen (e.g., urology, ureteroscopy, hysteroscopy, or colonoscopy) and upper abdomen (e.g., bronchoscopy, gastro-intestinal).

[0041] FIG. 3 illustrates an alternative robotics platform to system 201 from FIG. 2. As shown in isometric view 300, system 301 incorporates all the technologies disclosed with respect to system 201 with the additional vertical translation apparatus 302 that enables control over the vertical height of the rail 303. System 301 thus allows for vertical translation of the rail 303 relative to the support stand 304.

[0042] FIG. 4 illustrates a surgical bed with a rounded track for robotic arms along the edge of the bed, consistent with an embodiment of the present invention. As shown in the isometric view 400 of the robotic system 401, the system

401 comprises of a surgical bed **402**, a rail **403** (or “track”) for mechanical arms **404**, a support stand **405**, and a system base **406**. The surgical bed **402** may be configured to translate horizontally to position patient **407** relative to mechanical arms **404**.

[0043] Encircling the surgical bed **402**, the rail **403** provides a structure to slidingly translate the mechanical arms **404** to a desired location around the surgical bed **402**. The rail **403**, which may be referred to as a “track”, and the mechanical arms **404** may be slidingly translated along it in order to facilitate access for the arms. The rail **403** also provides allows for the conveyance and reception of power, controls, fluidics, aspiration to the mechanical arms **404**.

[0044] The mechanical arms **404** may be operatively coupled to the rail **403**. The mechanical arms **404** may also be robotic. The translation of the mechanical arms **404** may be actuated either manually or robotically. The mechanical arms **404** may be coupled independently to the rail **403** or in groups via a mechanical carriage that may slide around the rail **403**. In addition to providing structural support to the mechanical arms **404**, the carriage may be used to convey and receive power, controls, fluidics, and aspiration to and from the arms **404** to the rail **403**. The ability to translate the arms **404** and translate the bed **402** allows for nearly unlimited access to different portions of the anatomy of patient **407**.

[0045] In combination or individually, the support stand **405** and the system base **406** may be used to house electronics, fluidics, pneumatics, and aspiration. The electronics may be used from control, localization, navigation of the arms **404**. Thus, as a robotically-driven platform, system **401** provides for a comprehensive surgical bed and tool solution that may be used to perform any number of procedures around a patient. The support stand **405** may also translate vertically, allowing for easier access to the patient **407** and operative site.

[0046] As deployed in view **400**, mechanical arms **404** may be positioned to access the abdomen of patient **407** for laparoscopic procedures.

[0047] FIG. 5A illustrates a surgical bed with a rounded track for robotic arms along the edge of the bed, consistent with an embodiment of the present invention. As shown in the isometric view **500** of the robotic system **501**, the system **501** comprises of a surgical bed **502**, a rail **503** (or “track”) for mechanical arms **504**, **505**, **506**, a support stand **507**, and a system base **508**. The surgical bed **502** may be configured to translate horizontally to position a patient relative to mechanical arms **504**, **505**, **506**.

[0048] Encircling the surgical bed **502**, the rail **503** provides a structure to slidingly translate the mechanical arms **504**, **505**, **506** to a desired location around the surgical bed **502**. The rail **503**, which may be referred to as a “track”, and the mechanical arms **504**, **505**, **506** may be slidingly translated along it in order to facilitate access for the arms **504**, **505**, **506**. The rail **503** also provides allows for the conveyance and reception of power, controls, fluidics, aspiration to the mechanical arms **504**, **505**, **506**.

[0049] The mechanical arms **504**, **505**, **506** may be operatively coupled to the rail **503**. The mechanical arms **504**, **505**, **506** may also be robotic. The translation of the mechanical arms **504**, **505**, **506** may be actuated either manually or robotically. The mechanical arms **504**, **505**, **506** may be coupled independently to the rail **503** or individually or in groups via mechanical carriages that may slide around

the rail **503**. In addition to providing structural support to the mechanical arms **504**, **505**, **506** a carriage may be used to convey and receive power, controls, fluidics, and aspiration to and from the arms **504**, **505**, **506** to the rail **503**. The ability to translate the arms **504**, **505**, **506** and translate the bed **502** allows for nearly unlimited access to different portions of the anatomy of a patient.

[0050] In combination or individually, the support stand **507** and the system base **508** may be used to house electronics, fluidics, pneumatics, and aspiration. The electronics may be used from control, localization, navigation of the arms **504**, **505**, **506**. Thus, as a robotically-driven platform, system **501** provides for a comprehensive surgical bed and tool solution that may be used to perform any number of procedures around a patient. The support stand **507** may also translate vertically, allowing for easier access to the patient and operative site.

[0051] As deployed in view **500**, mechanical arms **504**, **505**, **506** may be positioned to access the abdomen of patient for laparoscopic procedures, while the carriages on the other side of rail **503** may be positioned to hold mechanical arms to create a virtual rail for access points in the lower abdomen (e.g., urology, ureteroscopy, or hysteroscopy).

[0052] FIG. 5B illustrates the surgical bed with a rounded track from FIG. 5A, consistent with an embodiment of the present invention. Reverse isometric view **509** provides a different perspective of the robotic system **501**, surgical bed **502**, rail **503** (or “track”) for mechanical arms **504**, **505**, **506** a support stand **507**, and a system base **508**.

[0053] FIG. 5C illustrates the surgical bed with a rounded track from FIGS. 5A, 5B, consistent with an embodiment of the present invention. Rear view **510** provides a different perspective of the robotic system **501**, surgical bed **502**, rail **503** (or “track”) for mechanical arms **504**, **505**, **506**, support stand **507**, and a system base **508**.

[0054] FIG. 5D illustrates several views of carriages for mechanical arms used in system **501** from FIGS. 5A, 5B, 5C, consistent with an embodiment of the present invention. Side views **511**, **512**, **513** provide different perspectives on a mechanically-driven carriage in system **501**.

[0055] FIG. 5E illustrates the surgical bed with a rounded track from FIG. 5A, consistent with an embodiment of the present invention. View **514** provides a different perspective of the robotic system **501**, surgical bed **502**, rail **503** (or “track”), support stand **507**, and system base **508**, absent mechanical arms **504**, **505**, **506**.

[0056] FIG. 6A illustrates a surgical bed with a rounded track for robotic arms along the edge of the bed, consistent with an embodiment of the present invention. As shown in the view **600**, the system **601** comprises of a surgical bed **602**, a rail **603** (or “track”) for mechanical arms **604**, **605**. The surgical bed **602** may be configured to translate horizontally to position a patient relative to mechanical arms **604**, **605**. The surgical bed **602** allows for a hinge **606** such that a portion **607** of surgical bed **602** may be declined at a different angle from the rest of the bed **602**. As discussed earlier, this may be desirable for certain operations, such as when performing a procedure that requires access a patient’s lower abdomen, such as ureteroscopy, hysteroscopy, or colonoscopy.

[0057] Underneath the surgical bed **602**, the rail **603** provides a structure to slidingly translate the mechanical arms **604**, **605** to a desired location around the surgical bed **602**. The rail **603**, which may be referred to as a “track”, and

the mechanical arms 604, 605 may be slidingly translated along it in order to facilitate access for the arms 604, 605. The rail 603 also provides allows for the conveyance and reception of power, controls, fluidics, aspiration to the mechanical arms 604, 605. As shown in FIG. 6A, there may be a shorter leg and longer leg portion of the U-shape rail 603. In some embodiments, the rail 603 may be fully circular, rather than a U-shaped.

[0058] The mechanical arms 604, 605 may be operatively coupled to the rail 603. The mechanical arms 604, 605 may also be robotic. The translation of the mechanical arms 604, 605 may be actuated either manually or robotically. The mechanical arms 604, 605 may be coupled independently to the rail 603 or individually or in groups (as shown) via a mechanical carriage 608 that may slide around the rail 603. In addition to providing structural support to the mechanical arms 604, 605, the carriage 606 may be used to convey and receive power, controls, fluidics, and aspiration to and from the arms 604, 605 to the rail 603. The ability to translate the arms 604, 605 and translate the bed 602 allows for nearly unlimited access to different portions of the anatomy of a patient.

[0059] Not shown, system 601 may also incorporate a support stand and the system base to house electronics, fluidics, pneumatics, and aspiration. The electronics may be used from control, localization, navigation of the arms 604, 605. Thus, as a robotically-driven platform, system 601 provides for a comprehensive surgical bed and tool solution that may be used to perform any number of procedures around a patient. The support stand may also translate vertically, allowing for easier access to the patient and operative site. The support stand may also support vertical translation of the rail 603 in order to facilitate access to particular anatomical access points.

[0060] As deployed in view 600, mechanical arms 604, 605 on carriage 608 may be positioned to access the abdomen of patient for procedures, such as laparoscopy or endoscopy, while a carriage 609 on the other side of rail 603 may be positioned to hold additional mechanical arms.

[0061] FIG. 6B illustrates the surgical bed with a rounded track from FIG. 6A. As shown in the view 610, mechanical arms 604, 605 on carriage 608 may be slidingly translated to the long side of the rail 603. View 610 also provides a view of a support base. As deployed in view 610, mechanical arms 604, 605 on carriage 608 may be positioned to form a virtual rail for access to the anatomical lumens in the lower abdomen for various procedures, such as ureteroscopy, hysteroscopy, or colonoscopy. To facilitate access surgical bed 602 has been slidingly translated forwards from the rail 603.

[0062] FIG. 7A illustrates a surgical bed with a rounded track for robotic arms underneath the edge of the bed, consistent with an embodiment of the present invention. As shown in the view 700, the system 701 comprises of a surgical bed 702, a rail 703 (or "track") for mechanical arms 704, 705, 706, 708. The surgical bed 702 may be configured to translate horizontally to position patient 709 relative to mechanical arms 704, 705, 706, 708. The surgical bed 702 may include a hinge such that the lower portion of surgical bed 702 may be declined at a different angle from the rest of the bed 702. As discussed earlier, this may be desirable for certain operations, such as when performing a procedure that requires access a patient's lower abdomen, such as ureteroscopy, hysteroscopy, or colonoscopy.

[0063] Underneath the surgical bed 702, the rail 703 provides a structure to slidingly translate the mechanical arms 704, 705, 706, 708 to a desired location around the surgical bed 702. The rail 703, which may be referred to as a "track" and the mechanical arms 704, 705 may be slidingly translated along it in order to facilitate access for the arms 704, 705, 706, 708. The rail 703 also provides allows for the conveyance and reception of power, controls, fluidics, aspiration to the mechanical arms 704, 705, 706, 708.

[0064] The mechanical arms 704, 705, 706, 708 may be operatively coupled to the rail 703. The mechanical arms 704, 705, 706, 708 may also be robotic. The translation of the mechanical arms 704, 705, 706, 708 may be actuated either manually or robotically. The mechanical arms 704, 705, 706, 708 may be coupled independently to the rail 703 or individually or in groups via a mechanical carriage that may slide around the rail 703. In addition to providing structural support to the mechanical arms 704, 705, 706, 708, the carriage may be used to convey and receive power, controls, fluidics, and aspiration to and from the arms 704, 705, 706, 708 to the rail 703. The ability to translate the arms 704, 705, 706, 708 and translate the bed 702 allows for nearly unlimited access to different portions of the anatomy of a patient.

[0065] System 701 may also incorporate support stand 710 and system base 711 to house electronics, fluidics, pneumatics, and aspiration. The electronics may be used from control, localization, navigation of the arms 704, 705, 706, 708. Thus, as a robotically-driven platform, system 701 provides for a comprehensive surgical bed and tool solution that may be used to perform any number of procedures around a patient. The rail 703 on support stand 710 may also translate vertically, allowing for easier access to the patient and operative site. The support stand may also telescope.

[0066] As deployed in view 700, mechanical arms 704, 705, 706, 708 may be positioned to access the abdomen of patient 709 for laparoscopic procedures, using a variety of rigid or semi-rigid laparoscopic instruments.

[0067] FIG. 7B illustrates the underside of the surgical bed with a rounded track from FIG. 7A. As shown in the view 712, mechanical arms 704, 705, 706, 708 may be coupled to the rail 703 using carriages 713 and 714, which may be slidingly translated along rail 703. Carriages 713 and 714 may be oriented at various angles from rail 703 to provide an additional access to the patient 709. View 712 also provides a view of a support base 709 which shows structures to vertically translate rail 703 and bed 702.

[0068] FIG. 7C illustrates the surgical bed with a rounded track from FIGS. 7A, 7B. As shown in side view 715, carriages 713 and 714 may be positioned along rail 703 such that mechanical arms 704, 705, 706, 708 may be arranged to form a virtual rail to guide an endoscopic device 716 into an anatomical lumen in the lower abdomen of patient 709 for a procedure such as ureteroscopy, hysteroscopy, or colonoscopy.

[0069] FIG. 7D illustrates the surgical bed with a rounded track from FIGS. 7A, 7B, 7C. Top view 717 provides a different perspective of the positioning of mechanical arms 704, 705, 706, 708 to form a virtual rail to guide an endoscopic device 716 into an anatomical lumen in the lower abdomen of patient 709 for a procedure such as ureteroscopy, hysteroscopy, or colonoscopy.

[0070] FIG. 7E illustrates the surgical bed with a rounded track from FIG. 7C. Isometric view 718 provides an alter-

native positioning of mechanical arms **704, 705, 706, 708** to form a virtual rail to guide an endoscopic device **714** into an anatomical lumen in the lower abdomen of patient **709** for a procedure such as ureteroscopy, hysteroscopy, or colonoscopy. In view **717**, the carriages **713** and **714** may be oriented below rail **703** to position mechanical arms **704, 705, 706, 708** such that the virtual rail is positioned lower than shown in FIGS. **7C** and **7D**.

[0071] FIG. **7F** illustrates the surgical bed with a rounded track from FIG. **7E**. Side view **719** provides a different perspective of the positioning of carriages **713** and **714** such that mechanical arms **704, 705, 706, 708** form a virtual rail to guide an endoscopic device **716** into an anatomical lumen in the lower abdomen of patient **709** for a procedure such as ureteroscopy, hysteroscopy, or colonoscopy.

[0072] FIG. **7G** illustrates the surgical bed with a rounded track from FIGS. **7A-7F**. View **719** shows stowage of mechanical arms **704, 705, 706, 708** through positioning of carriages **713** and **714** together along rail **703** under surgical bed **702**.

[0073] FIGS. **8A** and **8B** illustrate a surgical bed with a rounded track for robotic arms underneath the edge of the bed, consistent with an embodiment of the present invention. As shown in the view **800**, the system **801** comprises of a surgical bed **802**, a rail **803** (or “track”) for mechanical arms, such as **804, 805**. The surgical bed **802** may be configured to translate horizontally to position a patient relative to the mechanical arms. As shown in view **807** from FIG. **8B**, the surgical bed **802** may tilted on the support stand **806** to improve physician access to the patient.

[0074] Underneath the surgical bed **802**, the rail **803** provides a structure to slidably translate the mechanical arms **804, 805** to a desired location around the surgical bed **802**. The rail **803**, which may be referred to as a “track”, and the mechanical arms **804, 805** may be slidably translated along it in order to facilitate access for the arms. The rail **803** also provides allows for the conveyance and reception of power, controls, fluidics, aspiration to the mechanical arms.

[0075] The mechanical arms may be operatively coupled to the rail **803**. The mechanical arms may also be robotic. The translation of the mechanical arms **804, 805** may be actuated either manually or robotically. The mechanical arms **804, 805** may be coupled independently to the rail **803** or individually or in groups via a mechanical carriage that may slide around the rail **803**. In addition to providing structural support to the mechanical arms **804, 805** the carriage may be used to convey and receive power, controls, fluidics, aspiration to and from the arms **804, 805** to the support base **806**. The ability to translate the arms **804, 805** and translate the bed **802** allows for nearly unlimited access to different portions of the anatomy of a patient.

[0076] System **801** may also incorporate support stand **806** to house electronics, fluidics, pneumatics, and aspiration. The electronics may be used from control, localization, navigation of the arms **804, 805**. Thus, as a robotically-driven platform, system **801** provides for a comprehensive surgical bed and tool solution that may be used to perform any number of procedures around a patient. The rail **803** on support stand **806** may also translate vertically, allowing for easier access to the patient and operative site. The support stand may also telescope.

[0077] As deployed in view **800**, mechanical arms **804, 805** may be positioned to access the abdomen of a patient for

laparoscopic procedures, using a variety of rigid or semi-rigid laparoscopic instruments.

[0078] The aforementioned embodiments of the present invention may be designed to interface with robotics instrument device manipulators, tools, hardware, and software such as those disclosed in the aforementioned patent applications that are incorporated by reference. For example, the embodiments in this specification may be configured to be driven by an instrument drive mechanism or an instrument device manipulator that is attached to the distal end of a robotic arm through a sterile interface, such as a drape. As part of a larger robotics system, robotic control signals may be communicated from a remotely-located user interface, down the robotic arm, and to the instrument device manipulator to control the instrument or tool.

[0079] For purposes of comparing various embodiments, certain aspects and advantages of these embodiments are described. Not necessarily all such aspects or advantages are achieved by any particular embodiment. Thus, for example, various embodiments may be carried out in a manner that achieves or optimizes one advantage or group of advantages as taught herein without necessarily achieving other aspects or advantages as may also be taught or suggested herein.

[0080] Elements or components shown with any embodiment herein are exemplary for the specific embodiment and may be used on or in combination with other embodiments disclosed herein. While the invention is susceptible to various modifications and alternative forms, specific examples thereof have been shown in the drawings and are herein described in detail. The invention is not limited, however, to the particular forms or methods disclosed, but to the contrary, covers all modifications, equivalents and alternatives thereof.

1-30. (canceled)

31. A medical system comprising:

a base;

a stand coupled to the base;

a bed supported by the stand;

a first rail portion extending along a length of the bed; and at least one arm attached to the first rail portion, wherein the at least one arm is configured to be stowed beneath the bed supported by the stand and raised to perform a medical procedure.

32. The medical system of claim 31, further comprising a second rail portion extending along a length of the bed.

33. The medical system of claim 32, further comprising at least one arm attached to the second rail portion.

34. The medical system of claim 31, wherein the bed is configured to translate horizontally relative to the at least one arm.

35. The medical system of claim 31, wherein the bed comprises a hinge such that a lower portion of the bed can be declined at a different angle from remaining portions of the bed.

36. The medical system of claim 31, wherein the at least one arm is capable of slidably translating along the first rail portion.

37. The medical system of claim 31, wherein the at least one arm attached to the first rail portion comprises two arms forming a virtual rail to guide an endoscopic device.

38. The medical system of claim 31, wherein the first rail portion is capable of vertical translation.

39. The medical system of claim 31, further comprising a second rail portion extending along a length of the bed and

at least one arm attached to the second rail portion, wherein the at least one arm attached to the first rail portion and the at least one arm attached to the second rail portion extend upwardly along opposing sides of the bed.

40. The medical system of claim **31**, further comprising a second rail portion extending along a length of the bed, wherein at least two arms are coupled to the first rail portion and at least two arms are coupled to the second rail portion.

41. A medical system comprising:

a base;
a stand coupled to the base;
a bed supported by the stand;
a first rail portion extending along a length of the bed;
a second rail portion extending along a length of the bed;
at least one arm attached to the first rail portion; and
at least one arm attached to the second rail portion,
wherein the at least one arm attached to the first rail portion and the at least one arm attached to the second rail portion are configured to be stowed beneath the bed supported by the stand and raised to perform a medical procedure.

42. The medical system of claim **41**, wherein the at least one arm attached to the first rail portion and the at least one arm attached to the second rail portion are each capable of robotic control.

43. The medical system of claim **42**, wherein the at least one arm attached to the first rail portion and the at least one arm attached to the second rail portion are capable of both manual and robotic control.

44. The medical system of claim **41**, wherein the first rail portion and the second rail portion are capable of vertical translation.

45. The medical system of claim **41**, wherein the at least one arm attached to the first portion comprises a pair of arms that form a virtual rail to guide an endoscopic device into an anatomical lumen.

46. The medical system of claim **45**, wherein the endoscopic device is a tool used for ureteroscopy, hysteroscopy or colonoscopy.

47. The medical system of claim **41**, wherein the bed comprises a hinge such that a lower portion of the bed can be declined at a different angle from remaining portions of the bed.

48. The medical system of claim **41**, wherein the at least one arm attached to the first rail portion is coupled to a carriage that translates along the first rail portion.

49. The medical system of claim **41**, wherein the at least one arm attached to the first rail portion and the at least one arm attached to the second rail portion are capable of extending upwardly along opposing sides of the bed.

50. The medical system of claim **41**, wherein the at least one arm attached to the first rail portion comprises at least two arms, wherein the at least one arm attached to the second rail portion comprises at least two arms such that there are at least four arms extending from the bed, wherein the at least four arms are capable of manual and robotic control.

* * * * *

专利名称(译)	具有可配置轨道安装机械臂的手术系统		
公开(公告)号	US20190083183A1	公开(公告)日	2019-03-21
申请号	US16/195206	申请日	2018-11-19
[标]发明人	MOLL FREDERIC H YU ALAN LAU		
发明人	MOLL, FREDERIC H. YU, ALAN LAU		
IPC分类号	A61B34/30 A61G13/10 A61G13/04 A61G13/06 A61B90/57		
CPC分类号	A61B2090/571 A61B2034/304 A61B34/30 A61G13/10 A61G13/04 A61G13/101 A61G13/06 A61B1/00149 A61B1/2676 A61B1/2736 A61B1/303 A61B1/307 A61B1/31 A61B1/3132 A61B50/10 A61B90/50 A61B34/00 A61B34/20		
优先权	62/145418 2015-04-09 US		
其他公开文献	US10702348		
外部链接	Espacenet USPTO		

摘要(译)

机器人手术系统包括用于支撑患者的水平平台，围绕水平平台定位的轨道，可操作地连接到并配置成沿着轨道平移的托架，以及可操作地连接到托架并且通过轨。机器人臂被配置为在由平移托架提供的各种位置上对患者进行操作。导轨为托架提供圆形路径，例如U形路径。U形路径可包括第一腿和第二腿，第一腿比第二腿长。此外，该系统可包括可操作地连接到轨道的多个托架和多个机械臂。而且，该系统还可以包括中央底座，水平平台可以相对于中央底座进行铰接，例如通过水平或垂直平移，旋转或倾斜。

